


passion
for precision



High-performance **milling tools**



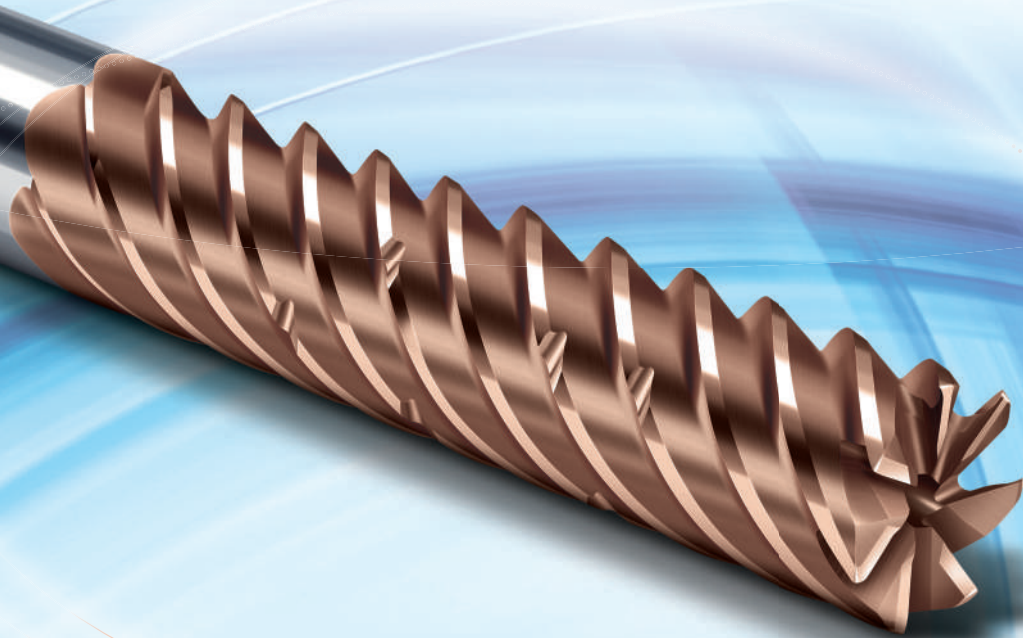


PRODUCTS



- Largest range of European-made, solid-carbide milling tools
- Leading innovator: 8 % of turnover reinvested in R&D
- Trendsetter in HSC, HPC, HDC and MFC
(HSC: High Speed Cutting; HPC: High Performance Cutting;
HDC: High Dynamic Cutting; MFC: Multi-functional Cutting)
- Perfection is our passion



E-Cut milling process:
www.fraisa.com/qr/env47

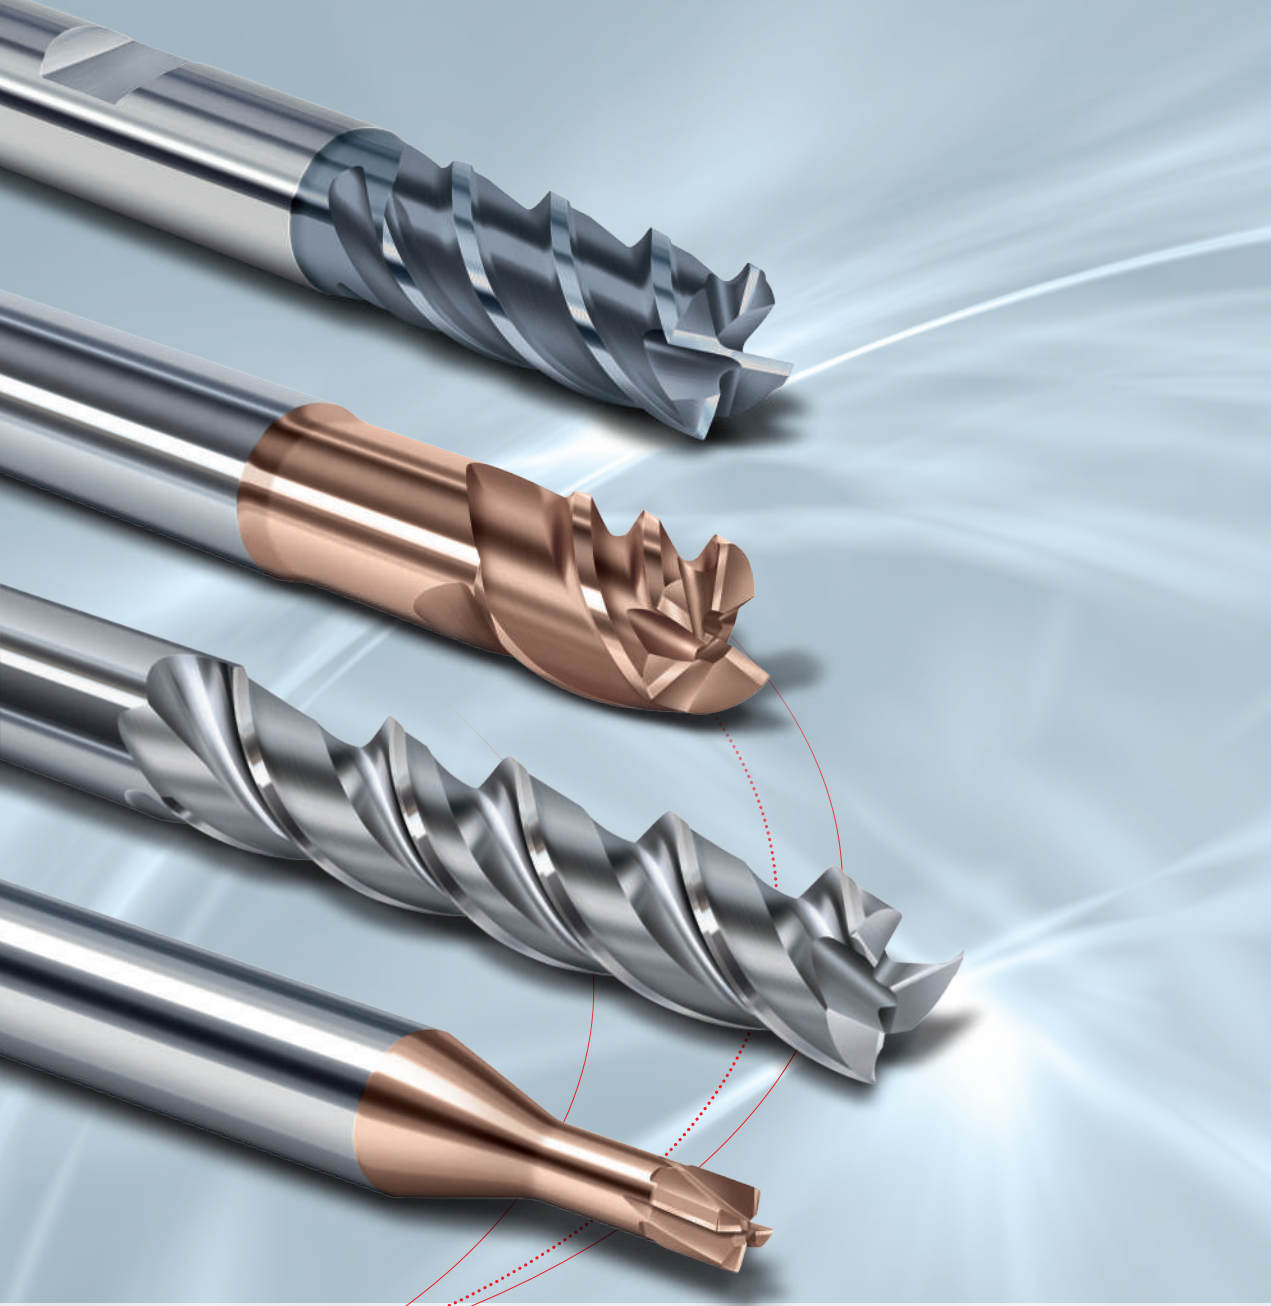

PRODUCTS



- Industrial tool reconditioning with performance guarantee for FRAISA and third-party tools
- Largest European service center for solid-carbide milling tools in Willich, Germany
- Over 30 years' experience in tool reconditioning and around 360,000 reconditioned tools every year.
State-of-the-art CNC grinding center and own systems for cutting-edge preparation and coating
- Cost savings thanks to producibility, 100% performance and maximum substrate retention
- Environmentally significant savings of 50,000 kg of tungsten and 5,000 kg of cobalt every year thanks to industrial tool reconditioning and recycling of tools that can no longer be reconditioned






FRAISA ReTool®



- Trendsetter in FRAISA ToolCare® tool management systems: 21 years' experience, 800 installed systems
- FRAISA ToolCareSecure: 100 % ability to deliver – guaranteed!
- FRAISA ToolCareConcept: order special tools like standard production items
- E-shop: simple ordering process at any time of the day or night
- Next-day delivery to anywhere in Europe, China and the USA



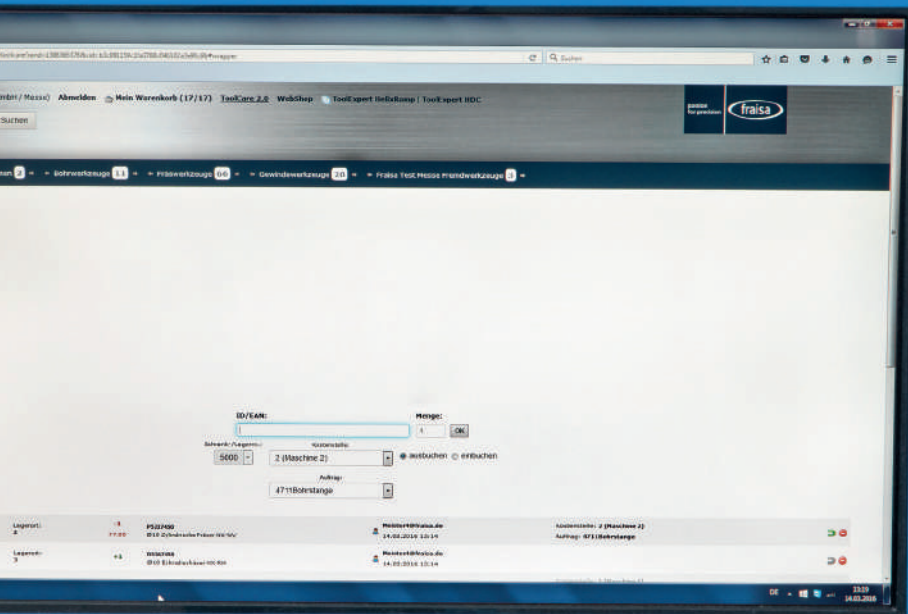

LOGISTICS



APPLICATION TECHNOLOGY



- 46 years' experience in milling technology data
- ToolSchool: 18 years of added value thanks to extensive Know-how transfer and training for more than 27,500 clients
- Accurate and dependable application information for each individual FRAISA tool
- FRAISA ToolExpert®: online access to application data for all FRAISA milling tools and strategies
- Unique presentation of application data directly in the catalogue



FRAISA ToolExpert® 2.0:
www.fraisa.com/qr/enw24



APPLICATION

PERSONAL CUSTOMER CONTACT



- Outstanding expertise thanks to regular and intensive professional training of our own customer service representatives
- Customer contact exclusively through in-house representatives and FRAISA-qualified sales partners
- FRAISA customer service representatives are experienced milling technology specialists
- Fast and efficient information transfer regarding products and technologies by means of online seminars
- National sales and distribution companies in Germany, France, Italy, Hungary, the USA, China and Switzerland
- Short communication channels from the customer service representatives to company management thanks to our medium-sized structure and transparent organization



ToolSchool:
www.fraisa.com/qr/env8



CUSTOMER CONTACT

passion
for precision





-
- 3R principle (Reduce, Reuse, Recycle): Reduction of the ecological footprint in life cycle management with innovative tools, optimum cutting data, recycling, and recovery of raw materials
 - Sustainable production processes thanks to the latest technology, such as free cooling, photovoltaic systems, waste heat recovery, and oil treatment
 - Long-term goal: To reduce the ecological footprint to net zero




“Industrial production can and must be **ecologically, economically and socially sustainable!**”

Josef Maushart | FRAISA SA
Chairman of the Board of Directors and Chief Executive Officer

Free Cooling

SUSTAINABILITY

Replace edition 2021

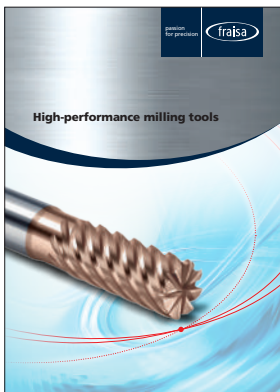

www.fraisa.com

**The raw material
surcharges are included
in the price.**

End milling tools for steel, stainless steel,
titanium and nickel

17 – 325

I

End milling tools for 3D machining

327 – 587

II

End milling tools for aluminium and copper

589 – 661

III

End milling tools for graphite

663 – 737

IV

End milling tools with special forms
End milling tools for CFC

739 – 773

V

Indexable insert milling tools

775 – 827

VI

Information

Symbols / Formulas / Abbreviations

829 – 859

i

INDEX
















860 – 867

INDEX



End milling tools for steel, stainless steel, titanium and nickel

Smooth-edged, cylindrical

Normal version									
N° 8504 / 8604		HX	X-Generation X	Roughing HPC Roughing HDC Finishing	d, 3 – 20 r	HRC 48- >60	HSS		35
N° 8500 / 8600		NX	X-Generation X	Roughing HPC Roughing HDC Finishing	d, 4 – 20 r	Rm 850-1500	HRC 48-56	Ti Titanium	37
N° 15222 / 15322		NX	X-Generation X	Roughing HPC Roughing HDC Finishing	d, 3 – 20 45° r	Rm 850-1500	HRC 48-56	Ti Titanium	39
N° 8700 / 8800		ZX	X-Generation X	Roughing Finishing	d, 3 – 20 r	Ni-/Mn- Alloys	Ti Titanium		41
N° 8705 / 8805		ZX	X-Generation X	Roughing Finishing	d, 6 – 20 r	Ni-/Mn- Alloys	Ti Titanium		43
N° 8506 / 8606		SX	X-Generation X	Roughing HPC Roughing HDC Finishing	d, 3 – 20 r	Inox Stainless			45
N° 8508 / 8608		new! SX	X-Generation X	Roughing HPC Roughing HDC Finishing	d, 6 – 20 r	Inox Stainless	Ni- Alloys		47
N° 8101 / 8201		MFC	Base-X B	Roughing HPC Roughing HDC Finishing	d, 4 – 20 r	Rm <850-1500	HRC 48-56	Inox Ti	49
N° 8102 / 8202		MFC	Base-X B	Roughing HPC Roughing HDC Finishing	d, 4 – 20 r	Rm <850-1500	HRC 48-56	Inox Ti	51
N° 8105 / 8205		MFC	Base-X B	Roughing HPC Roughing HDC Finishing	d, 6 – 20 r	Rm <850-1500	HRC 48-56	Inox Ti	53
N° 8100 / 8200		NVDS	Base-X B	Roughing HPC Roughing HDC Finishing	d, 4 – 20 r	Rm <850-1300	Inox Stainless	Ti Titanium	55
N° 8304 / 8404		NVS	Base-X B	Roughing Finishing	d, 2 – 20 r	Rm <850-1100	Inox Stainless		57
N° 15207 / 15307		NVD	Base-X B	Roughing HPC Roughing HDC Finishing	d, 3 – 20 45° r	Rm <850-1300	Inox Stainless	Ti Titanium	59
N° 8300 / 8400		E-Cut	Base-X B	Roughing HPC Roughing HDC Finishing	d, 1 – 20 r	Rm <850-1500	Inox Stainless		61
N° 8305 / 8405		E-Cut	Base-X B	Roughing HPC Roughing HDC Finishing	d, 4 – 20 r	Rm <850-1500	Inox Stainless		63

End milling tools for steel, stainless steel, titanium and nickel

Smooth-edged, cylindrical

Normal version										
N° 5255 / 5355	E-Cut	Base-X B	Roughing	d_1 3 – 20		Rm	Inox	Ti	65	
			Finishing	$<850-1100$		Stainless	Titanium			
N° 8303 / 8403		Base-X B	Roughing HPC	d_1 1 – 20		Rm	Inox		67	
			Roughing HDC	$<850-1500$		Stainless				
N° 15233 / 15333		Base-X B	Roughing	d_1 3 – 20		Rm			69	
			Finishing	$<850-1300$						
N° 5200 / 5300		Base-X B	Roughing	d_1 2 – 20		Rm			71	
			Finishing	$<850-1100$						
N° 46200 / 46300		new!	Favora® F	Roughing HPC	d_1 1 – 20		Rm	Inox		73
				Roughing HDC	$<850-1100$		Stainless			
N° 45225 / 45325	Finishing			$<850-1100$	Stainless					
N° 45217 / 45317	Favora® F	Roughing HPC	d_1 6 – 20		Rm	Inox		75		
		Roughing HDC	$<850-1100$		Stainless					
N° 45255 / 45355	Favora® F	Roughing	d_1 1 – 25		Rm	Inox		77		
		Finishing	$<850-1100$		Stainless					
N° 45233 / 45333	Favora® F	Roughing	d_1 3 – 20		Rm	Inox	Ti	79		
		Finishing	$<850-1100$		Stainless	Titanium				
N° 0110	HSS	Roughing	d_1 1 – 40		Rm			85		
		Finishing	$<850-1100$							
N° 0780	HSS	Roughing	d_1 1 – 25		Rm			89		
		Finishing	$<850-1100$							

End milling tools for steel, stainless steel, titanium and nickel

Smooth-edged, cylindrical

Normal version with neck

N° 15242 / 15342


















N° 5225 / 5325



NX	X-Generation	X	Roughing	d, 4 – 20	Rm 850-1500	HRC 48-56	Ti Titanium	93
			Finishing	45°				
Base-X		B	Roughing	d, 3 – 20	Rm <850-1300	Inox Stainless		95
			Finishing	45°				

End milling tools for steel, stainless steel, titanium and nickel

Smooth-edged, cylindrical

Medium length version									
N° 8514 / 8614		HX	X-Generation X	Roughing HPC Roughing HDC Finishing	d_1 3 – 20 r	HRC 48- >60	HSS		97
N° 15223 / 15323		NX	X-Generation X	Roughing HPC Roughing HDC Finishing	d_1 4 – 20 45°	Rm 850-1500	HRC 48-56	Ti Titanium	99
N° 8516 / 8616		SX	X-Generation X	Roughing HPC Roughing HDC Finishing	d_1 3 – 20 r	Inox Stainless			101
N° 8518 / 8618		new! SX	X-Generation X	Roughing HPC Roughing HDC Finishing	d_1 6 – 20 r	Inox Stainless	Ni- Alloys		103
N° 8111 / 8211		MFC	Base-X B	Roughing HPC Roughing HDC Finishing	d_1 4 – 20 r	Rm <850-1500	HRC 48-56	Inox Ti	105
N° 8112 / 8212		MFC	Base-X B	Roughing HPC Roughing HDC Finishing	d_1 4 – 20 r	Rm <850-1500	HRC 48-56	Inox Ti	107
N° 8115 / 8215		MFC	Base-X B	Roughing HPC Roughing HDC Finishing	d_1 6 – 20 r	Rm <850-1500	HRC 48-56	Inox Ti	109
N° 15210 / 15310		NVD	Base-X B	Roughing HPC Roughing HDC Finishing	d_1 6 – 20 45°	Rm <850-1300	Inox Stainless	Ti Titanium	111
N° 15208 / 15308		NVD	Base-X B	Roughing HPC Roughing HDC Finishing	d_1 4 – 20 45°	Rm <850-1300	Inox Stainless	Ti Titanium	113
N° 8310 / 8410		E-Cut	Base-X B	Roughing HPC Roughing HDC Finishing	d_1 2 – 20 r	Rm <850-1500	Inox Stainless		115
N° 8315 / 8415		E-Cut	Base-X B	Roughing HPC Roughing HDC Finishing	d_1 4 – 20 r	Rm <850-1500	Inox Stainless		117
N° 8313 / 8413		E-Cut	Base-X B	Roughing HPC Roughing HDC Finishing	d_1 2 – 20 r	Rm <850-1500	Inox Stainless		119
N° 46210 / 46310		new!	Favora® F	Roughing HPC Roughing HDC Finishing	d_1 2 – 20 r	Rm <850-1100	Inox Stainless		121
N° 45226 / 45326			Favora® F	Roughing HPC Roughing HDC Finishing	d_1 6 – 20 45°	Rm <850-1100	Inox Stainless		123
N° 45222 / 45322			Favora® F	Roughing Schlichten	d_1 2 – 25 45°	Rm <850-1100	Inox Stainless		125

End milling tools for steel, stainless steel, titanium and nickel

Smooth-edged, cylindrical

Medium length version

N° 45234 / 45334



Favora® F	Roughing	d, 3 – 20	Rm <850-1100	Inox Stainless		127
	Finishing	45°				

Medium length version with neck

N° 15259 / 15359



NX X Generation X	Roughing	d, 4 – 16	Rm 850-1500	HRC 48-56	Ti Titanium	129
	Finishing	45°				

N° 15225 / 15325



Base-X B	Roughing	d, 6 – 16	Rm <850-1300			131
	Finishing	45°				

N° 15299 / 15399



Base-X B	Roughing	d, 3 – 16	Rm <850-1300			133
	Finishing	45°				

End milling tools for steel, stainless steel, titanium and nickel

Smooth-edged, cylindrical

Long version

N° 45223 / 45323



Favora® F	Roughing	d ₁ 6 – 20	Rm <850-1100	Inox Stainless	135
	Finishing	45°			

N° 0200



HSS	Roughing	d ₁ 2 – 40	Rm <850-1100		137
	Finishing	90°			

5.2xd version

N° 8121 / 8221



MFC Base-X B	Roughing HPC	d ₁ 6 – 20	Rm <850-1500	HRC 48-56	Inox Ti	139
	Finishing	r				

N° 8320 / 8420



E-Cut Base-X B	Roughing HPC	d ₁ 3 – 20	Rm <850-1500	Inox Stainless	141
	Finishing	r			

N° 8323 / 8423



E-Cut Base-X B	Roughing HPC	d ₁ 3 – 20	Rm <850-1500	Inox Stainless	143
	Finishing	r			

Short version

N° 5249 / 5349



HX X-Generation X	Roughing	d ₁ 1 – 16	Rm 1300-1500	HRC 48-60	145
	Finishing	45°			

N° 5213 / 5313



SX X-Generation X	Roughing	d ₁ 3 – 16	Inox Stainless	147
	Finishing	45°		

N° 5229 / 5329



Base-X B	Roughing	d ₁ 3 – 16	Rm <850-1100	Inox Stainless	149
	Finishing	45°			

N° 5036



Base-X B	Roughing	d ₁ 1.5 – 10	Rm <850-1100	Inox Stainless	151
	Finishing	90°			

N° 0700



HSS	Roughing	d ₁ 1 – 25	Rm <850-1100		153
	Finishing	90°			

End milling tools for steel, stainless steel, titanium and nickel

Smooth-edged, with corner radius

Normal version

N° 8507 / 8607



HX	X-Generation X	Roughing HPC	r 0.2, 0.5, 1.0, 1.5, 2.0, 2.5, 3.0	HRC 48- >60	HSS		157
		Roughing HDC					
		Finishing					

N° 15268 / 15368



HX	X-Generation X	Roughing	r 0.2, 0.5, 1.0, 1.5, 2.0, 2.5, 4.0	Rm 850-1500	HRC 48-56	Ti Titanium	161
		Finishing					

N° 8720 / 8820



ZX	X-Generation X	Roughing	r 0.4, 0.5, 0.8, 1.0, 1.5, 2.0, 2.5, 4.0	Ni-/Mn- Alloys	Ti Titanium		165
		Finishing					

N° 8107 / 8207



MFC	Base-X B	Roughing HPC	r 0.2, 0.5, 1.0, 1.5, 2.0, 2.5	Rm <850-1500	HRC 48-56	Inox Ti	171
		Roughing HDC					
		Finishing					

N° 15226 / 15326



Base-X B	Roughing	r 0.5, 1.0, 1.5, 2.0, 2.5, 4.0	Rm <850-1300	Inox Stainless		175
	Finishing					

N° 45219 / 45319



Favora® F	Roughing	r 0.2, 0.5, 0.8, 1.0, 1.5, 2.0, 2.5, 4.0	Rm <850-1100	Inox Stainless		179
	Finishing					

Medium length version

N° 8517 / 8617



HX	X-Generation X	Roughing HPC	r 0.2, 0.5, 1.0, 1.5, 2.0, 2.5, 3.0	HRC 48- >60	HSS		185
		Roughing HDC					
		Finishing					

















N° 8117 / 8217



MFC	Base-X B	Roughing HPC	r 0.2, 0.5, 1.0, 1.5, 2.0, 2.5	Rm <850-1500	HRC 48-56	Inox Ti	189
		Roughing HDC					
		Finishing					

End milling tools for steel, stainless steel, titanium and nickel

Profiled, cylindrical

Normal version									
N° 8302 / 8402		SupraCarb®	B Base-X	Roughing Finishing	d_1 4 – 20 	Rm <850-1100	Inox Stainless		193
N° 15236 / 15336		SupraCarb®	B Base-X	Roughing Finishing	d_1 3 – 20 45° 	Rm <850-1100	Inox Stainless		195
N° 45371			F Favora®	Roughing Finishing	d_1 3 – 20 45° 	Rm <850-1100			197
N° 0619			HSS	Roughing Finishing	d_1 5 – 25 45° 	Rm 850-1300			199
N° 0540			HSS	Roughing Finishing	d_1 6 – 25 45° 	Rm <850-1300	Inox Stainless		201
N° 0610			HSS	Roughing Finishing	d_1 5 – 40 45° 	Rm <850-1100			203
N° 0609			HSS	Roughing Finishing	d_1 6 – 32 45° 	Rm <850-1100	Inox Stainless		207
N° 0695			HSS	Roughing Finishing	d_1 8 – 32 45° 	Rm <850-1100	Inox Stainless		209

End milling tools for steel, stainless steel, titanium and nickel

Profiled, cylindrical

Medium length version

N° 15238 / 15338



SupraCarb®

Base-X	B	Roughing	d, 6 – 20	Rm <850-1100	Inox Stainless		211
		Finishing					
Favora®	F	Roughing	d, 3 – 20	Rm <850-1100			213
		Finishing					
HSS	HSS	Roughing	d, 6 – 25	Rm 850-1300			215
		Finishing					
HSS	HSS	Roughing	d, 5 – 32	Rm <850-1100			217
		Finishing					

N° 45372



ToolSchool

N° 0659



N° 0650



Medium length version with neck

N° 15239 / 15339



SupraCarb®

Base-X	B	Roughing	d, 6 – 20	Rm <850-1100	Inox Stainless		219
		Finishing					

End milling tools for steel, stainless steel, titanium and nickel

Profiled, cylindrical

Short version

N° 15260 / 15360



SupraCarb®

Base-X B	Roughing	d ₁ 3 – 16	Rm <850-1100	Inox Stainless		221
	Finishing					

Long version

N° 15248 / 15348



SupraCarb®

Base-X B	Roughing	d ₁ 6 – 20	Rm <850-1100	Inox Stainless		223
	Finishing					

N° 0665



HSS	Roughing	d ₁ 5 – 40	Rm <850-1100			225
	Finishing					

Extra-long version with neck

N° 0621



HSS	Roughing	d ₁ 6 – 25	Rm 850-1300			227
	Finishing					

End milling tools for steel, stainless steel, titanium and nickel

Finishing, cylindrical


Normal version

N° 15250



MulticutXF

X-Generation
X



Rm
<850-1500

HRC
48-60

Inox
Stainless

229

N° 8301 / 8401



E-Cut

Base-X
B



Rm
<850-1500


Inox
Stainless

231

N° 45260 / 45360



Favora®
F



Rm
850-1300

233

Medium length version

N° 15251



MulticutXF

X-Generation
X



Rm
850-1500

HRC
48-60

Inox
Stainless


235

N° 8311



E-Cut

Base-X
B



Rm
<850-1500


Inox
Stainless

237

N° 45262 / 45362



Favora®
F



Rm
850-1300

239

Long version

N° 15254



MulticutXF

X-Generation
X



Rm
850-1500

HRC
48-60

Inox
Stainless

241


5.2xd version

N° 8521



MulticutXF

X-Generation
X



Rm
850-1500

HRC
48-60

Inox
Stainless


243

N° 8321



E-Cut

Base-X
B



Rm
<850-1500

Inox
Stainless

245

End milling tools for steel, stainless steel, titanium and nickel

Face finishing, cylindrical

Normal version

N° 8502



NX

X-Generation

X

Roughing



Finishing



d, 3 - 16

Rm
1300-1500

















HRC
48-56

Inox
Ti

247

End milling tools for steel, stainless steel, titanium and nickel









Micro, cylindrical

Shank \varnothing 6mm									
N° 6500		MicroX	X-Generation X	1xd	d, 0.1 – 2.0 	Rm 850-1500	HRC 48-60	Ti Titanium	249
N° 6501		MicroX	X-Generation X	2xd	d, 0.1 – 2.0 	Rm 850-1500	HRC 48-60	Ti Titanium	251
N° 6502		MicroX	X-Generation X	3xd	d, 0.1 – 3.0 	Rm 850-1500	HRC 48-60	Ti Titanium	253
N° 6503		MicroX	X-Generation X	4xd	d, 0.1 – 2.0 	Rm 850-1500	HRC 48-60	Ti Titanium	255
N° 6504		MicroX	X-Generation X	5xd	d, 0.1 – 3.0 	Rm 850-1500	HRC 48-60	Ti Titanium	257
N° 6505		MicroX	X-Generation X	6xd	d, 0.2 – 2.0 	Rm 850-1500	HRC 48-60	Ti Titanium	259
N° 6506		MicroX	X-Generation X	8xd	d, 0.2 – 3.0 	Rm 850-1500	HRC 48-60	Ti Titanium	261
N° 6508		MicroX	X-Generation X	10xd	d, 0.2 – 3.0 	Rm 850-1500	HRC 48-60	Ti Titanium	263















End milling tools for steel, stainless steel, titanium and nickel

Micro, cylindrical

Shank \varnothing 4mm									
N° 6800		Microcut new!	B	1xd	d, 0.2 – 2.0 45°	Rm <850-1500	HRC 48-56	Inox Ti	265
N° 6802		Microcut new!	B	3xd	d, 0.2 – 3.0 45°	Rm <850-1500	HRC 48-56	Inox Ti	267
N° 6804		Microcut new!	B	5xd	d, 0.2 – 3.0 45°	Rm <850-1500	HRC 48-56	Inox Ti	269
N° 6807		Microcut new!	B	8xd	d, 0.5 – 3.0 45°	Rm <850-1500	HRC 48-56	Inox Ti	271
N° 6809		Microcut new!	B	10xd	d, 0.5 – 3.0 45°	Rm <850-1500	HRC 48-56	Inox Ti	273
N° 6810		Microcut new!	B	12xd	d, 1.0 – 3.0 45°	Rm <850-1500	HRC 48-56	Inox Ti	275
N° 6811		Microcut new!	B	15xd	d, 1.0 – 3.0 45°	Rm <850-1500	HRC 48-56	Inox Ti	277
N° 6812		Microcut new!	B	20xd	d, 1.0 – 3.0 45°	Rm <850-1500	HRC 48-56	Inox Ti	279

End milling tools for steel, stainless steel, titanium and nickel

Micro, cylindrical

Shank \varnothing 3mm									
N° 5712		Microcut	Base-X B	3xd	d_1 0,2 – 3,0 45°	Rm <850-1500	Inox Stainless	Ti Titanium	281
N° 15752		Microcut	Base-X B	3xd	d_1 0,5 – 3,0 90°	Rm <850-1500	Inox Stainless	Ti Titanium	283
N° 5714		Microcut	Base-X B	5xd	d_1 0,5 – 3,0 45°	Rm <850-1500	Inox Stainless	Ti Titanium	285
N° 15754		Microcut	Base-X B	5xd	d_1 0,5 – 3,0 90°	Rm <850-1500	Inox Stainless	Ti Titanium	287
N° 5716		Microcut	Base-X B	8xd	d_1 0,5 – 3,0 45°	Rm <850-1500	Inox Stainless	Ti Titanium	289
N° 5717		Microcut	Base-X B	10xd	d_1 0,5 – 3,0 45°	Rm <850-1500	Inox Stainless	Ti Titanium	291
N° 5721		Microcut	Base-X B	12xd	d_1 1,0 – 3,0 45°	Rm <850-1300			293
N° 5723		Microcut	Base-X B	15xd	d_1 1,0 – 3,0 45°	Rm <850-1300			295
N° 15725		Microcut	Base-X B	20xd	d_1 1,0 – 3,0 45°	Rm <850-1100			297
N° 45709			Favora® F	1.5xd	d_1 0,1 – 2,9 90°	Rm <850	Inox Stainless	CuZn Gold Pl	299
N° 5710 / 45710			Favora® F	3xd	d_1 0,3 – 3,0 90°	Rm <850-1100			303
N° 45713			Favora® F	3xd	d_1 0,4 – 2,9 90°	Rm <850	Inox Stainless	CuZn Gold Pl	307

End milling tools for steel, stainless steel, titanium and nickel

Smooth-edged, cylindrical

Short-shank version

N° 15232



Favora® F	Roughing	d, 1,5 – 10	Rm <850-1100	Inox Stainless	Al CuZn Gold	311
	Finishing	90°				

N° 5236 / 5336



Favora® F	Roughing	d, 1,5 – 10	Rm <850-1100	Inox Stainless		315
	Finishing	90°				

N° 5335



Favora® F	Roughing	d, 2 – 10	Rm <850-1100	Inox Stainless		317
	Finishing	45°				

N° 5237 / 5337



Favora® F	Roughing	d, 3 – 10	Rm <850-1300	Inox Stainless		319
	Finishing	90°				

N° 0400




HSS	Roughing	d, 1 – 10	Rm <850			321
	Finishing	90°				

N° 0410



HSS	Roughing	d, 2 – 10	Rm <850			325
	Finishing	90°				

Application




Material

Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
3.00	4	60	0.012	4.500	1.800	6365	305	2.5	5°
4.00	4	60	0.017	6.000	2.400	4775	325	4.7	5°
5.00	4	60	0.022	7.500	3.000	3820	335	7.6	5°
6.00	4	60	0.027	9.000	3.600	3185	345	11.1	5°
8.00	4	60	0.035	12.000	4.800	2385	335	19.3	5°
10.00	4	60	0.045	15.000	6.000	1910	345	30.9	5°
12.00	4	60	0.055	18.000	7.200	1590	350	45.4	5°
16.00	4	60	0.065	24.000	9.600	1195	310	71.5	5°
20.00	4	60	0.080	30.000	12.000	955	305	110.0	5°



Hardened tool steel
> 60 HRC



3.00	4	25	0.006	3.750	1.800	2655	65	0.4	3°
4.00	4	25	0.008	5.000	2.400	1990	65	0.8	4°
5.00	4	25	0.010	6.250	3.000	1590	65	1.2	5°
6.00	4	25	0.012	7.500	3.600	1325	65	1.7	5°
8.00	4	25	0.015	10.000	4.800	995	60	2.9	5°
10.00	4	25	0.020	12.500	6.000	795	65	4.8	5°
12.00	4	25	0.025	15.000	7.200	665	65	7.2	5°
16.00	4	25	0.030	20.000	9.600	495	60	11.5	5°
20.00	4	25	0.035	25.000	12.000	400	55	16.7	3°

High speed steel,
hardened
64 - 70 HRC



3.00	4	15	0.005	3.000	0.750	1590	30	0.1	3°
4.00	4	15	0.010	4.000	1.000	1195	50	0.2	4°
5.00	4	15	0.015	5.000	1.250	955	55	0.4	5°
6.00	4	15	0.009	6.000	3.600	795	30	0.6	5°
8.00	4	15	0.012	8.000	4.800	595	30	1.1	5°
10.00	4	15	0.015	10.000	6.000	475	30	1.7	5°
12.00	4	15	0.018	12.000	7.200	400	30	2.5	5°
16.00	4	15	0.023	16.000	9.600	300	25	4.2	5°
20.00	4	15	0.025	20.000	12.000	240	25	5.7	3°

Application




Material

Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
3.00	4	50	0.013	3.000	3.000	5305	275	2.5	5°	34.3
4.00	4	50	0.017	4.000	4.000	3980	270	4.3	5°	45.7
5.00	4	50	0.022	5.000	5.000	3185	280	7.0	5°	57.2
6.00	4	50	0.027	6.000	6.000	2655	285	10.3	5°	68.6
8.00	4	50	0.035	8.000	8.000	1990	280	17.8	5°	91.4
10.00	4	50	0.045	10.000	10.000	1590	285	28.6	5°	114.3
12.00	4	50	0.055	12.000	12.000	1325	290	42.0	5°	137.2
16.00	4	50	0.080	8.000	16.000	995	320	40.7	5°	91.4
20.00	4	50	0.095	10.000	20.000	795	300	60.5	5°	114.3



Hardened tool steel
> 60 HRC





3.00	4	20	0.007	3.000	3.000	2120	60	0.5	3°	57.2
4.00	4	20	0.010	4.000	4.000	1590	65	1.0	4°	57.2
5.00	4	20	0.013	5.000	5.000	1275	65	1.7	5°	57.2
6.00	4	20	0.016	6.000	6.000	1060	70	2.4	5°	68.6
8.00	4	20	0.021	8.000	8.000	795	65	4.3	5°	91.4
10.00	4	20	0.026	10.000	10.000	635	65	6.6	5°	114.3
12.00	4	20	0.032	12.000	12.000	530	70	9.8	5°	137.2
16.00	4	20	0.050	8.000	16.000	400	80	10.2	5°	91.4
20.00	4	20	0.060	10.000	20.000	320	75	15.3	3°	190.8

High speed steel,
hardened
64 - 70 HRC



3.00	4	10	0.004	1.500	3.000	1060	15	0.1	3°	28.6
4.00	4	10	0.006	2.000	4.000	795	20	0.2	4°	28.6
5.00	4	10	0.008	3.750	5.000	635	20	0.4	5°	42.9
6.00	4	10	0.009	4.500	6.000	530	20	0.5	5°	51.4
8.00	4	10	0.012	6.000	8.000	400	20	0.9	5°	68.6
10.00	4	10	0.015	7.500	10.000	320	20	1.4	5°	85.7
12.00	4	10	0.020	9.000	12.000	265	20	2.3	5°	102.9
16.00	4	10	0.030	8.000	16.000	200	25	3.1	5°	91.4
20.00	4	10	0.035	10.000	20.000	160	20	4.5	3°	190.8

Precise cutting data for other applications and materials can be found in the cutting data software **ToolExpert 2.0**




Cylindrical end mills HX

Smooth-edged, normal version, short neck
High-performance penetration edge



HM XA	λ 45° γ -10°

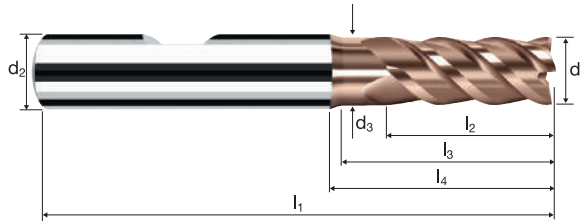

Roughing HPC	Roughing HDC	Finishing

					HRC 48-56	HRC 56-60	HRC > 60				HSS
--	--	--	--	--	-----------	-----------	----------	--	--	--	-----

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	DURO-Si
Example: Order-N°.	Coating H		Article-N° 8604		ø-Code 180						H8604
											H8504
180	3.00	6.00	2.80	57	8.00	14.00	20.37	0.100	4.5°	4	●
220	4.00	6.00	3.70	57	11.00	16.00	20.82	0.100	3.0°	4	●
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.100	1.5°	4	●
300	6.00	6.00	5.50	57	13.00	18.15	20.00	0.150	0.0°	4	●
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	0.0°	4	●
450	10.00	10.00	9.20	72	22.00	27.99	31.00	0.200	0.0°	4	●
501	12.00	12.00	11.00	83	26.00	33.29	37.00	0.200	0.0°	4	●
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	4	●
682	20.00	20.00	19.00	104	38.00	48.23	53.00	0.200	0.0°	4	●

Application	Material	d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]			
	Steel 850 - 1100 N/mm ² 	4.00	4	150	0.030	6.000	1.600	11935	1430	13.8	20°			
		5.00	4	150	0.035	7.500	2.000	9550	1335	20.1	20°			
	Steel 1100 - 1300 N/mm ² 	6.00	4	150	0.040	9.000	2.400	7960	1275	27.5	20°			
		8.00	4	150	0.050	12.000	3.200	5970	1195	45.8	20°			
		10.00	4	150	0.065	15.000	4.000	4775	1240	74.5	20°			
		12.00	4	150	0.075	18.000	4.800	3980	1195	103.1	20°			
		16.00	4	150	0.085	24.000	6.400	2985	1015	155.8	20°			
		20.00	4	150	0.100	30.000	8.000	2385	955	229.2	20°			
		4.00	4	115	0.030	6.000	1.600	9150	1100	10.5	18°			
		5.00	4	115	0.035	7.500	2.000	7320	1025	15.4	18°			
		6.00	4	115	0.040	9.000	2.400	6100	975	21.1	18°			
		8.00	4	115	0.050	12.000	3.200	4575	915	35.1	18°			
10.00	4	115	0.065	15.000	4.000	3660	950	57.1	18°					
12.00	4	115	0.075	18.000	4.800	3050	915	79.1	18°					
16.00	4	115	0.085	24.000	6.400	2290	780	119.5	18°					
20.00	4	115	0.100	30.000	8.000	1830	730	175.7	18°					
Hardened tool steel 52 - 56 HRC 		4.00	4	50	0.015	6.000	1.600	3980	240	2.3	15°			
		5.00	4	50	0.020	7.500	2.000	3185	255	3.8	15°			
		6.00	4	50	0.025	9.000	2.400	2655	265	5.7	15°			
		8.00	4	50	0.030	12.000	3.200	1990	240	9.2	15°			
		10.00	4	50	0.035	15.000	4.000	1590	225	13.4	15°			
		12.00	4	50	0.045	18.000	4.800	1325	240	20.6	15°			
		16.00	4	50	0.055	24.000	6.400	995	220	33.6	15°			
		20.00	4	50	0.070	30.000	8.000	795	225	53.5	15°			
		Titanium alloys > 300 HB [Ti6Al4V] 		4.00	4	60	0.020	6.000	1.600	4775	380	3.7	12°	
				5.00	4	60	0.025	7.500	2.000	3820	380	5.7	12°	
6.00	4			60	0.030	9.000	2.400	3185	380	8.3	12°			
8.00	4			60	0.040	12.000	3.200	2385	380	14.7	12°			
10.00	4			60	0.045	15.000	4.000	1910	345	20.6	12°			
12.00	4			60	0.055	18.000	4.800	1590	350	30.3	12°			
16.00	4			60	0.065	24.000	6.400	1195	310	47.7	12°			
20.00	4			60	0.080	30.000	8.000	955	305	73.3	12°			
Application	Material			d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
	Steel 850 - 1100 N/mm ² 	4.00	4	120	0.025	5.000	4.000	9550	955	19.1	32°	8.0		
		5.00	4	120	0.025	6.250	5.000	7640	765	23.9	32°	10.0		
	Steel 1100 - 1300 N/mm ² 	6.00	4	120	0.030	7.500	6.000	6365	765	34.4	32°	12.0		
		8.00	4	120	0.040	10.000	8.000	4775	765	61.1	32°	16.0		
		10.00	4	120	0.050	12.500	10.000	3820	765	95.5	32°	20.0		
		12.00	4	120	0.055	15.000	12.000	3185	700	126.1	32°	24.0		
		16.00	4	120	0.065	20.000	16.000	2385	620	198.6	32°	32.0		
		20.00	4	120	0.075	25.000	20.000	1910	575	286.5	32°	40.0		
		4.00	4	90	0.025	5.000	4.000	7160	715	14.3	28°	9.4		
		5.00	4	90	0.025	6.250	5.000	5730	575	17.9	28°	11.8		
		6.00	4	90	0.030	7.500	6.000	4775	575	25.8	28°	14.1		
		8.00	4	90	0.040	10.000	8.000	3580	575	45.8	28°	18.8		
10.00	4	90	0.050	12.500	10.000	2865	575	71.6	28°	23.5				
12.00	4	90	0.055	15.000	12.000	2385	525	94.5	28°	28.2				
16.00	4	90	0.065	20.000	16.000	1790	465	149.0	28°	37.6				
20.00	4	90	0.075	25.000	20.000	1430	430	214.9	28°	47.0				
Hardened tool steel 52 - 56 HRC 		4.00	4	40	0.010	5.000	4.000	3185	125	2.5	24°	11.2		
		5.00	4	40	0.015	6.250	5.000	2545	155	4.8	24°	14.0		
		6.00	4	40	0.020	7.500	6.000	2120	170	7.6	24°	16.8		
		8.00	4	40	0.025	10.000	8.000	1590	160	12.7	24°	22.5		
		10.00	4	40	0.025	12.500	10.000	1275	125	15.9	24°	28.1		
		12.00	4	40	0.035	15.000	12.000	1060	150	26.7	24°	33.7		
		16.00	4	40	0.040	20.000	16.000	795	125	40.7	24°	44.9		
		20.00	4	40	0.055	25.000	20.000	635	140	70.0	24°	56.2		
		Titanium alloys > 300 HB [Ti6Al4V] 		4.00	4	50	0.015	5.000	4.000	3980	240	4.8	19°	14.5
				5.00	4	50	0.020	6.250	5.000	3185	255	8.0	19°	18.2
6.00	4			50	0.025	7.500	6.000	2655	265	11.9	19°	21.8		
8.00	4			50	0.030	10.000	8.000	1990	240	19.1	19°	29.0		
10.00	4			50	0.035	12.500	10.000	1590	225	27.9	19°	36.3		
12.00	4			50	0.040	15.000	12.000	1325	210	38.2	19°	43.6		
16.00	4			50	0.050	20.000	16.000	995	200	63.7	19°	58.1		
20.00	4			50	0.060	25.000	20.000	795	190	95.5	19°	72.6		


Cylindrical end mills NX

Smooth-edged, normal version, short neck
High-performance penetration edge



HM
MG10

λ 45°
 γ -20°

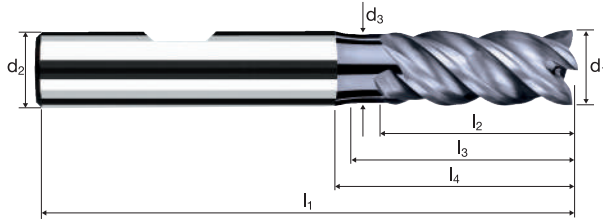


Roughing HPC	Roughing HDC	Finishing

Rm	Rm	Rm	HRC	HRC	Ti	GG(G)
850-1100	1100-1300	1300-1500	48-56	56-60	Titanium	Tool Steel

												POLYCHROM
Example: Order-N°.			Coating P	Article-N° 8600	\emptyset -Code 220							P8600
												P8500
\emptyset Code	d_1 e8	d_2 h6	d_3	l_1	l_2	l_3	l_4	r	α	z		
220	4.00	6.00	3.70	57	8.00	16.00	20.82	0.100	3.0°	4	●	
260	5.00	6.00	4.60	57	10.00	18.00	21.27	0.100	1.5°	4	●	
300	6.00	6.00	5.50	57	12.00	18.15	20.00	0.100	0.0°	4	●	
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	0.0°	4	●	
450	10.00	10.00	9.20	72	23.00	27.99	31.00	0.200	0.0°	4	●	
501	12.00	12.00	11.00	83	27.00	33.29	37.00	0.200	0.0°	4	●	
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	4	●	
682	20.00	20.00	19.00	104	39.00	48.23	53.00	0.200	0.0°	4	●	
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●

Application



Material

Steel
850 - 1100 N/mm²




Steel
1100 - 1300 N/mm²



Hardened tool steel
52 - 56 HRC



Titanium alloys
> 300 HB
[Ti6Al4V]



Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Hardened tool steel
52 - 56 HRC



Titanium alloys
> 300 HB
[Ti6Al4V]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
4.00	4	150	0.030	6.000	1.600	11935	1430	13.8
5.00	4	150	0.035	7.500	2.000	9550	1335	20.1
6.00	4	150	0.040	9.000	2.400	7960	1275	27.5
8.00	4	150	0.050	12.000	3.200	5970	1195	45.8
10.00	4	150	0.065	15.000	4.000	4775	1240	74.5
12.00	4	150	0.075	18.000	4.800	3980	1195	103.1
16.00	4	150	0.085	24.000	6.400	2985	1015	155.8
20.00	4	150	0.100	30.000	8.000	2385	955	229.2

4.00	4	115	0.030	6.000	1.600	9150	1100	10.5
5.00	4	115	0.035	7.500	2.000	7320	1025	15.4
6.00	4	115	0.040	9.000	2.400	6100	975	21.1
8.00	4	115	0.050	12.000	3.200	4575	915	35.1
10.00	4	115	0.065	15.000	4.000	3660	950	57.1
12.00	4	115	0.075	18.000	4.800	3050	915	79.1
16.00	4	115	0.085	24.000	6.400	2290	780	119.5
20.00	4	115	0.100	30.000	8.000	1830	730	175.7

4.00	4	50	0.015	6.000	1.600	3980	240	2.3
5.00	4	50	0.020	7.500	2.000	3185	255	3.8
6.00	4	50	0.025	9.000	2.400	2655	265	5.7
8.00	4	50	0.030	12.000	3.200	1990	240	9.2
10.00	4	50	0.035	15.000	4.000	1590	225	13.4
12.00	4	50	0.045	18.000	4.800	1325	240	20.6
16.00	4	50	0.055	24.000	6.400	995	220	33.6
20.00	4	50	0.070	30.000	8.000	795	225	53.5

4.00	4	60	0.020	6.000	1.600	4775	380	3.7
5.00	4	60	0.025	7.500	2.000	3820	380	5.7
6.00	4	60	0.030	9.000	2.400	3185	380	8.3
8.00	4	60	0.040	12.000	3.200	2385	380	14.7
10.00	4	60	0.045	15.000	4.000	1910	345	20.6
12.00	4	60	0.055	18.000	4.800	1590	350	30.3
16.00	4	60	0.065	24.000	6.400	1195	310	47.7
20.00	4	60	0.080	30.000	8.000	955	305	73.3

4.00	4	120	0.025	5.000	4.000	9550	955	19.1
5.00	4	120	0.025	6.250	5.000	7640	765	23.9
6.00	4	120	0.030	7.500	6.000	6365	765	34.4
8.00	4	120	0.040	10.000	8.000	4775	765	61.1
10.00	4	120	0.050	12.500	10.000	3820	765	95.5
12.00	4	120	0.055	15.000	12.000	3185	700	126.1
16.00	4	120	0.065	20.000	16.000	2385	620	198.6
20.00	4	120	0.075	25.000	20.000	1910	575	286.5

4.00	4	90	0.025	5.000	4.000	7160	715	14.3
5.00	4	90	0.025	6.250	5.000	5730	575	17.9
6.00	4	90	0.030	7.500	6.000	4775	575	25.8
8.00	4	90	0.040	10.000	8.000	3580	575	45.8
10.00	4	90	0.050	12.500	10.000	2865	575	71.6
12.00	4	90	0.055	15.000	12.000	2385	525	94.5
16.00	4	90	0.065	20.000	16.000	1790	465	149.0
20.00	4	90	0.075	25.000	20.000	1430	430	214.9

4.00	4	40	0.010	5.000	4.000	3185	125	2.5
5.00	4	40	0.015	6.250	5.000	2545	155	4.8
6.00	4	40	0.020	7.500	6.000	2120	170	7.6
8.00	4	40	0.025	10.000	8.000	1590	160	12.7
10.00	4	40	0.025	12.500	10.000	1275	125	15.9
12.00	4	40	0.035	15.000	12.000	1060	150	26.7
16.00	4	40	0.040	20.000	16.000	795	125	40.7
20.00	4	40	0.055	25.000	20.000	635	140	70.0



4.00	4	50	0.015	5.000	4.000	3980	240	4.8
5.00	4	50	0.020	6.250	5.000	3185	255	8.0
6.00	4	50	0.025	7.500	6.000	2655	265	11.9
8.00	4	50	0.030	10.000	8.000	1990	240	19.1
10.00	4	50	0.035	12.500	10.000	1590	225	27.9
12.00	4	50	0.040	15.000	12.000	1325	210	38.2
16.00	4	50	0.050	20.000	16.000	995	200	63.7
20.00	4	50	0.060	25.000	20.000	795	190	95.5

Cylindrical end mills NX

Smooth-edged, normal version



HM
MG10 λ 45°
 γ -20°

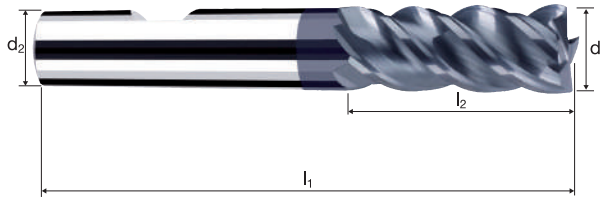


Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Ti Titanium	GG(G) Tool Steel
-----------------------	------------------------	------------------------	---------------------	---------------------	-----------------------	----------------------------

Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	45°	α	z	POLYCHROM	
									P15322	P15222
Example: Order-N°.	Coating: P		Article-N°: 15322		ø-Code: 180					
180	3.00	6.00	57	8.00	15.56	0.10	6.0°	4		●
220	4.00	6.00	57	8.00	14.59	0.10	4.5°	4		●
260	5.00	6.00	57	10.00	14.72	0.15	2.5°	4		●
300	6.00	6.00	57	12.00	-	0.15	0.0°	4		●
391	8.00	8.00	63	19.00	-	0.15	0.0°	4		●
450	10.00	10.00	72	23.00	-	0.20	0.0°	4		●
501	12.00	12.00	83	27.00	-	0.20	0.0°	4		●
610	16.00	16.00	92	32.00	-	0.20	0.0°	4		●
682	20.00	20.00	104	39.00	-	0.20	0.0°	4		●

Application

Material



Nickel-based alloys
annealed
Rm <1000 N/mm²
[Inconel 718]



d1 [mm]	z	v _r [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	35	0.010	5.400	1.800	3715	150	1.4
4.00	4	35	0.015	7.200	2.400	2785	165	2.9
5.00	4	35	0.020	9.000	3.000	2230	180	4.8
6.00	4	35	0.020	10.800	3.600	1855	150	5.8
8.00	4	35	0.030	14.400	4.800	1395	165	11.6
10.00	4	35	0.035	18.000	6.000	1115	155	16.8
12.00	4	35	0.045	21.600	7.200	930	165	26.0
16.00	4	35	0.050	28.800	9.600	695	140	38.5
20.00	4	35	0.060	36.000	12.000	555	135	57.8

Nickel-based alloys
precipitation hardened
Rm > 1000 N/mm²
[Inconel 718]



3.00	4	25	0.010	5.400	1.800	2655	105	1.0
4.00	4	25	0.010	7.200	2.400	1990	80	1.4
5.00	4	25	0.015	9.000	3.000	1590	95	2.6
6.00	4	25	0.015	10.800	3.600	1325	80	3.1
8.00	4	25	0.025	14.400	4.800	995	100	6.9
10.00	4	25	0.030	18.000	6.000	795	95	10.3
12.00	4	25	0.035	21.600	7.200	665	95	14.4
16.00	4	25	0.040	28.800	9.600	495	80	22.0
20.00	4	25	0.050	36.000	12.000	400	80	34.4

Manganese steel
Mn >5%
[1.3964 / Nitronic]
[1.3401 / X120Mn12]



3.00	4	40	0.010	5.400	1.800	4245	170	1.7
4.00	4	40	0.015	7.200	2.400	3185	190	3.3
5.00	4	40	0.020	9.000	3.000	2545	205	5.5
6.00	4	40	0.020	10.800	3.600	2120	170	6.6
8.00	4	40	0.030	14.400	4.800	1590	190	13.2
10.00	4	40	0.035	18.000	6.000	1275	180	19.3
12.00	4	40	0.045	21.600	7.200	1060	190	29.7
16.00	4	40	0.050	28.800	9.600	795	160	44.0
20.00	4	40	0.060	36.000	12.000	635	155	66.0

Inox difficult
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]



3.00	4	50	0.015	5.400	1.800	5305	320	3.1
4.00	4	50	0.020	7.200	2.400	3980	320	5.5
5.00	4	50	0.030	9.000	3.000	3185	380	10.3
6.00	4	50	0.035	10.800	3.600	2655	370	14.4
8.00	4	50	0.045	14.400	4.800	1990	360	24.8
10.00	4	50	0.055	18.000	6.000	1590	350	37.8
12.00	4	50	0.065	21.600	7.200	1325	345	53.6
16.00	4	50	0.070	28.800	9.600	995	280	77.0
20.00	4	50	0.085	36.000	12.000	795	270	116.9

PM high-speed steel
annealed
[Böhler S390]
[ASP 2023]



3.00	4	80	0.010	5.400	1.800	8490	340	3.3
4.00	4	80	0.015	7.200	2.400	6365	380	6.6
5.00	4	80	0.020	9.000	3.000	5095	405	11.0
6.00	4	80	0.020	10.800	3.600	4245	340	13.2
8.00	4	80	0.030	14.400	4.800	3185	380	26.4
10.00	4	80	0.035	18.000	6.000	2545	355	38.5
12.00	4	80	0.045	21.600	7.200	2120	380	59.4
16.00	4	80	0.050	28.800	9.600	1590	320	88.0
20.00	4	80	0.060	36.000	12.000	1275	305	132.0

Titanium alloys
> 300 HB
[Ti6Al4V]



3.00	4	70	0.010	5.400	1.800	7425	295	2.9
4.00	4	70	0.015	7.200	2.400	5570	335	5.8
5.00	4	70	0.015	9.000	3.000	4455	265	7.2
6.00	4	70	0.020	10.800	3.600	3715	295	11.6
8.00	4	70	0.025	14.400	4.800	2785	280	19.3
10.00	4	70	0.035	18.000	6.000	2230	310	33.7
12.00	4	70	0.040	21.600	7.200	1855	295	46.2
16.00	4	70	0.045	28.800	9.600	1395	250	69.3
20.00	4	70	0.055	36.000	12.000	1115	245	105.9



Nickel-based alloys
annealed
Rm <1000 N/mm²
[Inconel 718]



3.00	4	25	0.010	4.200	3.000	2655	105	1.3
4.00	4	25	0.010	5.600	4.000	1990	80	1.8
5.00	4	25	0.015	7.000	5.000	1590	95	3.3
6.00	4	25	0.015	8.400	6.000	1325	80	4.0
8.00	4	25	0.025	11.200	8.000	995	100	8.9
10.00	4	25	0.030	14.000	10.000	795	95	13.4
12.00	4	25	0.035	16.800	12.000	665	95	18.7
16.00	4	25	0.040	22.400	16.000	495	80	28.5
20.00	4	25	0.050	28.000	20.000	400	80	44.6

Nickel-based alloys
precipitation hardened
Rm > 1000 N/mm²
[Inconel 718]







3.00	4	20	0.005	4.200	3.000	2120	40	0.5
4.00	4	20	0.010	5.600	4.000	1590	65	1.4
5.00	4	20	0.010	7.000	5.000	1275	50	1.8
6.00	4	20	0.015	8.400	6.000	1060	65	3.2
8.00	4	20	0.020	11.200	8.000	795	65	5.7
10.00	4	20	0.020	14.000	10.000	635	50	7.1
12.00	4	20	0.025	16.800	12.000	530	55	10.7
16.00	4	20	0.030	22.400	16.000	400	50	17.1
20.00	4	20	0.040	28.000	20.000	320	50	28.5

Cylindrical end mills ZX

Smooth-edged, normal version, short neck




HM
MG10 λ 40°
 γ 5°

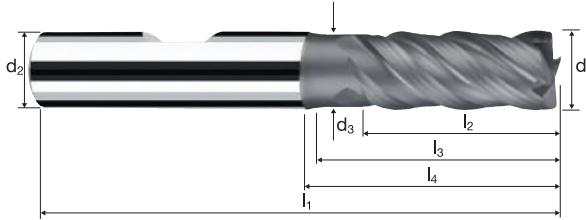

									Inox Stainless	Ti Titanium	Nickel-Alloys Mangan-Steels HSS
--	--	--	--	--	--	--	--	--	-------------------	----------------	---------------------------------------

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	TICUT		POLYCHROM	
											18800	18700	P8800	P8700
180	3.00	6.00	2.80	57	8.00	14.00	20.37	0.100	4.5°	4	●	■	●	
220	4.00	6.00	3.70	57	11.00	16.00	20.82	0.100	3.0°	4	●	■	●	
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.150	1.5°	4	●	■	●	
300	6.00	6.00	5.50	57	13.00	18.15	20.00	0.150	0.0°	4	●	■	●	
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	0.0°	4	●	■	●	
450	10.00	10.00	9.20	72	22.00	27.99	31.00	0.200	0.0°	4	●	■	●	
501	12.00	12.00	11.00	83	26.00	33.29	37.00	0.200	0.0°	4	●	■	●	
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.300	0.0°	4	●	■	●	
682	20.00	20.00	19.00	104	38.00	48.23	53.00	0.300	0.0°	4	●	■	●	
■ Availability and delivery dates on request														

Application



Material

Nickel-based alloys
annealed
Rm < 1000 N/mm²
[Inconel 718]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	5	45	0.020	10.800	1.200	2385	240	3.1
8.00	5	45	0.030	14.400	1.600	1790	270	6.2
10.00	5	45	0.035	18.000	2.000	1430	250	9.0
12.00	5	45	0.045	21.600	2.400	1195	270	13.9
16.00	5	45	0.050	28.800	3.200	895	225	20.6
20.00	5	45	0.060	36.000	4.000	715	215	30.9

Nickel-based alloys
precipitation hardened
Rm > 1000 N/mm²
[Inconel 718]



6.00	5	30	0.015	10.800	1.200	1590	120	1.5
8.00	5	30	0.025	14.400	1.600	1195	150	3.4
10.00	5	30	0.030	18.000	2.000	955	145	5.2
12.00	5	30	0.035	21.600	2.400	795	140	7.2
16.00	5	30	0.040	28.800	3.200	595	120	11.0
20.00	5	30	0.050	36.000	4.000	475	120	17.2

Manganese steel
Mn > 5%
[1.3964 / Nitronic]
[1.3401 / X120Mn12]



6.00	5	50	0.020	10.800	1.200	2655	265	3.4
8.00	5	50	0.030	14.400	1.600	1990	300	6.9
10.00	5	50	0.035	18.000	2.000	1590	280	10.0
12.00	5	50	0.045	21.600	2.400	1325	300	15.5
16.00	5	50	0.050	28.800	3.200	995	250	22.9
20.00	5	50	0.060	36.000	4.000	795	240	34.4

Inox difficult
[Cr-Ni-Mo++/1.4529]
Heat resistant steel
[1.4841]



6.00	5	60	0.035	10.800	1.200	3185	555	7.2
8.00	5	60	0.045	14.400	1.600	2385	535	12.4
10.00	5	60	0.055	18.000	2.000	1910	525	18.9
12.00	5	60	0.065	21.600	2.400	1590	515	26.8
16.00	5	60	0.070	28.800	3.200	1195	420	38.5
20.00	5	60	0.085	36.000	4.000	955	405	58.4

PM high-speed steel
annealed
[Böhler S390]
[ASP 2023]



6.00	5	90	0.020	10.800	1.200	4775	475	6.2
8.00	5	90	0.030	14.400	1.600	3580	535	12.4
10.00	5	90	0.035	18.000	2.000	2865	500	18.0
12.00	5	90	0.045	21.600	2.400	2385	535	27.8
16.00	5	90	0.050	28.800	3.200	1790	450	41.3
20.00	5	90	0.060	36.000	4.000	1430	430	61.9

Titanium alloys
> 300 HB
[Ti6Al4V]







6.00	5	85	0.020	10.800	1.200	4510	450	5.8
8.00	5	85	0.025	14.400	1.600	3380	425	9.7
10.00	5	85	0.035	18.000	2.000	2705	475	17.0
12.00	5	85	0.040	21.600	2.400	2255	450	23.4
16.00	5	85	0.045	28.800	3.200	1690	380	35.1
20.00	5	85	0.055	36.000	4.000	1355	370	53.6

Cylindrical end mills ZX

Smooth-edged, normal version, short neck



HM
MG10 λ 40°
 γ 5°

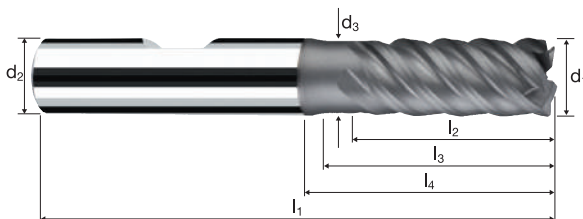

Roughing


Finishing



							Inox Stainless	Ti Titanium	Nickel-Alloys Mangan-Steels HSS
--	--	--	--	--	--	--	-------------------	----------------	---------------------------------------

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	z	Coating	
										TICUT	POLYCHROM
Example: Order-N°. Coating: P Article-N°. 8805 ø-Code: 300											
300	6.00	6.00	5.50	57	13.00	18.15	20.00	0.150	5	●	●
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	5	●	●
450	10.00	10.00	9.20	72	22.00	27.99	31.00	0.200	5	●	●
501	12.00	12.00	11.00	83	26.00	33.29	37.00	0.200	5	●	●
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.300	5	●	●
682	20.00	20.00	19.00	104	38.00	48.23	53.00	0.300	5	●	●
Availability and delivery dates on request											

Application



Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	96	0.015	3.750	1.200	10185	610	2.8
4.00	4	96	0.020	5.000	1.600	7640	610	4.9
5.00	4	80	0.023	6.250	3.250	5095	470	9.5
6.00	4	80	0.027	9.000	3.900	4245	460	16.1
8.00	4	80	0.036	12.000	5.200	3185	460	28.6
10.00	4	80	0.045	15.000	6.500	2545	460	44.7
12.00	4	80	0.054	18.000	7.800	2120	460	64.4
16.00	4	80	0.064	20.000	10.400	1590	405	84.7
20.00	4	80	0.080	25.000	13.000	1275	405	132.4

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



3.00	4	59	0.014	3.750	1.200	6260	340	1.5
4.00	4	59	0.020	5.000	1.600	4695	375	3.0
5.00	4	59	0.023	6.250	3.250	3755	340	6.9
6.00	4	59	0.027	9.000	3.900	3130	340	11.9
8.00	4	59	0.036	12.000	5.200	2350	340	21.1
10.00	4	59	0.045	15.000	6.500	1880	340	33.0
12.00	4	59	0.054	18.000	7.800	1565	340	47.5
16.00	4	59	0.064	20.000	10.400	1175	300	62.5
20.00	4	59	0.080	25.000	13.000	940	300	97.7

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]



3.00	4	48	0.014	3.750	1.200	5095	275	1.2
4.00	4	48	0.018	5.000	1.600	3820	275	2.2
5.00	4	44	0.020	6.250	3.250	2800	225	4.6
6.00	4	44	0.024	9.000	3.900	2335	225	7.9
8.00	4	44	0.032	12.000	5.200	1750	225	14.0
10.00	4	44	0.040	15.000	6.500	1400	225	21.8
12.00	4	44	0.048	18.000	7.800	1165	225	31.5
16.00	4	44	0.056	20.000	10.400	875	195	40.8
20.00	4	44	0.070	25.000	13.000	700	195	63.7

Inox martensitic
C < 0.3%
[Cr/1.4021]



3.00	4	122	0.020	3.750	1.200	12945	1010	4.5
4.00	4	122	0.026	5.000	1.600	9710	1010	8.1
5.00	4	102	0.030	6.250	3.250	6495	780	15.8
6.00	4	102	0.036	9.000	3.900	5410	780	27.4
8.00	4	102	0.048	12.000	5.200	4060	780	48.6
10.00	4	102	0.060	15.000	6.500	3245	780	76.0
12.00	4	102	0.072	18.000	7.800	2705	780	109.4
16.00	4	102	0.088	20.000	10.400	2030	715	148.6
20.00	4	102	0.110	25.000	13.000	1625	715	232.1



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



3.00	4	70	0.009	2.250	3.000	7425	265	1.8
4.00	4	70	0.012	3.000	4.000	5570	265	3.2
5.00	4	70	0.015	6.250	5.000	4455	265	8.3
6.00	4	70	0.022	9.000	6.000	3715	320	17.3
8.00	4	70	0.029	12.000	8.000	2785	320	30.8
10.00	4	70	0.036	15.000	10.000	2230	320	48.1
12.00	4	70	0.043	18.000	12.000	1855	320	69.3
16.00	4	70	0.051	20.000	16.000	1395	285	91.3
20.00	4	70	0.064	25.000	20.000	1115	285	142.6

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



3.00	4	47	0.008	2.250	3.000	4985	160	1.1
4.00	4	47	0.012	3.000	4.000	3740	180	2.2
5.00	4	52	0.015	6.250	5.000	3310	195	6.1
6.00	4	52	0.022	9.000	6.000	2760	240	12.9
8.00	4	52	0.029	12.000	8.000	2070	240	22.9
10.00	4	52	0.036	15.000	10.000	1655	240	35.8
12.00	4	52	0.043	18.000	12.000	1380	240	51.5
16.00	4	52	0.051	20.000	16.000	1035	210	67.8
20.00	4	52	0.064	25.000	20.000	830	210	105.9

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]



3.00	4	39	0.008	2.250	3.000	4140	135	0.9
4.00	4	39	0.011	3.000	4.000	3105	135	1.6
5.00	4	39	0.013	6.250	5.000	2485	130	4.0
6.00	4	39	0.019	9.000	6.000	2070	160	8.6
8.00	4	39	0.026	12.000	8.000	1550	160	15.3
10.00	4	39	0.032	15.000	10.000	1240	160	23.8
12.00	4	39	0.038	18.000	12.000	1035	160	34.3
16.00	4	39	0.045	20.000	16.000	775	140	44.5
20.00	4	39	0.056	25.000	20.000	620	140	69.5

Inox martensitic
C < 0.3%
[Cr/1.4021]






3.00	4	89	0.009	2.250	3.000	9445	340	2.3
4.00	4	89	0.012	3.000	4.000	7080	340	4.1
5.00	4	89	0.015	5.000	5.000	5665	340	8.5
6.00	4	89	0.022	7.500	6.000	4720	410	18.4
8.00	4	89	0.029	10.000	8.000	3540	410	32.6
10.00	4	89	0.036	12.500	10.000	2835	410	51.0
12.00	4	89	0.043	15.000	12.000	2360	410	73.4
16.00	4	89	0.053	16.000	16.000	1770	375	95.7
20.00	4	89	0.066	20.000	20.000	1415	375	149.6

Cylindrical end mills SX

Smooth-edged, normal version, short neck


HM λ 43°
MG10 γ 3°

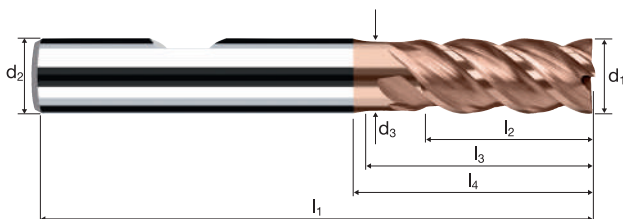

Rm < 850 Inox Stainless Ti Titanium Nickel-Alloys Mangan-Steels Tool Steel

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	Ordering Information	
											Coating	Article-N°
Example:												
Order-N°:	H	8606		180								H8606
												H8506
180	3.00	6.00	2.80	57	8.00	14.00	20.37	0.050	4.5°	4		●
220	4.00	6.00	3.70	57	11.00	16.00	20.82	0.100	3.0°	4		●
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.100	1.5°	4		●
300	6.00	6.00	5.50	57	13.00	18.15	20.00	0.150	0.0°	4		●
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	0.0°	4		●
450	10.00	10.00	9.20	72	22.00	27.99	31.00	0.200	0.0°	4		●
501	12.00	12.00	11.00	83	26.00	33.29	37.00	0.200	0.0°	4		●
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	4		●
682	20.00	20.00	19.00	104	38.00	48.23	53.00	0.250	0.0°	4		●

Application



Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	φ_Z [°]
6.00	6	80	0.022	16.000	5.400	4245	560	5
8.00	6	80	0.029	21.000	7.200	3185	554	5
10.00	7	80	0.031	25.000	9.000	2545	552	5
12.00	7	80	0.037	31.000	10.800	2120	549	5
16.00	8	80	0.038	36.000	14.400	1590	483	5
20.00	8	80	0.048	46.000	18.000	1275	490	5

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



6.00	6	60	0.022	16.000	5.400	3185	420	5
8.00	6	60	0.029	21.000	7.200	2385	415	5
10.00	7	60	0.031	25.000	9.000	1910	415	5
12.00	7	60	0.037	31.000	10.800	1590	412	5
16.00	8	60	0.038	36.000	14.400	1195	363	5
20.00	8	60	0.048	46.000	18.000	955	367	5

Inox difficult
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]




6.00	6	45	0.019	16.000	5.400	2385	272	5
8.00	6	45	0.026	21.000	7.200	1790	279	5
10.00	7	45	0.027	25.000	9.000	1430	270	5
12.00	7	45	0.033	31.000	10.800	1195	276	5
16.00	8	45	0.034	36.000	14.400	895	243	5
20.00	8	45	0.042	46.000	18.000	715	240	5

Nickel-based alloys
precipitation hardened
 $R_m > 1000 \text{ N/mm}^2$
[Inconel 718]



6.00	6	15	0.010	16.000	5.400	795	48	3
8.00	6	15	0.013	21.000	7.200	595	46	3
10.00	7	15	0.014	25.000	9.000	475	47	3
12.00	7	15	0.016	31.000	10.800	400	45	3
16.00	8	15	0.017	36.000	14.400	300	41	3
20.00	8	15	0.019	46.000	18.000	240	37	3

Application



Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [cm ³ /min]
6.00	6	129	0.055	16.000	0.600	6845	2275	21.8
8.00	6	129	0.082	21.000	0.800	5135	2523	42.4
10.00	7	122	0.091	25.000	1.000	3870	2463	61.6
12.00	7	122	0.104	31.000	1.200	3225	2346	87.3
16.00	8	116	0.120	36.000	1.600	2300	2210	127.3
20.00	8	116	0.122	46.000	2.000	1840	1800	165.6

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



6.00	6	95	0.055	16.000	0.600	5015	1667	16.0
8.00	6	95	0.082	21.000	0.800	3760	1848	31.0
10.00	7	89	0.091	25.000	1.000	2815	1791	44.8
12.00	7	89	0.104	31.000	1.200	2350	1709	63.6
16.00	8	84	0.120	36.000	1.600	1670	1605	92.4
20.00	8	84	0.122	46.000	2.000	1335	1306	120.2

Inox difficult
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]



6.00	6	75	0.050	16.000	0.600	3980	1194	11.5
8.00	6	75	0.074	21.000	0.800	2985	1327	22.3
10.00	7	72	0.080	25.000	1.000	2290	1289	32.2
12.00	7	72	0.092	31.000	1.200	1910	1227	45.7
16.00	8	68	0.109	36.000	1.600	1345	1173	67.6
20.00	8	68	0.113	46.000	2.000	1075	968	89.1

Nickel-based alloys
precipitation hardened
 $R_m > 1000 \text{ N/mm}^2$
[Inconel 718]



6.00	6	35	0.048	16.000	0.300	1865	539	2.6
8.00	6	35	0.069	21.000	0.400	1400	576	4.8
10.00	7	33	0.078	25.000	0.500	1060	582	7.3
12.00	7	33	0.086	31.000	0.600	885	531	9.9
16.00	8	31	0.101	36.000	0.800	625	504	14.5
20.00	8	31	0.100	46.000	1.000	500	399	18.4



Cylindrical end mills SX



Smooth-edged, chip breaker, normal version
High-performance penetration edge, central air/cooling channel

new!

HM
MG10 λ 55°
 γ 10°

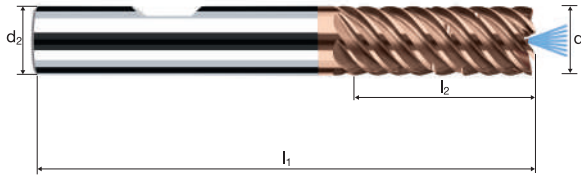


Roughing HPC Roughing HDC Finishing



Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	r	z	Example: Order-Nº.	
							Coating S	Article-Nº. 8608
								DURO-XI
								S8608
								S8508
300	6.00	6.00	57	16.00	0.100	6		●
391	8.00	8.00	63	21.00	0.150	6		●
450	10.00	10.00	72	25.00	0.200	7		●
501	12.00	12.00	83	31.00	0.200	7		●
610	16.00	16.00	92	36.00	0.200	8		●
682	20.00	20.00	104	46.00	0.250	8		●

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
4.00	4	150	0.030	7.200	1.600	11935	1430	16.5	18°
5.00	4	150	0.035	9.000	2.000	9550	1335	24.1	18°
6.00	4	150	0.040	10.800	2.400	7960	1275	33.0	18°
8.00	4	150	0.050	14.400	3.200	5970	1195	55.0	18°
10.00	4	150	0.065	18.000	4.000	4775	1240	89.4	18°
12.00	4	150	0.075	21.600	4.800	3980	1195	123.8	18°
16.00	4	150	0.085	24.000	6.400	2985	1015	155.8	18°
20.00	4	150	0.100	30.000	8.000	2385	955	229.2	18°



Steel
1100 - 1300 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
4.00	4	115	0.025	7.200	1.600	9150	915	10.5	15°
5.00	4	115	0.030	9.000	2.000	7320	880	15.8	15°
6.00	4	115	0.035	10.800	2.400	6100	855	22.1	15°
8.00	4	115	0.045	14.400	3.200	4575	825	38.0	15°
10.00	4	115	0.055	18.000	4.000	3660	805	58.0	15°
12.00	4	115	0.065	21.600	4.800	3050	795	82.2	15°
16.00	4	115	0.075	24.000	6.400	2290	685	105.4	15°
20.00	4	115	0.090	30.000	8.000	1830	660	158.1	15°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]
4.00	4	90	0.020	7.200	1.600	7160	575	6.6	12°
5.00	4	90	0.025	9.000	2.000	5730	575	10.3	12°
6.00	4	90	0.030	10.800	2.400	4775	575	14.9	12°
8.00	4	90	0.035	14.400	3.200	3580	500	23.1	12°
10.00	4	90	0.045	18.000	4.000	2865	515	37.1	12°
12.00	4	90	0.055	21.600	4.800	2385	525	54.5	12°
16.00	4	90	0.065	24.000	6.400	1790	465	71.5	12°
20.00	4	90	0.080	30.000	8.000	1430	460	110.0	12°


Application



Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
4.00	4	120	0.020	6.000	4.000	9550	765	18.3	20°	16.5
5.00	4	120	0.023	7.500	5.000	7640	705	26.4	20°	20.6
6.00	4	120	0.026	9.000	6.000	6365	660	35.8	20°	24.7
8.00	4	120	0.033	12.000	8.000	4775	630	60.5	20°	33.0
10.00	4	120	0.042	15.000	10.000	3820	640	96.3	20°	41.2
12.00	4	120	0.049	18.000	12.000	3185	625	134.8	20°	49.5
16.00	4	120	0.055	24.000	16.000	2385	525	201.7	20°	65.9
20.00	4	120	0.065	25.000	20.000	1910	495	248.3	20°	68.7



Steel
1100 - 1300 N/mm²







d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
4.00	4	90	0.016	6.000	4.000	7160	460	11.0	20°	16.5
5.00	4	90	0.020	7.500	5.000	5730	460	17.2	20°	20.6
6.00	4	90	0.023	9.000	6.000	4775	440	23.7	20°	24.7
8.00	4	90	0.029	12.000	8.000	3580	415	39.9	20°	33.0
10.00	4	90	0.036	15.000	10.000	2865	415	61.9	20°	41.2
12.00	4	90	0.042	18.000	12.000	2385	400	86.6	20°	49.5
16.00	4	90	0.049	24.000	16.000	1790	350	134.8	20°	65.9
20.00	4	90	0.058	25.000	20.000	1430	330	166.2	20°	68.7

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
4.00	4	70	0.013	6.000	4.000	5570	290	7.0	14°	24.1
5.00	4	70	0.016	7.500	5.000	4455	285	10.7	14°	30.1
6.00	4	70	0.020	9.000	6.000	3715	295	16.0	14°	36.1
8.00	4	70	0.023	12.000	8.000	2785	255	24.6	14°	48.1
10.00	4	70	0.029	15.000	10.000	2230	260	38.8	14°	60.2
12.00	4	70	0.036	18.000	12.000	1855	265	57.8	14°	72.2
16.00	4	70	0.042	24.000	16.000	1395	235	89.8	14°	96.3
20.00	4	70	0.052	25.000	20.000	1115	230	115.9	14°	100.3

This way to the cutting data software
ToolExpert MFC.
Quick, easy, reliable.






Cylindrical end mills MFC

Smooth-edged, normal version, short neck
High-performance penetration edge, central air/cooling channel




HM
MG10 λ 45°
 γ 10°

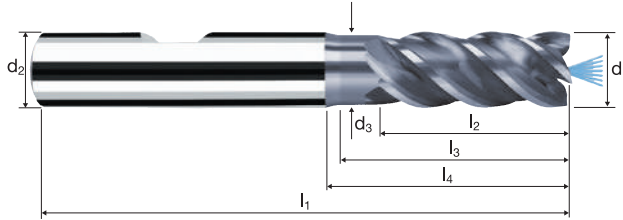

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

Example: Order-N°.											POLYCHROM	
											P8201	
											P8101	
\emptyset Code	d_1 e8	d_2 h5	d_3	l_1	l_2	l_3	l_4	r	α	z		
220	4.00	6.00	3.70	57	8.00	16.00	20.82	0.100	3.0°	4	●	
260	5.00	6.00	4.60	57	10.00	18.00	21.27	0.100	1.5°	4	●	
300	6.00	6.00	5.50	57	12.00	18.15	20.00	0.100	0.0°	4	●	
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	0.0°	4	●	
450	10.00	10.00	9.20	72	23.00	27.99	31.00	0.200	0.0°	4	●	
501	12.00	12.00	11.00	83	27.00	33.29	37.00	0.200	0.0°	4	●	
503*	12.00	12.00	11.00	83	27.00	33.29	37.00	0.200	0.0°	4	●	
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	4	●	
612*	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	4	●	
682	20.00	20.00	19.00	104	39.00	48.23	53.00	0.200	0.0°	4	●	
684*	20.00	20.00	19.00	104	39.00	48.23	53.00	0.200	0.0°	4	●	
* with chip breaker												

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
4.00	4	150	0.030	7.200	1.600	11935	1430	16.5	18°
5.00	4	150	0.035	9.000	2.000	9550	1335	24.1	18°
6.00	4	150	0.040	10.800	2.400	7960	1275	33.0	18°
8.00	4	150	0.050	14.400	3.200	5970	1195	55.0	18°
10.00	4	150	0.065	18.000	4.000	4775	1240	89.4	18°
12.00	4	150	0.075	21.600	4.800	3980	1195	123.8	18°
16.00	4	150	0.085	24.000	6.400	2985	1015	155.8	18°
20.00	4	150	0.100	30.000	8.000	2385	955	229.2	18°



Steel
1100 - 1300 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
4.00	4	115	0.025	7.200	1.600	9150	915	10.5	15°
5.00	4	115	0.030	9.000	2.000	7320	880	15.8	15°
6.00	4	115	0.035	10.800	2.400	6100	855	22.1	15°
8.00	4	115	0.045	14.400	3.200	4575	825	38.0	15°
10.00	4	115	0.055	18.000	4.000	3660	805	58.0	15°
12.00	4	115	0.065	21.600	4.800	3050	795	82.2	15°
16.00	4	115	0.075	24.000	6.400	2290	685	105.4	15°
20.00	4	115	0.090	30.000	8.000	1830	660	158.1	15°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]
4.00	4	90	0.020	7.200	1.600	7160	575	6.6	12°
5.00	4	90	0.025	9.000	2.000	5730	575	10.3	12°
6.00	4	90	0.030	10.800	2.400	4775	575	14.9	12°
8.00	4	90	0.035	14.400	3.200	3580	500	23.1	12°
10.00	4	90	0.045	18.000	4.000	2865	515	37.1	12°
12.00	4	90	0.055	21.600	4.800	2385	525	54.5	12°
16.00	4	90	0.065	24.000	6.400	1790	465	71.5	12°
20.00	4	90	0.080	30.000	8.000	1430	460	110.0	12°


Application



Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
4.00	4	120	0.021	6.000	4.000	9550	800	19.3	20°	16.5
5.00	4	120	0.025	7.500	5.000	7640	765	28.6	20°	20.6
6.00	4	120	0.028	9.000	6.000	6365	715	38.5	20°	24.7
8.00	4	120	0.035	12.000	8.000	4775	670	64.2	20°	33.0
10.00	4	120	0.046	15.000	10.000	3820	705	105.4	20°	41.2
12.00	4	120	0.053	18.000	12.000	3185	675	145.8	20°	49.5
16.00	4	120	0.059	24.000	16.000	2385	565	216.3	20°	65.9
20.00	4	120	0.070	25.000	20.000	1910	535	267.4	20°	68.7



Steel
1100 - 1300 N/mm²







d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
4.00	4	90	0.018	6.000	4.000	7160	515	12.4	20°	16.5
5.00	4	90	0.021	7.500	5.000	5730	480	18.0	20°	20.6
6.00	4	90	0.025	9.000	6.000	4775	475	25.8	20°	24.7
8.00	4	90	0.032	12.000	8.000	3580	460	44.0	20°	33.0
10.00	4	90	0.039	15.000	10.000	2865	445	67.0	20°	41.2
12.00	4	90	0.046	18.000	12.000	2385	440	94.9	20°	49.5
16.00	4	90	0.053	24.000	16.000	1790	380	145.8	20°	65.9
20.00	4	90	0.063	25.000	20.000	1430	360	180.5	20°	68.7

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
4.00	4	70	0.014	6.000	4.000	5570	310	7.5	14°	24.1
5.00	4	70	0.018	7.500	5.000	4455	320	12.0	14°	30.1
6.00	4	70	0.021	9.000	6.000	3715	310	16.8	14°	36.1
8.00	4	70	0.025	12.000	8.000	2785	280	26.7	14°	48.1
10.00	4	70	0.032	15.000	10.000	2230	285	42.8	14°	60.2
12.00	4	70	0.039	18.000	12.000	1855	290	62.6	14°	72.2
16.00	4	70	0.046	24.000	16.000	1395	255	98.4	14°	96.3
20.00	4	70	0.056	25.000	20.000	1115	250	124.8	14°	100.3

This way to the cutting data software
ToolExpert MFC.
Quick, easy, reliable.





Cylindrical end mills MFC

Smooth-edged, normal version, short neck
High-performance penetration edge, central air/cooling channel



HM
MG10 λ 45°
 γ 0°

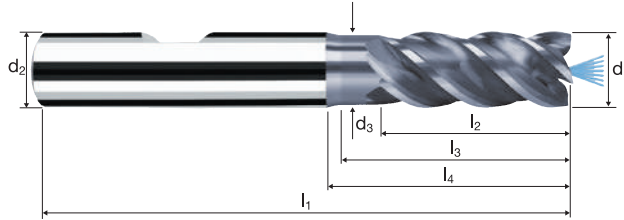


Roughing HPC Roughing HDC Finishing

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

Ø Code	d ₁ e8	d ₂ h5	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	POLYCHROM	
											Example: Order-N°.	Coating P
220	4.00	6.00	3.70	57	8.00	16.00	20.82	0.100	3.0°	4		●
260	5.00	6.00	4.60	57	10.00	18.00	21.27	0.100	1.5°	4		●
300	6.00	6.00	5.50	57	12.00	18.15	20.00	0.100	0.0°	4		●
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	0.0°	4		●
450	10.00	10.00	9.20	72	23.00	27.99	31.00	0.200	0.0°	4		●
501	12.00	12.00	11.00	83	27.00	33.29	37.00	0.200	0.0°	4		●
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	4		●
612*	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	4		●
682	20.00	20.00	19.00	104	39.00	48.23	53.00	0.200	0.0°	4		●
684*	20.00	20.00	19.00	104	39.00	48.23	53.00	0.200	0.0°	4		●

* with chip breaker

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
6.00	5	150	0.040	10.800	2.100	7960	1590	36.1	10°
8.00	5	150	0.050	14.400	2.800	5970	1490	60.2	12°
10.00	5	150	0.065	18.000	3.500	4775	1550	97.8	12°
12.00	5	150	0.075	21.600	4.200	3980	1490	135.4	12°
16.00	5	150	0.085	24.000	5.600	2985	1270	170.5	12°
20.00	5	150	0.100	30.000	7.000	2385	1195	250.7	12°



Steel
1100 - 1300 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
6.00	5	115	0.035	10.800	2.100	6100	1070	24.2	10°
8.00	5	115	0.045	14.400	2.800	4575	1030	41.5	11°
10.00	5	115	0.055	18.000	3.500	3660	1005	63.4	11°
12.00	5	115	0.065	21.600	4.200	3050	990	89.9	11°
16.00	5	115	0.075	24.000	5.600	2290	860	115.3	11°
20.00	5	115	0.090	30.000	7.000	1830	825	173.0	11°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
6.00	5	90	0.030	10.800	2.100	4775	715	16.2	8°
8.00	5	90	0.035	14.400	2.800	3580	625	25.3	8°
10.00	5	90	0.045	18.000	3.500	2865	645	40.6	8°
12.00	5	90	0.055	21.600	4.200	2385	655	59.6	8°
16.00	5	90	0.065	24.000	5.600	1790	580	78.2	8°
20.00	5	90	0.080	30.000	7.000	1430	575	120.3	8°

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
6.00	5	120	0.024	6.000	6.000	6365	765	27.5	12°	28.2
8.00	5	120	0.030	8.000	8.000	4775	715	45.8	12°	37.6
10.00	5	120	0.039	10.000	10.000	3820	745	74.5	12°	47.0
12.00	5	120	0.045	12.000	12.000	3185	715	103.1	12°	56.5
16.00	5	120	0.051	16.000	16.000	2385	610	155.8	12°	75.3
20.00	5	120	0.060	20.000	20.000	1910	575	229.2	12°	94.1



Steel
1100 - 1300 N/mm²







d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
6.00	5	90	0.021	6.000	6.000	4775	500	18.0	12°	28.2
8.00	5	90	0.027	8.000	8.000	3580	485	30.9	12°	37.6
10.00	5	90	0.033	10.000	10.000	2865	475	47.3	12°	47.0
12.00	5	90	0.039	12.000	12.000	2385	465	67.0	12°	56.5
16.00	5	90	0.045	16.000	16.000	1790	405	103.1	12°	75.3
20.00	5	90	0.054	20.000	20.000	1430	385	154.7	12°	94.1

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
6.00	5	70	0.018	6.000	6.000	3715	335	12.0	12°	28.2
8.00	5	70	0.021	8.000	8.000	2785	290	18.7	12°	37.6
10.00	5	70	0.027	10.000	10.000	2230	300	30.1	12°	47.0
12.00	5	70	0.033	12.000	12.000	1855	305	44.1	12°	56.5
16.00	5	70	0.039	16.000	16.000	1395	270	69.5	12°	75.3
20.00	5	70	0.048	20.000	20.000	1115	265	107.0	12°	94.1

This way to the cutting data software
ToolExpert MFC.
Quick, easy, reliable.





Cylindrical end mills MFC

Smooth-edged, normal version, short neck
High-performance penetration edge, central air/cooling channel



HM
MG10 λ 45°
 γ 0°

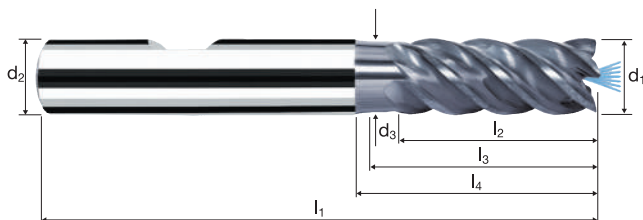

Roughing HPC Roughing HDC Finishing

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

Ø Code	d ₁ e8	d ₂ h5	d ₃	l ₁	l ₂	l ₃	l ₄	r	z	POLYCHROM					
										Example: Order-N°.				P8205	P8105
										Coating P	Article-N° 8205	ø-Code 300			
300	6.00	6.00	5.50	57	12.00	18.15	20.00	0.100	5		●				
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	5		●				
450	10.00	10.00	9.20	72	23.00	27.99	31.00	0.200	5		●				
501	12.00	12.00	11.00	83	27.00	33.29	37.00	0.200	5		●				
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	5		●				
612*	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	5		●				
682	20.00	20.00	19.00	104	39.00	48.23	53.00	0.200	5		●				
684*	20.00	20.00	19.00	104	39.00	48.23	53.00	0.200	5		●				
* with chip breaker															




Application	Material	d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
	Steel < 850 N/mm ²	4.00	4	180	0.035	6.000	1.600	14325	2005	19.3	20°
		5.00	4	180	0.040	7.500	2.000	11460	1835	27.5	20°
	Steel 850 - 1100 N/mm ²	6.00	4	180	0.050	9.000	2.400	9550	1910	41.3	20°
		8.00	4	180	0.060	12.000	3.200	7160	1720	66.0	20°
	Cold work tool steel (12% Cr), high alloyed [1.2379]	10.00	4	180	0.075	15.000	4.000	5730	1720	103.1	20°
		12.00	4	180	0.085	18.000	4.800	4775	1625	140.3	20°
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]	16.00	4	180	0.095	24.000	6.400	3580	1360	209.0	20°
		20.00	4	180	0.110	30.000	8.000	2865	1260	302.5	20°
	Steel < 850 N/mm ²	4.00	4	150	0.030	6.000	1.600	11935	1430	13.8	18°
		5.00	4	150	0.035	7.500	2.000	9550	1335	20.1	18°
	Steel 850 - 1100 N/mm ²	6.00	4	150	0.040	9.000	2.400	7960	1275	27.5	18°
		8.00	4	150	0.050	12.000	3.200	5970	1195	45.8	18°
	Cold work tool steel (12% Cr), high alloyed [1.2379]	10.00	4	150	0.065	15.000	4.000	4775	1240	74.5	18°
		12.00	4	150	0.075	18.000	4.800	3980	1195	103.1	18°
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]	16.00	4	150	0.085	24.000	6.400	2985	1015	155.8	18°
		20.00	4	150	0.100	30.000	8.000	2385	955	229.2	18°
	Steel < 850 N/mm ²	4.00	4	70	0.030	6.000	1.600	5570	670	6.4	12°
		5.00	4	70	0.035	7.500	2.000	4455	625	9.4	12°
	Steel 850 - 1100 N/mm ²	6.00	4	70	0.040	9.000	2.400	3715	595	12.8	12°
		8.00	4	70	0.050	12.000	3.200	2785	555	21.4	12°
	Cold work tool steel (12% Cr), high alloyed [1.2379]	10.00	4	70	0.060	15.000	4.000	2230	535	32.1	12°
		12.00	4	70	0.075	18.000	4.800	1855	555	48.1	12°
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]	16.00	4	70	0.085	24.000	6.400	1395	475	72.7	12°
		20.00	4	70	0.095	30.000	8.000	1115	425	101.6	12°
	Steel < 850 N/mm ²	4.00	4	90	0.020	6.000	1.600	7160	575	5.5	12°
		5.00	4	90	0.025	7.500	2.000	5730	575	8.6	12°
	Steel 850 - 1100 N/mm ²	6.00	4	90	0.030	9.000	2.400	4775	575	12.4	12°
		8.00	4	90	0.035	12.000	3.200	3580	500	19.3	12°
	Cold work tool steel (12% Cr), high alloyed [1.2379]	10.00	4	90	0.045	15.000	4.000	2865	515	30.9	12°
		12.00	4	90	0.055	18.000	4.800	2385	525	45.4	12°
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]	16.00	4	90	0.065	24.000	6.400	1790	465	71.5	12°
		20.00	4	90	0.080	30.000	8.000	1430	460	110.0	12°
	Steel < 850 N/mm ²	4.00	4	145	0.025	5.000	4.000	11540	1155	23.1	32°
		5.00	4	145	0.030	6.250	5.000	9230	1110	34.6	32°
	Steel 850 - 1100 N/mm ²	6.00	4	145	0.040	7.500	6.000	7690	1230	55.4	32°
		8.00	4	145	0.045	10.000	8.000	5770	1040	83.1	32°
	Cold work tool steel (12% Cr), high alloyed [1.2379]	10.00	4	145	0.055	12.500	10.000	4615	1015	126.9	32°
		12.00	4	145	0.065	15.000	12.000	3845	1000	180.0	32°
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]	16.00	4	145	0.070	20.000	16.000	2885	810	258.5	32°
		20.00	4	145	0.085	25.000	20.000	2310	785	392.3	32°
	Steel < 850 N/mm ²	4.00	4	120	0.020	5.000	4.000	9550	765	15.3	29°
		5.00	4	120	0.025	6.250	5.000	7640	765	23.9	29°
	Steel 850 - 1100 N/mm ²	6.00	4	120	0.030	7.500	6.000	6365	765	34.4	29°
		8.00	4	120	0.040	10.000	8.000	4775	765	61.1	29°
	Cold work tool steel (12% Cr), high alloyed [1.2379]	10.00	4	120	0.050	12.500	10.000	3820	765	95.5	29°
		12.00	4	120	0.055	15.000	12.000	3185	700	126.1	29°
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]	16.00	4	120	0.065	20.000	16.000	2385	620	198.6	29°
		20.00	4	120	0.075	25.000	20.000	1910	575	286.5	29°
	Steel < 850 N/mm ²	4.00	4	55	0.025	5.000	4.000	4375	440	8.8	19°
		5.00	4	55	0.025	6.250	5.000	3500	350	10.9	19°
	Steel 850 - 1100 N/mm ²	6.00	4	55	0.030	7.500	6.000	2920	350	15.8	19°
		8.00	4	55	0.040	10.000	8.000	2190	350	28.0	19°
	Cold work tool steel (12% Cr), high alloyed [1.2379]	10.00	4	55	0.045	12.500	10.000	1750	315	39.4	19°
		12.00	4	55	0.055	15.000	12.000	1460	320	57.8	19°
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]	16.00	4	55	0.065	20.000	16.000	1095	285	91.0	19°
		20.00	4	55	0.070	25.000	20.000	875	245	122.5	19°
	Steel < 850 N/mm ²	4.00	4	70	0.015	5.000	4.000	5570	335	6.7	14°
		5.00	4	70	0.020	6.250	5.000	4455	355	11.1	14°
	Steel 850 - 1100 N/mm ²	6.00	4	70	0.025	7.500	6.000	3715	370	16.7	14°
		8.00	4	70	0.025	10.000	8.000	2785	280	22.3	14°
	Cold work tool steel (12% Cr), high alloyed [1.2379]	10.00	4	70	0.035	12.500	10.000	2230	310	39.0	14°
		12.00	4	70	0.040	15.000	12.000	1855	295	53.5	14°
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]	16.00	4	70	0.050	20.000	16.000	1395	280	89.1	14°
		20.00	4	70	0.060	25.000	20.000	1115	265	133.7	14°

Cylindrical end mills NVDS

Smooth-edged, normal version, short neck
High-performance penetration edge





HM
MG10 λ 45°
 γ 0°

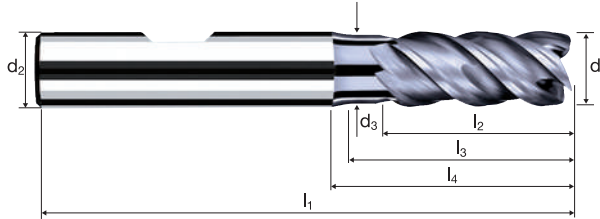

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	--------------------------------------

Ø Code	d ₁ e8	d ₂ h5	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	POLYCHROM	
											Example: Order-N°.	Coating P
220	4.00	6.00	3.70	57	8.00	16.00	20.82	0.100	3.0°	4	●	P8200
260	5.00	6.00	4.60	57	10.00	18.00	21.27	0.100	1.5°	4	●	P8100
300	6.00	6.00	5.50	57	12.00	18.15	20.00	0.100	0.0°	4	●	
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	0.0°	4	●	
450	10.00	10.00	9.20	72	23.00	27.99	31.00	0.200	0.0°	4	●	
501	12.00	12.00	11.00	83	27.00	33.29	37.00	0.200	0.0°	4	●	
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	4	●	
682	20.00	20.00	19.00	104	39.00	48.23	53.00	0.200	0.0°	4	●	

Application



Material

Steel
< 850 N/mm²

Steel
850 - 1100 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
3.00	4	150	0.018	4.500	1.200	15915	1145	6.2	16°
4.00	4	150	0.022	6.000	1.600	11935	1050	10.1	16°
5.00	4	150	0.028	7.500	2.000	9550	1070	16.0	16°
6.00	4	150	0.035	9.000	2.400	7960	1115	24.1	16°
8.00	4	150	0.045	12.000	3.200	5970	1075	41.3	16°
10.00	4	150	0.060	15.000	4.000	4775	1145	68.8	16°
12.00	4	150	0.065	18.000	4.800	3980	1035	89.4	16°
16.00	4	150	0.075	24.000	6.400	2985	895	137.5	16°
20.00	4	150	0.090	30.000	8.000	2385	860	206.3	16°

3.00	4	125	0.015	4.500	1.200	13265	795	4.3	15°
4.00	4	125	0.018	6.000	1.600	9945	715	6.9	15°
5.00	4	125	0.024	7.500	2.000	7960	765	11.5	15°
6.00	4	125	0.030	9.000	2.400	6630	795	17.2	15°
8.00	4	125	0.040	12.000	3.200	4975	795	30.6	15°
10.00	4	125	0.055	15.000	4.000	3980	875	52.5	15°
12.00	4	125	0.060	18.000	4.800	3315	795	68.8	15°
16.00	4	125	0.070	24.000	6.400	2485	695	107.0	15°
20.00	4	125	0.080	30.000	8.000	1990	635	152.8	15°

3.00	4	85	0.013	4.500	1.200	9020	470	2.5	9°
4.00	4	85	0.016	6.000	1.600	6765	435	4.2	9°
5.00	4	85	0.020	7.500	2.000	5410	435	6.5	9°
6.00	4	85	0.025	9.000	2.400	4510	450	9.7	9°
8.00	4	85	0.035	12.000	3.200	3380	475	18.2	9°
10.00	4	85	0.045	15.000	4.000	2705	485	29.2	9°
12.00	4	85	0.050	18.000	4.800	2255	450	39.0	9°
16.00	4	85	0.060	24.000	6.400	1690	405	62.3	9°
20.00	4	85	0.070	30.000	8.000	1355	380	90.9	9°

3.00	4	45	0.013	4.500	1.200	4775	250	1.3	7°
4.00	4	45	0.016	6.000	1.600	3580	230	2.2	7°
5.00	4	45	0.020	7.500	2.000	2865	230	3.4	7°
6.00	4	45	0.025	9.000	2.400	2385	240	5.2	7°
8.00	4	45	0.035	12.000	3.200	1790	250	9.6	7°
10.00	4	45	0.045	15.000	4.000	1430	260	15.5	7°
12.00	4	45	0.050	18.000	4.800	1195	240	20.6	7°
16.00	4	45	0.060	24.000	6.400	895	215	33.0	7°
20.00	4	45	0.070	30.000	8.000	715	200	48.1	7°

Application



Material

Steel
< 850 N/mm²

Steel
850 - 1100 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
3.00	4	120	0.014	1.800	3.000	12730	715	3.9	26°	3.7
4.00	4	120	0.018	2.800	4.000	9550	690	7.7	26°	5.7
5.00	4	120	0.022	4.000	5.000	7640	670	13.4	26°	8.2
6.00	4	120	0.028	6.000	6.000	6365	715	25.7	26°	12.3
8.00	4	120	0.036	8.000	8.000	4775	690	44.0	26°	16.4
10.00	4	120	0.048	10.000	10.000	3820	735	73.3	26°	20.5
12.00	4	120	0.052	12.000	12.000	3185	660	95.3	26°	24.6
16.00	4	120	0.060	16.000	16.000	2385	575	146.7	26°	32.8
20.00	4	120	0.072	20.000	20.000	1910	550	220.0	26°	41.0

3.00	4	100	0.011	1.800	3.000	10610	465	2.5	24°	4.0
4.00	4	100	0.014	2.800	4.000	7960	445	5.0	24°	6.3
5.00	4	100	0.020	4.000	5.000	6365	510	10.2	24°	9.0
6.00	4	100	0.024	6.000	6.000	5305	510	18.3	24°	13.5
8.00	4	100	0.032	8.000	8.000	3980	510	32.6	24°	18.0
10.00	4	100	0.044	10.000	10.000	3185	560	56.0	24°	22.5
12.00	4	100	0.048	12.000	12.000	2655	510	73.3	24°	27.0
16.00	4	100	0.056	16.000	16.000	1990	445	114.1	24°	35.9
20.00	4	100	0.064	20.000	20.000	1590	405	163.0	24°	44.9

3.00	4	70	0.010	1.800	3.000	7425	295	1.6	11°	9.3
4.00	4	70	0.013	2.800	4.000	5570	290	3.2	11°	14.4
5.00	4	70	0.016	4.000	5.000	4455	285	5.7	11°	20.6
6.00	4	70	0.020	6.000	6.000	3715	295	10.7	11°	30.9
8.00	4	70	0.028	8.000	8.000	2785	310	20.0	11°	41.2
10.00	4	70	0.036	10.000	10.000	2230	320	32.1	11°	51.4
12.00	4	70	0.040	12.000	12.000	1855	295	42.8	11°	61.7
16.00	4	70	0.048	16.000	16.000	1395	265	68.4	11°	82.3
20.00	4	70	0.056	20.000	20.000	1115	250	99.8	11°	102.9


3.00	4	35	0.010	1.800	3.000	3715	150	0.8	10°	10.2
4.00	4	35	0.013	2.800	4.000	2785	145	1.6	10°	15.9
5.00	4	35	0.016	4.000	5.000	2230	145	2.9	10°	22.7
6.00	4	35	0.020	6.000	6.000	1855	150	5.3	10°	34.0
8.00	4	35	0.028	8.000	8.000	1395	155	10.0	10°	45.4
10.00	4	35	0.036	10.000	10.000	1115	160	16.0	10°	56.7
12.00	4	35	0.040	12.000	12.000	930	150	21.4	10°	68.1
16.00	4	35	0.048	16.000	16.000	695	135	34.2	10°	90.7
20.00	4	35	0.056	20.000	20.000	555	125	49.9	10°	113.4

Cylindrical end mills NVS

Smooth-edged, normal version, short neck
High-performance penetration edge




HM
MG10 λ 45°
 γ 15°

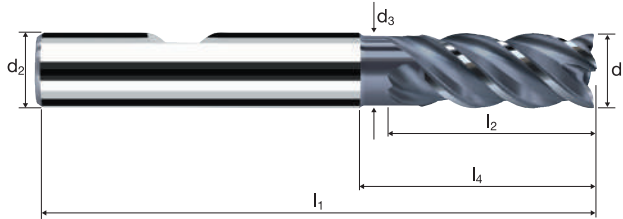

Rm < 850	Rm 850-1100	Rm 1100-1300						Inox Stainless	Ti Titanium	GG(G) Copper Tool Steel
-------------	----------------	-----------------	--	--	--	--	--	-------------------	----------------	-------------------------------


Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	POLYCHROM	
											P8404	P8304
140	2.00	6.00	1.90	57	7.00	10.00	18.31	0.050	7.0°	4	●	
160	2.50	6.00	2.30	57	8.00	10.00	17.56	0.050	6.5°	4	●	
178*	3.00	3.00	2.80	45	8.00	13.56	14.00	0.050	0.0°	4	●	
180	3.00	6.00	2.80	57	8.00	14.00	20.63	0.050	4.5°	4	●	
200	3.50	6.00	3.20	57	8.00	14.00	19.88	0.050	4.0°	4	●	
218*	4.00	4.00	3.70	50	11.00	15.47	16.00	0.100	0.0°	4	●	
220	4.00	6.00	3.70	57	11.00	16.00	20.95	0.100	3.0°	4	●	
240	4.50	6.00	4.10	57	12.00	16.00	20.20	0.100	2.5°	4	●	
258*	5.00	5.00	4.60	50	13.00	15.40	16.00	0.100	0.0°	4	●	
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.100	1.5°	4	●	
280	5.50	6.00	5.00	57	13.00	20.00	22.52	0.100	1.0°	4	●	
300	6.00	6.00	5.50	57	13.00	19.34	20.00	0.100	0.0°	4	●	
331	7.00	8.00	6.40	63	16.00	24.00	27.64	0.100	1.5°	4	●	
391	8.00	8.00	7.40	63	19.00	25.29	26.00	0.150	0.0°	4	●	
420	9.00	10.00	8.20	72	19.00	26.00	30.02	0.200	1.5°	4	●	
450	10.00	10.00	9.20	72	22.00	30.20	31.00	0.200	0.0°	4	●	
501	12.00	12.00	11.00	83	26.00	36.13	37.00	0.200	0.0°	4	●	
610	16.00	16.00	15.00	92	32.00	42.13	43.00	0.200	0.0°	4	●	
682	20.00	20.00	19.00	104	38.00	52.13	53.00	0.200	0.0°	4	●	
* without clamping flat only												

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
4.00	4	180	0.035	6.000	1.600	14325	2005	19.3
5.00	4	180	0.040	7.500	2.000	11460	1835	27.5
6.00	4	180	0.050	9.000	2.400	9550	1910	41.3
8.00	4	180	0.060	12.000	3.200	7160	1720	66.0
10.00	4	180	0.075	15.000	4.000	5730	1720	103.1
12.00	4	180	0.085	18.000	4.800	4775	1625	140.3
16.00	4	180	0.095	24.000	6.400	3580	1360	209.0
20.00	4	180	0.110	30.000	8.000	2865	1260	302.5

Steel
850 - 1100 N/mm²



4.00	4	150	0.030	6.000	1.600	11935	1430	13.8
5.00	4	150	0.035	7.500	2.000	9550	1335	20.1
6.00	4	150	0.040	9.000	2.400	7960	1275	27.5
8.00	4	150	0.050	12.000	3.200	5970	1195	45.8
10.00	4	150	0.065	15.000	4.000	4775	1240	74.5
12.00	4	150	0.075	18.000	4.800	3980	1195	103.1
16.00	4	150	0.085	24.000	6.400	2985	1015	155.8
20.00	4	150	0.100	30.000	8.000	2385	955	229.2

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



4.00	4	70	0.030	6.000	1.600	5570	670	6.4
5.00	4	70	0.035	7.500	2.000	4455	625	9.4
6.00	4	70	0.040	9.000	2.400	3715	595	12.8
8.00	4	70	0.050	12.000	3.200	2785	555	21.4
10.00	4	70	0.060	15.000	4.000	2230	535	32.1
12.00	4	70	0.075	18.000	4.800	1855	555	48.1
16.00	4	70	0.085	24.000	6.400	1395	475	72.7
20.00	4	70	0.095	30.000	8.000	1115	425	101.6

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



4.00	4	90	0.020	6.000	1.600	7160	575	5.5
5.00	4	90	0.025	7.500	2.000	5730	575	8.6
6.00	4	90	0.030	9.000	2.400	4775	575	12.4
8.00	4	90	0.035	12.000	3.200	3580	500	19.3
10.00	4	90	0.045	15.000	4.000	2865	515	30.9
12.00	4	90	0.055	18.000	4.800	2385	525	45.4
16.00	4	90	0.065	24.000	6.400	1790	465	71.5
20.00	4	90	0.080	30.000	8.000	1430	460	110.0



Steel
< 850 N/mm²



4.00	4	145	0.025	5.000	4.000	11540	1155	23.1
5.00	4	145	0.030	6.250	5.000	9230	1110	34.6
6.00	4	145	0.040	7.500	6.000	7690	1230	55.4
8.00	4	145	0.045	10.000	8.000	5770	1040	83.1
10.00	4	145	0.055	12.500	10.000	4615	1015	126.9
12.00	4	145	0.065	15.000	12.000	3845	1000	180.0
16.00	4	145	0.070	20.000	16.000	2885	810	258.5
20.00	4	145	0.085	25.000	20.000	2310	785	392.3

Steel
850 - 1100 N/mm²



4.00	4	120	0.020	5.000	4.000	9550	765	15.3
5.00	4	120	0.025	6.250	5.000	7640	765	23.9
6.00	4	120	0.030	7.500	6.000	6365	765	34.4
8.00	4	120	0.040	10.000	8.000	4775	765	61.1
10.00	4	120	0.050	12.500	10.000	3820	765	95.5
12.00	4	120	0.055	15.000	12.000	3185	700	126.1
16.00	4	120	0.065	20.000	16.000	2385	620	198.6
20.00	4	120	0.075	25.000	20.000	1910	575	286.5

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



4.00	4	55	0.025	5.000	4.000	4375	440	8.8
5.00	4	55	0.025	6.250	5.000	3500	350	10.9
6.00	4	55	0.030	7.500	6.000	2920	350	15.8
8.00	4	55	0.040	10.000	8.000	2190	350	28.0
10.00	4	55	0.045	12.500	10.000	1750	315	39.4
12.00	4	55	0.055	15.000	12.000	1460	320	57.8
16.00	4	55	0.065	20.000	16.000	1095	285	91.0
20.00	4	55	0.070	25.000	20.000	875	245	122.5

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]





4.00	4	70	0.015	5.000	4.000	5570	335	6.7
5.00	4	70	0.020	6.250	5.000	4455	355	11.1
6.00	4	70	0.025	7.500	6.000	3715	370	16.7
8.00	4	70	0.025	10.000	8.000	2785	280	22.3
10.00	4	70	0.035	12.500	10.000	2230	310	39.0
12.00	4	70	0.040	15.000	12.000	1855	295	53.5
16.00	4	70	0.050	20.000	16.000	1395	280	89.1
20.00	4	70	0.060	25.000	20.000	1115	265	133.7

Cylindrical end mills NVD

Smooth-edged, normal version




HM
MG10 λ 45°
 γ 0°

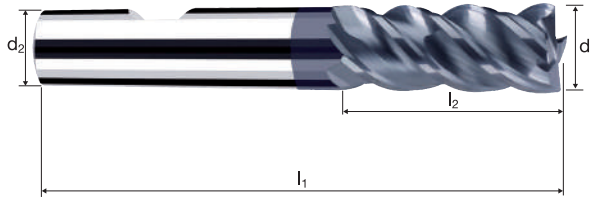

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	--------------------------------------

Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	45°	α	z	POLYCHROM	
									P15307	P15207
180	3.00	6.00	57	8.00	15.56	0.10	6.0°	4	●	
220	4.00	6.00	57	8.00	14.59	0.10	4.5°	4	●	
260	5.00	6.00	57	10.00	14.72	0.15	2.5°	4	●	
300	6.00	6.00	57	12.00	-	0.15	0.0°	4	●	
391	8.00	8.00	63	19.00	-	0.15	0.0°	4	●	
450	10.00	10.00	72	23.00	-	0.20	0.0°	4	●	
501	12.00	12.00	83	27.00	-	0.20	0.0°	4	●	
610	16.00	16.00	92	32.00	-	0.20	0.0°	4	●	
682	20.00	20.00	104	39.00	-	0.20	0.0°	4	●	


Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
3.00	4	155	0.024	3.750	1.200	16445	1580	7.1	1.5°
4.00	4	155	0.034	5.000	1.600	12335	1675	13.4	1.5°
5.00	4	155	0.042	6.250	2.000	9870	1660	20.7	1.5°
6.00	4	155	0.045	9.000	2.400	8225	1480	32.0	1.5°
8.00	4	155	0.060	12.000	3.200	6165	1480	56.8	1.5°
10.00	4	155	0.075	15.000	4.000	4935	1480	88.8	1.5°
12.00	4	155	0.084	18.000	4.800	4110	1380	119.4	1.5°
16.00	4	155	0.096	24.000	6.400	3085	1185	181.9	1.5°
20.00	4	155	0.110	30.000	8.000	2465	1085	260.5	1.5°



Steel
850 - 1100 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
3.00	4	140	0.022	3.750	1.200	14855	1305	5.9	2°
4.00	4	140	0.032	5.000	1.600	11140	1425	11.4	2°
5.00	4	140	0.040	6.250	2.000	8915	1425	17.8	2°
6.00	4	140	0.039	9.000	2.400	7425	1160	25.0	2°
8.00	4	140	0.052	12.000	3.200	5570	1160	44.5	2°
10.00	4	140	0.065	15.000	4.000	4455	1160	69.5	2°
12.00	4	140	0.078	18.000	4.800	3715	1160	100.1	2°
16.00	4	140	0.088	24.000	6.400	2785	980	150.6	2°
20.00	4	140	0.100	30.000	8.000	2230	890	213.9	2°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
3.00	4	90	0.015	3.750	1.200	9550	575	2.6	1.5°
4.00	4	90	0.022	5.000	1.600	7160	630	5.0	1.5°
5.00	4	90	0.027	6.250	2.000	5730	620	7.7	1.5°
6.00	4	90	0.027	9.000	2.400	4775	515	11.1	1.5°
8.00	4	90	0.036	12.000	3.200	3580	515	19.8	1.5°
10.00	4	90	0.045	15.000	4.000	2865	515	30.9	1.5°
12.00	4	90	0.054	18.000	4.800	2385	515	44.6	1.5°
16.00	4	90	0.056	24.000	6.400	1790	400	61.6	1.5°
20.00	4	90	0.070	30.000	8.000	1430	400	96.3	1.5°


Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]
3.00	4	125	0.012	2.250	3.000	13265	635	4.3	1.5°
4.00	4	125	0.017	4.000	4.000	9945	675	10.8	1.5°
5.00	4	125	0.021	5.000	5.000	7960	670	16.7	1.5°
6.00	4	125	0.029	7.500	6.000	6630	770	34.6	1.5°
8.00	4	125	0.039	10.000	8.000	4975	775	62.1	1.5°
10.00	4	125	0.049	12.500	10.000	3980	780	97.5	1.5°
12.00	4	125	0.055	15.000	12.000	3315	730	131.3	1.5°
16.00	4	125	0.062	20.000	16.000	2485	615	197.4	1.5°
20.00	4	125	0.072	25.000	20.000	1990	575	286.5	1.5°







Steel
850 - 1100 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]
3.00	4	110	0.011	2.250	3.000	11670	515	3.5	2°
4.00	4	110	0.016	4.000	4.000	8755	560	9.0	2°
5.00	4	110	0.020	5.000	5.000	7005	560	14.0	2°
6.00	4	110	0.025	7.500	6.000	5835	585	26.3	2°
8.00	4	110	0.034	10.000	8.000	4375	595	47.6	2°
10.00	4	110	0.042	12.500	10.000	3500	590	73.5	2°
12.00	4	110	0.051	15.000	12.000	2920	595	107.1	2°
16.00	4	110	0.057	20.000	16.000	2190	500	159.7	2°
20.00	4	110	0.065	25.000	20.000	1750	455	227.6	2°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]
3.00	4	70	0.008	2.250	3.000	7425	240	1.6	1.5°
4.00	4	70	0.011	4.000	4.000	5570	245	3.9	1.5°
5.00	4	70	0.014	5.000	5.000	4455	250	6.2	1.5°
6.00	4	70	0.018	7.500	6.000	3715	265	12.0	1.5°
8.00	4	70	0.023	10.000	8.000	2785	255	20.5	1.5°
10.00	4	70	0.029	12.500	10.000	2230	260	32.3	1.5°
12.00	4	70	0.035	15.000	12.000	1855	260	46.8	1.5°
16.00	4	70	0.036	20.000	16.000	1395	200	64.2	1.5°
20.00	4	70	0.046	25.000	20.000	1115	205	102.5	1.5°

Suitable cutting data for other applications and materials can be found in the cutting data software **ToolExpert E-Cut**





Cylindrical end mills E-Cut

Smooth-edged, normal version, short neck



HM
MG10 λ 45°
 γ 10°

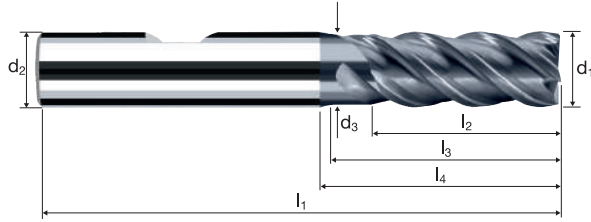


Roughing HPC Roughing HDC Finishing

Rm < 850 Rm 850-1100 Rm 1100-1300 Rm 1300-1500 HRC 48-56 Incoating Ti Titanium GG(G) Tool Steel

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	POLYCHROM	
											P8400	P8300
100	1.00	6.00	0.95	57	3.00	5.00	14.82	0.050	10.0°	4	●	
140	2.00	6.00	1.90	57	5.00	8.00	16.05	0.050	7.5°	4	●	
160	2.50	6.00	2.30	57	7.00	10.00	17.30	0.050	6.5°	4	●	
180	3.00	6.00	2.80	57	8.00	14.00	20.37	0.050	4.5°	4	●	
220	4.00	6.00	3.70	57	11.00	16.00	20.82	0.100	3.0°	4	●	
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.100	1.5°	4	●	
300	6.00	6.00	5.50	57	13.00	18.15	20.00	0.100	0.0°	4	●	
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	0.0°	4	●	
450	10.00	10.00	9.20	72	23.00	27.99	31.00	0.200	0.0°	4	●	
501	12.00	12.00	11.00	83	27.00	33.29	37.00	0.200	0.0°	4	●	
570	14.00	14.00	13.00	83	28.00	32.97	37.00	0.200	0.0°	4	●	
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	4	●	
682	20.00	20.00	19.00	104	40.00	48.23	53.00	0.250	0.0°	4	●	

Application




Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _z [°]
4.00	5	165	0.040	6.000	1.200	13130	2625	18.9	1°
5.00	5	165	0.049	7.500	1.500	10505	2575	29.0	1°
6.00	5	165	0.051	9.000	1.800	8755	2230	36.2	1°
8.00	5	165	0.069	12.000	2.400	6565	2265	65.2	1°
10.00	5	165	0.085	15.000	3.000	5250	2230	100.4	1°
12.00	5	165	0.096	18.000	3.600	4375	2100	136.1	1°
16.00	5	165	0.111	24.000	4.800	3285	1820	209.9	1°
20.00	5	165	0.127	30.000	6.000	2625	1670	300.2	1°



Steel
850 - 1100 N/mm²




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _z [°]
4.00	5	150	0.036	6.000	1.200	11935	2150	15.5	1.5°
5.00	5	150	0.045	7.500	1.500	9550	2150	24.2	1.5°
6.00	5	150	0.045	9.000	1.800	7960	1790	29.0	1.5°
8.00	5	150	0.060	12.000	2.400	5970	1790	51.6	1.5°
10.00	5	150	0.074	15.000	3.000	4775	1765	79.5	1.5°
12.00	5	150	0.089	18.000	3.600	3980	1770	114.7	1.5°
16.00	5	150	0.102	24.000	4.800	2985	1520	175.3	1.5°
20.00	5	150	0.115	30.000	6.000	2385	1375	247.1	1.5°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _z [°]
4.00	5	95	0.025	6.000	1.200	7560	945	6.8	1°
5.00	5	95	0.031	7.500	1.500	6050	935	10.5	1°
6.00	5	95	0.031	9.000	1.800	5040	780	12.7	1°
8.00	5	95	0.042	12.000	2.400	3780	795	22.9	1°
10.00	5	95	0.051	15.000	3.000	3025	770	34.7	1°
12.00	5	95	0.062	18.000	3.600	2520	780	50.6	1°
16.00	5	95	0.064	24.000	4.800	1890	605	69.7	1°
20.00	5	95	0.080	30.000	6.000	1510	605	108.9	1°

Application



Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _z [°]
4.00	5	243	0.073	11.000	0.400	19335	7100	31.2	
5.00	5	243	0.092	13.000	0.500	15470	7150	46.5	
6.00	5	243	0.112	13.000	0.600	12890	7190	56.1	
8.00	5	243	0.150	19.000	0.800	9670	7230	109.9	
10.00	5	243	0.185	23.000	1.000	7735	7155	164.5	
12.00	5	243	0.223	27.000	1.200	6445	7190	232.9	
16.00	5	243	0.245	32.000	1.600	4835	5915	302.9	
20.00	5	243	0.307	40.000	2.000	3865	5945	475.5	

Steel
850 - 1100 N/mm²






d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _z [°]
4.00	5	195	0.073	11.000	0.400	15520	5700	25.1	
5.00	5	195	0.092	13.000	0.500	12415	5740	37.3	
6.00	5	195	0.112	13.000	0.600	10345	5770	45.0	
8.00	5	195	0.150	19.000	0.800	7760	5805	88.2	
10.00	5	195	0.185	23.000	1.000	6205	5740	132.0	
12.00	5	195	0.223	27.000	1.200	5175	5770	186.9	
16.00	5	195	0.245	32.000	1.600	3880	4750	243.1	
20.00	5	195	0.307	40.000	2.000	3105	4770	381.5	

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _z [°]
4.00	5	135	0.070	11.000	0.200	10745	3780	8.3	
5.00	5	135	0.088	13.000	0.250	8595	3780	12.3	
6.00	5	135	0.106	13.000	0.300	7160	3780	14.7	
8.00	5	135	0.141	19.000	0.400	5370	3780	28.7	
10.00	5	135	0.176	23.000	0.500	4295	3780	43.5	
12.00	5	135	0.211	27.000	0.600	3580	3780	61.2	
16.00	5	135	0.229	32.000	0.800	2685	3070	78.6	
20.00	5	135	0.295	40.000	1.000	2150	3165	126.6	

Suitable cutting data for other applications and materials can be found in the cutting data software **ToolExpert E-Cut**






Cylindrical end mills E-Cut

Smooth-edged, normal version, short neck






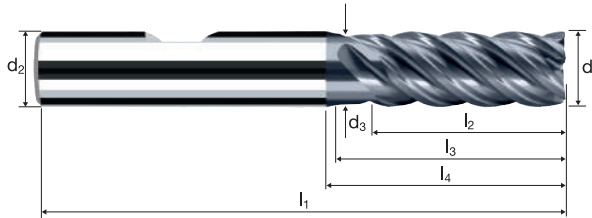



















HM
MG10 λ 45°
 γ 10°



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	POLYCHROM	
											Example: Order-N°.	Coating
												P8405
												P8305
220	4.00	6.00	3.70	57	11.00	16.00	20.82	0.100	3.0°	5		●
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.100	1.5°	5		●
300	6.00	6.00	5.50	57	13.00	18.15	20.00	0.100	0.0°	5		●
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	0.0°	5		●
450	10.00	10.00	9.20	72	23.00	27.99	31.00	0.200	0.0°	5		●
501	12.00	12.00	11.00	83	27.00	33.29	37.00	0.200	0.0°	5		●
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	5		●
682	20.00	20.00	19.00	104	40.00	48.23	53.00	0.250	0.0°	5		●


Application	Material	d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
	Steel < 850 N/mm ²  	4.00	4	160	0.015	6.000	1.000	12730	765
		6.00	4	160	0.020	9.000	1.500	8490	680
		8.00	4	160	0.025	12.000	2.000	6365	635
		10.00	4	160	0.035	15.000	2.500	5095	715
		12.00	4	160	0.040	18.000	3.000	4245	680
		14.00	4	160	0.045	21.000	3.500	3640	655
		16.00	4	160	0.055	24.000	4.000	3185	700
		18.00	4	160	0.060	27.000	4.500	2830	680
		20.00	4	160	0.065	30.000	5.000	2545	660
		Steel 850 - 1100 N/mm ²    	4.00	4	100	0.015	6.000	1.000	7960
6.00	4		100	0.020	9.000	1.500	5305	425	
8.00	4		100	0.025	12.000	2.000	3980	400	
10.00	4		100	0.035	15.000	2.500	3185	445	
12.00	4		100	0.040	18.000	3.000	2655	425	
14.00	4		100	0.045	21.000	3.500	2275	410	
16.00	4		100	0.055	24.000	4.000	1990	440	
18.00	4		100	0.060	27.000	4.500	1770	425	
20.00	4		100	0.065	30.000	5.000	1590	415	
Steel 1100 - 1300 N/mm ²    	4.00		4	75	0.015	6.000	0.400	5970	360
	6.00	4	75	0.020	9.000	0.600	3980	320	
	8.00	4	75	0.025	12.000	0.800	2985	300	
	10.00	4	75	0.035	15.000	1.000	2385	335	
	12.00	4	75	0.040	18.000	1.200	1990	320	
	14.00	4	75	0.045	21.000	1.400	1705	305	
	16.00	4	75	0.055	24.000	1.600	1490	330	
	18.00	4	75	0.060	27.000	1.800	1325	320	
	20.00	4	75	0.065	30.000	2.000	1195	310	
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]  	4.00	4	90	0.015	6.000	1.000	7160	430
6.00		4	90	0.020	9.000	1.500	4775	380	
8.00		4	90	0.025	12.000	2.000	3580	360	
10.00		4	90	0.035	15.000	2.500	2865	400	
12.00		4	90	0.040	18.000	3.000	2385	380	
14.00		4	90	0.045	21.000	3.500	2045	370	
16.00		4	90	0.055	24.000	4.000	1790	395	
18.00		4	90	0.060	27.000	4.500	1590	380	
20.00		4	90	0.065	30.000	5.000	1430	370	
Cast iron (lamellar / spheroidal)    		4.00	4	120	0.015	6.000	1.000	9550	575
	6.00	4	120	0.020	9.000	1.500	6365	510	
	8.00	4	120	0.025	12.000	2.000	4775	475	
	10.00	4	120	0.035	15.000	2.500	3820	535	
	12.00	4	120	0.040	18.000	3.000	3185	510	
	14.00	4	120	0.045	21.000	3.500	2730	490	
	16.00	4	120	0.055	24.000	4.000	2385	525	
	18.00	4	120	0.060	27.000	4.500	2120	510	
	20.00	4	120	0.065	30.000	5.000	1910	495	
	Unalloyed copper  	4.00	4	230	0.015	6.000	1.000	18305	1100
6.00		4	230	0.020	9.000	1.500	12200	975	
8.00		4	230	0.025	12.000	2.000	9150	915	
10.00		4	230	0.035	15.000	2.500	7320	1025	
12.00		4	230	0.040	18.000	3.000	6100	975	
14.00		4	230	0.045	21.000	3.500	5230	940	
16.00		4	230	0.055	24.000	4.000	4575	1005	
18.00		4	230	0.060	27.000	4.500	4065	975	
20.00		4	230	0.065	30.000	5.000	3660	950	
Titanium alloys up to 300 HB [Ti5Al2.5Sn]  		4.00	4	95	0.015	6.000	1.000	7560	455
	6.00	4	95	0.020	9.000	1.500	5040	405	
	8.00	4	95	0.025	12.000	2.000	3780	380	
	10.00	4	95	0.035	15.000	2.500	3025	425	
	12.00	4	95	0.040	18.000	3.000	2520	405	
	14.00	4	95	0.045	21.000	3.500	2160	390	
	16.00	4	95	0.055	24.000	4.000	1890	415	
	18.00	4	95	0.060	27.000	4.500	1680	405	
	20.00	4	95	0.065	30.000	5.000	1510	395	
	Inox difficult [Cr-Ni-Mo++/1.4529] Heat resistant steel [1.4841]  	4.00	4	50	0.015	6.000	1.000	3980	240
6.00		4	50	0.020	9.000	1.500	2655	210	
8.00		4	50	0.025	12.000	2.000	1990	200	
10.00		4	50	0.035	15.000	2.500	1590	225	
12.00		4	50	0.040	18.000	3.000	1325	210	
14.00		4	50	0.045	21.000	3.500	1135	205	
16.00		4	50	0.055	24.000	4.000	995	220	
18.00		4	50	0.060	27.000	4.500	885	210	
20.00		4	50	0.065	30.000	5.000	795	205	

Cylindrical end mills

Smooth-edged, normal version, short neck




HM
MG10 λ 55°
 γ 15°

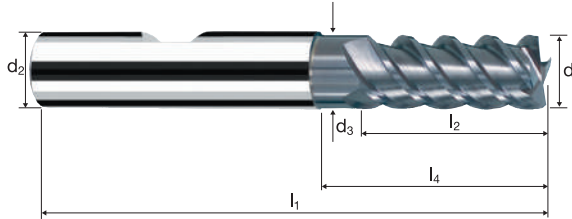

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Gold / Platinum
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	--------------------------

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	POLYCHROM	
											Example: Order-N°.	Coating P
180	3.00	6.00	2.80	57	8.00	14.00	20.63	0.10	4.5°	4		●
220	4.00	6.00	3.70	57	11.00	16.00	20.95	0.10	3.0°	4		●
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.15	1.5°	4		●
300	6.00	6.00	5.50	57	13.00	19.34	20.00	0.15	0.0°	4		●
331*	7.00	8.00	-	63	16.00	-	20.02	0.15	1.5°	4		●
391	8.00	8.00	7.40	63	19.00	25.29	26.00	0.15	0.0°	4		●
420*	9.00	10.00	-	72	19.00	-	23.02	0.20	1.5°	4		●
450	10.00	10.00	9.20	72	22.00	30.20	31.00	0.20	0.0°	4		●
470*	11.00	12.00	-	83	26.00	-	30.52	0.20	1.0°	4		●
501	12.00	12.00	11.00	83	26.00	36.13	37.00	0.20	0.0°	4		●
570	14.00	14.00	13.00	83	26.00	36.13	37.00	0.20	0.0°	4		●
610	16.00	16.00	15.00	92	32.00	42.13	43.00	0.20	0.0°	4		●
640	18.00	18.00	17.00	92	32.00	42.13	43.00	0.20	0.0°	4		●
682	20.00	20.00	19.00	104	38.00	52.13	53.00	0.20	0.0°	4		●
* without short neck only												


Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
3.00	3	145	0.021	3.750	1.950	15385	970	7.1	2°
4.00	3	145	0.030	5.000	2.600	11540	1040	13.5	2°
5.00	3	145	0.038	6.250	3.250	9230	1050	21.4	2°
6.00	3	145	0.041	9.000	3.900	7690	945	33.2	2°
8.00	3	145	0.054	12.000	5.200	5770	935	58.3	2°
10.00	3	145	0.068	15.000	6.500	4615	940	91.8	2°
12.00	3	145	0.076	18.000	7.800	3845	875	123.1	2°
16.00	3	145	0.086	24.000	10.400	2885	745	185.8	2°
20.00	3	145	0.099	30.000	13.000	2310	685	267.3	2°



Steel
850 - 1100 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
3.00	3	130	0.020	3.750	1.950	13795	830	6.1	3°
4.00	3	130	0.029	5.000	2.600	10345	900	11.7	3°
5.00	3	130	0.036	6.250	3.250	8275	895	18.2	3°
6.00	3	130	0.035	9.000	3.900	6895	725	25.4	3°
8.00	3	130	0.047	12.000	5.200	5175	730	45.5	3°
10.00	3	130	0.059	15.000	6.500	4140	730	71.4	3°
12.00	3	130	0.070	18.000	7.800	3450	725	101.7	3°
16.00	3	130	0.079	24.000	10.400	2585	615	153.0	3°
20.00	3	130	0.099	30.000	13.000	2070	615	239.7	3°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
3.00	3	80	0.015	3.750	1.950	8490	380	2.8	2°
4.00	3	80	0.022	5.000	2.600	6365	420	5.5	2°
5.00	3	80	0.027	6.250	3.250	5095	415	8.4	2°
6.00	3	80	0.027	9.000	3.900	4245	345	12.1	2°
8.00	3	80	0.036	12.000	5.200	3185	345	21.5	2°
10.00	3	80	0.045	15.000	6.500	2545	345	33.5	2°
12.00	3	80	0.054	18.000	7.800	2120	345	48.3	2°
16.00	3	80	0.056	24.000	10.400	1590	265	66.7	2°
20.00	3	80	0.070	30.000	13.000	1275	265	104.3	2°


Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]
3.00	3	125	0.017	3.000	3.000	13265	675	6.1	2°
4.00	3	125	0.024	5.000	4.000	9945	715	14.3	2°
5.00	3	125	0.030	6.250	5.000	7960	715	22.4	2°
6.00	3	125	0.033	9.000	6.000	6630	655	35.5	2°
8.00	3	125	0.043	12.000	8.000	4975	640	61.6	2°
10.00	3	125	0.054	15.000	10.000	3980	645	96.7	2°
12.00	3	125	0.061	18.000	12.000	3315	605	131.1	2°
16.00	3	125	0.069	24.000	16.000	2485	515	197.7	2°
20.00	3	125	0.079	30.000	20.000	1990	470	282.9	2°







Steel
850 - 1100 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]
3.00	3	110	0.016	3.000	3.000	11670	560	5.0	2°
4.00	3	110	0.023	5.000	4.000	8755	605	12.1	2°
5.00	3	110	0.029	6.250	5.000	7005	610	19.0	2°
6.00	3	110	0.028	9.000	6.000	5835	490	26.5	2°
8.00	3	110	0.038	12.000	8.000	4375	500	47.9	2°
10.00	3	110	0.047	15.000	10.000	3500	495	74.1	2°
12.00	3	110	0.056	18.000	12.000	2920	490	105.9	2°
16.00	3	110	0.063	24.000	16.000	2190	415	158.8	2°
20.00	3	110	0.079	30.000	20.000	1750	415	249.0	2°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]
3.00	3	70	0.012	3.000	3.000	7425	265	2.4	2°
4.00	3	70	0.018	5.000	4.000	5570	300	6.0	2°
5.00	3	70	0.022	6.250	5.000	4455	295	9.2	2°
6.00	3	70	0.022	9.000	6.000	3715	245	13.2	2°
8.00	3	70	0.029	12.000	8.000	2785	240	23.3	2°
10.00	3	70	0.036	15.000	10.000	2230	240	36.1	2°
12.00	3	70	0.043	18.000	12.000	1855	240	51.7	2°
16.00	3	70	0.045	24.000	16.000	1395	190	72.2	2°
20.00	3	70	0.056	30.000	20.000	1115	185	112.3	2°

Suitable cutting data for other applications and materials can be found in the cutting data software **ToolExpert E-Cut**





Cylindrical end mills E-Cut

Smooth-edged, normal version, short neck



HM
MG10 λ 45°
 γ 10°

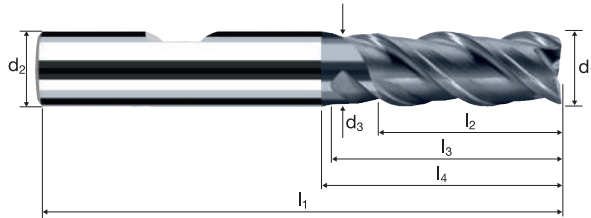


Roughing HPC Roughing HDC Finishing

Rm < 850 Rm 850-1100 Rm 1100-1300 Rm 1300-1500 HRC 48-56 Inox Stainless Ti Titanium GG(G) Tool Steel


Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	POLYCHROM			
											Order-N°.	Article-N°.	ø-Code	
100	1.00	6.00	0.95	57	3.00	5.00	14.82	0.050	10.0°	3	P	8403	100	●
140	2.00	6.00	1.90	57	5.00	8.00	16.05	0.050	7.5°	3	P	8403	100	●
160	2.50	6.00	2.30	57	7.00	10.00	17.30	0.050	6.5°	3	P	8403	100	●
180	3.00	6.00	2.80	57	8.00	14.00	20.37	0.050	4.5°	3	P	8403	100	●
200	3.50	6.00	3.20	57	9.00	14.00	19.69	0.050	4.0°	3	P	8403	100	●
220	4.00	6.00	3.70	57	11.00	16.00	20.82	0.100	3.0°	3	P	8403	100	●
240	4.50	6.00	4.10	57	12.00	17.00	21.14	0.100	2.5°	3	P	8403	100	●
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.100	1.5°	3	P	8403	100	●
280	5.50	6.00	5.00	57	13.00	18.00	20.59	0.100	1.0°	3	P	8403	100	●
300	6.00	6.00	5.50	57	13.00	18.15	20.00	0.100	0.0°	3	P	8403	100	●
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	0.0°	3	P	8403	100	●
450	10.00	10.00	9.20	72	23.00	27.99	31.00	0.200	0.0°	3	P	8403	100	●
501	12.00	12.00	11.00	83	27.00	33.29	37.00	0.200	0.0°	3	P	8403	100	●
570	14.00	14.00	13.00	83	28.00	32.97	37.00	0.200	0.0°	3	P	8403	100	●
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	3	P	8403	100	●
682	20.00	20.00	19.00	104	40.00	48.23	53.00	0.250	0.0°	3	P	8403	100	●

Application



Material

Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	3	190	0.015	4.500	1.400	20160	905	5.7
4.00	3	190	0.015	6.000	1.800	15120	680	7.3
5.00	3	190	0.020	7.500	2.250	12095	725	12.2
6.00	3	190	0.040	9.000	2.700	10080	1210	29.4
8.00	3	190	0.050	12.000	3.600	7560	1135	49.0
10.00	3	190	0.065	15.000	4.500	6050	1180	79.6
12.00	3	190	0.075	18.000	5.400	5040	1135	110.2
16.00	3	190	0.100	24.000	7.200	3780	1135	196.0
20.00	3	190	0.125	30.000	9.000	3025	1135	306.2
3.00	3	140	0.015	4.500	1.400	14855	670	4.2
4.00	3	140	0.015	6.000	1.800	11140	500	5.4
5.00	3	140	0.020	7.500	2.250	8915	535	9.0
6.00	3	140	0.040	9.000	2.700	7425	890	21.7
8.00	3	140	0.050	12.000	3.600	5570	835	36.1
10.00	3	140	0.065	15.000	4.500	4455	870	58.7
12.00	3	140	0.075	18.000	5.400	3715	835	81.2
16.00	3	140	0.100	24.000	7.200	2785	835	144.4
20.00	3	140	0.125	30.000	9.000	2230	835	225.6
3.00	3	70	0.010	4.500	1.350	7425	225	1.4
4.00	3	70	0.015	6.000	1.800	5570	250	2.7
5.00	3	70	0.015	7.500	2.250	4455	200	3.4
6.00	3	70	0.035	9.000	2.700	3715	390	9.5
8.00	3	70	0.045	12.000	3.600	2785	375	16.2
10.00	3	70	0.055	15.000	4.500	2230	370	24.8
12.00	3	70	0.065	18.000	5.400	1855	360	35.2
16.00	3	70	0.085	24.000	7.200	1395	355	61.4
20.00	3	70	0.110	30.000	9.000	1115	370	99.3
3.00	3	90	0.005	4.500	1.350	9550	145	0.9
4.00	3	90	0.010	6.000	1.800	7160	215	2.3
5.00	3	90	0.010	7.500	2.250	5730	170	2.9
6.00	3	90	0.025	9.000	2.700	4775	360	8.7
8.00	3	90	0.030	12.000	3.600	3580	320	13.9
10.00	3	90	0.040	15.000	4.500	2865	345	23.2
12.00	3	90	0.045	18.000	5.400	2385	320	31.3
16.00	3	90	0.060	24.000	7.200	1790	320	55.7
20.00	3	90	0.080	30.000	9.000	1430	345	92.8
3.00	3	155	0.015	4.500	3.000	16445	740	10.0
4.00	3	155	0.015	6.000	4.000	12335	555	13.3
5.00	3	155	0.025	7.500	5.000	9870	740	27.8
6.00	3	155	0.030	9.000	6.000	8225	740	40.0
8.00	3	155	0.040	12.000	8.000	6165	740	71.0
10.00	3	155	0.050	15.000	10.000	4935	740	111.0
12.00	3	155	0.060	18.000	12.000	4110	740	159.9
16.00	3	155	0.080	18.000	16.000	3085	740	189.5
20.00	3	155	0.100	20.000	20.000	2465	740	296.0
3.00	3	105	0.015	4.500	3.000	11140	500	6.8
4.00	3	105	0.015	6.000	4.000	8355	375	9.0
5.00	3	105	0.025	7.500	5.000	6685	500	18.8
6.00	3	105	0.030	9.000	6.000	5570	500	27.1
8.00	3	105	0.040	12.000	8.000	4180	500	48.1
10.00	3	105	0.050	15.000	10.000	3340	500	75.2
12.00	3	105	0.060	18.000	12.000	2785	500	108.3
16.00	3	105	0.080	16.000	16.000	2090	500	128.3
20.00	3	105	0.100	20.000	20.000	1670	500	200.5
3.00	3	55	0.010	4.500	3.000	5835	175	2.4
4.00	3	55	0.015	6.000	4.000	4375	195	4.7
5.00	3	55	0.015	7.500	5.000	3500	160	5.9
6.00	3	55	0.030	9.000	6.000	2920	265	14.2
8.00	3	55	0.040	12.000	8.000	2190	265	25.2
10.00	3	55	0.050	15.000	10.000	1750	265	39.4
12.00	3	55	0.060	18.000	12.000	1460	265	56.7
16.00	3	55	0.080	16.000	16.000	1095	265	67.2
20.00	3	55	0.100	20.000	20.000	875	265	105.0
3.00	3	75	0.010	1.500	3.000	7960	240	1.1
4.00	3	75	0.015	2.000	4.000	5970	270	2.1
5.00	3	75	0.015	2.500	5.000	4775	215	2.7
6.00	3	75	0.025	3.000	6.000	3980	300	5.4
8.00	3	75	0.035	4.000	8.000	2985	315	10.0
10.00	3	75	0.045	5.000	10.000	2385	320	16.1
12.00	3	75	0.050	6.000	12.000	1990	300	21.5
16.00	3	75	0.070	8.000	16.000	1490	315	40.1
20.00	3	75	0.085	10.000	20.000	1195	305	60.9

Cylindrical end mills

Smooth-edged, normal version




HM
MG10 λ 40°
 γ 0°

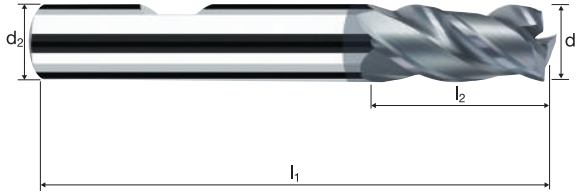

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	---------------------

Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	45°	α	z	POLYCHROM	
									P15333	P15233
180	3.00	6.00	57	7.00	14.96	0.10	6.0°	3		●
220	4.00	6.00	57	8.00	14.59	0.10	4.5°	3		●
260	5.00	6.00	57	10.00	14.72	0.15	2.5°	3		●
300	6.00	6.00	57	10.00	-	0.15	0.0°	3		●
391	8.00	8.00	63	16.00	-	0.15	0.0°	3		●
450	10.00	10.00	72	19.00	-	0.20	0.0°	3		●
501	12.00	12.00	83	22.00	-	0.20	0.0°	3		●
610	16.00	16.00	92	26.00	-	0.20	0.0°	3		●
682	20.00	20.00	104	32.00	-	0.20	0.0°	3		●

Application



Material

Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	2	115	0.010	3.000	1.400	12200	245	1.0
4.00	2	115	0.015	4.000	1.800	9150	275	2.0
5.00	2	115	0.020	5.000	2.300	7320	295	3.4
6.00	2	115	0.025	6.000	2.700	6100	305	4.9
8.00	2	115	0.030	8.000	3.600	4575	275	7.9
10.00	2	115	0.040	10.000	4.500	3660	295	13.2
12.00	2	115	0.050	12.000	5.400	3050	305	19.8
16.00	2	115	0.065	16.000	7.200	2290	295	34.3
20.00	2	115	0.080	20.000	9.000	1830	295	52.7
3.00	2	75	0.010	3.000	1.400	7960	160	0.7
4.00	2	75	0.015	4.000	1.800	5970	180	1.3
5.00	2	75	0.020	5.000	2.300	4775	190	2.2
6.00	2	75	0.020	6.000	2.700	3980	160	2.6
8.00	2	75	0.030	8.000	3.600	2985	180	5.2
10.00	2	75	0.035	10.000	4.500	2385	165	7.5
12.00	2	75	0.045	12.000	5.400	1990	180	11.6
16.00	2	75	0.060	16.000	7.200	1490	180	20.6
20.00	2	75	0.070	20.000	9.000	1195	165	30.1
3.00	2	40	0.010	3.000	1.400	4245	85	0.4
4.00	2	40	0.015	4.000	1.800	3185	95	0.7
5.00	2	40	0.020	5.000	2.300	2545	100	1.2
6.00	2	40	0.020	6.000	2.700	2120	85	1.4
8.00	2	40	0.030	8.000	3.600	1590	95	2.8
10.00	2	40	0.035	10.000	4.500	1275	90	4.0
12.00	2	40	0.045	12.000	5.400	1060	95	6.2
16.00	2	40	0.060	16.000	7.200	795	95	11.0
20.00	2	40	0.070	20.000	9.000	635	90	16.0
3.00	2	150	0.015	3.000	1.400	15915	475	2.0
4.00	2	150	0.020	4.000	1.800	11935	475	3.4
5.00	2	150	0.020	5.000	2.300	9550	380	4.4
6.00	2	150	0.025	6.000	2.700	7960	400	6.4
8.00	2	150	0.035	8.000	3.600	5970	420	12.0
10.00	2	150	0.045	10.000	4.500	4775	430	19.3
12.00	2	150	0.055	12.000	5.400	3980	440	28.4
16.00	2	150	0.070	16.000	7.200	2985	420	48.1
20.00	2	150	0.090	20.000	9.000	2385	430	77.3
3.00	2	85	0.010	0.750	3.000	9020	180	0.4
4.00	2	85	0.010	1.000	4.000	6765	135	0.5
5.00	2	85	0.015	1.250	5.000	5410	160	1.0
6.00	2	85	0.015	1.500	6.000	4510	135	1.2
8.00	2	85	0.020	2.000	8.000	3380	135	2.2
10.00	2	85	0.030	2.500	10.000	2705	160	4.1
12.00	2	85	0.035	3.000	12.000	2255	160	5.7
16.00	2	85	0.045	4.000	16.000	1690	150	9.7
20.00	2	85	0.055	5.000	20.000	1355	150	14.9
3.00	2	60	0.010	0.750	3.000	6365	125	0.3
4.00	2	60	0.010	1.000	4.000	4775	95	0.4
5.00	2	60	0.015	1.250	5.000	3820	115	0.7
6.00	2	60	0.015	1.500	6.000	3185	95	0.9
8.00	2	60	0.020	2.000	8.000	2385	95	1.5
10.00	2	60	0.025	2.500	10.000	1910	95	2.4
12.00	2	60	0.030	3.000	12.000	1590	95	3.4
16.00	2	60	0.040	4.000	16.000	1195	95	6.1
20.00	2	60	0.050	5.000	20.000	955	95	9.5
3.00	2	30	0.010	0.750	3.000	3185	65	0.1
4.00	2	30	0.010	1.000	4.000	2385	50	0.2
5.00	2	30	0.015	1.250	5.000	1910	55	0.4
6.00	2	30	0.015	1.500	6.000	1590	50	0.4
8.00	2	30	0.020	2.000	8.000	1195	50	0.8
10.00	2	30	0.025	2.500	10.000	955	50	1.2
12.00	2	30	0.030	3.000	12.000	795	50	1.7
16.00	2	30	0.040	4.000	16.000	595	50	3.1
20.00	2	30	0.050	5.000	20.000	475	50	4.8
3.00	2	105	0.010	1.500	3.000	11140	225	1.0
4.00	2	105	0.010	2.000	4.000	8355	165	1.3
5.00	2	105	0.015	2.500	5.000	6685	200	2.5
6.00	2	105	0.020	3.000	6.000	5570	225	4.0
8.00	2	105	0.025	4.000	8.000	4180	210	6.7
10.00	2	105	0.030	5.000	10.000	3340	200	10.0
12.00	2	105	0.035	6.000	12.000	2785	195	14.0
16.00	2	105	0.050	8.000	16.000	2090	210	26.7
20.00	2	105	0.060	10.000	20.000	1670	200	40.1


Cylindrical end mills

Smooth-edged, normal version








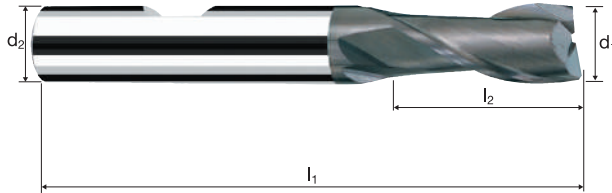



HM
MG10

λ 30°
 γ 12°



Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless		GG(G) Copper
-------------	----------------	-----------------	--	--	--	--	-------------------	--	-----------------

										POLYCHROM
Example: Order-N°.										P5300
										P5200
\emptyset Code	d_1 e8	d_2 h6	l_1	l_2	l_4	45°	α	z		
138*	2.00	2.00	42	6.00	-	0.10	0.0°	2		●
140	2.00	6.00	54	6.00	15.32	0.10	8.0°	2		●
158*	2.50	2.50	42	7.00	-	0.10	0.0°	2		●
160	2.50	6.00	54	6.00	14.89	0.10	7.5°	2		●
178*	3.00	3.00	45	7.00	-	0.10	0.0°	2		●
180	3.00	6.00	57	7.00	14.96	0.10	6.0°	2		●
200	3.50	6.00	57	7.00	14.02	0.10	5.5°	2		●
218*	4.00	4.00	50	8.00	-	0.10	0.0°	2		●
220	4.00	6.00	57	8.00	14.59	0.10	4.5°	2		●
240	4.50	6.00	57	8.00	13.66	0.15	3.5°	2		●
258*	5.00	5.00	50	10.00	-	0.15	0.0°	2		●
260	5.00	6.00	57	10.00	14.72	0.15	2.5°	2		●
280	5.50	6.00	57	10.00	13.79	0.15	1.5°	2		●
300	6.00	6.00	57	10.00	-	0.15	0.0°	2		●
331	7.00	8.00	63	13.00	17.72	0.15	2.0°	2		●
391	8.00	8.00	63	16.00	-	0.15	0.0°	2		●
420	9.00	10.00	72	16.00	20.72	0.20	1.5°	2		●
450	10.00	10.00	72	19.00	-	0.20	0.0°	2		●
501	12.00	12.00	83	22.00	-	0.20	0.0°	2		●
610	16.00	16.00	92	26.00	-	0.20	0.0°	2		●
682	20.00	20.00	104	32.00	-	0.20	0.0°	2		●
* without clamping flat only										

Application	Material	d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
	Steel 500 - 850 N/mm ² 	3.00	4	140	0.022	3.750	1.200	14855	1307	5.9
		4.00	4	140	0.031	5.000	1.600	11140	1381	11.1
		5.00	4	140	0.038	6.250	2.000	8915	1355	16.9
		6.00	4	140	0.041	9.000	2.400	7425	1218	26.3
		8.00	4	140	0.054	12.000	3.200	5475	1203	46.2
		10.00	4	140	0.068	15.000	4.000	4455	1212	72.7
		12.00	4	140	0.076	18.000	4.800	3715	1129	97.6
		16.00	4	140	0.086	24.000	6.400	2785	958	147.1
		20.00	4	140	0.099	30.000	8.000	2230	883	211.9
			Steel 850 - 1100 N/mm ² 	3.00	4	120	0.020	3.750	1.200	12730
4.00	4			120	0.025	5.000	1.600	9550	955	7.6
5.00	4			120	0.033	6.250	2.000	7640	1009	12.6
6.00	4			120	0.035	9.000	2.400	6365	891	19.2
8.00	4			120	0.047	12.000	3.200	4775	898	34.5
10.00	4			120	0.059	15.000	4.000	3820	902	54.1
12.00	4			120	0.070	18.000	4.800	3185	892	77.1
16.00	4			120	0.079	24.000	6.400	2385	754	115.8
20.00	4			120	0.090	30.000	8.000	1910	688	165.0
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 			3.00	4	80	0.012	3.750	1.200	8490
		4.00	4	80	0.016	5.000	1.600	6365	407	3.3
		5.00	4	80	0.020	6.250	2.000	5095	408	5.1
		6.00	4	80	0.024	9.000	2.400	4245	408	8.8
		8.00	4	80	0.032	12.000	3.200	3185	408	15.7
		10.00	4	80	0.041	15.000	4.000	2545	417	25.0
		12.00	4	80	0.049	18.000	4.800	2120	416	35.9
		16.00	4	80	0.050	24.000	6.400	1590	318	48.8
		20.00	4	80	0.063	30.000	8.000	1275	321	77.1
			Cast iron (lamellar / spheroidal) 	3.00	4	155	0.020	3.750	1.200	16445
4.00	4			155	0.029	5.000	1.600	12335	1431	11.4
5.00	4			155	0.034	6.250	2.000	9870	1342	16.8
6.00	4			155	0.038	9.000	2.400	8225	1250	27.0
8.00	4			155	0.050	12.000	3.200	6165	1233	47.3
10.00	4			155	0.063	15.000	4.000	4935	1244	74.6
12.00	4			155	0.076	18.000	4.800	4110	1249	107.9
16.00	4			155	0.086	24.000	6.400	3085	1061	163.0
20.00	4			155	0.099	30.000	8.000	2465	976	234.3
Application	Steel 500 - 850 N/mm ² 			3.00	4	105	0.011	2.250	3.000	11140
		4.00	4	105	0.016	4.000	4.000	8355	535	8.6
		5.00	4	105	0.019	5.000	5.000	6685	508	12.7
		6.00	4	105	0.027	7.500	6.000	5570	602	27.1
		8.00	4	105	0.035	10.000	8.000	4180	585	46.8
		10.00	4	105	0.044	12.500	10.000	3340	588	73.5
		12.00	4	105	0.049	15.000	12.000	2785	546	98.3
		16.00	4	105	0.056	20.000	16.000	2090	468	149.8
		20.00	4	105	0.064	25.000	20.000	1670	428	213.8
			Steel 850 - 1100 N/mm ² 	3.00	4	90	0.010	2.250	3.000	9550
4.00	4			90	0.013	4.000	4.000	7160	372	6.0
5.00	4			90	0.017	5.000	5.000	5730	390	9.7
6.00	4			90	0.023	7.500	6.000	4775	439	19.8
8.00	4			90	0.031	10.000	8.000	3580	444	35.5
10.00	4			90	0.038	12.500	10.000	2865	436	54.4
12.00	4			90	0.046	15.000	12.000	2385	439	79.0
16.00	4			90	0.051	20.000	16.000	1790	365	116.9
20.00	4			90	0.058	25.000	20.000	1430	332	165.9
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 			3.00	4	60	0.006	2.250	3.000	6365
		4.00	4	60	0.008	4.000	4.000	4775	153	2.4
		5.00	4	60	0.010	5.000	5.000	3820	153	3.8
		6.00	4	60	0.016	7.500	6.000	3185	204	9.2
		8.00	4	60	0.021	10.000	8.000	2385	200	16.0
		10.00	4	60	0.027	12.500	10.000	1910	206	25.8
		12.00	4	60	0.032	15.000	12.000	1590	204	36.6
		16.00	4	60	0.033	20.000	16.000	1195	158	50.5
		20.00	4	60	0.041	25.000	20.000	955	157	78.3
			Cast iron (lamellar / spheroidal) 	3.00	4	116	0.010	2.250	3.000	12310
4.00	4			116	0.015	4.000	4.000	9230	554	8.9
5.00	4			116	0.017	5.000	5.000	7385	502	12.6
6.00	4			116	0.025	7.500	6.000	6155	616	27.7
8.00	4			116	0.033	10.000	8.000	4615	609	48.7
10.00	4			116	0.041	12.500	10.000	3690	605	75.7
12.00	4			116	0.049	15.000	12.000	3075	603	108.5
16.00	4			116	0.056	20.000	16.000	2310	517	165.6
20.00	4			116	0.064	25.000	20.000	1845	472	236.2



Cylindrical end mills

Smooth-edged, normal version, short neck



HM
MG10

λ **43°**
 γ **6°**

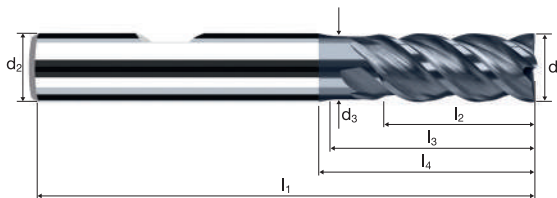


new!

Roughing HPC Roughing HDC Finishing

Rm < 850 Rm 850-1100 Rm 1100-1300 **Inox** Stainless Ti Titanium GG(G) Tool Steel Nickel-Alloys

Example: Order-N°.											POLYCHROM	
											P46300	
											P46200	
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z		
100	1.00	6.00	0.95	57	3.00	7.00	16.82	0.050	9.0°	4	●	
140	2.00	6.00	1.90	57	5.00	10.00	18.05	0.050	6.5°	4	●	
178*	3.00	3.00	-	45	8.00	-	-	0.050	0.0°	4	●	
180	3.00	6.00	2.80	57	8.00	14.00	20.37	0.050	4.5°	4	●	
218*	4.00	4.00	-	50	11.00	-	-	0.100	0.0°	4	●	
220	4.00	6.00	3.70	57	11.00	16.00	20.82	0.100	3.0°	4	●	
258*	5.00	5.00	-	50	13.00	-	-	0.100	0.0°	4	●	
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.100	1.5°	4	●	
300	6.00	6.00	5.50	57	13.00	18.15	20.00	0.150	0.0°	4	●	
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	0.0°	4	●	
450	10.00	10.00	9.20	72	23.00	27.99	31.00	0.200	0.0°	4	●	
501	12.00	12.00	11.00	83	27.00	33.29	37.00	0.200	0.0°	4	●	
570	14.00	14.00	13.00	83	28.00	32.97	37.00	0.200	0.0°	4	●	
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	4	●	
682	20.00	20.00	19.00	104	40.00	48.23	53.00	0.250	0.0°	4	●	
* without clamping flat only, without short neck												

Application



Material

Steel
500 - 850 N/mm²



d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]
6.00	4	140	0.041	9.000	2.400	7425	1203	26.0
8.00	4	140	0.054	12.000	3.200	5570	1203	46.2
10.00	4	140	0.068	15.000	4.000	4455	1203	72.2
12.00	4	140	0.076	18.000	4.800	3715	1123	97.1
16.00	4	140	0.086	24.000	6.400	2785	963	147.8
20.00	4	140	0.099	30.000	8.000	2230	883	211.9

Steel
850 - 1100 N/mm²



6.00	4	125	0.035	9.000	2.400	6630	931	20.1
8.00	4	125	0.047	12.000	3.200	4975	931	35.8
10.00	4	125	0.059	15.000	4.000	3980	931	55.9
12.00	4	125	0.070	18.000	4.800	3315	931	80.4
16.00	4	125	0.079	24.000	6.400	2485	787	120.9
20.00	4	125	0.090	30.000	8.000	1990	716	171.9

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



6.00	4	80	0.024	9.000	2.400	4245	413	8.9
8.00	4	80	0.032	12.000	3.200	3185	413	15.9
10.00	4	80	0.041	15.000	4.000	2545	412	24.7
12.00	4	80	0.049	18.000	4.800	2120	412	35.6
16.00	4	80	0.050	24.000	6.400	1590	321	49.2
20.00	4	80	0.063	30.000	8.000	1275	321	77.1

Cast iron
(lamellar / spheroidal)



6.00	4	155	0.038	9.000	2.400	8225	1244	26.9
8.00	4	155	0.050	12.000	3.200	6165	1243	47.7
10.00	4	155	0.063	15.000	4.000	4935	1244	74.6
12.00	4	155	0.076	18.000	4.800	4110	1243	107.4
16.00	4	155	0.086	24.000	6.400	3085	1066	163.8
20.00	4	155	0.099	30.000	8.000	2465	976	234.3

Application



Material

Steel
500 - 850 N/mm²



6.00	4	110	0.026	7.500	6.000	5835	607	27.3
8.00	4	110	0.035	10.000	8.000	4375	613	49.0
10.00	4	110	0.044	12.500	10.000	3500	616	77.0
12.00	4	110	0.049	15.000	12.000	2920	572	103.0
16.00	4	110	0.056	20.000	16.000	2190	491	157.0
20.00	4	110	0.064	25.000	20.000	1750	448	224.0

Steel
850 - 1100 N/mm²



6.00	4	100	0.023	7.500	6.000	5305	488	22.0
8.00	4	100	0.030	10.000	8.000	3980	478	38.2
10.00	4	100	0.038	12.500	10.000	3185	484	60.5
12.00	4	100	0.046	15.000	12.000	2655	489	87.9
16.00	4	100	0.051	20.000	16.000	1990	406	129.9
20.00	4	100	0.059	25.000	20.000	1590	375	187.6

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



6.00	4	65	0.016	7.500	6.000	3450	221	9.9
8.00	4	65	0.021	10.000	8.000	2585	217	17.4
10.00	4	65	0.026	12.500	10.000	2070	215	26.9
12.00	4	65	0.032	15.000	12.000	1725	221	39.7
16.00	4	65	0.033	20.000	16.000	1295	171	54.7
20.00	4	65	0.041	25.000	20.000	1035	170	84.9

Cast iron
(lamellar / spheroidal)



6.00	4	125	0.025	7.500	6.000	6630	663	29.8
8.00	4	125	0.033	10.000	8.000	4975	657	52.5
10.00	4	125	0.041	12.500	10.000	3980	653	81.6
12.00	4	125	0.049	15.000	12.000	3315	650	116.9
16.00	4	125	0.056	20.000	16.000	2485	557	178.1
20.00	4	125	0.064	25.000	20.000	1990	509	254.7

Cylindrical end mills

Smooth-edged, normal version




HM
MG10

λ **43°**
 γ **3°**

45°

Vario

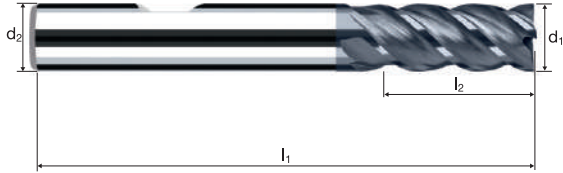


Roughing HPC **Roughing HDC** **Finishing**

Rm < 850 **Rm** 850-1100 **Rm** 1100-1300 **Inox** Stainless **Ti** Titanium **GG(G)** Tool Steel **Nickel-Alloys**

								POLYCHROM	
Example: Order-Nº.								P45325	
								P45225	
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	45°	z	Coating		
							Article-Nº.	Ø-Code	
300	6.00	6.00	57	13.00	0.10	4	P	300	
391	8.00	8.00	63	19.00	0.10	4			
450	10.00	10.00	72	22.00	0.15	4			
501	12.00	12.00	83	26.00	0.15	4			
610	16.00	16.00	92	32.00	0.15	4			
682	20.00	20.00	104	38.00	0.15	4			

Application



Material

Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	170	0.015	4.500	0.750	18040	1080	3.7
4.00	4	170	0.020	6.000	1.200	13530	1080	7.8
5.00	4	170	0.025	7.500	1.750	10825	1080	14.2
6.00	4	170	0.030	9.000	2.400	9020	1080	23.4
8.00	4	170	0.040	12.000	3.200	6765	1080	41.6
10.00	4	170	0.050	15.000	4.000	5410	1080	64.9
12.00	4	170	0.060	18.000	4.800	4510	1080	93.5
16.00	4	170	0.075	24.000	6.400	3380	1015	155.8
20.00	4	170	0.095	30.000	8.000	2705	1030	246.8
3.00	4	120	0.015	4.500	0.750	12730	765	2.6
4.00	4	120	0.020	6.000	1.200	9550	765	5.5
5.00	4	120	0.025	7.500	1.750	7640	765	10.0
6.00	4	120	0.030	9.000	2.400	6365	765	16.5
8.00	4	120	0.040	12.000	3.200	4775	765	29.3
10.00	4	120	0.050	15.000	4.000	3820	765	45.8
12.00	4	120	0.060	18.000	4.800	3185	765	66.0
16.00	4	120	0.075	24.000	6.400	2385	715	110.0
20.00	4	120	0.095	30.000	8.000	1910	725	174.2
3.00	4	80	0.010	4.500	0.750	8490	340	1.1
4.00	4	80	0.015	6.000	1.200	6365	380	2.8
5.00	4	80	0.020	7.500	1.750	5095	405	5.3
6.00	4	80	0.025	9.000	2.400	4245	425	9.2
8.00	4	80	0.030	12.000	3.200	3185	380	14.7
10.00	4	80	0.040	15.000	4.000	2545	405	24.4
12.00	4	80	0.050	18.000	4.800	2120	425	36.7
16.00	4	80	0.060	24.000	6.400	1590	380	58.7
20.00	4	80	0.075	30.000	8.000	1275	380	91.7
3.00	4	135	0.015	4.500	0.750	14325	860	2.9
4.00	4	135	0.020	6.000	1.200	10745	860	6.2
5.00	4	135	0.025	7.500	1.750	8595	860	11.3
6.00	4	135	0.030	9.000	2.400	7160	860	18.6
8.00	4	135	0.040	12.000	3.200	5370	860	33.0
10.00	4	135	0.050	15.000	4.000	4295	860	51.6
12.00	4	135	0.060	18.000	4.800	3580	860	74.3
16.00	4	135	0.085	24.000	6.400	2685	915	140.3
20.00	4	135	0.105	30.000	8.000	2150	900	216.6
3.00	4	135	0.010	1.800	3.000	14325	575	3.1
4.00	4	135	0.015	2.800	4.000	10745	645	7.2
5.00	4	135	0.020	4.000	5.000	8595	690	13.8
6.00	4	135	0.025	6.000	6.000	7160	715	25.8
8.00	4	135	0.030	8.000	8.000	5370	645	41.3
10.00	4	135	0.040	10.000	10.000	4295	690	68.8
12.00	4	135	0.045	12.000	12.000	3580	645	92.8
16.00	4	135	0.055	8.000	16.000	2685	590	75.6
20.00	4	135	0.070	10.000	20.000	2150	600	120.3
3.00	4	95	0.010	1.800	3.000	10080	405	2.2
4.00	4	95	0.015	2.800	4.000	7560	455	5.1
5.00	4	95	0.020	4.000	5.000	6050	485	9.7
6.00	4	95	0.025	6.000	6.000	5040	505	18.1
8.00	4	95	0.030	8.000	8.000	3780	455	29.0
10.00	4	95	0.040	10.000	10.000	3025	485	48.4
12.00	4	95	0.045	12.000	12.000	2520	455	65.3
16.00	4	95	0.055	8.000	16.000	1890	415	53.2
20.00	4	95	0.070	10.000	20.000	1510	425	84.7
3.00	4	65	0.008	1.300	3.000	6895	220	0.9
4.00	4	65	0.010	2.000	4.000	5175	205	1.7
5.00	4	65	0.015	2.800	5.000	4140	250	3.5
6.00	4	65	0.020	4.200	6.000	3450	275	7.0
8.00	4	65	0.025	8.000	8.000	2585	260	16.6
10.00	4	65	0.030	10.000	10.000	2070	250	24.8
12.00	4	65	0.040	12.000	12.000	1725	275	39.7
16.00	4	65	0.045	8.000	16.000	1295	235	29.8
20.00	4	65	0.055	10.000	20.000	1035	230	45.5
3.00	4	115	0.010	1.800	3.000	12200	490	2.6
4.00	4	115	0.015	2.800	4.000	9150	550	6.1
5.00	4	115	0.025	4.000	5.000	7320	730	14.6
6.00	4	115	0.025	6.000	6.000	6100	610	22.0
8.00	4	115	0.035	8.000	8.000	4575	640	41.0
10.00	4	115	0.040	10.000	10.000	3660	585	58.6
12.00	4	115	0.050	12.000	12.000	3050	610	87.9
16.00	4	115	0.065	8.000	16.000	2290	595	76.1
20.00	4	115	0.080	10.000	20.000	1830	585	117.1

Cylindrical end mills

Smooth-edged, normal version, short neck



HM
MG10 λ 40°
 γ 6°

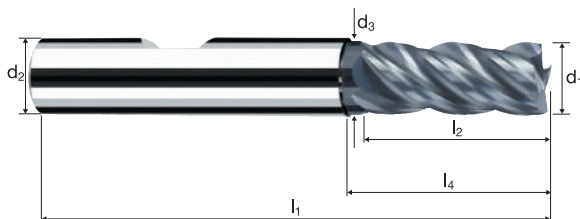

Roughing

Finishing













ToolSchool

P46200 / P46300

Rm < 850	Rm 850-1100	Rm 1100-1300						Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
-------------	----------------	-----------------	--	--	--	--	--	-------------------	----------------	--------------------------------------

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	POLYCHROM		
Example: Order-N°: Coating: P Article-N°: 45317 ø-Code: 100													
												P45317	
												P45217	
100	1.00	6.00	0.95	57	5.00	7.00	17.08	0.07	9.5°	4		●	
140	2.00	6.00	1.90	57	7.00	10.00	18.31	0.10	7.5°	4		●	
178*	3.00	3.00	-	45	8.00	-	-	0.10	0.0°	4		●	
180	3.00	6.00	2.80	57	8.00	14.00	20.63	0.10	4.5°	4		●	
218*	4.00	4.00	-	50	11.00	-	-	0.10	0.0°	4		●	
220	4.00	6.00	3.70	57	11.00	16.00	20.95	0.10	3.0°	4		●	
258*	5.00	5.00	-	50	13.00	-	-	0.15	0.0°	4		●	
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.15	1.5°	4		●	
300	6.00	6.00	5.50	57	13.00	19.34	20.00	0.15	0.0°	4		●	
391	8.00	8.00	7.40	63	19.00	25.29	26.00	0.15	0.0°	4		●	
450	10.00	10.00	9.20	72	22.00	30.20	31.00	0.20	0.0°	4		●	
501	12.00	12.00	11.00	83	26.00	36.13	37.00	0.20	0.0°	4		●	
570	14.00	14.00	13.00	83	26.00	36.13	37.00	0.20	0.0°	4		●	
610	16.00	16.00	15.00	92	32.00	42.13	43.00	0.20	0.0°	4		●	
682	20.00	20.00	19.00	104	38.00	52.13	53.00	0.20	0.0°	4		●	
772	25.00	25.00	24.00	121	45.00	63.13	64.00	0.25	0.0°	4		●	
* without clamping flat only, without short neck													


Application	Material	d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
	Steel < 850 N/mm ² 	4.00	4	160	0.015	6.000	1.000	12730	765
		6.00	4	160	0.020	9.000	1.500	8490	680
		8.00	4	160	0.025	12.000	2.000	6365	635
		10.00	4	160	0.035	15.000	2.500	5095	715
		12.00	4	160	0.040	18.000	3.000	4245	680
		14.00	4	160	0.045	21.000	3.500	3640	655
		16.00	4	160	0.055	24.000	4.000	3185	700
		18.00	4	160	0.060	27.000	4.500	2830	680
		20.00	4	160	0.065	30.000	5.000	2545	660
			Steel 850 - 1100 N/mm ² 	4.00	4	120	0.015	6.000	1.000
6.00	4			120	0.020	9.000	1.500	6365	510
8.00	4			120	0.025	12.000	2.000	4775	475
10.00	4			120	0.035	15.000	2.500	3820	535
12.00	4			120	0.040	18.000	3.000	3185	510
14.00	4			120	0.045	21.000	3.500	2730	490
16.00	4			120	0.055	24.000	4.000	2385	525
18.00	4			120	0.060	27.000	4.500	2120	510
20.00	4			120	0.065	30.000	5.000	1910	495
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 			4.00	4	90	0.015	6.000	1.000
		6.00	4	90	0.020	9.000	1.500	4775	380
		8.00	4	90	0.025	12.000	2.000	3580	360
		10.00	4	90	0.035	15.000	2.500	2865	400
		12.00	4	90	0.040	18.000	3.000	2385	380
		14.00	4	90	0.045	21.000	3.500	2045	370
		16.00	4	90	0.055	24.000	4.000	1790	395
		18.00	4	90	0.060	27.000	4.500	1590	380
		20.00	4	90	0.065	30.000	5.000	1430	370
			Titanium alloys > 300 HB [Ti6Al4V] 	4.00	4	50	0.015	6.000	1.000
6.00	4			50	0.020	9.000	1.500	2655	210
8.00	4			50	0.025	12.000	2.000	1990	200
10.00	4			50	0.035	15.000	2.500	1590	225
12.00	4			50	0.040	18.000	3.000	1325	210
14.00	4			50	0.045	21.000	3.500	1135	205
16.00	4			50	0.055	24.000	4.000	995	220
18.00	4			50	0.060	27.000	4.500	885	210
20.00	4			50	0.065	30.000	5.000	795	205
	Steel < 850 N/mm ² 			4.00	4	170	0.010	6.000	0.100
		6.00	4	170	0.015	9.000	0.100	9020	540
		8.00	4	170	0.025	12.000	0.150	6765	675
		10.00	4	170	0.030	15.000	0.150	5410	650
		12.00	4	170	0.035	18.000	0.200	4510	630
		14.00	4	170	0.040	21.000	0.200	3865	620
		16.00	4	170	0.045	24.000	0.250	3380	610
		18.00	4	170	0.050	27.000	0.250	3005	600
		20.00	4	170	0.055	30.000	0.300	2705	595
			Steel 850 - 1100 N/mm ² 	4.00	4	140	0.010	6.000	0.100
6.00	4			140	0.015	9.000	0.100	7425	445
8.00	4			140	0.025	12.000	0.150	5570	555
10.00	4			140	0.030	15.000	0.150	4455	535
12.00	4			140	0.035	18.000	0.200	3715	520
14.00	4			140	0.040	21.000	0.200	3185	510
16.00	4			140	0.045	24.000	0.250	2785	500
18.00	4			140	0.050	27.000	0.250	2475	495
20.00	4			140	0.055	30.000	0.300	2230	490
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 			4.00	4	100	0.010	6.000	0.100
		6.00	4	100	0.015	9.000	0.100	5305	320
		8.00	4	100	0.025	12.000	0.150	3980	400
		10.00	4	100	0.030	15.000	0.150	3185	380
		12.00	4	100	0.035	18.000	0.200	2655	370
		14.00	4	100	0.040	21.000	0.200	2275	365
		16.00	4	100	0.045	24.000	0.250	1990	360
		18.00	4	100	0.050	27.000	0.250	1770	355
		20.00	4	100	0.055	30.000	0.300	1590	350
			Titanium alloys > 300 HB [Ti6Al4V] 	4.00	4	60	0.010	6.000	0.100
6.00	4			60	0.015	9.000	0.100	3185	190
8.00	4			60	0.025	12.000	0.150	2385	240
10.00	4			60	0.030	15.000	0.150	1910	230
12.00	4			60	0.035	18.000	0.200	1590	225
14.00	4			60	0.040	21.000	0.200	1365	220
16.00	4			60	0.045	24.000	0.250	1195	215
18.00	4			60	0.050	27.000	0.250	1060	210
20.00	4			60	0.055	30.000	0.300	955	210

Cylindrical end mills

Smooth-edged, normal version, short neck



HM
MG10 λ 55°
 γ 15°

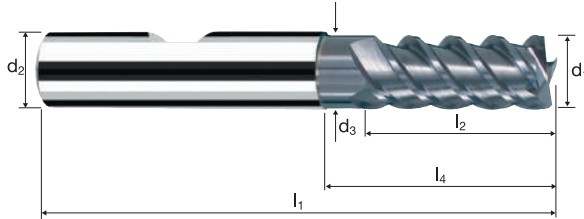

Roughing


Finishing



Rm < 850	Rm 850-1100	Rm 1100-1300						Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	--	--	--	--	--	-------------------	----------------	-------

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	POLYCHROM	
											Order-N°	Article-N°
180	3.00	6.00	2.80	57	8.00	14.00	20.63	0.10	4.5°	4	P	45355
220	4.00	6.00	3.70	57	11.00	16.00	20.95	0.10	3.0°	4		45255
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.15	1.5°	4		
300	6.00	6.00	5.50	57	13.00	19.34	20.00	0.15	0.0°	4		
391	8.00	8.00	7.40	63	19.00	25.29	26.00	0.15	0.0°	4		
450	10.00	10.00	9.20	72	22.00	30.20	31.00	0.20	0.0°	4		
501	12.00	12.00	11.00	83	26.00	36.13	37.00	0.20	0.0°	4		
570	14.00	14.00	13.00	83	26.00	36.13	37.00	0.20	0.0°	4		
610	16.00	16.00	15.00	92	32.00	42.13	43.00	0.20	0.0°	4		
640	18.00	18.00	17.00	92	32.00	42.13	43.00	0.20	0.0°	4		
682	20.00	20.00	19.00	104	38.00	52.13	53.00	0.20	0.0°	4		

Application



Material

Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
2.00	3	165	0.005	3.000	1.300	26260	395	1.5
3.00	3	165	0.010	4.500	1.950	17505	525	4.6
4.00	3	165	0.015	6.000	2.600	13130	590	9.2
5.00	3	165	0.020	7.500	3.250	10505	630	15.4
6.00	3	165	0.020	9.000	3.900	8755	525	18.4
7.00	3	165	0.025	10.500	4.550	7505	565	26.9
8.00	3	165	0.030	12.000	5.200	6565	590	36.9
9.00	3	165	0.030	13.500	5.850	5835	525	41.5
10.00	3	165	0.035	15.000	6.500	5250	550	53.8
2.00	3	110	0.005	3.000	1.300	17505	265	1.0
3.00	3	110	0.010	4.500	1.950	11670	350	3.1
4.00	3	110	0.015	6.000	2.600	8755	395	6.1
5.00	3	110	0.020	7.500	3.250	7005	420	10.2
6.00	3	110	0.020	9.000	3.900	5835	350	12.3
7.00	3	110	0.025	10.500	4.550	5000	375	17.9
8.00	3	110	0.030	12.000	5.200	4375	395	24.6
9.00	3	110	0.030	13.500	5.850	3890	350	27.7
10.00	3	110	0.035	15.000	6.500	3500	370	35.8
2.00	3	80	0.005	3.000	1.300	12730	190	0.7
3.00	3	80	0.010	4.500	1.950	8490	255	2.2
4.00	3	80	0.010	6.000	2.600	6365	190	3.0
5.00	3	80	0.015	7.500	3.250	5095	230	5.6
6.00	3	80	0.015	9.000	3.900	4245	190	6.7
7.00	3	80	0.020	10.500	4.550	3640	220	10.4
8.00	3	80	0.020	12.000	5.200	3185	190	11.9
9.00	3	80	0.025	13.500	5.850	2830	210	16.8
10.00	3	80	0.025	15.000	6.500	2545	190	18.6
2.00	3	130	0.005	3.000	1.300	20690	310	1.2
3.00	3	130	0.010	4.500	1.950	13795	415	3.6
4.00	3	130	0.015	6.000	2.600	10345	465	7.3
5.00	3	130	0.020	7.500	3.250	8275	495	12.1
6.00	3	130	0.020	9.000	3.900	6895	415	14.5
7.00	3	130	0.025	10.500	4.550	5910	445	21.2
8.00	3	130	0.030	12.000	5.200	5175	465	29.0
9.00	3	130	0.030	13.500	5.850	4600	415	32.7
10.00	3	130	0.035	15.000	6.500	4140	435	42.4
2.00	3	130	0.005	2.800	2.000	20690	310	1.7
3.00	3	130	0.010	4.200	3.000	13795	415	5.2
4.00	3	130	0.015	5.600	4.000	10345	465	10.4
5.00	3	130	0.015	7.000	5.000	8275	370	13.0
6.00	3	130	0.020	8.400	6.000	6895	415	20.9
7.00	3	130	0.025	9.800	7.000	5910	445	30.4
8.00	3	130	0.025	11.200	8.000	5175	390	34.8
9.00	3	130	0.030	12.600	9.000	4600	415	46.9
10.00	3	130	0.030	14.000	10.000	4140	370	52.1
2.00	3	85	0.005	2.800	2.000	13530	205	1.1
3.00	3	85	0.010	4.200	3.000	9020	270	3.4
4.00	3	85	0.015	5.600	4.000	6765	305	6.8
5.00	3	85	0.015	7.000	5.000	5410	245	8.5
6.00	3	85	0.020	8.400	6.000	4510	270	13.6
7.00	3	85	0.025	9.800	7.000	3865	290	19.9
8.00	3	85	0.025	11.200	8.000	3380	255	22.7
9.00	3	85	0.030	12.600	9.000	3005	270	30.7
10.00	3	85	0.030	14.000	10.000	2705	245	34.1
2.00	3	65	0.005	2.800	2.000	10345	155	0.9
3.00	3	65	0.005	4.200	3.000	6895	105	1.3
4.00	3	65	0.010	5.600	4.000	5175	155	3.5
5.00	3	65	0.010	7.000	5.000	4140	125	4.3
6.00	3	65	0.015	8.400	6.000	3450	155	7.8
7.00	3	65	0.015	9.800	7.000	2955	135	9.1
8.00	3	65	0.020	11.200	8.000	2585	155	13.9
9.00	3	65	0.020	12.600	9.000	2300	140	15.6
10.00	3	65	0.025	14.000	10.000	2070	155	21.7
2.00	3	110	0.005	2.800	2.000	17505	265	1.5
3.00	3	110	0.010	4.200	3.000	11670	350	4.4
4.00	3	110	0.015	5.600	4.000	8755	395	8.8
5.00	3	110	0.015	7.000	5.000	7005	315	11.0
6.00	3	110	0.020	8.400	6.000	5835	350	17.6
7.00	3	110	0.025	9.800	7.000	5000	375	25.7
8.00	3	110	0.025	11.200	8.000	4375	330	29.4
9.00	3	110	0.030	12.600	9.000	3890	350	39.7
10.00	3	110	0.030	14.000	10.000	3500	315	44.1



Cylindrical end mills

Smooth-edged, normal version



HM
MG10

λ 40°
 γ 6°

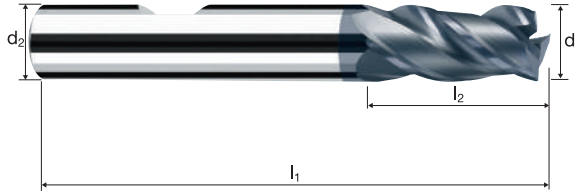

Roughing


Finishing



Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	--------------------------------------

Example: Order-N°.										POLYCHROM
										P45333
										P45233
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	45°	α	z		
140	2.00	6.00	54	6.00	15.32	0.10	8.0°	3		●
160	2.50	6.00	54	6.00	14.89	0.10	7.5°	3		●
180	3.00	6.00	57	7.00	14.96	0.10	6.0°	3		●
200	3.50	6.00	57	7.00	14.02	0.10	5.5°	3		●
220	4.00	6.00	57	8.00	14.59	0.10	4.5°	3		●
240	4.50	6.00	57	8.00	13.66	0.15	3.5°	3		●
260	5.00	6.00	57	10.00	14.72	0.15	2.5°	3		●
280	5.50	6.00	57	10.00	13.79	0.15	1.5°	3		●
300	6.00	6.00	57	10.00	-	0.15	0.0°	3		●
322	6.50	8.00	63	13.00	18.66	0.15	2.5°	3		●
331	7.00	8.00	63	13.00	17.72	0.15	2.0°	3		●
362	7.50	8.00	63	16.00	19.79	0.15	1.0°	3		●
391	8.00	8.00	63	16.00	-	0.15	0.0°	3		●
410	8.50	10.00	72	16.00	21.66	0.20	2.5°	3		●
420	9.00	10.00	72	16.00	20.72	0.20	1.5°	3		●
430	9.50	10.00	72	19.00	22.79	0.20	1.0°	3		●
450	10.00	10.00	72	19.00	-	0.20	0.0°	3		●

Application



Material

Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
11.00	3	165	0.040	16.500	7.150	4775	575	67.6
12.00	3	165	0.045	18.000	7.440	4375	590	79.1
13.00	3	165	0.045	19.500	7.800	4040	545	83.0
14.00	3	165	0.050	21.000	8.120	3750	565	96.0
15.00	3	165	0.055	22.500	8.400	3500	580	109.2
16.00	3	165	0.055	24.000	8.800	3285	540	114.4
20.00	3	165	0.070	30.000	11.000	2625	550	182.0

11.00	3	110	0.040	16.500	7.150	3185	380	45.1
12.00	3	110	0.045	18.000	7.440	2920	395	52.8
13.00	3	110	0.045	19.500	7.800	2695	365	55.3
14.00	3	110	0.050	21.000	8.120	2500	375	64.0
15.00	3	110	0.055	22.500	8.400	2335	385	72.8
16.00	3	110	0.055	24.000	8.800	2190	360	76.3
20.00	3	110	0.070	30.000	11.000	1750	370	121.3

11.00	3	80	0.030	16.500	7.150	2315	210	24.6
12.00	3	80	0.030	18.000	7.440	2120	190	25.6
13.00	3	80	0.035	19.500	7.800	1960	205	31.3
14.00	3	80	0.035	21.000	8.120	1820	190	32.6
15.00	3	80	0.040	22.500	8.400	1700	205	38.5
16.00	3	80	0.040	24.000	8.800	1590	190	40.3
20.00	3	80	0.055	30.000	11.000	1275	210	69.3

11.00	3	130	0.040	16.500	7.150	3760	450	53.3
12.00	3	130	0.045	18.000	7.440	3450	465	62.3
13.00	3	130	0.045	19.500	7.800	3185	430	65.4
14.00	3	130	0.050	21.000	8.120	2955	445	75.6
15.00	3	130	0.055	22.500	8.400	2760	455	86.0
16.00	3	130	0.055	24.000	8.800	2585	425	90.1
20.00	3	130	0.070	30.000	11.000	2070	435	143.4

11.00	3	130	0.035	15.400	11.000	3760	395	66.9
12.00	3	130	0.040	16.200	12.000	3450	415	80.4
13.00	3	130	0.040	17.030	13.000	3185	380	84.6
14.00	3	130	0.045	17.990	14.000	2955	400	100.5
15.00	3	130	0.050	18.750	15.000	2760	415	116.4
16.00	3	130	0.050	19.200	16.000	2585	390	119.2
20.00	3	130	0.065	22.000	20.000	2070	405	177.5

11.00	3	85	0.035	15.400	11.000	2460	260	43.8
12.00	3	85	0.040	16.200	12.000	2255	270	52.6
13.00	3	85	0.040	17.030	13.000	2080	250	55.3
14.00	3	85	0.045	17.990	14.000	1935	260	65.7
15.00	3	85	0.050	18.750	15.000	1805	270	76.1
16.00	3	85	0.050	19.200	16.000	1690	255	77.9
20.00	3	85	0.065	22.000	20.000	1355	265	116.1

11.00	3	65	0.025	15.400	11.000	1880	140	23.9
12.00	3	65	0.030	16.200	12.000	1725	155	30.2
13.00	3	65	0.030	17.030	13.000	1590	145	31.7
14.00	3	65	0.035	17.990	14.000	1480	155	39.1
15.00	3	65	0.035	18.750	15.000	1380	145	40.7
16.00	3	65	0.040	19.200	16.000	1295	155	47.7
20.00	3	65	0.045	22.000	20.000	1035	140	61.4

11.00	3	110	0.035	15.400	11.000	3185	335	56.6
12.00	3	110	0.040	16.200	12.000	2920	350	68.1
13.00	3	110	0.040	17.030	13.000	2695	325	71.6
14.00	3	110	0.045	17.990	14.000	2500	340	85.0
15.00	3	110	0.050	18.750	15.000	2335	350	98.5
16.00	3	110	0.050	19.200	16.000	2190	330	100.8
20.00	3	110	0.065	22.000	20.000	1750	340	150.2


Cylindrical end mills

Smooth-edged, normal version



HM
MG10

λ 40°
 γ 6°

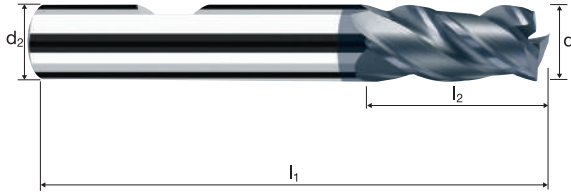

Roughing



Finishing



Rm
< 850

Rm
850-1100

Rm
1100-1300



Inox
Stainless

Ti
Titanium

GG(G)
Tool Steel
Nickel-Alloys

Ø Code	d ₁ e8	d ₂ h6	Coating			Article-N°		ø-Code		45°	α	z	POLYCHROM
			P	45333	470	Ø	Ø	P45333					
470	11.00	12.00								0.20	1.5°	3	●
501	12.00	12.00								0.20	0.0°	3	●
540	13.00	14.00								0.20	1.5°	3	●
570	14.00	14.00								0.20	0.0°	3	●
581	15.00	16.00								0.20	1.0°	3	●
610	16.00	16.00								0.20	0.0°	3	●
682	20.00	20.00								0.20	0.0°	3	●

Application	Material	d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	
	Steel < 850 N/mm ² 	2.00	4	65	0.005	3.000	0.050	10345	205	
		4.00	4	65	0.010	6.000	0.100	5175	205	
		5.00	4	65	0.015	7.500	0.150	4140	250	
		6.00	4	65	0.015	9.000	0.150	3450	205	
		8.00	4	65	0.025	12.000	0.200	2585	260	
		10.00	4	65	0.030	15.000	0.250	2070	250	
		12.00	4	65	0.035	18.000	0.300	1725	240	
		16.00	4	65	0.045	24.000	0.400	1295	235	
		Steel 850 - 1100 N/mm ² 	2.00	4	54	0.005	3.000	0.050	8595	170
			4.00	4	54	0.010	6.000	0.100	4295	170
5.00	4		54	0.015	7.500	0.150	3440	205		
6.00	4		54	0.015	9.000	0.150	2865	170		
8.00	4		54	0.025	12.000	0.200	2150	215		
10.00	4		54	0.030	15.000	0.250	1720	205		
12.00	4		54	0.035	18.000	0.300	1430	200		
16.00	4		54	0.045	24.000	0.400	1075	195		
Steel 1100 - 1300 N/mm ² 	2.00		4	42	0.005	3.000	0.050	6685	135	
	4.00		4	42	0.010	6.000	0.100	3340	135	
	5.00	4	42	0.015	7.500	0.150	2675	160		
	6.00	4	42	0.015	9.000	0.150	2230	135		
	8.00	4	42	0.025	12.000	0.200	1670	165		
	10.00	4	42	0.030	15.000	0.250	1335	160		
	12.00	4	42	0.035	18.000	0.300	1115	155		
	16.00	4	42	0.045	24.000	0.400	835	150		
	Cold work tool steel (12% Cr), high alloyed [1.2379] 	2.00	4	30	0.005	3.000	0.050	4775	95	
		4.00	4	30	0.010	6.000	0.100	2385	95	
5.00		4	30	0.015	7.500	0.150	1910	115		
6.00		4	30	0.015	9.000	0.150	1590	95		
8.00		4	30	0.025	12.000	0.200	1195	120		
10.00		4	30	0.030	15.000	0.250	955	115		
12.00		4	30	0.035	18.000	0.300	795	110		
16.00		4	30	0.045	24.000	0.400	595	105		
Cast iron (lamellar / spheroidal) 		2.00	4	50	0.005	3.000	0.050	7960	160	
		4.00	4	50	0.010	6.000	0.100	3980	160	
	5.00	4	50	0.015	7.500	0.150	3185	190		
	6.00	4	50	0.015	9.000	0.150	2655	160		
	8.00	4	50	0.025	12.000	0.200	1990	200		
	10.00	4	50	0.030	15.000	0.250	1590	190		
	12.00	4	50	0.035	18.000	0.300	1325	185		
	16.00	4	50	0.045	24.000	0.400	995	180		
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	2.00	4	26	0.005	3.000	0.050	4140	85	
		4.00	4	26	0.010	6.000	0.100	2070	85	
5.00		4	26	0.015	7.500	0.150	1655	100		
6.00		4	26	0.015	9.000	0.150	1380	85		
8.00		4	26	0.025	12.000	0.200	1035	105		
10.00		4	26	0.030	15.000	0.250	830	100		
12.00		4	26	0.035	18.000	0.300	690	95		
16.00		4	26	0.045	24.000	0.400	515	95		
Unalloyed copper 		2.00	4	80	0.005	3.000	0.050	12730	255	
		4.00	4	80	0.010	6.000	0.100	6365	255	
	5.00	4	80	0.015	7.500	0.150	5095	305		
	6.00	4	80	0.015	9.000	0.150	4245	255		
	8.00	4	80	0.025	12.000	0.200	3185	320		
	10.00	4	80	0.030	15.000	0.250	2545	305		
	12.00	4	80	0.035	18.000	0.300	2120	295		
	16.00	4	80	0.045	24.000	0.400	1590	285		
	Wrought aluminium Construction aluminium 	2.00	4	100	0.005	3.000	0.050	15915	320	
		4.00	4	100	0.010	6.000	0.100	7960	320	
5.00		4	100	0.015	7.500	0.150	6365	380		
6.00		4	100	0.015	9.000	0.150	5305	320		
8.00		4	100	0.025	12.000	0.200	3980	400		
10.00		4	100	0.030	15.000	0.250	3185	380		
12.00		4	100	0.035	18.000	0.300	2655	370		
16.00		4	100	0.045	24.000	0.400	1990	360		

Cylindrical end mills


Smooth-edged, normal version

HSS

HSS-E
Co8

λ 40°
 γ 15°

90°

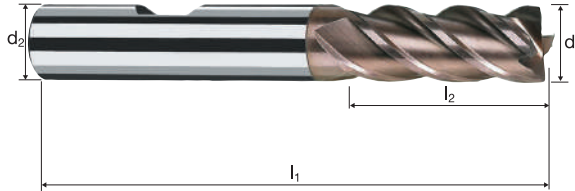

Roughing

Finishing



Rm
< 850

Rm
850-1100


Rm
1100-1300

Inox
Stainless

Ti
Titanium



GG(G)
Aluminium
Copper

Example: Order-N°.									UNICUT-4X	
									U0110	
\emptyset Code	d_1 k8	d_2 h6	l_1	l_2	l_4	α	z			
100	1.00	6.00	49	5.00	12.48	3.0°	4	●		
120	1.50	6.00	50	6.00	12.99	3.0°	4	●		
140	2.00	6.00	51	7.00	13.61	2.5°	4	●		
160	2.50	6.00	52	8.00	15.50	2.0°	4	●		
180	3.00	6.00	52	8.00	15.50	2.0°	4	●		
200	3.50	6.00	54	10.00	17.50	1.5°	4	●		
220	4.00	6.00	55	11.00	18.50	1.5°	4	●		
240	4.50	6.00	55	11.00	18.50	1.0°	4	●		
260	5.00	6.00	57	13.00	20.50	1.0°	4	●		
280	5.50	6.00	57	13.00	20.50	1.0°	4	●		
300	6.00	6.00	57	13.00	-	0.0°	4	●		
342	7.00	10.00	66	16.00	25.50	1.5°	4	●		
391	8.00	8.00	63	19.00	-	0.0°	4	●		
420	9.00	10.00	69	19.00	28.50	0.5°	4	●		
450	10.00	10.00	72	22.00	-	0.0°	4	●		
470	11.00	12.00	79	22.00	33.50	0.5°	4	●		
501	12.00	12.00	83	26.00	-	0.0°	4	●		
570	14.00	12.00	83	26.00	-	0.0°	4	●		
581	15.00	12.00	83	26.00	-	0.0°	4	●		
610	16.00	16.00	92	32.00	-	0.0°	4	●		
640	18.00	16.00	92	32.00	-	0.0°	4	●		





Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
20.00	4	65	0.055	30.000	0.500	1035	230
22.00	4	65	0.065	33.000	0.550	940	245
24.00	4	65	0.070	36.000	0.600	860	240
25.00	4	65	0.070	37.500	0.650	830	230
28.00	6	65	0.080	42.000	0.700	740	355
30.00	6	65	0.085	45.000	0.750	690	350
32.00	6	65	0.090	48.000	0.800	645	350
36.00	6	65	0.105	54.000	0.900	575	360
40.00	6	65	0.115	60.000	1.000	515	355

Steel
850 - 1100 N/mm²



20.00	4	54	0.055	30.000	0.500	860	190
22.00	4	54	0.065	33.000	0.550	780	205
24.00	4	54	0.070	36.000	0.600	715	200
25.00	4	54	0.070	37.500	0.650	690	195
28.00	6	54	0.080	42.000	0.700	615	295
30.00	6	54	0.085	45.000	0.750	575	290
32.00	6	54	0.090	48.000	0.800	535	290
36.00	6	54	0.105	54.000	0.900	475	300
40.00	6	54	0.115	60.000	1.000	430	295

Steel
1100 - 1300 N/mm²






20.00	4	42	0.055	30.000	0.500	670	145
22.00	4	42	0.065	33.000	0.550	610	160
24.00	4	42	0.070	36.000	0.600	555	155
25.00	4	42	0.070	37.500	0.650	535	150
28.00	6	42	0.080	42.000	0.700	475	230
30.00	6	42	0.085	45.000	0.750	445	225
32.00	6	42	0.090	48.000	0.800	420	225
36.00	6	42	0.105	54.000	0.900	370	235
40.00	6	42	0.115	60.000	1.000	335	230

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



20.00	4	30	0.055	30.000	0.500	475	105
22.00	4	30	0.065	33.000	0.550	435	115
24.00	4	30	0.070	36.000	0.600	400	110
25.00	4	30	0.070	37.500	0.650	380	105
28.00	6	30	0.080	42.000	0.700	340	165
30.00	6	30	0.085	45.000	0.750	320	160
32.00	6	30	0.090	48.000	0.800	300	160
36.00	6	30	0.105	54.000	0.900	265	165
40.00	6	30	0.115	60.000	1.000	240	165

Cast iron
(lamellar / spheroidal)



20.00	4	50	0.055	30.000	0.500	795	175
22.00	4	50	0.065	33.000	0.550	725	190
24.00	4	50	0.070	36.000	0.600	665	185
25.00	4	50	0.070	37.500	0.650	635	180
28.00	6	50	0.080	42.000	0.700	570	275
30.00	6	50	0.085	45.000	0.750	530	270
32.00	6	50	0.090	48.000	0.800	495	270
36.00	6	50	0.105	54.000	0.900	440	280
40.00	6	50	0.115	60.000	1.000	400	275

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



20.00	4	26	0.055	30.000	0.500	415	90
22.00	4	26	0.065	33.000	0.550	375	100
24.00	4	26	0.070	36.000	0.600	345	95
25.00	4	26	0.070	37.500	0.650	330	95
28.00	6	26	0.080	42.000	0.700	295	140
30.00	6	26	0.085	45.000	0.750	275	140
32.00	6	26	0.090	48.000	0.800	260	140
36.00	6	26	0.105	54.000	0.900	230	145
40.00	6	26	0.115	60.000	1.000	205	145

Unalloyed copper

20.00	4	80	0.055	30.000	0.500	1275	280
22.00	4	80	0.065	33.000	0.550	1155	300
24.00	4	80	0.070	36.000	0.600	1060	295
25.00	4	80	0.070	37.500	0.650	1020	285
28.00	6	80	0.080	42.000	0.700	910	435
30.00	6	80	0.085	45.000	0.750	850	435
32.00	6	80	0.090	48.000	0.800	795	430
36.00	6	80	0.105	54.000	0.900	705	445
40.00	6	80	0.115	60.000	1.000	635	440

Wrought aluminium
Construction aluminium



20.00	4	100	0.055	30.000	0.500	1590	350
22.00	4	100	0.065	33.000	0.550	1445	375
24.00	4	100	0.070	36.000	0.600	1325	370
25.00	4	100	0.070	37.500	0.650	1275	355
28.00	6	100	0.080	42.000	0.700	1135	545
30.00	6	100	0.085	45.000	0.750	1060	540
32.00	6	100	0.090	48.000	0.800	995	535
36.00	6	100	0.105	54.000	0.900	885	555
40.00	6	100	0.115	60.000	1.000	795	550

Cylindrical end mills

Smooth-edged, normal version




HSS-E λ 40°
Co8 γ 15°

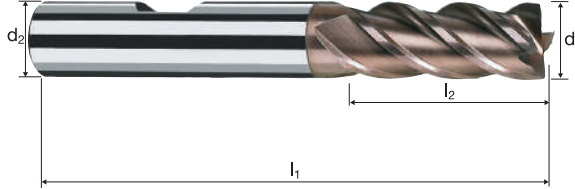

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Aluminium Copper
----------	-------------	--------------	--	--	--	--	----------------	-------------	------------------------

Example: Order-N°. Coating: U Article-N°: 0110 ø-Code: 682 									UNICUT-4X
Ø Code	d ₁ k8	d ₂ h6	l ₁	l ₂	l ₄	α	z		
682	20.00	20.00	104	38.00	-	0.0°	4		●
690	21.00	20.00	104	38.00	-	0.0°	4		●
710	22.00	20.00	104	38.00	-	0.0°	4		●
741	24.00	20.00	111	45.00	-	0.0°	4		●
772	25.00	25.00	121	45.00	-	0.0°	4		●
800	28.00	25.00	121	45.00	-	0.0°	6		●
810	30.00	25.00	121	45.00	-	0.0°	6		●
832	32.00	32.00	133	53.00	-	0.0°	6		●
860	36.00	32.00	133	53.00	-	0.0°	6		●
881	40.00	32.00	143	63.00	-	0.0°	6		●

Application




Material

Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)





d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	3	64	0.010	4.500	0.200	6790	205	0.2
4.00	3	64	0.010	6.000	0.300	5095	155	0.3
5.00	3	64	0.015	7.500	0.350	4075	185	0.5
6.00	3	64	0.020	9.000	0.400	3395	205	0.7
7.00	3	64	0.020	10.500	0.500	2910	175	0.9
8.00	3	64	0.025	12.000	0.550	2545	190	1.3
10.00	3	64	0.030	15.000	0.700	2035	185	1.9
12.00	3	64	0.045	18.000	0.850	1700	230	3.5
14.00	3	64	0.055	21.000	1.000	1455	240	5.0
3.00	3	52	0.010	4.500	0.200	5515	165	0.1
4.00	3	52	0.010	6.000	0.300	4140	125	0.2
5.00	3	52	0.015	7.500	0.350	3310	150	0.4
6.00	3	52	0.020	9.000	0.400	2760	165	0.6
7.00	3	52	0.020	10.500	0.500	2365	140	0.7
8.00	3	52	0.025	12.000	0.550	2070	155	1.0
10.00	3	52	0.030	15.000	0.700	1655	150	1.6
12.00	3	52	0.045	18.000	0.850	1380	185	2.8
14.00	3	52	0.055	21.000	1.000	1180	195	4.1
3.00	3	26	0.010	4.500	0.200	2760	85	0.1
4.00	3	26	0.010	6.000	0.300	2070	60	0.1
5.00	3	26	0.015	7.500	0.350	1655	75	0.2
6.00	3	26	0.020	9.000	0.400	1380	85	0.3
7.00	3	26	0.020	10.500	0.500	1180	70	0.4
8.00	3	26	0.025	12.000	0.550	1035	80	0.5
10.00	3	26	0.030	15.000	0.700	830	75	0.8
12.00	3	26	0.045	18.000	0.850	690	95	1.4
14.00	3	26	0.055	21.000	1.000	590	100	2.0
3.00	3	45	0.010	4.500	0.200	4775	145	0.1
4.00	3	45	0.010	6.000	0.300	3580	105	0.2
5.00	3	45	0.015	7.500	0.350	2865	130	0.3
6.00	3	45	0.020	9.000	0.400	2385	145	0.5
7.00	3	45	0.020	10.500	0.500	2045	125	0.6
8.00	3	45	0.025	12.000	0.550	1790	135	0.9
10.00	3	45	0.030	15.000	0.700	1430	130	1.4
12.00	3	45	0.045	18.000	0.850	1195	160	2.5
14.00	3	45	0.055	21.000	1.000	1025	170	3.5
3.00	3	60	0.010	1.500	3.000	6365	190	0.9
4.00	3	60	0.010	2.000	4.000	4775	145	1.1
5.00	3	60	0.015	2.500	5.000	3820	170	2.1
6.00	3	60	0.020	3.000	6.000	3185	190	3.4
7.00	3	60	0.020	3.500	7.000	2730	165	4.0
8.00	3	60	0.025	4.000	8.000	2385	180	5.7
10.00	3	60	0.030	5.000	10.000	1910	170	8.6
12.00	3	60	0.045	6.000	12.000	1590	215	15.5
14.00	3	60	0.055	7.000	14.000	1365	225	22.1
3.00	3	50	0.010	1.500	3.000	5305	160	0.7
4.00	3	50	0.010	2.000	4.000	3980	120	1.0
5.00	3	50	0.015	2.500	5.000	3185	145	1.8
6.00	3	50	0.020	3.000	6.000	2655	160	2.9
7.00	3	50	0.020	3.500	7.000	2275	135	3.3
8.00	3	50	0.025	4.000	8.000	1990	150	4.8
10.00	3	50	0.030	5.000	10.000	1590	145	7.2
12.00	3	50	0.045	6.000	12.000	1325	180	12.9
14.00	3	50	0.055	7.000	14.000	1135	190	18.4
3.00	3	23	0.010	1.500	3.000	2440	75	0.3
4.00	3	23	0.010	2.000	4.000	1830	55	0.4
5.00	3	23	0.015	2.500	5.000	1465	65	0.8
6.00	3	23	0.020	3.000	6.000	1220	75	1.3
7.00	3	23	0.020	3.500	7.000	1045	65	1.5
8.00	3	23	0.025	4.000	8.000	915	70	2.2
10.00	3	23	0.030	5.000	10.000	730	65	3.3
12.00	3	23	0.045	6.000	12.000	610	80	5.9
14.00	3	23	0.055	7.000	14.000	525	85	8.5
3.00	3	40	0.010	1.500	3.000	4245	125	0.6
4.00	3	40	0.010	2.000	4.000	3185	95	0.8
5.00	3	40	0.015	2.500	5.000	2545	115	1.4
6.00	3	40	0.020	3.000	6.000	2120	125	2.3
7.00	3	40	0.020	3.500	7.000	1820	110	2.7
8.00	3	40	0.025	4.000	8.000	1590	120	3.8
10.00	3	40	0.030	5.000	10.000	1275	115	5.7
12.00	3	40	0.045	6.000	12.000	1060	145	10.3
14.00	3	40	0.055	7.000	14.000	910	150	14.7

Cylindrical end mills

Smooth-edged, normal version

HSS

HSS-E λ 30°
Co8 γ 15°

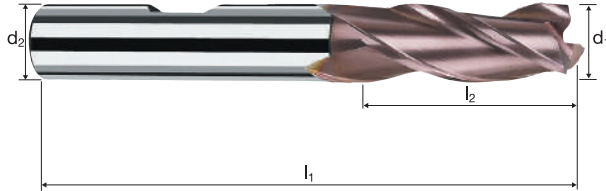

Roughing

Finishing



Rm
< 850

Rm
850-1100


Rm
1100-1300

Inox
Stainless

GG(G)
Aluminium
Copper

Example: Order-N°.		Coating U	Article-N° 0780	ø-Code 100					UNICUT-4X
Ø Code	d ₁ f8	d ₂ h6	l ₁	l ₂	l ₄	α	z	U0780	
100	1.00	6.00	49	5.00	12.48	10.5°	3	●	
120	1.50	6.00	50	6.00	12.99	10.0°	3	●	
140	2.00	6.00	51	7.00	13.61	8.5°	3	●	
160	2.50	6.00	52	8.00	15.50	6.5°	3	●	
180	3.00	6.00	52	8.00	15.50	6.0°	3	●	
200	3.50	6.00	54	10.00	17.50	4.5°	3	●	
220	4.00	6.00	55	11.00	18.50	3.5°	3	●	
240	4.50	6.00	55	11.00	18.50	2.5°	3	●	
260	5.00	6.00	57	13.00	20.50	1.5°	3	●	
280	5.50	6.00	57	13.00	20.50	1.0°	3	●	
300	6.00	6.00	57	13.00	-	0.0°	3	●	
322	6.50	10.00	66	16.00	25.50	4.0°	3	●	
342	7.00	10.00	66	16.00	25.50	3.5°	3	●	
391	8.00	8.00	63	19.00	-	0.0°	3	●	
402	8.00	10.00	69	19.00	28.50	2.5°	3	●	
420	9.00	10.00	69	19.00	28.50	1.5°	3	●	
450	10.00	10.00	72	22.00	-	0.0°	3	●	
470	11.00	12.00	79	22.00	33.50	1.0°	3	●	
501	12.00	12.00	83	26.00	-	0.0°	3	●	
540	13.00	12.00	83	26.00	-	0.0°	3	●	
570	14.00	12.00	83	26.00	-	0.0°	3	●	

Application




Material

Steel
< 850 N/mm²



d1 [mm]	z	v _r [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
15.00	3	64	0.060	22.500	1.050	1360	245	5.8
16.00	3	64	0.060	24.000	1.100	1275	230	6.1
18.00	3	64	0.070	27.000	1.250	1130	240	8.0
20.00	3	64	0.080	30.000	1.400	1020	245	10.3
22.00	3	64	0.085	33.000	1.550	925	235	12.1
25.00	3	64	0.100	37.500	1.750	815	245	16.0

Steel
850 - 1100 N/mm²




15.00	3	52	0.060	22.500	1.050	1105	200	4.7
16.00	3	52	0.060	24.000	1.100	1035	185	4.9
18.00	3	52	0.070	27.000	1.250	920	195	6.5
20.00	3	52	0.080	30.000	1.400	830	200	8.3
22.00	3	52	0.085	33.000	1.550	750	190	9.8
25.00	3	52	0.100	37.500	1.750	660	200	13.0

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



15.00	3	26	0.060	22.500	1.050	550	100	2.3
16.00	3	26	0.060	24.000	1.100	515	95	2.5
18.00	3	26	0.070	27.000	1.250	460	95	3.3
20.00	3	26	0.080	30.000	1.400	415	100	4.2
22.00	3	26	0.085	33.000	1.550	375	95	4.9
25.00	3	26	0.100	37.500	1.750	330	100	6.5

Cast iron
(lamellar / spheroidal)



15.00	3	45	0.060	22.500	1.050	955	170	4.1
16.00	3	45	0.060	24.000	1.100	895	160	4.3
18.00	3	45	0.070	27.000	1.250	795	165	5.6
20.00	3	45	0.080	30.000	1.400	715	170	7.2
22.00	3	45	0.085	33.000	1.550	650	165	8.5
25.00	3	45	0.100	37.500	1.750	575	170	11.3



Steel
< 850 N/mm²



15.00	3	60	0.060	7.500	15.000	1275	230	25.8
16.00	3	60	0.065	8.000	16.000	1195	235	29.8
18.00	3	60	0.070	9.000	18.000	1060	225	36.1
20.00	3	60	0.080	10.000	20.000	955	230	45.8
22.00	3	60	0.085	11.000	22.000	870	220	53.6
25.00	3	60	0.100	12.500	25.000	765	230	71.6

Steel
850 - 1100 N/mm²




15.00	3	50	0.060	7.500	15.000	1060	190	21.5
16.00	3	50	0.065	8.000	16.000	995	195	24.8
18.00	3	50	0.070	9.000	18.000	885	185	30.1
20.00	3	50	0.080	10.000	20.000	795	190	38.2
22.00	3	50	0.085	11.000	22.000	725	185	44.6
25.00	3	50	0.100	12.500	25.000	635	190	59.7

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



15.00	3	23	0.060	7.500	15.000	490	90	9.9
16.00	3	23	0.065	8.000	16.000	460	90	11.4
18.00	3	23	0.070	9.000	18.000	405	85	13.8
20.00	3	23	0.080	10.000	20.000	365	90	17.6
22.00	3	23	0.085	11.000	22.000	335	85	20.5
25.00	3	23	0.100	12.500	25.000	295	90	27.5

Cast iron
(lamellar / spheroidal)




15.00	3	40	0.060	7.500	15.000	850	155	17.2
16.00	3	40	0.065	8.000	16.000	795	155	19.9
18.00	3	40	0.070	9.000	18.000	705	150	24.1
20.00	3	40	0.080	10.000	20.000	635	155	30.6
22.00	3	40	0.085	11.000	22.000	580	150	35.7
25.00	3	40	0.100	12.500	25.000	510	155	47.7

Cylindrical end mills

Smooth-edged, normal version



HSS-E Co8	λ 30°
	γ 15°

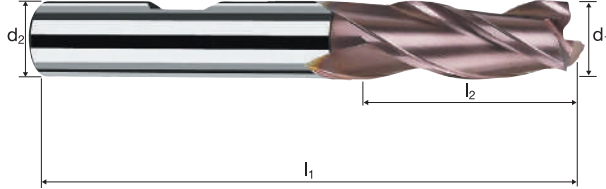

Roughing




Finishing



Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	GG(G) Aluminium Copper
----------	-------------	--------------	--	--	--	--	-------------------	------------------------------

\emptyset Code	d_1 f8	d_2 h6	l_1	l_2	l_4	α	z	UNICUT-4X
								U0780
581	15.00	12.00	83	26.00	-	0.0°	3	●
610	16.00	16.00	92	32.00	-	0.0°	3	●
640	18.00	16.00	92	32.00	-	0.0°	3	●
671	20.00	16.00	98	38.00	-	0.0°	3	●
682	20.00	20.00	104	38.00	-	0.0°	3	●
710	22.00	20.00	104	38.00	-	0.0°	3	●
772	25.00	25.00	121	45.00	-	0.0°	3	●

Application



Material

Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Hardened tool steel
52 - 56 HRC



Titanium alloys
> 300 HB
[Ti6Al4V]



Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Hardened tool steel
52 - 56 HRC



Titanium alloys
> 300 HB
[Ti6Al4V]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
4.00	4	150	0.030	4.000	2.600	11935	1430	14.9
5.00	4	150	0.040	5.000	3.250	9550	1530	24.8
6.00	4	150	0.045	6.000	3.900	7960	1430	33.5
8.00	4	150	0.060	8.000	5.200	5970	1430	59.6
10.00	4	150	0.075	10.000	6.500	4775	1430	93.1
12.00	4	150	0.090	12.000	7.800	3980	1430	134.1
16.00	4	150	0.100	16.000	10.400	2985	1195	198.6
20.00	4	150	0.125	20.000	13.000	2385	1195	310.4

4.00	4	115	0.025	4.000	2.600	9150	915	9.5
5.00	4	115	0.035	5.000	3.250	7320	1025	16.7
6.00	4	115	0.040	6.000	3.900	6100	975	22.8
8.00	4	115	0.055	8.000	5.200	4575	1005	41.9
10.00	4	115	0.065	10.000	6.500	3660	950	61.9
12.00	4	115	0.080	12.000	7.800	3050	975	91.4
16.00	4	115	0.090	16.000	10.400	2290	825	137.1
20.00	4	115	0.110	20.000	13.000	1830	805	209.4

4.00	4	50	0.015	4.000	2.600	3980	240	2.5
5.00	4	50	0.020	5.000	3.250	3185	255	4.1
6.00	4	50	0.020	6.000	3.900	2655	210	5.0
8.00	4	50	0.025	8.000	5.200	1990	200	8.3
10.00	4	50	0.035	10.000	6.500	1590	225	14.5
12.00	4	50	0.040	12.000	7.800	1325	210	19.9
16.00	4	50	0.050	16.000	10.400	995	200	33.1
20.00	4	50	0.060	20.000	13.000	795	190	49.7

4.00	4	60	0.015	4.000	1.600	4775	285	1.8
5.00	4	60	0.020	5.000	2.000	3820	305	3.1
6.00	4	60	0.020	6.000	2.300	3185	255	3.5
8.00	4	60	0.025	8.000	3.100	2385	240	5.9
10.00	4	60	0.035	10.000	3.900	1910	265	10.4
12.00	4	60	0.040	12.000	4.700	1590	255	14.4
16.00	4	60	0.050	16.000	6.200	1195	240	23.7
20.00	4	60	0.060	20.000	7.800	955	230	35.8

4.00	4	120	0.020	3.600	4.000	9550	765	11.0
5.00	4	120	0.025	4.500	5.000	7640	765	17.2
6.00	4	120	0.035	5.400	6.000	6365	890	28.9
8.00	4	120	0.045	7.200	8.000	4775	860	49.5
10.00	4	120	0.055	9.000	10.000	3820	840	75.6
12.00	4	120	0.065	10.800	12.000	3185	830	107.3
16.00	4	120	0.075	14.400	16.000	2385	715	165.0
20.00	4	120	0.095	18.000	20.000	1910	725	261.3

4.00	4	90	0.020	3.600	4.000	7160	575	8.3
5.00	4	90	0.025	4.500	5.000	5730	575	12.9
6.00	4	90	0.035	5.400	6.000	4775	670	21.7
8.00	4	90	0.045	7.200	8.000	3580	645	37.1
10.00	4	90	0.055	9.000	10.000	2865	630	56.7
12.00	4	90	0.065	10.800	12.000	2385	620	80.4
16.00	4	90	0.075	14.400	16.000	1790	535	123.8
20.00	4	90	0.095	18.000	20.000	1430	545	196.0

4.00	4	40	0.015	3.600	4.000	3185	190	2.8
5.00	4	40	0.020	4.500	5.000	2545	205	4.6
6.00	4	40	0.025	5.400	6.000	2120	210	6.9
8.00	4	40	0.030	7.200	8.000	1590	190	11.0
10.00	4	40	0.040	9.000	10.000	1275	205	18.3
12.00	4	40	0.045	10.800	12.000	1060	190	24.8
16.00	4	40	0.050	14.400	16.000	795	160	36.7
20.00	4	40	0.065	18.000	20.000	635	165	59.6


4.00	4	50	0.020	3.600	4.000	3980	320	4.6
5.00	4	50	0.025	4.500	5.000	3185	320	7.2
6.00	4	50	0.030	5.400	6.000	2655	320	10.3
8.00	4	50	0.040	7.200	8.000	1990	320	18.3
10.00	4	50	0.050	9.000	10.000	1590	320	28.6
12.00	4	50	0.060	10.800	12.000	1325	320	41.3
16.00	4	50	0.070	14.400	16.000	995	280	64.2
20.00	4	50	0.085	18.000	20.000	795	270	97.4

Cylindrical end mills NX

Smooth-edged, normal version, neck




HM
MG10 λ 45°
 γ -20°

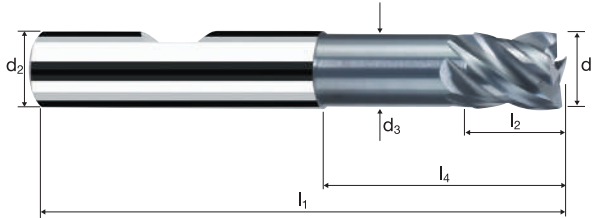

Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60		Ti Titanium	GG(G) Tool Steel
-----------------------	------------------------	------------------------	---------------------	---------------------	--	-----------------------	----------------------------


Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	POLYCHROM	
											Order-N°	Article-N°

Application



Material

Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	190	0.020	3.000	1.400	20160	1615	6.8
4.00	4	190	0.030	4.000	1.800	15120	1815	13.1
5.00	4	190	0.040	5.000	2.300	12095	1935	22.3
6.00	4	190	0.050	6.000	2.700	10080	2015	32.7
8.00	4	190	0.065	8.000	3.600	7560	1965	56.6
10.00	4	190	0.080	10.000	4.500	6050	1935	87.1
12.00	4	190	0.095	12.000	5.400	5040	1915	124.1
16.00	4	190	0.125	16.000	7.200	3780	1890	217.7
20.00	4	190	0.155	20.000	9.000	3025	1875	337.5
3.00	4	140	0.020	3.000	1.400	14855	1190	5.0
4.00	4	140	0.030	4.000	1.800	11140	1335	9.6
5.00	4	140	0.040	5.000	2.300	8915	1425	16.4
6.00	4	140	0.050	6.000	2.700	7425	1485	24.1
8.00	4	140	0.065	8.000	3.600	5570	1450	41.7
10.00	4	140	0.080	10.000	4.500	4455	1425	64.2
12.00	4	140	0.095	12.000	5.400	3715	1410	91.4
16.00	4	140	0.125	16.000	7.200	2785	1395	160.4
20.00	4	140	0.155	20.000	9.000	2230	1380	248.7
3.00	4	70	0.020	3.000	1.400	7425	595	2.5
4.00	4	70	0.030	4.000	1.800	5570	670	4.8
5.00	4	70	0.035	5.000	2.300	4455	625	7.2
6.00	4	70	0.045	6.000	2.700	3715	670	10.8
8.00	4	70	0.060	8.000	3.600	2785	670	19.3
10.00	4	70	0.070	10.000	4.500	2230	625	28.1
12.00	4	70	0.085	12.000	5.400	1855	630	40.9
16.00	4	70	0.110	16.000	7.200	1395	615	70.6
20.00	4	70	0.140	20.000	9.000	1115	625	112.3
3.00	4	90	0.015	3.000	1.400	9550	575	2.4
4.00	4	90	0.020	4.000	1.800	7160	575	4.1
5.00	4	90	0.025	5.000	2.300	5730	575	6.6
6.00	4	90	0.030	6.000	2.700	4775	575	9.3
8.00	4	90	0.040	8.000	3.600	3580	575	16.5
10.00	4	90	0.050	10.000	4.500	2865	575	25.8
12.00	4	90	0.060	12.000	5.400	2385	575	37.1
16.00	4	90	0.080	16.000	7.200	1790	575	66.0
20.00	4	90	0.100	20.000	9.000	1430	575	103.1
3.00	4	155	0.015	2.400	3.000	16445	985	7.1
4.00	4	155	0.020	3.200	4.000	12335	985	12.6
5.00	4	155	0.030	4.000	5.000	9870	1185	23.7
6.00	4	155	0.040	4.800	6.000	8225	1315	37.9
8.00	4	155	0.050	6.400	8.000	6165	1235	63.2
10.00	4	155	0.065	8.000	10.000	4935	1285	102.6
12.00	4	155	0.075	9.600	12.000	4110	1235	142.1
16.00	4	155	0.075	8.000	16.000	3085	925	118.4
20.00	4	155	0.095	10.000	20.000	2465	935	187.5
3.00	4	105	0.015	2.400	3.000	11140	670	4.8
4.00	4	105	0.020	3.200	4.000	8355	670	8.6
5.00	4	105	0.030	4.000	5.000	6685	800	16.0
6.00	4	105	0.040	4.800	6.000	5570	890	25.7
8.00	4	105	0.050	6.400	8.000	4180	835	42.8
10.00	4	105	0.065	8.000	10.000	3340	870	69.5
12.00	4	105	0.075	9.600	12.000	2785	835	96.3
16.00	4	105	0.075	8.000	16.000	2090	625	80.2
20.00	4	105	0.095	10.000	20.000	1670	635	127.0
3.00	4	55	0.015	2.400	3.000	5835	350	2.5
4.00	4	55	0.020	3.200	4.000	4375	350	4.5
5.00	4	55	0.030	4.000	5.000	3500	420	8.4
6.00	4	55	0.035	4.800	6.000	2920	410	11.8
8.00	4	55	0.045	6.400	8.000	2190	395	20.2
10.00	4	55	0.055	8.000	10.000	1750	385	30.8
12.00	4	55	0.060	9.600	12.000	1460	350	40.3
16.00	4	55	0.075	8.000	16.000	1095	330	42.0
20.00	4	55	0.095	10.000	20.000	875	335	66.5
3.00	4	75	0.015	2.400	3.000	7960	475	3.4
4.00	4	75	0.015	3.200	4.000	5970	360	4.6
5.00	4	75	0.025	4.000	5.000	4775	475	9.5
6.00	4	75	0.030	4.800	6.000	3980	475	13.8
8.00	4	75	0.040	6.400	8.000	2985	475	24.4
10.00	4	75	0.050	8.000	10.000	2385	475	38.2
12.00	4	75	0.050	9.600	12.000	1990	400	45.8
16.00	4	75	0.065	8.000	16.000	1490	390	49.7
20.00	4	75	0.080	10.000	20.000	1195	380	76.4

Cylindrical end mills

Smooth-edged, normal version, neck


HM
MG10 λ 40°
 γ 0°

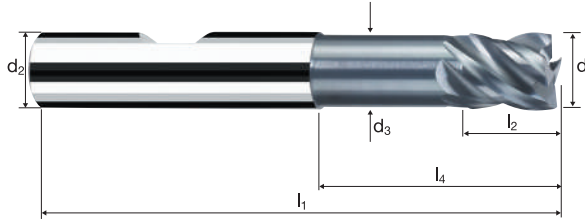

Rm < 850 Rm 850-1100 Rm 1100-1300 Rm 1300-1500 Inox Stainless Ti Titanium GG(G) Tool Steel Nickel-Alloys

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	POLYCHROM						
											Example: Order-N°.		Coating	Article-N°.	ø-Code	Code	
											P 5325 180					Ø	Code
180	3.00	6.00	2.80	57	4.00	14.00	20.63	0.10	4.5°	4	●	P5325					
220	4.00	6.00	3.70	57	5.00	16.00	20.95	0.10	3.0°	4	●	P5225					
260	5.00	6.00	4.60	57	6.00	18.00	21.27	0.15	1.5°	4	●						
300	6.00	6.00	5.50	57	7.00	19.34	20.00	0.15	0.0°	4	●						
391	8.00	8.00	7.40	63	9.00	25.29	26.00	0.15	0.0°	4	●						
450	10.00	10.00	9.20	72	11.00	30.20	31.00	0.20	0.0°	4	●						
501	12.00	12.00	11.00	83	13.00	36.13	37.00	0.20	0.0°	4	●						
610	16.00	16.00	15.00	92	17.00	42.13	43.00	0.20	0.0°	4	●						
682	20.00	20.00	19.00	104	21.00	52.13	53.00	0.20	0.0°	4	●						

Application




Material

Hardened tool steel
52 - 56 HRC

H

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	q _Z [°]
3.00	4	60	0.009	3.000	1.800	6365	230	1.2	5°
4.00	4	60	0.013	4.000	2.400	4775	250	2.4	5°
5.00	4	60	0.017	5.000	3.000	3820	260	3.9	5°
6.00	4	60	0.021	7.500	3.600	3185	265	7.2	5°
8.00	4	60	0.028	10.000	4.800	2385	265	12.8	5°
10.00	4	60	0.035	12.500	6.000	1910	265	20.1	5°
12.00	4	60	0.042	15.000	7.200	1590	265	28.9	5°
16.00	4	60	0.050	20.000	9.600	1195	240	45.8	5°
20.00	4	60	0.060	25.000	12.000	955	230	68.8	5°



Hardened tool steel
> 60 HRC

H


3.00	4	25	0.004	3.000	1.800	2655	40	0.2	3°
4.00	4	25	0.006	4.000	2.400	1990	50	0.5	4°
5.00	4	25	0.008	5.000	3.000	1590	50	0.8	5°
6.00	4	25	0.009	6.000	3.600	1325	50	1.0	5°
8.00	4	25	0.011	8.000	4.800	995	45	1.7	5°
10.00	4	25	0.015	10.000	6.000	795	50	2.9	5°
12.00	4	25	0.018	12.000	7.200	665	50	4.1	5°
16.00	4	25	0.023	16.000	9.600	495	45	7.0	5°
20.00	4	25	0.025	20.000	12.000	400	40	9.5	3°

High speed steel,
hardened
64 - 70 HRC

H

3.00	4	15	0.005	2.250	0.450	1590	30	0.0	3°
4.00	4	15	0.006	3.000	0.600	1195	30	0.1	4°
5.00	4	15	0.008	3.750	0.750	955	30	0.1	5°
6.00	4	15	0.006	4.500	3.600	795	20	0.3	5°
8.00	4	15	0.008	6.000	4.800	595	20	0.6	5°
10.00	4	15	0.010	7.500	6.000	475	20	0.9	5°
12.00	4	15	0.012	9.000	7.200	400	20	1.2	5°
16.00	4	15	0.016	12.000	9.600	300	20	2.2	5°
20.00	4	15	0.020	15.000	12.000	240	20	3.4	3°

Application




Material

Hardened tool steel
52 - 56 HRC

H

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
3.00	4	50	0.010	3.000	3.000	5305	210	1.9	5°	34.3
4.00	4	50	0.013	4.000	4.000	3980	205	3.3	5°	45.7
5.00	4	50	0.017	5.000	5.000	3185	215	5.4	5°	57.2
6.00	4	50	0.021	6.000	6.000	2655	225	8.0	5°	68.6
8.00	4	50	0.028	8.000	8.000	1990	225	14.3	5°	91.4
10.00	4	50	0.035	10.000	10.000	1590	225	22.3	5°	114.3
12.00	4	50	0.042	12.000	12.000	1325	225	32.1	5°	137.2
16.00	4	50	0.064	8.000	16.000	995	255	32.6	5°	91.4
20.00	4	50	0.075	10.000	20.000	795	240	47.7	5°	114.3



Hardened tool steel
> 60 HRC

H



3.00	4	20	0.004	3.000	3.000	2120	35	0.3	3°	57.2
4.00	4	20	0.006	4.000	4.000	1590	40	0.6	4°	57.2
5.00	4	20	0.008	5.000	5.000	1275	40	1.0	5°	57.2
6.00	4	20	0.009	6.000	6.000	1060	40	1.4	5°	68.6
8.00	4	20	0.011	8.000	8.000	795	35	2.2	5°	91.4
10.00	4	20	0.015	10.000	10.000	635	40	3.8	5°	114.3
12.00	4	20	0.020	12.000	12.000	530	40	6.1	5°	137.2
16.00	4	20	0.032	8.000	16.000	400	50	6.5	5°	91.4
20.00	4	20	0.040	10.000	20.000	320	50	10.2	3°	190.8

High speed steel,
hardened
64 - 70 HRC

H

3.00	4	10	0.003	1.500	3.000	1060	15	0.1	3°	28.6
4.00	4	10	0.004	2.000	4.000	795	15	0.1	4°	28.6
5.00	4	10	0.005	2.500	5.000	635	15	0.2	5°	28.6
6.00	4	10	0.006	3.000	6.000	530	15	0.2	5°	34.3
8.00	4	10	0.008	4.000	8.000	400	15	0.4	5°	45.7
10.00	4	10	0.010	5.000	10.000	320	15	0.6	5°	57.2
12.00	4	10	0.012	6.000	12.000	265	15	0.9	5°	68.6
16.00	4	10	0.016	8.000	16.000	200	15	1.6	5°	91.4
20.00	4	10	0.020	10.000	20.000	160	15	2.5	3°	190.8

Precise cutting data for other applications and materials can be found in the cutting data software **ToolExpert 2.0**





Cylindrical end mills HX

Smooth-edged, medium length version, short neck
High-performance penetration edge



HM
XA λ 45°
 γ -10°

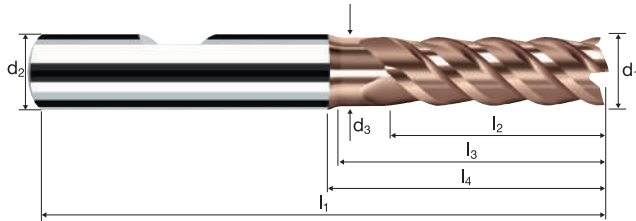


Roughing HPC Roughing HDC Finishing

HRC 48-56 HRC 56-60 HRC > 60 HSS

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	DURO-Si
Example: Order-N°: Coating: H Article-N°: 8614 ø-Code: 180											H8614
											H8514
180	3.00	6.00	2.80	63	11.00	18.00	24.37	0.100	4.5°	4	●
220	4.00	6.00	3.70	63	13.00	22.00	26.82	0.100	3.5°	4	●
260	5.00	6.00	4.60	63	16.00	24.00	27.27	0.100	1.5°	4	●
300	6.00	6.00	5.50	63	21.00	25.34	26.00	0.150	0.0°	4	●
391	8.00	8.00	7.40	72	31.00	34.79	35.50	0.150	0.0°	4	●
450	10.00	10.00	9.20	84	37.00	42.20	43.00	0.200	0.0°	4	●
501	12.00	12.00	11.00	97	44.00	50.13	51.00	0.200	0.0°	4	●
610	16.00	16.00	15.00	108	53.00	58.13	59.00	0.200	0.0°	4	●
682	20.00	20.00	19.00	122	62.00	70.13	71.00	0.200	0.0°	4	●

Application



Material

Steel
1100 - 1300 N/mm²



P



P

Steel
1300 - 1500 N/mm²



P

Hardened tool steel
52 - 56 HRC



P

Titanium alloys
> 300 HB
[Ti6Al4V]



P



Steel
1100 - 1300 N/mm²



P



P

Steel
1300 - 1500 N/mm²



P

Hardened tool steel
52 - 56 HRC



P

Titanium alloys
> 300 HB
[Ti6Al4V]



P

d1 [mm]	z	v _r [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
4.00	4	115	0.025	7.200	0.800	9150	915	5.3
5.00	4	115	0.035	9.000	1.000	7320	1025	9.2
6.00	4	115	0.040	10.800	1.200	6100	975	12.7
8.00	4	115	0.055	14.400	1.600	4575	1005	23.2
10.00	4	115	0.065	18.000	2.000	3660	950	34.3
12.00	4	115	0.080	21.600	2.400	3050	975	50.6
16.00	4	115	0.090	28.800	3.200	2290	825	75.9
20.00	4	115	0.110	36.000	4.000	1830	805	116.0

4.00	4	80	0.025	7.200	0.800	6365	635	3.7
5.00	4	80	0.030	9.000	1.000	5095	610	5.5
6.00	4	80	0.035	10.800	1.200	4245	595	7.7
8.00	4	80	0.045	14.400	1.600	3185	575	13.2
10.00	4	80	0.060	18.000	2.000	2545	610	22.0
12.00	4	80	0.070	21.600	2.400	2120	595	30.8
16.00	4	80	0.080	28.800	3.200	1590	510	46.9
20.00	4	80	0.100	36.000	4.000	1275	510	73.3

4.00	4	50	0.015	7.200	0.800	3980	240	1.4
5.00	4	50	0.020	9.000	1.000	3185	255	2.3
6.00	4	50	0.020	10.800	1.200	2655	210	2.8
8.00	4	50	0.025	14.400	1.600	1990	200	4.6
10.00	4	50	0.035	18.000	2.000	1590	225	8.0
12.00	4	50	0.040	21.600	2.400	1325	210	11.0
16.00	4	50	0.050	28.800	3.200	995	200	18.3
20.00	4	50	0.060	36.000	4.000	795	190	27.5

4.00	4	60	0.015	7.200	0.800	4775	285	1.7
5.00	4	60	0.020	9.000	1.000	3820	305	2.8
6.00	4	60	0.020	10.800	1.200	3185	255	3.3
8.00	4	60	0.025	14.400	1.600	2385	240	5.5
10.00	4	60	0.035	18.000	2.000	1910	265	9.6
12.00	4	60	0.040	21.600	2.400	1590	255	13.2
16.00	4	60	0.050	28.800	3.200	1195	240	22.0
20.00	4	60	0.060	36.000	4.000	955	230	33.0

4.00	4	90	0.015	6.000	4.000	7160	430	10.3
5.00	4	90	0.015	7.500	5.000	5730	345	12.9
6.00	4	90	0.020	9.000	6.000	4775	380	20.6
8.00	4	90	0.025	12.000	8.000	3580	360	34.4
10.00	4	90	0.035	15.000	10.000	2865	400	60.2
12.00	4	90	0.040	18.000	12.000	2385	380	82.5
16.00	4	90	0.050	24.000	16.000	1790	360	137.5
20.00	4	90	0.060	30.000	20.000	1430	345	206.3

4.00	4	65	0.010	6.000	4.000	5175	205	5.0
5.00	4	65	0.015	7.500	5.000	4140	250	9.3
6.00	4	65	0.020	9.000	6.000	3450	275	14.9
8.00	4	65	0.025	12.000	8.000	2585	260	24.8
10.00	4	65	0.030	15.000	10.000	2070	250	37.2
12.00	4	65	0.035	18.000	12.000	1725	240	52.1
16.00	4	65	0.045	24.000	16.000	1295	235	89.4
20.00	4	65	0.055	30.000	20.000	1035	230	136.6

4.00	4	40	0.010	4.000	4.000	3185	125	2.0
5.00	4	40	0.010	5.000	5.000	2545	100	2.5
6.00	4	40	0.015	6.000	6.000	2120	125	4.6
8.00	4	40	0.020	8.000	8.000	1590	125	8.1
10.00	4	40	0.025	10.000	10.000	1275	125	12.7
12.00	4	40	0.025	12.000	12.000	1060	105	15.3
16.00	4	40	0.030	16.000	16.000	795	95	24.4
20.00	4	40	0.040	20.000	20.000	635	100	40.7

4.00	4	50	0.010	6.000	4.000	3980	160	3.8
5.00	4	50	0.015	7.500	5.000	3185	190	7.2
6.00	4	50	0.020	9.000	6.000	2655	210	11.5
8.00	4	50	0.025	12.000	8.000	1990	200	19.1
10.00	4	50	0.030	15.000	10.000	1590	190	28.6
12.00	4	50	0.035	18.000	12.000	1325	185	40.1
16.00	4	50	0.045	24.000	16.000	995	180	68.8
20.00	4	50	0.055	30.000	20.000	795	175	105.0

Cylindrical end mills NX


Smooth-edged, medium length version



HM MG10 λ 45° γ -20°

45°

Vario

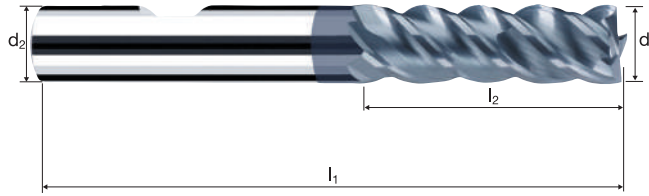


Roughing HPC Roughing HDC Finishing

Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60		Ti Titanium	GG(G) Tool Steel
----------------	-----------------	-----------------	--------------	--------------	--	----------------	---------------------

Example: Order-N°.										POLYCHROM
		Coating P	Article-N° 15323		ø-Code 220					P15323
										P15223
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	45°	α	z		
220	4.00	6.00	63	13.00	19.59	0.10	3.5°	4		●
260	5.00	6.00	63	16.00	20.72	0.15	1.5°	4		●
300	6.00	6.00	63	21.00	-	0.15	0.0°	4		●
391	8.00	8.00	72	31.00	-	0.15	0.0°	4		●
450	10.00	10.00	84	37.00	-	0.20	0.0°	4		●
501	12.00	12.00	97	44.00	-	0.20	0.0°	4		●
610	16.00	16.00	108	53.00	-	0.20	0.0°	4		●
682	20.00	20.00	122	62.00	-	0.20	0.0°	4		●

Application



Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	86	0.013	3.750	1.200	9125	475	2.1
4.00	4	86	0.017	5.000	1.600	6845	465	3.7
5.00	4	72	0.020	6.250	3.250	4585	370	7.5
6.00	4	72	0.024	9.000	3.900	3820	370	13.0
8.00	4	72	0.032	12.000	5.200	2865	370	23.2
10.00	4	72	0.041	15.000	6.500	2290	370	36.2
12.00	4	72	0.049	18.000	7.800	1910	370	52.1
16.00	4	72	0.058	20.000	10.400	1430	330	68.6
20.00	4	72	0.072	25.000	13.000	1145	330	107.3

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



3.00	4	53	0.013	3.750	1.200	5625	290	1.3
4.00	4	53	0.017	5.000	1.600	4220	285	2.3
5.00	4	53	0.020	6.250	3.250	3375	275	5.6
6.00	4	53	0.024	9.000	3.900	2810	275	9.6
8.00	4	53	0.032	12.000	5.200	2110	275	17.1
10.00	4	53	0.041	15.000	6.500	1685	275	26.6
12.00	4	53	0.049	18.000	7.800	1405	275	38.4
16.00	4	53	0.058	20.000	10.400	1055	245	50.5
20.00	4	53	0.072	25.000	13.000	845	245	79.0

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]



3.00	4	44	0.012	3.750	1.200	4670	215	1.0
4.00	4	44	0.015	5.000	1.600	3500	210	1.7
5.00	4	40	0.018	6.250	3.250	2545	185	3.7
6.00	4	40	0.022	9.000	3.900	2120	180	6.4
8.00	4	40	0.029	12.000	5.200	1590	185	11.5
10.00	4	40	0.036	15.000	6.500	1275	185	17.9
12.00	4	40	0.043	18.000	7.800	1060	180	25.6
16.00	4	40	0.050	20.000	10.400	795	160	33.1
20.00	4	40	0.061	25.000	13.000	635	155	50.5

Inox martensitic
C < 0.3%
[Cr/1.4021]



3.00	4	110	0.017	3.750	1.200	11670	780	3.5
4.00	4	110	0.023	5.000	1.600	8755	790	6.3
5.00	4	92	0.027	6.250	3.250	5855	635	12.8
6.00	4	92	0.032	9.000	3.900	4880	635	22.3
8.00	4	92	0.043	12.000	5.200	3660	630	39.3
10.00	4	92	0.054	15.000	6.500	2930	635	61.7
12.00	4	92	0.065	18.000	7.800	2440	635	89.1
16.00	4	92	0.079	20.000	10.400	1830	580	120.3
20.00	4	92	0.097	25.000	13.000	1465	570	184.6



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



3.00	4	63	0.007	2.250	3.000	6685	175	1.2
4.00	4	63	0.009	3.000	4.000	5015	170	2.0
5.00	4	63	0.013	6.250	5.000	4010	210	6.6
6.00	4	63	0.019	9.000	6.000	3340	260	14.0
8.00	4	63	0.026	12.000	8.000	2505	260	24.9
10.00	4	63	0.032	15.000	10.000	2005	260	39.0
12.00	4	63	0.039	18.000	12.000	1670	260	56.1
16.00	4	63	0.046	20.000	16.000	1255	230	73.9
20.00	4	63	0.058	25.000	20.000	1005	230	115.5

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



3.00	4	42	0.007	2.250	3.000	4455	115	0.8
4.00	4	42	0.009	3.000	4.000	3340	115	1.4
5.00	4	46	0.013	6.250	5.000	2930	155	4.8
6.00	4	46	0.019	9.000	6.000	2440	190	10.2
8.00	4	46	0.026	12.000	8.000	1830	190	18.2
10.00	4	46	0.032	15.000	10.000	1465	190	28.5
12.00	4	46	0.039	18.000	12.000	1220	190	41.0
16.00	4	46	0.046	20.000	16.000	915	170	54.0
20.00	4	46	0.058	25.000	20.000	730	170	84.3

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]



3.00	4	35	0.006	2.250	3.000	3715	85	0.6
4.00	4	35	0.007	3.000	4.000	2785	85	1.0
5.00	4	35	0.012	6.250	5.000	2230	105	3.3
6.00	4	35	0.017	9.000	6.000	1855	130	6.9
8.00	4	35	0.023	12.000	8.000	1395	130	12.4
10.00	4	35	0.029	15.000	10.000	1115	130	19.3
12.00	4	35	0.034	18.000	12.000	930	130	27.6
16.00	4	35	0.040	20.000	16.000	695	110	35.7
20.00	4	35	0.049	25.000	20.000	555	110	54.4

Inox martensitic
C < 0.3%
[Cr/1.4021]



3.00	4	81	0.007	2.250	3.000	8595	230	1.6
4.00	4	81	0.009	3.000	4.000	6445	230	2.8
5.00	4	81	0.014	5.000	5.000	5155	280	7.0
6.00	4	81	0.020	7.500	6.000	4295	335	15.1
8.00	4	81	0.026	10.000	8.000	3225	335	26.6
10.00	4	81	0.032	12.500	10.000	2580	335	41.8
12.00	4	81	0.039	15.000	12.000	2150	335	60.3
16.00	4	81	0.047	16.000	16.000	1610	305	78.2
20.00	4	81	0.058	20.000	20.000	1290	300	120.0


Cylindrical end mills SX

Smooth-edged, medium length version, short neck



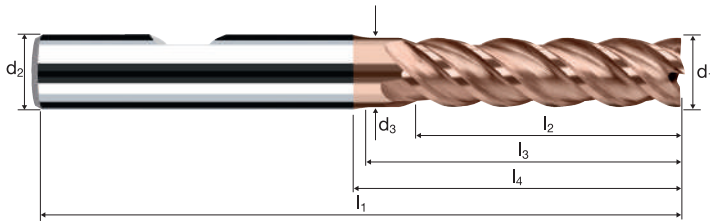


HM
MG10

λ **43°**
 γ **3°**



Vario

Roughing HPC **Roughing HDC** **Finishing**

Rm < 850


Inox Stainless

Ti Titanium

Nickel-Alloys
Mangan-Steels
Tool Steel

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	DURO-Si	
											H8616	H8516
180	3.00	6.00	2.80	63	11.00	18.00	24.37	0.050	4.5°	4	●	
220	4.00	6.00	3.70	63	13.00	22.00	26.82	0.100	3.5°	4	●	
260	5.00	6.00	4.60	63	16.00	24.00	27.27	0.100	1.5°	4	●	
300	6.00	6.00	5.50	63	21.00	25.34	26.00	0.150	0.0°	4	●	
391	8.00	8.00	7.40	72	31.00	34.79	35.50	0.150	0.0°	4	●	
450	10.00	10.00	9.20	84	37.00	42.20	43.00	0.200	0.0°	4	●	
501	12.00	12.00	11.00	97	44.00	50.13	51.00	0.200	0.0°	4	●	
610	16.00	16.00	15.00	108	53.00	58.13	59.00	0.200	0.0°	4	●	
682	20.00	20.00	19.00	122	62.00	70.13	71.00	0.250	0.0°	4	●	

Application



Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	φZ [°]
6.00	6	70	0.019	22.000	5.400	3715	424	4
8.00	6	70	0.026	31.000	7.200	2785	435	4
10.00	7	70	0.028	39.000	9.000	2230	437	4
12.00	7	70	0.033	46.000	10.800	1855	429	4
16.00	8	70	0.035	53.000	14.400	1395	391	4
20.00	8	70	0.043	63.000	18.000	1115	384	4

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



6.00	6	55	0.019	22.000	5.400	2920	333	4
8.00	6	55	0.026	31.000	7.200	2190	342	4
10.00	7	55	0.028	39.000	9.000	1750	343	4
12.00	7	55	0.033	46.000	10.800	1460	337	4
16.00	8	55	0.035	53.000	14.400	1095	307	4
20.00	8	55	0.043	63.000	18.000	875	301	4

Inox difficult
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]




6.00	6	40	0.017	22.000	5.400	2120	216	4
8.00	6	40	0.023	31.000	7.200	1590	219	4
10.00	7	40	0.025	39.000	9.000	1275	223	4
12.00	7	40	0.029	46.000	10.800	1060	215	4
16.00	8	40	0.030	53.000	14.400	795	191	4
20.00	8	40	0.037	63.000	18.000	635	188	4

Nickel-based alloys
precipitation hardened
Rm > 1000 N/mm²
[Inconel 718]



6.00	6	20	0.009	22.000	5.400	1060	57	2
8.00	6	20	0.012	31.000	7.200	795	57	2
10.00	7	20	0.012	39.000	9.000	635	53	2
12.00	7	20	0.015	46.000	10.800	530	56	2
16.00	8	20	0.016	53.000	14.400	400	51	2
20.00	8	20	0.017	63.000	18.000	320	44	2

Application



Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [cm ³ /min]
6.00	6	141	0.047	22.000	0.450	7470	2098	20.8
8.00	6	141	0.065	31.000	0.600	5600	2167	40.3
10.00	7	133	0.068	39.000	0.750	4220	2003	58.6
12.00	7	133	0.081	46.000	0.900	3520	2003	82.9
16.00	8	126	0.095	53.000	1.200	2510	1906	121.2
20.00	8	126	0.104	63.000	1.500	2005	1663	157.2

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



6.00	6	103	0.047	22.000	0.450	5470	1536	15.2
8.00	6	103	0.065	31.000	0.600	4105	1589	29.5
10.00	7	97	0.068	39.000	0.750	3075	1459	42.7
12.00	7	97	0.081	46.000	0.900	2560	1457	60.3
16.00	8	92	0.095	53.000	1.200	1825	1386	88.1
20.00	8	92	0.104	63.000	1.500	1460	1211	114.5

Inox difficult
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]



6.00	6	82	0.042	22.000	0.450	4345	1105	10.9
8.00	6	82	0.058	31.000	0.600	3255	1137	21.1
10.00	7	79	0.060	39.000	0.750	2500	1047	30.6
12.00	7	79	0.072	46.000	0.900	2085	1051	43.5
16.00	8	74	0.086	53.000	1.200	1465	1008	64.1
20.00	8	74	0.095	63.000	1.500	1175	897	84.7

Nickel-based alloys
precipitation hardened
Rm > 1000 N/mm²
[Inconel 718]



6.00	6	43	0.053	22.000	0.150	2305	739	2.4
8.00	6	43	0.071	31.000	0.200	1730	739	4.6
10.00	7	41	0.077	39.000	0.250	1310	704	6.9
12.00	7	41	0.089	46.000	0.300	1090	675	9.3
16.00	8	39	0.105	53.000	0.400	775	649	13.7
20.00	8	39	0.111	63.000	0.500	620	552	17.4




Cylindrical end mills SX



Smooth-edged, chip breaker, medium length version
 High-performance penetration edge, central air/cooling channel


HM
MG10

λ **55°**
 γ **10°**

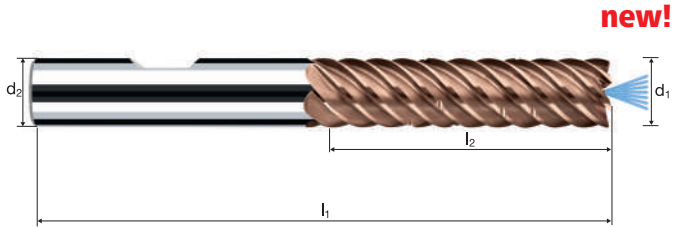

Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	r	z	DURO-XI	
							S8618	S8518
300	6.00	6.00	63	22.00	0.100	6	●	●
391	8.00	8.00	72	31.00	0.150	6	●	●
450	10.00	10.00	84	39.00	0.200	7	●	●
501	12.00	12.00	97	46.00	0.200	7	●	●
610	16.00	16.00	108	53.00	0.200	8	●	●
682	20.00	20.00	122	63.00	0.250	8	●	●

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
4.00	4	135	0.026	8.000	1.200	10745	1115	10.7	12°
5.00	4	135	0.030	10.000	1.500	8595	1030	15.5	12°
6.00	4	135	0.034	12.000	1.800	7160	975	21.0	12°
8.00	4	135	0.043	16.000	2.400	5370	925	35.5	12°
10.00	4	135	0.055	20.000	3.000	4295	945	56.7	12°
12.00	4	135	0.064	24.000	3.600	3580	915	79.2	12°
16.00	4	135	0.072	25.600	4.800	2685	775	95.0	12°
20.00	4	135	0.085	32.000	6.000	2150	730	140.3	12°



Steel
1100 - 1300 N/mm²



4.00	4	105	0.021	8.000	1.200	8355	700	6.7	12°
5.00	4	105	0.026	10.000	1.500	6685	695	10.4	12°
6.00	4	105	0.030	12.000	1.800	5570	670	14.4	12°
8.00	4	105	0.038	16.000	2.400	4180	635	24.4	12°
10.00	4	105	0.047	20.000	3.000	3340	630	37.7	12°
12.00	4	105	0.055	24.000	3.600	2785	615	52.9	12°
16.00	4	105	0.064	25.600	4.800	2090	535	65.7	12°
20.00	4	105	0.077	32.000	6.000	1670	515	98.8	12°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



4.00	4	80	0.017	8.000	1.200	6365	435	4.2	8°
5.00	4	80	0.021	10.000	1.500	5095	430	6.4	8°
6.00	4	80	0.026	12.000	1.800	4245	440	9.5	8°
8.00	4	80	0.030	16.000	2.400	3185	380	14.7	8°
10.00	4	80	0.038	20.000	3.000	2545	385	23.2	8°
12.00	4	80	0.047	24.000	3.600	2120	400	34.5	8°
16.00	4	80	0.055	25.600	4.800	1590	350	43.0	8°
20.00	4	80	0.068	32.000	6.000	1275	345	66.5	8°

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
4.00	4	110	0.017	6.000	4.000	8755	595	14.3	12°	28.2
5.00	4	110	0.020	7.500	5.000	7005	560	21.0	12°	35.3
6.00	4	110	0.022	9.000	6.000	5835	515	27.7	12°	42.3
8.00	4	110	0.028	12.000	8.000	4375	490	47.1	12°	56.5
10.00	4	110	0.036	15.000	10.000	3500	505	75.6	12°	70.6
12.00	4	110	0.042	18.000	12.000	2920	490	105.9	12°	84.7
16.00	4	110	0.047	24.000	16.000	2190	410	158.0	12°	112.9
20.00	4	110	0.055	30.000	20.000	1750	385	231.1	12°	141.1



Steel
1100 - 1300 N/mm²






4.00	4	85	0.014	6.000	4.000	6765	380	9.1	12°	28.2
5.00	4	85	0.017	7.500	5.000	5410	370	13.8	12°	35.3
6.00	4	85	0.020	9.000	6.000	4510	360	19.5	12°	42.3
8.00	4	85	0.025	12.000	8.000	3380	340	32.5	12°	56.5
10.00	4	85	0.031	15.000	10.000	2705	335	50.3	12°	70.6
12.00	4	85	0.036	18.000	12.000	2255	325	70.1	12°	84.7
16.00	4	85	0.042	24.000	16.000	1690	285	109.1	12°	112.9
20.00	4	85	0.050	30.000	20.000	1355	270	162.3	12°	141.1

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



4.00	4	65	0.011	6.000	4.000	5175	230	5.5	12°	28.2
5.00	4	65	0.014	7.500	5.000	4140	230	8.7	12°	35.3
6.00	4	65	0.017	9.000	6.000	3450	235	12.7	12°	42.3
8.00	4	65	0.020	12.000	8.000	2585	205	19.9	12°	56.5
10.00	4	65	0.025	15.000	10.000	2070	205	31.0	12°	70.6
12.00	4	65	0.031	18.000	12.000	1725	215	46.2	12°	84.7
16.00	4	65	0.036	24.000	16.000	1295	185	71.5	12°	112.9
20.00	4	65	0.044	30.000	20.000	1035	180	109.2	12°	141.1

This way to the cutting data software
ToolExpert MFC.
Quick, easy, reliable.






Cylindrical end mills MFC

Smooth-edged, chip breaker, medium length version
High-performance penetration edge, central air/cooling channel



HM
MG10 λ 45°
 γ 10°

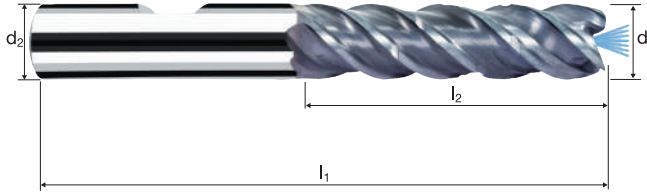


Roughing HPC Roughing HDC Finishing

Rm < 850 Rm 850-1100 Rm 1100-1300 Rm 1300-1500 HRC 48-56 Inox Stainless Ti Titanium GG(G) Tool Steel

										POLYCHROM	
Example: Order-N°.										P8211	
										P8111	
\emptyset Code	d_1 e8	d_2 h5	l_1	l_2	l_4	r	α	z			
220*	4.00	6.00	63	13.00	19.59	0.100	3.5°	4	●		
260*	5.00	6.00	63	16.00	20.72	0.100	1.5°	4	●		
300	6.00	6.00	63	21.00	-	0.100	0.0°	4	●		
391	8.00	8.00	72	31.00	-	0.150	0.0°	4	●		
450	10.00	10.00	84	37.00	-	0.200	0.0°	4	●		
501	12.00	12.00	97	44.00	-	0.200	0.0°	4	●		
610	16.00	16.00	108	53.00	-	0.200	0.0°	4	●		
682	20.00	20.00	122	62.00	-	0.200	0.0°	4	●		
* without chip breaker only											

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
4.00	4	135	0.026	8.000	1.200	10745	1115	10.7	12°
5.00	4	135	0.030	10.000	1.500	8595	1030	15.5	12°
6.00	4	135	0.034	12.000	1.800	7160	975	21.0	12°
8.00	4	135	0.043	16.000	2.400	5370	925	35.5	12°
10.00	4	135	0.055	20.000	3.000	4295	945	56.7	12°
12.00	4	135	0.064	24.000	3.600	3580	915	79.2	12°
16.00	4	135	0.072	25.600	4.800	2685	775	95.0	12°
20.00	4	135	0.085	32.000	6.000	2150	730	140.3	12°



Steel
1100 - 1300 N/mm²



4.00	4	105	0.021	8.000	1.200	8355	700	6.7	12°
5.00	4	105	0.026	10.000	1.500	6685	695	10.4	12°
6.00	4	105	0.030	12.000	1.800	5570	670	14.4	12°
8.00	4	105	0.038	16.000	2.400	4180	635	24.4	12°
10.00	4	105	0.047	20.000	3.000	3340	630	37.7	12°
12.00	4	105	0.055	24.000	3.600	2785	615	52.9	12°
16.00	4	105	0.064	25.600	4.800	2090	535	65.7	12°
20.00	4	105	0.077	32.000	6.000	1670	515	98.8	12°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



4.00	4	80	0.017	8.000	1.200	6365	435	4.2	8°
5.00	4	80	0.021	10.000	1.500	5095	430	6.4	8°
6.00	4	80	0.026	12.000	1.800	4245	440	9.5	8°
8.00	4	80	0.030	16.000	2.400	3185	380	14.7	8°
10.00	4	80	0.038	20.000	3.000	2545	385	23.2	8°
12.00	4	80	0.047	24.000	3.600	2120	400	34.5	8°
16.00	4	80	0.055	25.600	4.800	1590	350	43.0	8°
20.00	4	80	0.068	32.000	6.000	1275	345	66.5	8°


Application



Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
4.00	4	110	0.017	6.000	4.000	8755	595	14.3	12°	28.2
5.00	4	110	0.020	7.500	5.000	7005	560	21.0	12°	35.3
6.00	4	110	0.022	9.000	6.000	5835	515	27.7	12°	42.3
8.00	4	110	0.028	12.000	8.000	4375	490	47.1	12°	56.5
10.00	4	110	0.036	15.000	10.000	3500	505	75.6	12°	70.6
12.00	4	110	0.042	18.000	12.000	2920	490	105.9	12°	84.7
16.00	4	110	0.047	24.000	16.000	2190	410	158.0	12°	112.9
20.00	4	110	0.055	30.000	20.000	1750	385	231.1	12°	141.1



Steel
1100 - 1300 N/mm²






4.00	4	85	0.014	6.000	4.000	6765	380	9.1	12°	28.2
5.00	4	85	0.017	7.500	5.000	5410	370	13.8	12°	35.3
6.00	4	85	0.020	9.000	6.000	4510	360	19.5	12°	42.3
8.00	4	85	0.025	12.000	8.000	3380	340	32.5	12°	56.5
10.00	4	85	0.031	15.000	10.000	2705	335	50.3	12°	70.6
12.00	4	85	0.036	18.000	12.000	2255	325	70.1	12°	84.7
16.00	4	85	0.042	24.000	16.000	1690	285	109.1	12°	112.9
20.00	4	85	0.050	30.000	20.000	1355	270	162.3	12°	141.1

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



4.00	4	65	0.011	6.000	4.000	5175	230	5.5	12°	28.2
5.00	4	65	0.014	7.500	5.000	4140	230	8.7	12°	35.3
6.00	4	65	0.017	9.000	6.000	3450	235	12.7	12°	42.3
8.00	4	65	0.020	12.000	8.000	2585	205	19.9	12°	56.5
10.00	4	65	0.025	15.000	10.000	2070	205	31.0	12°	70.6
12.00	4	65	0.031	18.000	12.000	1725	215	46.2	12°	84.7
16.00	4	65	0.036	24.000	16.000	1295	185	71.5	12°	112.9
20.00	4	65	0.044	30.000	20.000	1035	180	109.2	12°	141.1

This way to the cutting data software
ToolExpert MFC.
Quick, easy, reliable.





Cylindrical end mills MFC

Smooth-edged, chip breaker, medium length version
High-performance penetration edge, central air/cooling channel



HM
MG10 λ 45°
 γ 0°

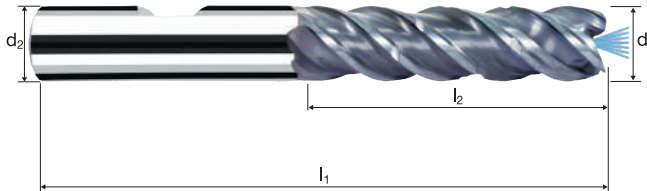


Roughing HPC Roughing HDC Finishing

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

Ø Code	d ₁ e8	d ₂ h5	l ₁	l ₂	l ₄	r	α	z	POLYCHROM	
										P8212
										P8112
220*	4.00	6.00	63	13.00	19.59	0.100	3.5°	4		●
260*	5.00	6.00	63	16.00	20.72	0.100	1.5°	4		●
300	6.00	6.00	63	21.00	-	0.100	0.0°	4		●
391	8.00	8.00	72	31.00	-	0.150	0.0°	4		●
450	10.00	10.00	84	37.00	-	0.200	0.0°	4		●
501	12.00	12.00	97	44.00	-	0.200	0.0°	4		●
610	16.00	16.00	108	53.00	-	0.200	0.0°	4		●
682	20.00	20.00	122	62.00	-	0.200	0.0°	4		●
* without chip breaker only										

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
6.00	5	135	0.034	12.000	1.500	7160	1220	21.9	10°
8.00	5	135	0.043	16.000	2.000	5370	1155	37.0	12°
10.00	5	135	0.055	20.000	2.500	4295	1180	59.1	12°
12.00	5	135	0.064	24.000	3.000	3580	1145	82.5	12°
16.00	5	135	0.072	25.600	4.000	2685	965	99.0	12°
20.00	5	135	0.085	32.000	5.000	2150	915	146.1	12°



Steel
1100 - 1300 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
6.00	5	105	0.030	12.000	1.500	5570	835	15.0	10°
8.00	5	105	0.038	16.000	2.000	4180	795	25.4	12°
10.00	5	105	0.047	20.000	2.500	3340	785	39.3	12°
12.00	5	105	0.055	24.000	3.000	2785	765	55.1	12°
16.00	5	105	0.064	25.600	4.000	2090	670	68.4	12°
20.00	5	105	0.077	32.000	5.000	1670	645	102.9	12°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
6.00	5	80	0.026	12.000	1.500	4245	550	9.9	8°
8.00	5	80	0.030	16.000	2.000	3185	475	15.3	8°
10.00	5	80	0.038	20.000	2.500	2545	485	24.2	8°
12.00	5	80	0.047	24.000	3.000	2120	500	35.9	8°
16.00	5	80	0.055	25.600	4.000	1590	440	44.8	8°
20.00	5	80	0.068	32.000	5.000	1275	435	69.3	8°

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
6.00	5	110	0.020	6.000	6.000	5835	585	21.0	10°	34.0
8.00	5	110	0.026	8.000	8.000	4375	570	36.4	10°	45.4
10.00	5	110	0.033	10.000	10.000	3500	580	57.8	10°	56.7
12.00	5	110	0.038	12.000	12.000	2920	555	79.8	10°	68.1
16.00	5	110	0.043	16.000	16.000	2190	470	120.4	10°	90.7
20.00	5	110	0.051	20.000	20.000	1750	445	178.6	10°	113.4



Steel
1100 - 1300 N/mm²






d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
6.00	5	85	0.018	6.000	6.000	4510	405	14.6	10°	34.0
8.00	5	85	0.023	8.000	8.000	3380	390	24.9	10°	45.4
10.00	5	85	0.028	10.000	10.000	2705	380	37.9	10°	56.7
12.00	5	85	0.033	12.000	12.000	2255	370	53.6	10°	68.1
16.00	5	85	0.038	16.000	16.000	1690	320	82.3	10°	90.7
20.00	5	85	0.046	20.000	20.000	1355	310	124.5	10°	113.4

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
6.00	5	65	0.016	6.000	6.000	3450	275	9.9	10°	34.0
8.00	5	65	0.018	8.000	8.000	2585	235	14.9	10°	45.4
10.00	5	65	0.023	10.000	10.000	2070	240	23.8	10°	56.7
12.00	5	65	0.028	12.000	12.000	1725	240	34.8	10°	68.1
16.00	5	65	0.033	16.000	16.000	1295	215	54.6	10°	90.7
20.00	5	65	0.041	20.000	20.000	1035	210	84.8	10°	113.4

This way to the cutting data software
ToolExpert MFC.
Quick, easy, reliable.







Cylindrical end mills MFC



Smooth-edged, chip breaker, medium length version
High-performance penetration edge, central air/cooling channel


HM λ 45°
MG10 γ 0°

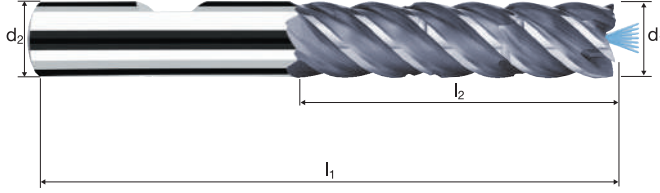

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56		Inox Stainless	Ti Titanium	GG(G) Tool Steel
--------------------	-----------------------	------------------------	------------------------	---------------------	--	--------------------------	-----------------------	----------------------------

Example: Order-N°.								POLYCHROM	
Coating		Article-N°.		ø-Code					
P		8215		300				P8215	P8115
Ø Code	d ₁ e8	d ₂ h5	l ₁	l ₂	r	z			
300	6.00	6.00	63	21.00	0.100	5	●		
391	8.00	8.00	72	31.00	0.150	5	●		
450	10.00	10.00	84	37.00	0.200	5	●		
501	12.00	12.00	97	44.00	0.200	5	●		
610	16.00	16.00	108	53.00	0.200	5	●		
682	20.00	20.00	122	62.00	0.200	5	●		

Application



Material

Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	180	0.040	10.800	1.200	9550	1530	19.8
8.00	4	180	0.050	14.400	1.600	7160	1430	33.0
10.00	4	180	0.065	18.000	2.000	5730	1490	53.6
12.00	4	180	0.075	21.600	2.400	4775	1430	74.3
16.00	4	180	0.085	28.800	3.200	3580	1220	112.2
20.00	4	180	0.105	36.000	4.000	2865	1205	173.3

6.00	4	140	0.040	10.800	1.200	7425	1190	15.4
8.00	4	140	0.050	14.400	1.600	5570	1115	25.7
10.00	4	140	0.065	18.000	2.000	4455	1160	41.7
12.00	4	140	0.075	21.600	2.400	3715	1115	57.8
16.00	4	140	0.085	28.800	3.200	2785	945	87.3
20.00	4	140	0.105	36.000	4.000	2230	935	134.8

6.00	4	70	0.035	10.800	1.200	3715	520	6.7
8.00	4	70	0.045	14.400	1.600	2785	500	11.6
10.00	4	70	0.060	18.000	2.000	2230	535	19.3
12.00	4	70	0.070	21.600	2.400	1855	520	27.0
16.00	4	70	0.080	28.800	3.200	1395	445	41.1
20.00	4	70	0.100	36.000	4.000	1115	445	64.2

6.00	4	85	0.025	10.800	1.200	4510	450	5.8
8.00	4	85	0.030	14.400	1.600	3380	405	9.4
10.00	4	85	0.040	18.000	2.000	2705	435	15.6
12.00	4	85	0.050	21.600	2.400	2255	450	23.4
16.00	4	85	0.055	28.800	3.200	1690	370	34.3
20.00	4	85	0.070	36.000	4.000	1355	380	54.5

6.00	4	145	0.020	8.100	6.000	7690	615	29.9
8.00	4	145	0.025	10.800	8.000	5770	575	49.8
10.00	4	145	0.035	13.500	10.000	4615	645	87.2
12.00	4	145	0.040	16.200	12.000	3845	615	119.6
16.00	4	145	0.050	19.200	16.000	2885	575	177.2
20.00	4	145	0.060	24.000	20.000	2310	555	265.9

6.00	4	105	0.020	8.100	6.000	5570	445	21.7
8.00	4	105	0.025	10.800	8.000	4180	420	36.1
10.00	4	105	0.035	13.500	10.000	3340	470	63.2
12.00	4	105	0.040	16.200	12.000	2785	445	86.6
16.00	4	105	0.050	19.200	16.000	2090	420	128.3
20.00	4	105	0.060	24.000	20.000	1670	400	192.5

6.00	4	55	0.020	8.100	6.000	2920	235	11.3
8.00	4	55	0.025	10.800	8.000	2190	220	18.9
10.00	4	55	0.030	13.500	10.000	1750	210	28.4
12.00	4	55	0.035	16.200	12.000	1460	205	39.7
16.00	4	55	0.045	19.200	16.000	1095	195	60.5
20.00	4	55	0.055	24.000	20.000	875	195	92.4




6.00	4	65	0.015	8.100	6.000	3450	205	10.1
8.00	4	65	0.020	10.800	8.000	2585	205	17.9
10.00	4	65	0.025	13.500	10.000	2070	205	27.9
12.00	4	65	0.030	16.200	12.000	1725	205	40.2
16.00	4	65	0.035	19.200	16.000	1295	180	55.6
20.00	4	65	0.045	24.000	20.000	1035	185	89.4

Cylindrical end mills NVD

Smooth-edged, chip breaker, medium length version




HM
MG10 λ 45°
 γ 0°

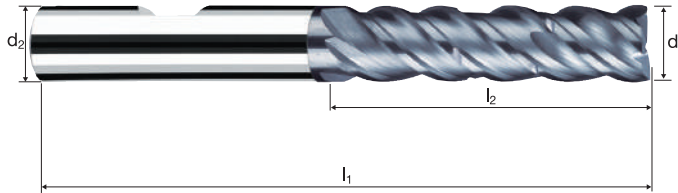

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	--------------------------------------


Example: Order-N°.								POLYCHROM	
Coating P		Article-N° 15310		ø-Code 300				P15310	
ø Code		d ₁ e8	d ₂ h6	l ₁	l ₂	45°	z	P15210	
300	6.00	6.00	63	21.00	0.15	4	●		
391	8.00	8.00	72	31.00	0.15	4	●		
450	10.00	10.00	84	37.00	0.20	4	●		
501	12.00	12.00	97	44.00	0.20	4	●		
610	16.00	16.00	108	53.00	0.20	4	●		
682	20.00	20.00	122	62.00	0.20	4	●		

Application



Material

Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
4.00	4	180	0.025	7.200	0.800	14325	1430	8.3
5.00	4	180	0.030	9.000	1.000	11460	1375	12.4
6.00	4	180	0.040	10.800	1.200	9550	1530	19.8
8.00	4	180	0.050	14.400	1.600	7160	1430	33.0
10.00	4	180	0.065	18.000	2.000	5730	1490	53.6
12.00	4	180	0.075	21.600	2.400	4775	1430	74.3
16.00	4	180	0.085	28.800	3.200	3580	1220	112.2
20.00	4	180	0.105	36.000	4.000	2865	1205	173.3

4.00	4	140	0.025	7.200	0.800	11140	1115	6.4
5.00	4	140	0.030	9.000	1.000	8915	1070	9.6
6.00	4	140	0.040	10.800	1.200	7425	1190	15.4
8.00	4	140	0.050	14.400	1.600	5570	1115	25.7
10.00	4	140	0.065	18.000	2.000	4455	1160	41.7
12.00	4	140	0.075	21.600	2.400	3715	1115	57.8
16.00	4	140	0.085	28.800	3.200	2785	945	87.3
20.00	4	140	0.105	36.000	4.000	2230	935	134.8

4.00	4	70	0.025	7.200	0.800	5570	555	3.2
5.00	4	70	0.030	9.000	1.000	4455	535	4.8
6.00	4	70	0.035	10.800	1.200	3715	520	6.7
8.00	4	70	0.045	14.400	1.600	2785	500	11.6
10.00	4	70	0.060	18.000	2.000	2230	535	19.3
12.00	4	70	0.070	21.600	2.400	1855	520	27.0
16.00	4	70	0.080	28.800	3.200	1395	445	41.1
20.00	4	70	0.100	36.000	4.000	1115	445	64.2

4.00	4	85	0.020	7.200	0.800	6765	540	3.1
5.00	4	85	0.020	9.000	1.000	5410	435	3.9
6.00	4	85	0.025	10.800	1.200	4510	450	5.8
8.00	4	85	0.030	14.400	1.600	3380	405	9.4
10.00	4	85	0.040	18.000	2.000	2705	435	15.6
12.00	4	85	0.050	21.600	2.400	2255	450	23.4
16.00	4	85	0.055	28.800	3.200	1690	370	34.3
20.00	4	85	0.070	36.000	4.000	1355	380	54.5

4.00	4	145	0.015	5.400	4.000	11540	690	15.0
5.00	4	145	0.015	6.750	5.000	9230	555	18.7
6.00	4	145	0.020	8.100	6.000	7690	615	29.9
8.00	4	145	0.025	10.800	8.000	5770	575	49.8
10.00	4	145	0.035	13.500	10.000	4615	645	87.2
12.00	4	145	0.040	16.200	12.000	3845	615	119.6
16.00	4	145	0.050	19.200	16.000	2885	575	177.2
20.00	4	145	0.060	24.000	20.000	2310	555	265.9

4.00	4	105	0.015	5.400	4.000	8355	500	10.8
5.00	4	105	0.015	6.750	5.000	6685	400	13.5
6.00	4	105	0.020	8.100	6.000	5570	445	21.7
8.00	4	105	0.025	10.800	8.000	4180	420	36.1
10.00	4	105	0.035	13.500	10.000	3340	470	63.2
12.00	4	105	0.040	16.200	12.000	2785	445	86.6
16.00	4	105	0.050	19.200	16.000	2090	420	128.3
20.00	4	105	0.060	24.000	20.000	1670	400	192.5

4.00	4	55	0.010	5.400	4.000	4375	175	3.8
5.00	4	55	0.015	6.750	5.000	3500	210	7.1
6.00	4	55	0.020	8.100	6.000	2920	235	11.3
8.00	4	55	0.025	10.800	8.000	2190	220	18.9
10.00	4	55	0.030	13.500	10.000	1750	210	28.4
12.00	4	55	0.035	16.200	12.000	1460	205	39.7
16.00	4	55	0.045	19.200	16.000	1095	195	60.5
20.00	4	55	0.055	24.000	20.000	875	195	92.4



4.00	4	65	0.010	5.400	4.000	5175	205	4.5
5.00	4	65	0.010	6.750	5.000	4140	165	5.6
6.00	4	65	0.015	8.100	6.000	3450	205	10.1
8.00	4	65	0.020	10.800	8.000	2585	205	17.9
10.00	4	65	0.025	13.500	10.000	2070	205	27.9
12.00	4	65	0.030	16.200	12.000	1725	205	40.2
16.00	4	65	0.035	19.200	16.000	1295	180	55.6
20.00	4	65	0.045	24.000	20.000	1035	185	89.4

Cylindrical end mills NVD

Smooth-edged, medium length version




HM
MG10 λ 45°
 γ 0°

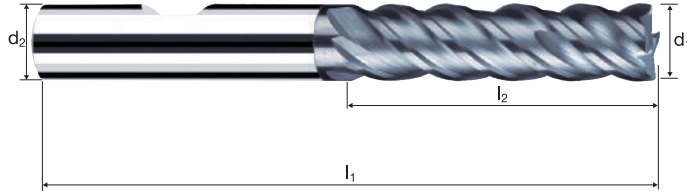

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
--------------------	-----------------------	------------------------	------------------------	--	--	--	--------------------------	-----------------------	---

Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	45°	α	z	POLYCHROM	
									P15308	P15208
220	4.00	6.00	63	13.00	19.59	0.10	3.5°	4		●
260	5.00	6.00	63	16.00	20.72	0.15	1.5°	4		●
300	6.00	6.00	63	21.00	-	0.15	0.0°	4		●
391	8.00	8.00	72	31.00	-	0.15	0.0°	4		●
450	10.00	10.00	84	37.00	-	0.20	0.0°	4		●
501	12.00	12.00	97	44.00	-	0.20	0.0°	4		●
610	16.00	16.00	108	53.00	-	0.20	0.0°	4		●
682	20.00	20.00	122	62.00	-	0.20	0.0°	4		●


Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
3.00	4	130	0.020	3.750	1.200	13795	1105	5.0	1.5°
4.00	4	130	0.030	5.000	1.600	10345	1240	9.9	1.5°
5.00	4	130	0.037	6.250	2.000	8275	1225	15.3	1.5°
6.00	4	130	0.039	9.000	2.400	6895	1075	23.2	1.5°
8.00	4	130	0.052	12.000	3.200	5175	1075	41.3	1.5°
10.00	4	130	0.065	15.000	4.000	4140	1075	64.6	1.5°
12.00	4	130	0.072	18.000	4.800	3450	995	85.8	1.5°
16.00	4	130	0.088	24.000	6.400	2585	910	139.8	1.5°
20.00	4	130	0.099	30.000	8.000	2070	820	196.6	1.5°




Steel
850 - 1100 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
3.00	4	120	0.019	3.750	1.200	12730	970	4.4	2°
4.00	4	120	0.028	5.000	1.600	9550	1070	8.6	2°
5.00	4	120	0.035	6.250	2.000	7640	1070	13.4	2°
6.00	4	120	0.033	9.000	2.400	6365	840	18.2	2°
8.00	4	120	0.044	12.000	3.200	4775	840	32.3	2°
10.00	4	120	0.055	15.000	4.000	3820	840	50.4	2°
12.00	4	120	0.066	18.000	4.800	3185	840	72.6	2°
16.00	4	120	0.080	24.000	6.400	2385	765	117.3	2°
20.00	4	120	0.090	30.000	8.000	1910	690	165.0	2°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
3.00	4	75	0.013	3.750	1.200	7960	415	1.9	1.5°
4.00	4	75	0.019	5.000	1.600	5970	455	3.6	1.5°
5.00	4	75	0.024	6.250	2.000	4775	460	5.7	1.5°
6.00	4	75	0.023	9.000	2.400	3980	365	7.9	1.5°
8.00	4	75	0.030	12.000	3.200	2985	360	13.8	1.5°
10.00	4	75	0.038	15.000	4.000	2385	365	21.8	1.5°
12.00	4	75	0.046	18.000	4.800	1990	365	31.6	1.5°
16.00	4	75	0.050	24.000	6.400	1490	300	45.8	1.5°
20.00	4	75	0.063	30.000	8.000	1195	300	72.2	1.5°


Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]
3.00	4	105	0.009	2.250	3.000	11140	400	2.7	1.5°
4.00	4	105	0.014	4.000	4.000	8355	470	7.5	1.5°
5.00	4	105	0.017	5.000	5.000	6685	455	11.4	1.5°
6.00	4	105	0.023	7.500	6.000	5570	510	23.1	1.5°
8.00	4	105	0.031	10.000	8.000	4180	520	41.4	1.5°
10.00	4	105	0.039	12.500	10.000	3340	520	65.2	1.5°
12.00	4	105	0.043	15.000	12.000	2785	480	86.2	1.5°
16.00	4	105	0.053	20.000	16.000	2090	445	141.7	1.5°
20.00	4	105	0.059	25.000	20.000	1670	395	197.2	1.5°






Steel
850 - 1100 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]
3.00	4	95	0.009	2.250	3.000	10080	365	2.4	2°
4.00	4	95	0.013	4.000	4.000	7560	395	6.3	2°
5.00	4	95	0.016	5.000	5.000	6050	385	9.7	2°
6.00	4	95	0.020	7.500	6.000	5040	405	18.1	2°
8.00	4	95	0.026	10.000	8.000	3780	395	31.4	2°
10.00	4	95	0.033	12.500	10.000	3025	400	49.9	2°
12.00	4	95	0.040	15.000	12.000	2520	405	72.6	2°
16.00	4	95	0.048	20.000	16.000	1890	365	116.1	2°
20.00	4	95	0.054	25.000	20.000	1510	325	163.3	2°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]
3.00	4	60	0.006	2.250	3.000	6365	155	1.0	1.5°
4.00	4	60	0.009	4.000	4.000	4775	170	2.8	1.5°
5.00	4	60	0.011	5.000	5.000	3820	170	4.2	1.5°
6.00	4	60	0.014	7.500	6.000	3185	180	8.0	1.5°
8.00	4	60	0.018	10.000	8.000	2385	170	13.8	1.5°
10.00	4	60	0.023	12.500	10.000	1910	175	22.0	1.5°
12.00	4	60	0.028	15.000	12.000	1590	180	32.1	1.5°
16.00	4	60	0.030	20.000	16.000	1195	145	45.8	1.5°
20.00	4	60	0.038	25.000	20.000	955	145	72.6	1.5°



Suitable cutting data for other applications and materials can be found in the cutting data software **ToolExpert E-Cut**



Cylindrical end mills E-Cut

Smooth-edged, chip breaker, medium length version

HM
MG10 λ 45°
 γ 10°

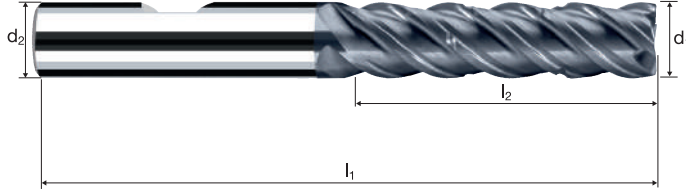


Roughing HPC Roughing HDC Finishing

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

										POLYCHROM		
Example: Order-N°.										P8410		
										P8310		
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	r	α	z				
140*	2.00	6.00	63	7.00	17.12	0.050	7.0°	4			●	
180*	3.00	6.00	63	11.00	20.26	0.050	4.5°	4			●	
220*	4.00	6.00	63	13.00	21.39	0.100	3.5°	4			●	
260*	5.00	6.00	63	16.00	23.52	0.100	1.5°	4			●	
300	6.00	6.00	63	21.00	-	0.100	0.0°	4			●	
391	8.00	8.00	72	31.00	-	0.150	0.0°	4			●	
450	10.00	10.00	84	37.00	-	0.200	0.0°	4			●	
501	12.00	12.00	97	44.00	-	0.200	0.0°	4			●	
610	16.00	16.00	108	53.00	-	0.200	0.0°	4			●	
682	20.00	20.00	122	62.00	-	0.250	0.0°	4			●	
* without chip breaker only												


Application

Material



Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
4.00	5	140	0.034	6.000	1.200	11140	1895	13.6	1°
5.00	5	140	0.042	7.500	1.500	8915	1870	21.1	1°
6.00	5	140	0.045	9.000	1.800	7425	1670	27.1	1°
8.00	5	140	0.060	12.000	2.400	5570	1670	48.1	1°
10.00	5	140	0.075	15.000	3.000	4455	1670	75.2	1°
12.00	5	140	0.084	18.000	3.600	3715	1560	101.1	1°
16.00	5	140	0.102	24.000	4.800	2785	1420	163.6	1°
20.00	5	140	0.115	30.000	6.000	2230	1280	230.6	1°



Steel
850 - 1100 N/mm²


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
4.00	5	130	0.032	6.000	1.200	10345	1655	11.9	1.5°
5.00	5	130	0.038	7.500	1.500	8275	1570	17.7	1.5°
6.00	5	130	0.038	9.000	1.800	6895	1310	21.2	1.5°
8.00	5	130	0.051	12.000	2.400	5175	1320	38.0	1.5°
10.00	5	130	0.064	15.000	3.000	4140	1325	59.6	1.5°
12.00	5	130	0.076	18.000	3.600	3450	1310	84.9	1.5°
16.00	5	130	0.093	24.000	4.800	2585	1205	138.5	1.5°
20.00	5	130	0.104	30.000	6.000	2070	1075	193.7	1.5°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
4.00	5	80	0.022	6.000	1.200	6365	700	5.0	1°
5.00	5	80	0.027	7.500	1.500	5095	690	7.7	1°
6.00	5	80	0.027	9.000	1.800	4245	575	9.3	1°
8.00	5	80	0.035	12.000	2.400	3185	555	16.0	1°
10.00	5	80	0.043	15.000	3.000	2545	545	24.6	1°
12.00	5	80	0.053	18.000	3.600	2120	560	36.4	1°
16.00	5	80	0.058	24.000	4.800	1590	460	53.2	1°
20.00	5	80	0.073	30.000	6.000	1275	465	83.7	1°

Application

Material



Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
4.00	5	230	0.036	13.000	0.400	18305	3255	16.9
5.00	5	230	0.044	16.000	0.500	14640	3240	25.9
6.00	5	230	0.054	21.000	0.600	12200	3285	41.4
8.00	5	230	0.072	31.000	0.800	9150	3300	81.8
10.00	5	230	0.089	37.000	1.000	7320	3275	121.1
12.00	5	230	0.107	44.000	1.200	6100	3255	171.9
16.00	5	230	0.117	53.000	1.600	4575	2685	227.6
20.00	5	230	0.148	62.000	2.000	3660	2710	336.1



Steel
850 - 1100 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
4.00	5	185	0.036	13.000	0.400	14720	2620	13.6
5.00	5	185	0.044	16.000	0.500	11775	2605	20.8
6.00	5	185	0.054	21.000	0.600	9815	2645	33.3
8.00	5	185	0.072	31.000	0.800	7360	2655	65.8
10.00	5	185	0.089	37.000	1.000	5890	2635	97.4
12.00	5	185	0.107	44.000	1.200	4905	2620	138.3
16.00	5	185	0.117	53.000	1.600	3680	2160	183.1
20.00	5	185	0.148	62.000	2.000	2945	2180	270.3

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
4.00	5	142	0.034	13.000	0.200	11300	1930	5.0
5.00	5	142	0.042	16.000	0.250	9040	1895	7.6
6.00	5	142	0.050	21.000	0.300	7535	1875	11.8
8.00	5	142	0.067	31.000	0.400	5650	1890	23.4
10.00	5	142	0.084	37.000	0.500	4520	1895	35.1
12.00	5	142	0.101	44.000	0.600	3765	1905	50.2
16.00	5	142	0.110	53.000	0.800	2825	1560	66.1
20.00	5	142	0.141	62.000	1.000	2260	1600	99.1

Suitable cutting data for other applications and materials can be found in the cutting data software **ToolExpert E-Cut**





Cylindrical end mills E-Cut

Smooth-edged, chip breaker, medium length version



HM
MG10 λ 45°
 γ 10°

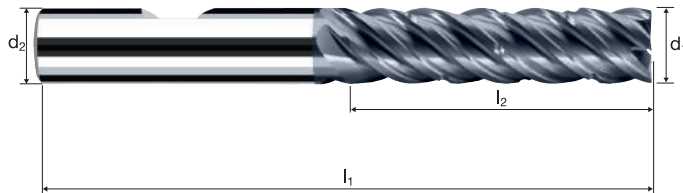


Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
----------	-------------	--------------	--------------	-----------	--	--	----------------	-------------	------------------

POLYCHROM										
Example: Order-N°.										
Coating: P Article-N°: 8415 ø-Code: 220										
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	r	α	z		
220*	4.00	6.00	63	13.00	21.39	0.100	3.0°	5	●	
260*	5.00	6.00	63	16.00	23.52	0.100	1.5°	5	●	
300	6.00	6.00	63	21.00	-	0.100	0.0°	5	●	
391	8.00	8.00	72	31.00	-	0.150	0.0°	5	●	
450	10.00	10.00	84	37.00	-	0.200	0.0°	5	●	
501	12.00	12.00	97	44.00	-	0.200	0.0°	5	●	
610	16.00	16.00	108	53.00	-	0.200	0.0°	5	●	
682	20.00	20.00	122	62.00	-	0.250	0.0°	5	●	

* without chip breaker only


Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
3.00	3	120	0.018	3.750	1.950	12730	690	5.0	2°
4.00	3	120	0.027	5.000	2.600	9550	775	10.1	2°
5.00	3	120	0.033	6.250	3.250	7640	755	15.4	2°
6.00	3	120	0.035	9.000	3.900	6365	670	23.5	2°
8.00	3	120	0.047	12.000	5.200	4775	675	42.0	2°
10.00	3	120	0.059	15.000	6.500	3820	675	65.9	2°
12.00	3	120	0.065	18.000	7.800	3185	620	87.1	2°
16.00	3	120	0.079	24.000	10.400	2385	565	141.2	2°
20.00	3	120	0.089	30.000	13.000	1910	510	198.9	2°



Steel
850 - 1100 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
3.00	3	110	0.017	3.750	1.950	11670	595	4.4	3°
4.00	3	110	0.025	5.000	2.600	8755	655	8.5	3°
5.00	3	110	0.032	6.250	3.250	7005	670	13.7	3°
6.00	3	110	0.030	9.000	3.900	5835	525	18.4	3°
8.00	3	110	0.040	12.000	5.200	4375	525	32.8	3°
10.00	3	110	0.050	15.000	6.500	3500	525	51.2	3°
12.00	3	110	0.059	18.000	7.800	2920	515	72.5	3°
16.00	3	110	0.072	24.000	10.400	2190	475	118.0	3°
20.00	3	110	0.081	30.000	13.000	1750	425	165.9	3°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
3.00	3	70	0.013	3.750	1.950	7425	290	2.1	2°
4.00	3	70	0.019	5.000	2.600	5570	320	4.1	2°
5.00	3	70	0.024	6.250	3.250	4455	320	6.5	2°
6.00	3	70	0.023	9.000	3.900	3715	255	9.0	2°
8.00	3	70	0.030	12.000	5.200	2785	250	15.6	2°
10.00	3	70	0.038	15.000	6.500	2230	255	24.8	2°
12.00	3	70	0.046	18.000	7.800	1855	255	36.0	2°
16.00	3	70	0.050	24.000	10.400	1395	210	52.1	2°
20.00	3	70	0.063	30.000	13.000	1115	210	82.1	2°


Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]
3.00	3	105	0.013	3.000	3.000	11140	435	3.9	2°
4.00	3	105	0.019	5.000	4.000	8355	475	9.5	2°
5.00	3	105	0.023	6.250	5.000	6685	460	14.4	2°
6.00	3	105	0.028	9.000	6.000	5570	470	25.3	2°
8.00	3	105	0.038	12.000	8.000	4180	475	45.7	2°
10.00	3	105	0.047	15.000	10.000	3340	470	70.7	2°
12.00	3	105	0.052	18.000	12.000	2785	435	93.9	2°
16.00	3	105	0.063	24.000	16.000	2090	395	151.6	2°
20.00	3	105	0.071	30.000	20.000	1670	355	213.6	2°






Steel
850 - 1100 N/mm²











d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]
3.00	3	95	0.012	3.000	3.000	10080	365	3.3	2°
4.00	3	95	0.018	5.000	4.000	7560	410	8.2	2°
5.00	3	95	0.022	6.250	5.000	6050	400	12.5	2°
6.00	3	95	0.024	9.000	6.000	5040	365	19.6	2°
8.00	3	95	0.032	12.000	8.000	3780	365	34.8	2°
10.00	3	95	0.040	15.000	10.000	3025	365	54.4	2°
12.00	3	95	0.047	18.000	12.000	2520	355	76.7	2°
16.00	3	95	0.058	24.000	16.000	1890	330	126.3	2°
20.00	3	95	0.065	30.000	20.000	1510	295	176.9	2°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]
3.00	3	60	0.009	3.000	3.000	6365	170	1.5	2°
4.00	3	60	0.013	5.000	4.000	4775	185	3.7	2°
5.00	3	60	0.017	6.250	5.000	3820	195	6.1	2°
6.00	3	60	0.018	9.000	6.000	3185	170	9.3	2°
8.00	3	60	0.024	12.000	8.000	2385	170	16.5	2°
10.00	3	60	0.030	15.000	10.000	1910	170	25.8	2°
12.00	3	60	0.037	18.000	12.000	1590	175	38.2	2°
16.00	3	60	0.040	24.000	16.000	1195	145	55.0	2°
20.00	3	60	0.050	30.000	20.000	955	145	85.9	2°

Suitable cutting data for other applications and materials can be found in the cutting data software **ToolExpert E-Cut**



Application	Material	d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [cm ³ /min]		
	Steel 500 - 850 N/mm ² 	3.00	4	115	0.018	3.750	1.200	12200	878	4.0		
		4.00	4	115	0.027	5.000	1.600	9150	988	7.9		
		5.00	4	115	0.033	6.250	2.000	7320	966	12.1		
		6.00	4	115	0.034	9.000	2.400	6100	830	17.9		
		8.00	4	115	0.046	12.000	3.200	4575	842	32.3		
		10.00	4	115	0.058	15.000	4.000	3660	849	50.9		
		12.00	4	115	0.065	18.000	4.800	3050	793	68.5		
		16.00	4	115	0.077	24.000	6.400	2290	705	108.3		
		20.00	4	115	0.089	30.000	8.000	1830	652	156.4		
			Steel 850 - 1100 N/mm ² 	3.00	4	105	0.017	3.750	1.200	11140	758	3.4
4.00	4			105	0.023	5.000	1.600	8355	769	6.1		
5.00	4			105	0.029	6.250	2.000	6685	776	9.7		
6.00	4			105	0.030	9.000	2.400	5570	668	14.4		
8.00	4			105	0.040	12.000	3.200	4180	669	25.7		
10.00	4			105	0.050	15.000	4.000	3340	668	40.1		
12.00	4			105	0.059	18.000	4.800	2785	657	56.8		
16.00	4			105	0.071	24.000	6.400	2090	594	91.2		
20.00	4			105	0.081	30.000	8.000	1670	541	129.9		
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 			3.00	4	70	0.011	3.750	1.200	7425	327	1.5
		4.00	4	70	0.014	5.000	1.600	5570	312	2.5		
		5.00	4	70	0.018	6.250	2.000	4455	321	4.0		
		6.00	4	70	0.021	9.000	2.400	3715	312	6.7		
		8.00	4	70	0.028	12.000	3.200	2785	312	12.0		
		10.00	4	70	0.034	15.000	4.000	2230	303	18.2		
		12.00	4	70	0.041	18.000	4.800	1855	304	26.3		
		16.00	4	70	0.046	24.000	6.400	1395	257	39.4		
		20.00	4	70	0.057	30.000	8.000	1115	254	61.0		
			Cast iron (lamellar / spheroidal) 	3.00	4	130	0.017	3.750	1.200	13795	938	4.2
4.00	4			130	0.025	5.000	1.600	10345	1035	8.3		
5.00	4			130	0.030	6.250	2.000	8275	993	12.4		
6.00	4			130	0.032	9.000	2.400	6895	883	19.1		
8.00	4			130	0.043	12.000	3.200	5175	890	34.2		
10.00	4			130	0.054	15.000	4.000	4140	894	53.7		
12.00	4			130	0.064	18.000	4.800	3450	883	76.3		
16.00	4			130	0.077	24.000	6.400	2585	796	122.3		
20.00	4			130	0.089	30.000	8.000	2070	737	176.9		
Application	Material			d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
			Steel 500 - 850 N/mm ² 	3.00	4	92	0.008	2.250	3.000	9760	312	2.1
				4.00	4	92	0.012	4.000	4.000	7320	351	5.6
				5.00	4	92	0.015	5.000	5.000	5855	351	8.8
				6.00	4	92	0.020	7.500	6.000	4880	390	17.6
				8.00	4	92	0.028	10.000	8.000	3660	410	32.8
				10.00	4	92	0.035	12.500	10.000	2930	410	51.3
				12.00	4	92	0.039	15.000	12.000	2440	381	68.5
				16.00	4	92	0.046	20.000	16.000	1830	337	107.7
				20.00	4	92	0.053	25.000	20.000	1465	311	155.3
	Steel 850 - 1100 N/mm ² 			3.00	4	84	0.008	2.250	3.000	8915	285	1.9
		4.00	4	84	0.010	4.000	4.000	6685	267	4.3		
		5.00	4	84	0.013	5.000	5.000	5350	278	7.0		
		6.00	4	84	0.018	7.500	6.000	4455	321	14.4		
		8.00	4	84	0.024	10.000	8.000	3340	321	25.6		
		10.00	4	84	0.030	12.500	10.000	2675	321	40.1		
		12.00	4	84	0.035	15.000	12.000	2230	312	56.2		
		16.00	4	84	0.043	20.000	16.000	1670	287	91.9		
		20.00	4	84	0.049	25.000	20.000	1335	262	130.9		
			Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	3.00	4	56	0.005	2.250	3.000	5940	119	0.8
4.00	4			56	0.006	4.000	4.000	4455	107	1.7		
5.00	4			56	0.008	5.000	5.000	3565	114	2.9		
6.00	4			56	0.013	7.500	6.000	2970	154	6.9		
8.00	4			56	0.017	10.000	8.000	2230	152	12.1		
10.00	4			56	0.020	12.500	10.000	1785	143	17.9		
12.00	4			56	0.025	15.000	12.000	1485	149	26.7		
16.00	4			56	0.028	20.000	16.000	1115	125	40.0		
20.00	4			56	0.034	25.000	20.000	890	121	60.5		
	Cast iron (lamellar / spheroidal) 			3.00	4	104	0.008	2.250	3.000	11035	353	2.4
		4.00	4	104	0.011	4.000	4.000	8275	364	5.8		
		5.00	4	104	0.014	5.000	5.000	6620	371	9.3		
		6.00	4	104	0.019	7.500	6.000	5515	419	18.9		
		8.00	4	104	0.026	10.000	8.000	4140	431	34.4		
		10.00	4	104	0.032	12.500	10.000	3310	424	53.0		
		12.00	4	104	0.038	15.000	12.000	2760	420	75.5		
		16.00	4	104	0.046	20.000	16.000	2070	381	121.9		
		20.00	4	104	0.053	25.000	20.000	1655	351	175.5		

Application



Material

Steel
500 - 850 N/mm²



d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]
6.00	4	120	0.034	9.000	2.400	6365	877	18.9
8.00	4	120	0.046	12.000	3.200	4775	877	33.7
10.00	4	120	0.057	15.000	4.000	3820	877	52.6
12.00	4	120	0.064	18.000	4.800	3185	819	70.7
16.00	4	120	0.073	24.000	6.400	2385	701	107.6
20.00	4	120	0.084	30.000	8.000	1910	643	154.3

Steel
850 - 1100 N/mm²



6.00	4	105	0.030	9.000	2.400	5570	665	14.4
8.00	4	105	0.040	12.000	3.200	4180	665	25.5
10.00	4	105	0.050	15.000	4.000	3340	664	39.9
12.00	4	105	0.060	18.000	4.800	2785	665	57.4
16.00	4	105	0.067	24.000	6.400	2090	563	86.4
20.00	4	105	0.077	30.000	8.000	1670	511	122.6

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



6.00	4	70	0.021	9.000	2.400	3715	307	6.6
8.00	4	70	0.028	12.000	3.200	2785	307	11.8
10.00	4	70	0.034	15.000	4.000	2230	307	18.4
12.00	4	70	0.041	18.000	4.800	1855	307	26.5
16.00	4	70	0.043	24.000	6.400	1395	239	36.7
20.00	4	70	0.054	30.000	8.000	1115	239	57.3

Cast iron
(lamellar / spheroidal)



6.00	4	130	0.032	9.000	2.400	6895	886	19.1
8.00	4	130	0.043	12.000	3.200	5175	887	34.1
10.00	4	130	0.054	15.000	4.000	4140	887	53.2
12.00	4	130	0.064	18.000	4.800	3450	887	76.6
16.00	4	130	0.073	24.000	6.400	2585	759	116.6
20.00	4	130	0.084	30.000	8.000	2070	697	167.2

Application



Material

Steel
500 - 850 N/mm²



d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]
6.00	4	95	0.022	7.500	6.000	5040	444	20.0
8.00	4	95	0.030	10.000	8.000	3780	454	36.3
10.00	4	95	0.037	12.500	10.000	3025	448	56.0
12.00	4	95	0.042	15.000	12.000	2520	423	76.2
16.00	4	95	0.048	20.000	16.000	1890	363	116.1
20.00	4	95	0.055	25.000	20.000	1510	332	166.1

Steel
850 - 1100 N/mm²



6.00	4	85	0.019	7.500	6.000	4510	343	15.4
8.00	4	85	0.026	10.000	8.000	3380	352	28.1
10.00	4	85	0.032	12.500	10.000	2705	346	43.3
12.00	4	85	0.039	15.000	12.000	2255	352	63.3
16.00	4	85	0.044	20.000	16.000	1690	297	95.2
20.00	4	85	0.050	25.000	20.000	1355	271	135.5

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




6.00	4	55	0.013	7.500	6.000	2920	152	6.8
8.00	4	55	0.018	10.000	8.000	2190	158	12.6
10.00	4	55	0.022	12.500	10.000	1750	154	19.3
12.00	4	55	0.027	15.000	12.000	1460	158	28.4
16.00	4	55	0.028	20.000	16.000	1095	123	39.2
20.00	4	55	0.035	25.000	20.000	875	123	61.3

Cast iron
(lamellar / spheroidal)



6.00	4	105	0.021	7.500	6.000	5570	468	21.1
8.00	4	105	0.028	10.000	8.000	4180	468	37.5
10.00	4	105	0.035	12.500	10.000	3340	468	58.5
12.00	4	105	0.042	15.000	12.000	2785	468	84.2
16.00	4	105	0.048	20.000	16.000	2090	401	128.4
20.00	4	105	0.055	25.000	20.000	1670	367	183.7

Application



Material

Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




Cast iron
(lamellar / spheroidal)



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	170	0.010	5.400	0.600	18040	720	2.3
4.00	4	170	0.015	7.200	0.800	13530	810	4.7
5.00	4	170	0.020	9.000	1.000	10825	865	7.8
6.00	4	170	0.025	10.800	1.200	9020	900	11.7
8.00	4	170	0.035	14.400	1.600	6765	945	21.8
10.00	4	170	0.045	18.000	2.000	5410	975	35.1
12.00	4	170	0.050	21.600	2.400	4510	900	46.8
16.00	4	170	0.065	28.800	3.200	3380	880	81.0
20.00	4	170	0.080	36.000	4.000	2705	865	124.7
3.00	4	120	0.010	5.400	0.600	12730	510	1.7
4.00	4	120	0.015	7.200	0.800	9550	575	3.3
5.00	4	120	0.020	9.000	1.000	7640	610	5.5
6.00	4	120	0.025	10.800	1.200	6365	635	8.3
8.00	4	120	0.035	14.400	1.600	4775	670	15.4
10.00	4	120	0.045	18.000	2.000	3820	690	24.8
12.00	4	120	0.050	21.600	2.400	3185	635	33.0
16.00	4	120	0.065	28.800	3.200	2385	620	57.2
20.00	4	120	0.080	36.000	4.000	1910	610	88.0
3.00	4	80	0.008	5.400	0.600	8490	270	0.9
4.00	4	80	0.010	7.200	0.800	6365	255	1.5
5.00	4	80	0.015	9.000	1.000	5095	305	2.8
6.00	4	80	0.020	10.800	1.200	4245	340	4.4
8.00	4	80	0.025	14.400	1.600	3185	320	7.3
10.00	4	80	0.030	18.000	2.000	2545	305	11.0
12.00	4	80	0.035	21.600	2.400	2120	295	15.4
16.00	4	80	0.045	28.800	3.200	1590	285	26.4
20.00	4	80	0.055	36.000	4.000	1275	280	40.3
3.00	4	135	0.012	5.400	0.600	14325	690	2.2
4.00	4	135	0.015	7.200	0.800	10745	645	3.7
5.00	4	135	0.020	9.000	1.000	8595	690	6.2
6.00	4	135	0.030	10.800	1.200	7160	860	11.1
8.00	4	135	0.040	14.400	1.600	5370	860	19.8
10.00	4	135	0.050	18.000	2.000	4295	860	30.9
12.00	4	135	0.055	21.600	2.400	3580	790	40.8
16.00	4	135	0.070	28.800	3.200	2685	750	69.3
20.00	4	135	0.090	36.000	4.000	2150	775	111.4
3.00	4	135	0.008	1.800	3.000	14325	460	2.5
4.00	4	135	0.010	2.800	4.000	10745	430	4.8
5.00	4	135	0.015	4.000	5.000	8595	515	10.3
6.00	4	135	0.020	6.000	6.000	7160	575	20.6
8.00	4	135	0.025	8.000	8.000	5370	535	34.4
10.00	4	135	0.035	10.000	10.000	4295	600	60.2
12.00	4	135	0.040	12.000	12.000	3580	575	82.5
16.00	4	135	0.050	8.000	16.000	2685	535	68.8
20.00	4	135	0.060	10.000	20.000	2150	515	103.1
3.00	4	95	0.008	1.800	3.000	10080	325	1.7
4.00	4	95	0.010	2.800	4.000	7560	300	3.4
5.00	4	95	0.015	4.000	5.000	6050	365	7.3
6.00	4	95	0.020	6.000	6.000	5040	405	14.5
8.00	4	95	0.025	8.000	8.000	3780	380	24.2
10.00	4	95	0.035	10.000	10.000	3025	425	42.3
12.00	4	95	0.040	12.000	12.000	2520	405	58.1
16.00	4	95	0.050	8.000	16.000	1890	380	48.4
20.00	4	95	0.060	10.000	20.000	1510	365	72.6
3.00	4	65	0.006	1.800	3.000	6895	165	0.9
4.00	4	65	0.008	2.800	4.000	5175	165	1.9
5.00	4	65	0.012	4.000	5.000	4140	200	4.0
6.00	4	65	0.016	4.200	6.000	3450	220	5.6
8.00	4	65	0.018	8.000	8.000	2585	185	11.9
10.00	4	65	0.022	10.000	10.000	2070	180	18.2
12.00	4	65	0.025	12.000	12.000	1725	170	24.8
16.00	4	65	0.035	8.000	16.000	1295	180	23.2
20.00	4	65	0.040	10.000	20.000	1035	165	33.1
3.00	4	115	0.010	1.800	3.000	12200	490	2.6
4.00	4	115	0.010	2.800	4.000	9150	365	4.1
5.00	4	115	0.015	4.000	5.000	7320	440	8.8
6.00	4	115	0.025	6.000	6.000	6100	610	22.0
8.00	4	115	0.030	8.000	8.000	4575	550	35.1
10.00	4	115	0.040	10.000	10.000	3660	585	58.6
12.00	4	115	0.040	12.000	12.000	3050	490	70.3
16.00	4	115	0.055	8.000	16.000	2290	505	64.4
20.00	4	115	0.070	10.000	20.000	1830	510	102.5

Application



Material

Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	3	165	0.010	4.500	1.800	17505	525	4.3
4.00	3	165	0.015	6.000	2.400	13130	590	8.5
5.00	3	165	0.015	7.500	3.000	10505	475	10.6
6.00	3	165	0.020	9.000	3.600	8755	525	17.0
8.00	3	165	0.025	12.000	4.800	6565	490	28.4
10.00	3	165	0.030	15.000	6.000	5250	475	42.5
12.00	3	165	0.040	18.000	7.200	4375	525	68.1
16.00	3	165	0.050	24.000	8.400	3285	490	99.3
20.00	3	165	0.065	30.000	10.500	2625	510	161.3
3.00	3	110	0.010	4.500	1.800	11670	350	2.8
4.00	3	110	0.015	6.000	2.400	8755	395	5.7
5.00	3	110	0.015	7.500	3.000	7005	315	7.1
6.00	3	110	0.020	9.000	3.600	5835	350	11.3
8.00	3	110	0.025	12.000	4.800	4375	330	18.9
10.00	3	110	0.030	15.000	6.000	3500	315	28.4
12.00	3	110	0.040	18.000	7.200	2920	350	45.4
16.00	3	110	0.050	24.000	8.400	2190	330	66.2
20.00	3	110	0.065	30.000	10.500	1750	340	107.5
3.00	3	80	0.005	4.500	1.800	8490	125	1.0
4.00	3	80	0.010	6.000	2.400	6365	190	2.8
5.00	3	80	0.010	7.500	3.000	5095	155	3.4
6.00	3	80	0.015	9.000	3.600	4245	190	6.2
8.00	3	80	0.020	12.000	4.800	3185	190	11.0
10.00	3	80	0.025	15.000	6.000	2545	190	17.2
12.00	3	80	0.030	18.000	7.200	2120	190	24.8
16.00	3	80	0.040	24.000	8.400	1590	190	38.5
20.00	3	80	0.045	30.000	10.500	1275	170	54.1
3.00	3	130	0.010	4.500	1.800	13795	415	3.4
4.00	3	130	0.015	6.000	2.400	10345	465	6.7
5.00	3	130	0.015	7.500	3.000	8275	370	8.4
6.00	3	130	0.020	9.000	3.600	6895	415	13.4
8.00	3	130	0.025	12.000	4.800	5175	390	22.3
10.00	3	130	0.030	15.000	6.000	4140	370	33.5
12.00	3	130	0.040	18.000	7.200	3450	415	53.6
16.00	3	130	0.050	24.000	8.400	2585	390	78.2
20.00	3	130	0.065	30.000	10.500	2070	405	127.1
3.00	3	130	0.010	2.000	3.000	13795	415	2.5
4.00	3	130	0.015	3.100	4.000	10345	465	5.8
5.00	3	130	0.015	4.400	5.000	8275	370	8.2
6.00	3	130	0.020	7.800	6.000	6895	415	19.4
8.00	3	130	0.025	10.400	8.000	5175	390	32.3
10.00	3	130	0.025	13.000	10.000	4140	310	40.3
12.00	3	130	0.035	15.600	12.000	3450	360	67.8
16.00	3	130	0.045	17.600	16.000	2585	350	98.3
20.00	3	130	0.060	22.000	20.000	2070	370	163.9
3.00	3	85	0.010	2.000	3.000	9020	270	1.6
4.00	3	85	0.015	3.100	4.000	6765	305	3.8
5.00	3	85	0.015	4.400	5.000	5410	245	5.4
6.00	3	85	0.020	7.800	6.000	4510	270	12.7
8.00	3	85	0.025	10.400	8.000	3380	255	21.1
10.00	3	85	0.025	13.000	10.000	2705	205	26.4
12.00	3	85	0.035	15.600	12.000	2255	235	44.3
16.00	3	85	0.045	17.600	16.000	1690	230	64.3
20.00	3	85	0.060	22.000	20.000	1355	245	107.1
3.00	3	65	0.005	2.000	3.000	6895	105	0.6
4.00	3	65	0.010	3.100	4.000	5175	155	1.9
5.00	3	65	0.010	4.400	5.000	4140	125	2.7
6.00	3	65	0.015	7.800	6.000	3450	155	7.3
8.00	3	65	0.020	10.400	8.000	2585	155	12.9
10.00	3	65	0.025	13.000	10.000	2070	155	20.2
12.00	3	65	0.025	15.600	12.000	1725	130	24.2
16.00	3	65	0.035	17.600	16.000	1295	135	38.2
20.00	3	65	0.040	22.000	20.000	1035	125	54.6
3.00	3	110	0.010	2.000	3.000	11670	350	2.1
4.00	3	110	0.015	3.100	4.000	8755	395	4.9
5.00	3	110	0.015	4.400	5.000	7005	315	6.9
6.00	3	110	0.020	7.800	6.000	5835	350	16.4
8.00	3	110	0.025	10.400	8.000	4375	330	27.3
10.00	3	110	0.025	13.000	10.000	3500	265	34.1
12.00	3	110	0.035	15.600	12.000	2920	305	57.4
16.00	3	110	0.045	17.600	16.000	2190	295	83.2
20.00	3	110	0.060	22.000	20.000	1750	315	138.7


Cylindrical end mills

Smooth-edged, medium length version, short neck



HM
MG10


λ 40°
 γ 6°

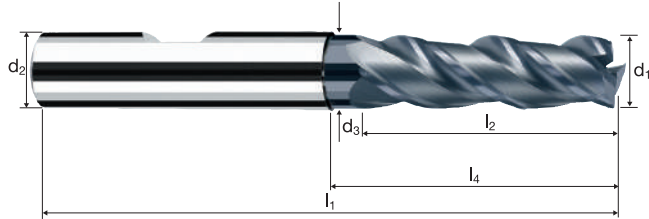

Rm < 850 Rm 850-1100 Rm 1100-1300 Inox Stainless Ti Titanium GG(G) Tool Steel Nickel-Alloys

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	POLYCHROM	
											Example: Order-N°.	Coating P
180	3.00	6.00	2.80	63	14.00	20.00	26.63	0.10	3.5°	3	•	P45334
220	4.00	6.00	3.70	63	17.00	22.00	26.95	0.10	2.5°	3	•	P45234
260	5.00	6.00	4.60	63	19.00	24.00	27.27	0.15	1.5°	3	•	
300	6.00	6.00	5.50	63	19.00	25.34	26.00	0.15	0.0°	3	•	
391	8.00	8.00	7.40	72	28.00	34.29	35.00	0.15	0.0°	3	•	
450	10.00	10.00	9.20	84	34.00	42.20	43.00	0.20	0.0°	3	•	
501	12.00	12.00	11.00	97	40.00	50.13	51.00	0.20	0.0°	3	•	
610	16.00	16.00	15.00	108	48.00	58.13	59.00	0.20	0.0°	3	•	
682	20.00	20.00	19.00	122	56.00	70.13	71.00	0.20	0.0°	3	•	

Application



Material

Steel
850 - 1100 N/mm²




Steel
1100 - 1300 N/mm²



Steel
1300 - 1500 N/mm²



Titanium alloys
> 300 HB
[Ti6Al4V]



Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Steel
1300 - 1500 N/mm²



Titanium alloys
> 300 HB
[Ti6Al4V]



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
4.00	4	150	0.025	4.000	1.800	11935	1195	8.6
5.00	4	150	0.035	5.000	2.250	9550	1335	15.0
6.00	4	150	0.040	6.000	2.700	7960	1275	20.6
8.00	4	150	0.055	8.000	3.600	5970	1315	37.8
10.00	4	150	0.065	10.000	4.500	4775	1240	55.9
12.00	4	150	0.080	12.000	5.400	3980	1275	82.5
16.00	4	150	0.090	16.000	7.200	2985	1075	123.8

4.00	4	115	0.025	4.000	1.800	9150	915	6.6
5.00	4	115	0.035	5.000	2.250	7320	1025	11.5
6.00	4	115	0.040	6.000	2.700	6100	975	15.8
8.00	4	115	0.055	8.000	3.600	4575	1005	29.0
10.00	4	115	0.065	10.000	4.500	3660	950	42.8
12.00	4	115	0.080	12.000	5.400	3050	975	63.3
16.00	4	115	0.090	16.000	7.200	2290	825	94.9

4.00	4	80	0.025	4.000	1.800	6365	635	4.6
5.00	4	80	0.030	5.000	2.250	5095	610	6.9
6.00	4	80	0.035	6.000	2.700	4245	595	9.6
8.00	4	80	0.045	8.000	3.600	3185	575	16.5
10.00	4	80	0.060	10.000	4.500	2545	610	27.5
12.00	4	80	0.070	12.000	5.400	2120	595	38.5
16.00	4	80	0.080	16.000	7.200	1590	510	58.7

4.00	4	50	0.015	4.000	1.800	3980	240	1.7
5.00	4	50	0.020	5.000	2.250	3185	255	2.9
6.00	4	50	0.020	6.000	2.700	2655	210	3.4
8.00	4	50	0.025	8.000	3.600	1990	200	5.7
10.00	4	50	0.035	10.000	4.500	1590	225	10.0
12.00	4	50	0.040	12.000	5.400	1325	210	13.8
16.00	4	50	0.050	16.000	7.200	995	200	22.9

4.00	4	115	0.020	3.200	4.000	9150	730	9.4
5.00	4	115	0.025	4.000	5.000	7320	730	14.6
6.00	4	115	0.035	4.800	6.000	6100	855	24.6
8.00	4	115	0.045	6.400	8.000	4575	825	42.2
10.00	4	115	0.055	8.000	10.000	3660	805	64.4
12.00	4	115	0.065	9.600	12.000	3050	795	91.4
16.00	4	115	0.075	11.200	16.000	2290	685	123.0


4.00	4	90	0.020	3.200	4.000	7160	575	7.3
5.00	4	90	0.025	4.000	5.000	5730	575	11.5
6.00	4	90	0.035	4.800	6.000	4775	670	19.3
8.00	4	90	0.045	6.400	8.000	3580	645	33.0
10.00	4	90	0.055	8.000	10.000	2865	630	50.4
12.00	4	90	0.065	9.600	12.000	2385	620	71.5
16.00	4	90	0.075	11.200	16.000	1790	535	96.3

4.00	4	65	0.020	3.200	4.000	5175	415	5.3
5.00	4	65	0.025	4.000	5.000	4140	415	8.3
6.00	4	65	0.030	4.800	6.000	3450	415	11.9
8.00	4	65	0.040	6.400	8.000	2585	415	21.2
10.00	4	65	0.050	8.000	10.000	2070	415	33.1
12.00	4	65	0.060	9.600	12.000	1725	415	47.7
16.00	4	65	0.070	11.200	16.000	1295	360	64.9

4.00	4	40	0.015	3.200	4.000	3185	190	2.4
5.00	4	40	0.015	4.000	5.000	2545	155	3.1
6.00	4	40	0.020	4.800	6.000	2120	170	4.9
8.00	4	40	0.025	6.400	8.000	1590	160	8.1
10.00	4	40	0.035	8.000	10.000	1275	180	14.3
12.00	4	40	0.040	9.600	12.000	1060	170	19.6
16.00	4	40	0.045	11.200	16.000	795	145	25.7

Cylindrical end mills NX


Smooth-edged, medium length version, neck

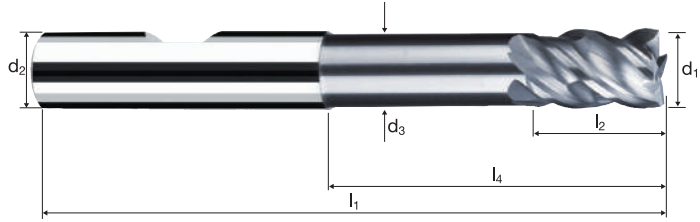

Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Ti Titanium	GG(G) Tool Steel
----------------	-----------------	-----------------	--------------	--------------	----------------	---------------------

Example: Order-N°.		Coating P	Article-N° 15359	ø-Code 220								POLYCHROM	
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z			
220	4.00	6.00	3.70	63	6.00	22.00	26.95	0.10	2.5°	4	●		
260	5.00	6.00	4.60	63	8.00	24.00	27.27	0.15	1.5°	4	●		
300	6.00	6.00	5.50	63	9.00	25.34	26.00	0.15	0.0°	4	●		
391	8.00	8.00	7.40	72	12.00	34.29	35.00	0.15	0.0°	4	●		
450	10.00	10.00	9.20	84	15.00	42.20	43.00	0.20	0.0°	4	●		
501	12.00	12.00	11.00	97	18.00	50.13	51.00	0.20	0.0°	4	●		
610	16.00	16.00	15.00	108	24.00	58.13	59.00	0.20	0.0°	4	●		

Application



Material

Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	190	0.050	6.000	2.400	10080	2015	29.0
8.00	4	190	0.065	8.000	3.200	7560	1965	50.3
10.00	4	190	0.080	10.000	4.000	6050	1935	77.4
12.00	4	190	0.095	12.000	4.800	5040	1915	110.3
16.00	4	190	0.125	16.000	3.200	3780	1890	96.8

6.00	4	140	0.050	6.000	2.400	7425	1485	21.4
8.00	4	140	0.065	8.000	3.200	5570	1450	37.1
10.00	4	140	0.080	10.000	4.000	4455	1425	57.0
12.00	4	140	0.095	12.000	4.800	3715	1410	81.3
16.00	4	140	0.125	16.000	3.200	2785	1395	71.3

6.00	4	70	0.045	6.000	2.400	3715	670	9.6
8.00	4	70	0.060	8.000	3.200	2785	670	17.1
10.00	4	70	0.070	10.000	4.000	2230	625	25.0
12.00	4	70	0.085	12.000	4.800	1855	630	36.4
16.00	4	70	0.110	16.000	3.200	1395	615	31.4

6.00	4	90	0.030	6.000	2.400	4775	575	8.3
8.00	4	90	0.040	8.000	3.200	3580	575	14.7
10.00	4	90	0.050	10.000	4.000	2865	575	22.9
12.00	4	90	0.060	12.000	4.800	2385	575	33.0
16.00	4	90	0.080	16.000	3.200	1790	575	29.3

6.00	4	155	0.040	4.200	6.000	8225	1315	33.2
8.00	4	155	0.050	5.600	8.000	6165	1235	55.3
10.00	4	155	0.065	7.000	10.000	4935	1285	89.8
12.00	4	155	0.075	8.400	12.000	4110	1235	124.3
16.00	4	155	0.075	6.400	16.000	3085	925	94.7

6.00	4	105	0.040	4.200	6.000	5570	890	22.5
8.00	4	105	0.050	5.600	8.000	4180	835	37.4
10.00	4	105	0.065	7.000	10.000	3340	870	60.8
12.00	4	105	0.075	8.400	12.000	2785	835	84.2
16.00	4	105	0.075	6.400	16.000	2090	625	64.2

6.00	4	55	0.035	4.200	6.000	2920	410	10.3
8.00	4	55	0.045	5.600	8.000	2190	395	17.6
10.00	4	55	0.055	7.000	10.000	1750	385	27.0
12.00	4	55	0.060	8.400	12.000	1460	350	35.3
16.00	4	55	0.075	6.400	16.000	1095	330	33.6

6.00	4	75	0.030	4.200	6.000	3980	475	12.0
8.00	4	75	0.040	5.600	8.000	2985	475	21.4
10.00	4	75	0.045	7.000	10.000	2385	430	30.1
12.00	4	75	0.050	8.400	12.000	1990	400	40.1
16.00	4	75	0.065	6.400	16.000	1490	390	39.7

Cylindrical end mills

Smooth-edged, medium length version, neck




HM
MG10

λ 40°
 γ 0°

45°

Vario

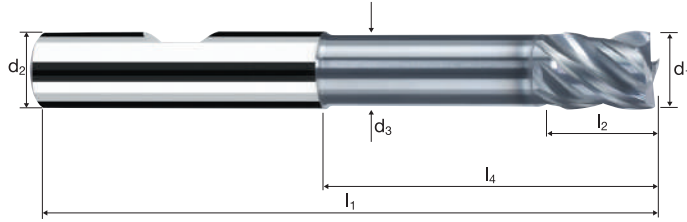


Roughing Finishing

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	---------------------

Example: Order-N°.										POLYCHROM	
										P15325	
										P15225	
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	z		
300	6.00	6.00	5.50	70	7.00	32.34	33.00	0.15	4	●	
391	8.00	8.00	7.40	80	9.00	42.29	43.00	0.15	4	●	
450	10.00	10.00	9.20	84	11.00	42.20	43.00	0.20	4	●	
501	12.00	12.00	11.00	97	13.00	50.13	51.00	0.20	4	●	
610	16.00	16.00	15.00	115	17.00	65.13	66.00	0.20	4	●	

Application

Material



Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	3	190	0.015	4.500	1.200	20160	905	4.9
4.00	3	190	0.015	6.000	1.600	15120	680	6.5
5.00	3	190	0.020	7.500	2.000	12095	725	10.9
6.00	3	190	0.040	9.000	2.400	10080	1210	26.1
8.00	3	190	0.050	12.000	3.200	7560	1135	43.5
10.00	3	190	0.065	15.000	4.000	6050	1180	70.8
12.00	3	190	0.075	18.000	4.800	5040	1135	98.0
16.00	3	190	0.085	24.000	6.400	3780	965	148.1

3.00	3	140	0.015	4.500	1.200	14855	670	3.6
4.00	3	140	0.015	6.000	1.600	11140	500	4.8
5.00	3	140	0.020	7.500	2.000	8915	535	8.0
6.00	3	140	0.040	9.000	2.400	7425	890	19.3
8.00	3	140	0.050	12.000	3.200	5570	835	32.1
10.00	3	140	0.065	15.000	4.000	4455	870	52.1
12.00	3	140	0.075	18.000	4.800	3715	835	72.2
16.00	3	140	0.085	24.000	6.400	2785	710	109.1

3.00	3	70	0.010	4.500	1.200	7425	225	1.2
4.00	3	70	0.015	6.000	1.600	5570	250	2.4
5.00	3	70	0.015	7.500	2.000	4455	200	3.0
6.00	3	70	0.035	9.000	2.400	3715	390	8.4
8.00	3	70	0.045	12.000	3.200	2785	375	14.4
10.00	3	70	0.055	15.000	4.000	2230	370	22.1
12.00	3	70	0.065	18.000	4.800	1855	360	31.3
16.00	3	70	0.075	24.000	6.400	1395	315	48.1

3.00	3	90	0.010	4.500	1.200	9550	285	1.5
4.00	3	90	0.010	6.000	1.600	7160	215	2.1
5.00	3	90	0.010	7.500	2.000	5730	170	2.6
6.00	3	90	0.030	9.000	2.400	4775	430	9.3
8.00	3	90	0.035	12.000	3.200	3580	375	14.4
10.00	3	90	0.045	15.000	4.000	2865	385	23.2
12.00	3	90	0.050	18.000	4.800	2385	360	30.9
16.00	3	90	0.060	24.000	6.400	1790	320	49.5

3.00	3	155	0.015	4.200	3.000	16445	740	9.3
4.00	3	155	0.015	5.600	4.000	12335	555	12.4
5.00	3	155	0.025	7.000	5.000	9870	740	25.9
6.00	3	155	0.030	8.400	6.000	8225	740	37.3
8.00	3	155	0.040	11.200	8.000	6165	740	66.3
10.00	3	155	0.050	14.000	10.000	4935	740	103.6
12.00	3	155	0.060	16.800	12.000	4110	740	149.2
16.00	3	155	0.070	14.400	16.000	3085	650	149.2

3.00	3	105	0.015	4.200	3.000	11140	500	6.3
4.00	3	105	0.015	5.600	4.000	8355	375	8.4
5.00	3	105	0.025	7.000	5.000	6685	500	17.5
6.00	3	105	0.030	8.400	6.000	5570	500	25.3
8.00	3	105	0.040	11.200	8.000	4180	500	44.9
10.00	3	105	0.050	14.000	10.000	3340	500	70.2
12.00	3	105	0.060	16.800	12.000	2785	500	101.1
16.00	3	105	0.070	14.400	16.000	2090	440	101.1

3.00	3	55	0.010	4.200	3.000	5835	175	2.2
4.00	3	55	0.015	5.600	4.000	4375	195	4.4
5.00	3	55	0.015	7.000	5.000	3500	160	5.5
6.00	3	55	0.030	8.400	6.000	2920	265	13.2
8.00	3	55	0.040	11.200	8.000	2190	265	23.5
10.00	3	55	0.050	14.000	10.000	1750	265	36.8
12.00	3	55	0.060	16.800	12.000	1460	265	52.9
16.00	3	55	0.070	14.400	16.000	1095	230	52.9


3.00	3	70	0.010	4.200	3.000	7425	225	2.8
4.00	3	70	0.010	5.600	4.000	5570	165	3.7
5.00	3	70	0.010	7.000	5.000	4455	135	4.7
6.00	3	70	0.025	8.400	6.000	3715	280	14.0
8.00	3	70	0.030	11.200	8.000	2785	250	22.5
10.00	3	70	0.040	14.000	10.000	2230	265	37.4
12.00	3	70	0.050	16.800	12.000	1855	280	56.1
16.00	3	70	0.055	14.400	16.000	1395	230	52.9

Cylindrical end mills

Smooth-edged, medium length version, neck




HM
MG10 λ 40°
 γ 0°

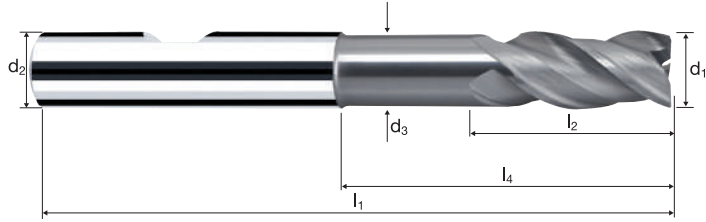

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	---------------------

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	POLYCHROM		
											Order-N°	Article-N°	ø-Code
180	3.00	6.00	2.80	63	8.00	20.00	26.63	0.10	3.5°	3	P	15399	180
220	4.00	6.00	3.70	63	11.00	22.00	26.95	0.10	2.5°	3			
260	5.00	6.00	4.60	63	13.00	24.00	27.27	0.15	1.5°	3			
300	6.00	6.00	5.50	63	13.00	25.34	26.00	0.15	0.0°	3			
391	8.00	8.00	7.40	72	19.00	34.29	35.00	0.15	0.0°	3			
450	10.00	10.00	9.20	84	22.00	42.20	43.00	0.20	0.0°	3			
501	12.00	12.00	11.00	97	26.00	50.13	51.00	0.20	0.0°	3			
610	16.00	16.00	15.00	108	32.00	58.13	59.00	0.20	0.0°	3			

Application



Material

Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Titanium alloys
> 300 HB
[Ti6Al4V]



Inox difficult
[Cr-Ni-Mo++/1.4529]
Heat resistant steel
[1.4841]




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	130	0.045	15.000	0.600	6895	1240	11.2
8.00	4	130	0.060	20.000	0.800	5175	1240	19.9
10.00	4	130	0.075	25.000	1.000	4140	1240	31.0
12.00	4	130	0.090	30.000	1.200	3450	1240	44.7
16.00	4	130	0.115	40.000	1.600	2585	1190	76.1
20.00	4	130	0.145	50.000	2.000	2070	1200	120.0
6.00	4	120	0.040	15.000	0.600	6365	1020	9.2
8.00	4	120	0.050	20.000	0.800	4775	955	15.3
10.00	4	120	0.065	25.000	1.000	3820	995	24.8
12.00	4	120	0.080	30.000	1.200	3185	1020	36.7
16.00	4	120	0.100	40.000	1.600	2385	955	61.1
20.00	4	120	0.125	50.000	2.000	1910	955	95.5
6.00	4	100	0.035	15.000	0.600	5305	745	6.7
8.00	4	100	0.045	20.000	0.800	3980	715	11.5
10.00	4	100	0.060	25.000	1.000	3185	765	19.1
12.00	4	100	0.070	30.000	1.200	2655	745	26.7
16.00	4	100	0.090	40.000	1.600	1990	715	45.8
20.00	4	100	0.110	50.000	2.000	1590	700	70.0
6.00	4	80	0.025	15.000	0.450	4245	425	2.9
8.00	4	80	0.030	20.000	0.600	3185	380	4.6
10.00	4	80	0.040	25.000	0.750	2545	405	7.6
12.00	4	80	0.050	30.000	0.900	2120	425	11.5
16.00	4	80	0.060	40.000	1.200	1590	380	18.3
20.00	4	80	0.075	50.000	1.500	1275	380	28.6
6.00	4	120	0.045	15.000	0.600	6365	1145	10.3
8.00	4	120	0.060	20.000	0.800	4775	1145	18.3
10.00	4	120	0.070	25.000	1.000	3820	1070	26.7
12.00	4	120	0.085	30.000	1.200	3185	1080	39.0
16.00	4	120	0.110	40.000	1.600	2385	1050	67.2
20.00	4	120	0.135	50.000	2.000	1910	1030	103.1
6.00	4	76	0.045	15.000	0.450	4030	725	4.9
8.00	4	76	0.060	20.000	0.600	3025	725	8.7
10.00	4	76	0.075	25.000	0.750	2420	725	13.6
12.00	4	76	0.090	30.000	0.900	2015	725	19.6
16.00	4	76	0.115	40.000	1.200	1510	695	33.4
20.00	4	76	0.145	50.000	1.500	1210	700	52.6
6.00	4	50	0.030	15.000	0.600	2655	320	2.9
8.00	4	50	0.035	20.000	0.800	1990	280	4.5
10.00	4	50	0.045	25.000	1.000	1590	285	7.2
12.00	4	50	0.055	30.000	1.200	1325	290	10.5
16.00	4	50	0.065	40.000	1.600	995	260	16.6
20.00	4	50	0.085	50.000	2.000	795	270	27.1
6.00	4	40	0.025	15.000	0.450	2120	210	1.4
8.00	4	40	0.030	20.000	0.600	1590	190	2.3
10.00	4	40	0.040	25.000	0.750	1275	205	3.8
12.00	4	40	0.050	30.000	0.900	1060	210	5.7
16.00	4	40	0.060	40.000	1.200	795	190	9.2
20.00	4	40	0.075	50.000	1.500	635	190	14.3

Cylindrical end mills

Smooth-edged, long version




HM MG10	λ 40° γ 6°
--------------------------	---------------

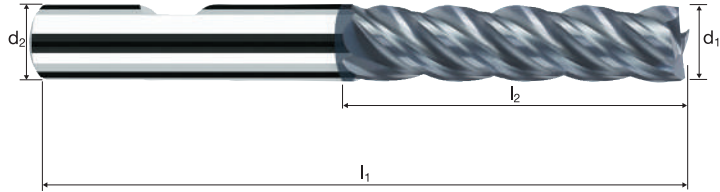



Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Tool Steel
--------------------	-----------------------	------------------------	--	--	--	--	--------------------------	-----------------------	----------------------------

		Coating		Article-N°		ø-Code				POLYCHROM
Example: Order-N°.		P		45323		300				P45323
										P45223
Ø Code	d ₁ e8	d ₂ h6		l ₁	l ₂	45°		z		
300	6.00	6.00		70	26.00	0.15		4		•
391	8.00	8.00		80	36.00	0.15		4		•
450	10.00	10.00		100	45.00	0.20		4		•
501	12.00	12.00		110	53.00	0.20		4		•
610	16.00	16.00		123	63.00	0.20		4		•
682	20.00	20.00		141	75.00	0.20		4		•





Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
4.00	4	32	0.005	11.200	0.050	2545	50
6.00	4	32	0.010	16.800	0.100	1700	70
8.00	4	32	0.015	22.400	0.100	1275	75
10.00	4	32	0.020	28.000	0.150	1020	80
12.00	4	32	0.020	33.600	0.200	850	70
16.00	4	32	0.030	44.800	0.250	635	75
20.00	4	32	0.035	56.000	0.300	510	70
30.00	6	32	0.055	84.000	0.450	340	110
40.00	6	32	0.075	112.000	0.600	255	115

Steel
850 - 1100 N/mm²



4.00	4	25	0.005	11.200	0.050	1990	40
6.00	4	25	0.010	16.800	0.100	1325	55
8.00	4	25	0.015	22.400	0.100	995	60
10.00	4	25	0.020	28.000	0.150	795	65
12.00	4	25	0.020	33.600	0.200	665	55
16.00	4	25	0.030	44.800	0.250	495	60
20.00	4	25	0.035	56.000	0.300	400	55
30.00	6	25	0.055	84.000	0.450	265	90
40.00	6	25	0.075	112.000	0.600	200	90

Steel
1100 - 1300 N/mm²



4.00	4	20	0.005	11.200	0.050	1590	30
6.00	4	20	0.010	16.800	0.100	1060	40
8.00	4	20	0.015	22.400	0.100	795	50
10.00	4	20	0.020	28.000	0.150	635	50
12.00	4	20	0.020	33.600	0.200	530	40
16.00	4	20	0.030	44.800	0.250	400	50
20.00	4	20	0.035	56.000	0.300	320	45
30.00	6	20	0.055	84.000	0.450	210	70
40.00	6	20	0.075	112.000	0.600	160	70

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



4.00	4	18	0.005	11.200	0.050	1430	30
6.00	4	18	0.010	16.800	0.100	955	40
8.00	4	18	0.015	22.400	0.100	715	45
10.00	4	18	0.020	28.000	0.150	575	45
12.00	4	18	0.020	33.600	0.200	475	40
16.00	4	18	0.030	44.800	0.250	360	45
20.00	4	18	0.035	56.000	0.300	285	40
30.00	6	18	0.055	84.000	0.450	190	65
40.00	6	18	0.075	112.000	0.600	145	65

Cast iron
(lamellar / spheroidal)



4.00	4	24	0.005	11.200	0.050	1910	40
6.00	4	24	0.010	16.800	0.100	1275	50
8.00	4	24	0.015	22.400	0.100	955	55
10.00	4	24	0.020	28.000	0.150	765	60
12.00	4	24	0.020	33.600	0.200	635	50
16.00	4	24	0.030	44.800	0.250	475	55
20.00	4	24	0.035	56.000	0.300	380	55
30.00	6	24	0.055	84.000	0.450	255	85
40.00	6	24	0.075	112.000	0.600	190	85

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



4.00	4	15	0.005	11.200	0.050	1195	25
6.00	4	15	0.010	16.800	0.100	795	30
8.00	4	15	0.015	22.400	0.100	595	35
10.00	4	15	0.020	28.000	0.150	475	40
12.00	4	15	0.020	33.600	0.200	400	30
16.00	4	15	0.030	44.800	0.250	300	35
20.00	4	15	0.035	56.000	0.300	240	35
30.00	6	15	0.055	84.000	0.450	160	55
40.00	6	15	0.075	112.000	0.600	120	55

Unalloyed copper

4.00	4	40	0.005	11.200	0.050	3185	65
6.00	4	40	0.010	16.800	0.100	2120	85
8.00	4	40	0.015	22.400	0.100	1590	95
10.00	4	40	0.020	28.000	0.150	1275	100
12.00	4	40	0.020	33.600	0.200	1060	85
16.00	4	40	0.030	44.800	0.250	795	95
20.00	4	40	0.035	56.000	0.300	635	90
30.00	6	40	0.055	84.000	0.450	425	140
40.00	6	40	0.075	112.000	0.600	320	145

Wrought aluminium
Construction aluminium

4.00	4	50	0.005	11.200	0.050	3980	80
6.00	4	50	0.010	16.800	0.100	2655	105
8.00	4	50	0.015	22.400	0.100	1990	120
10.00	4	50	0.020	28.000	0.150	1590	125
12.00	4	50	0.020	33.600	0.200	1325	105
16.00	4	50	0.030	44.800	0.250	995	120
20.00	4	50	0.035	56.000	0.300	795	110
30.00	6	50	0.055	84.000	0.450	530	175
40.00	6	50	0.075	112.000	0.600	400	180


Cylindrical end mills

Smooth-edged, long version

HSS

HSS-E λ 35°
Co8 γ 15°

90°

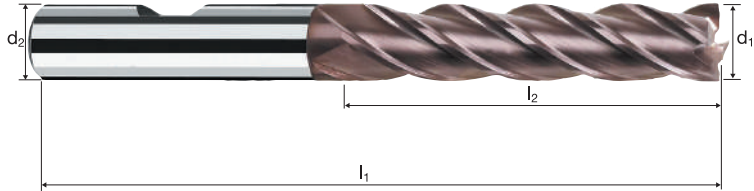

Roughing

Finishing



Rm
< 850

Rm
850-1100

Rm
1100-1300


Inox
Stainless

Ti
Titanium

GG(G)
Copper

Example: Order-N°.									UNICUT-4X	
									U0200	
\emptyset Code	d_1 k8	d_2 h6	l_1	l_2	l_4	α	z			
140	2.00	6.00	54	10.00	16.81	7.0°	4	●		
160	2.50	6.00	56	12.00	19.50	5.5°	4	●		
180	3.00	6.00	56	12.00	19.50	4.5°	4	●		
220	4.00	6.00	63	19.00	26.50	2.5°	4	●		
260	5.00	6.00	68	24.00	31.50	1.0°	4	●		
300	6.00	6.00	68	24.00	-	0.0°	4	●		
391	8.00	8.00	82	38.00	-	0.0°	4	●		
450	10.00	10.00	95	45.00	-	0.0°	4	●		
501	12.00	12.00	110	53.00	-	0.0°	4	●		
570	14.00	12.00	110	53.00	-	0.0°	4	●		
610	16.00	16.00	123	63.00	-	0.0°	4	●		
640	18.00	16.00	123	63.00	-	0.0°	4	●		
682	20.00	20.00	141	75.00	-	0.0°	4	●		
772	25.00	25.00	166	90.00	-	0.0°	4	●		
810	30.00	25.00	166	90.00	-	0.0°	6	●		
832	32.00	32.00	186	106.00	-	0.0°	6	●		
860	36.00	32.00	186	106.00	-	0.0°	6	●		
881	40.00	32.00	205	125.00	-	0.0°	6	●		
892	40.00	40.00	217	125.00	-	0.0°	6	●		

Application



Material

Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




d1 [mm]	z	v _c [m/min]	f _f [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	φ _Z [°]
6.00	4	120	0.034	32.000	5.400	6365	865	10°
8.00	4	120	0.043	42.000	7.200	4775	820	10°
10.00	4	120	0.055	53.000	9.000	3820	840	10°
12.00	4	120	0.064	63.000	10.800	3185	815	10°
16.00	4	120	0.072	84.000	14.400	2385	690	10°
20.00	4	120	0.085	105.000	18.000	1910	650	10°

6.00	4	90	0.030	32.000	5.400	4775	575	10°
8.00	4	90	0.038	42.000	7.200	3580	545	10°
10.00	4	90	0.047	53.000	9.000	2865	540	10°
12.00	4	90	0.055	63.000	10.800	2385	525	10°
16.00	4	90	0.064	84.000	14.400	1790	460	10°
20.00	4	90	0.077	105.000	18.000	1430	440	10°

6.00	4	70	0.026	32.000	5.400	3715	385	7°
8.00	4	70	0.030	42.000	7.200	2785	335	7°
10.00	4	70	0.038	53.000	9.000	2230	340	7°
12.00	4	70	0.047	63.000	10.800	1855	350	7°
16.00	4	70	0.055	84.000	14.400	1395	305	7°
20.00	4	70	0.068	105.000	18.000	1115	305	7°

Application



Material

Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]





d1 [mm]	z	v _c [m/min]	f _f [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	250	0.124	32.000	0.300	13265	6580	63.2
8.00	4	250	0.165	42.000	0.400	9945	6565	110.3
10.00	4	250	0.207	53.000	0.500	7960	6590	174.6
12.00	4	250	0.241	63.000	0.600	6630	6390	241.5
16.00	4	250	0.268	84.000	0.800	4975	5335	358.5
20.00	4	250	0.330	105.000	1.000	3980	5255	551.8

6.00	4	194	0.103	32.000	0.300	10290	4240	40.7
8.00	4	194	0.145	42.000	0.400	7720	4480	75.3
10.00	4	194	0.172	53.000	0.500	6175	4250	112.6
12.00	4	194	0.213	63.000	0.600	5145	4385	165.8
16.00	4	194	0.241	84.000	0.800	3860	3720	250.0
20.00	4	194	0.296	105.000	1.000	3090	3660	384.3

6.00	4	167	0.062	32.000	0.300	8860	2195	21.1
8.00	4	167	0.086	42.000	0.400	6645	2285	38.4
10.00	4	167	0.107	53.000	0.500	5315	2275	60.3
12.00	4	167	0.124	63.000	0.600	4430	2195	83.0
16.00	4	167	0.141	84.000	0.800	3320	1870	125.7
20.00	4	167	0.179	105.000	1.000	2660	1905	200.0

This way to the cutting data software
ToolExpert MFC.
Quick, easy, reliable.








Cylindrical end mills MFC

Smooth-edged, chip breaker, extra-long version 5.2xd
High-performance penetration edge, central air/cooling channel




HM λ 45°
MG10 γ 10°

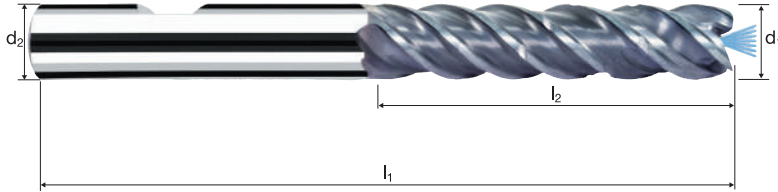

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

Ø Code	d ₁ e8	d ₂ h5	l ₁	l ₂	r	z	Order-N°	Example: Order-N°		POLYCHROM	
								Coating	Article-N°		ø-Code
								P	8221	300	P8221
											P8121
300	6.00	6.00	73	32.00	0.100	4					●
391	8.00	8.00	84	42.00	0.150	4					●
450	10.00	10.00	100	53.00	0.200	4					●
501	12.00	12.00	117	63.00	0.200	4					●
610	16.00	16.00	144	84.00	0.200	4					●
682	20.00	20.00	169	105.00	0.200	4					●

Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	φZ [°]
3.00	4	90	0.014	16.000	2.700	9550	535	1.5°
4.00	4	90	0.020	21.000	3.600	7160	575	1.5°
5.00	4	90	0.030	26.000	4.500	5730	690	1.5°
6.00	4	90	0.037	32.000	5.400	4775	705	1.5°
8.00	4	90	0.039	42.000	7.200	3580	560	1.5°
10.00	4	90	0.052	53.000	9.000	2865	595	1.5°
12.00	4	90	0.065	63.000	10.800	2385	620	1.5°
16.00	4	90	0.072	84.000	14.400	1790	515	1.5°
20.00	4	90	0.088	105.000	18.000	1430	505	1.5°


Steel
850 - 1100 N/mm²

3.00	4	85	0.012	16.000	2.700	9020	435	2°
4.00	4	85	0.019	21.000	3.600	6765	515	2°
5.00	4	85	0.028	26.000	4.500	5410	605	2°
6.00	4	85	0.035	32.000	5.400	4510	630	2°
8.00	4	85	0.033	42.000	7.200	3380	445	2°
10.00	4	85	0.044	53.000	9.000	2705	475	2°
12.00	4	85	0.055	63.000	10.800	2255	495	2°
16.00	4	85	0.066	84.000	14.400	1690	445	2°
20.00	4	85	0.080	105.000	18.000	1355	435	2°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

3.00	4	55	0.008	16.000	2.700	5835	185	1.5°
4.00	4	55	0.013	21.000	3.600	4375	230	1.5°
5.00	4	55	0.019	26.000	4.500	3500	265	1.5°
6.00	4	55	0.024	32.000	5.400	2920	280	1.5°
8.00	4	55	0.023	42.000	7.200	2190	200	1.5°
10.00	4	55	0.030	53.000	9.000	1750	210	1.5°
12.00	4	55	0.038	63.000	10.800	1460	220	1.5°
16.00	4	55	0.046	84.000	14.400	1095	200	1.5°
20.00	4	55	0.050	105.000	18.000	875	175	1.5°

Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	260	0.064	16.000	0.075	27585	7100	8.5
4.00	4	260	0.086	21.000	0.100	20690	7155	15.0
5.00	4	260	0.109	26.000	0.125	16550	7190	23.4
6.00	4	260	0.133	32.000	0.150	13795	7320	35.1
8.00	4	260	0.177	42.000	0.200	10345	7320	61.5
10.00	4	260	0.219	53.000	0.250	8275	7255	96.1
12.00	4	260	0.263	63.000	0.300	6895	7265	137.3
16.00	4	260	0.290	84.000	0.400	5175	5990	201.3
20.00	4	260	0.364	105.000	0.500	4140	6025	316.2



Steel
850 - 1100 N/mm²

3.00	4	266	0.072	16.000	0.075	28225	8170	9.8
4.00	4	266	0.097	21.000	0.100	21170	8235	17.3
5.00	4	266	0.122	26.000	0.125	16935	8275	26.9
6.00	4	266	0.149	32.000	0.150	14110	8425	40.4
8.00	4	266	0.199	42.000	0.200	10585	8425	70.8
10.00	4	266	0.247	53.000	0.250	8465	8350	110.6
12.00	4	266	0.296	63.000	0.300	7055	8365	158.1
16.00	4	266	0.326	84.000	0.400	5290	6895	231.7
20.00	4	266	0.409	105.000	0.500	4235	6935	364.0

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

3.00	4	184	0.045	16.000	0.075	19525	3535	4.2
4.00	4	184	0.065	21.000	0.100	14640	3825	8.0
5.00	4	184	0.080	26.000	0.125	11715	3770	12.2
6.00	4	184	0.095	32.000	0.150	9760	3730	17.9
8.00	4	184	0.128	42.000	0.200	7320	3755	31.5
10.00	4	184	0.161	53.000	0.250	5855	3770	49.9
12.00	4	184	0.194	63.000	0.300	4880	3780	71.4
16.00	4	184	0.209	84.000	0.400	3660	3055	102.6
20.00	4	184	0.269	105.000	0.500	2930	3150	165.4

Suitable cutting data for other applications and materials can be found in the cutting data software **ToolExpert E-Cut**




Cylindrical end mills E-Cut

Smooth-edged, chip breaker, extra-long version 5.2xd



HM
MG10 λ 45°
 γ 10°

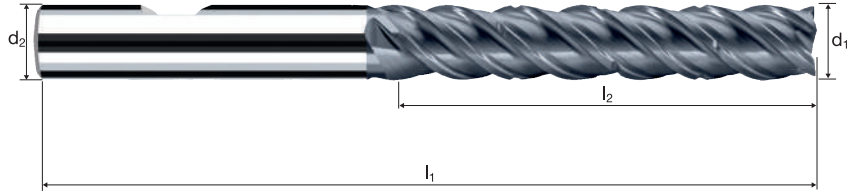


Roughing HPC Roughing HDC Finishing

Rm < 850 Rm 850-1100 Rm 1100-1300 Rm 1300-1500 HRC 48-56 Inox Stainless Ti Titanium GG(G) Tool Steel

										POLYCHROM	
Example: Order-N°.										P8420	
										P8320	
\emptyset Code	d_1 e8	d_2 h6	l_1	l_2	l_4	r	α	z			
180*	3.00	6.00	63	16.00	25.26	0.050	4.5°	4	●		
220*	4.00	6.00	70	21.00	29.39	0.100	3.0°	4	●		
260	5.00	6.00	73	26.00	33.52	0.100	1.5°	4	●		
300	6.00	6.00	73	32.00	-	0.100	0.0°	4	●		
391	8.00	8.00	84	42.00	-	0.150	0.0°	4	●		
450	10.00	10.00	100	53.00	-	0.200	0.0°	4	●		
501	12.00	12.00	117	63.00	-	0.200	0.0°	4	●		
610	16.00	16.00	144	84.00	-	0.200	0.0°	4	●		
682	20.00	20.00	169	105.00	-	0.250	0.0°	4	●		
* without chip breaker only											

Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	φZ [°]
3.00	3	85	0.012	16.000	2.700	9020	325	2°
4.00	3	85	0.018	21.000	3.600	6765	365	2°
5.00	3	85	0.027	26.000	4.500	5410	440	2°
6.00	3	85	0.033	32.000	5.400	4510	445	2°
8.00	3	85	0.035	42.000	7.200	3380	355	2°
10.00	3	85	0.047	53.000	9.000	2705	380	2°
12.00	3	85	0.059	63.000	10.800	2255	400	2°
16.00	3	85	0.065	84.000	14.400	1690	330	2°
20.00	3	85	0.079	105.000	18.000	1355	320	2°


Steel
850 - 1100 N/mm²

3.00	3	75	0.011	16.000	2.700	7960	265	3°
4.00	3	75	0.017	21.000	3.600	5970	305	3°
5.00	3	75	0.025	26.000	4.500	4775	360	3°
6.00	3	75	0.032	32.000	5.400	3980	380	3°
8.00	3	75	0.030	42.000	7.200	2985	270	3°
10.00	3	75	0.040	53.000	9.000	2385	285	3°
12.00	3	75	0.050	63.000	10.800	1990	300	3°
16.00	3	75	0.059	84.000	14.400	1490	265	3°
20.00	3	75	0.072	105.000	18.000	1195	260	3°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

3.00	3	50	0.008	16.000	2.700	5305	125	2°
4.00	3	50	0.013	21.000	3.600	3980	155	2°
5.00	3	50	0.019	26.000	4.500	3185	180	2°
6.00	3	50	0.024	32.000	5.400	2655	190	2°
8.00	3	50	0.023	42.000	7.200	1990	135	2°
10.00	3	50	0.030	53.000	9.000	1590	145	2°
12.00	3	50	0.038	63.000	10.800	1325	150	2°
16.00	3	50	0.046	84.000	14.400	995	135	2°
20.00	3	50	0.050	105.000	18.000	795	120	2°

Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	3	211	0.041	16.000	0.150	22390	2775	6.7
4.00	3	211	0.055	21.000	0.200	16790	2795	11.7
5.00	3	211	0.070	26.000	0.250	13435	2810	18.3
6.00	3	211	0.085	32.000	0.300	11195	2860	27.5
8.00	3	211	0.114	42.000	0.400	8395	2860	48.0
10.00	3	211	0.141	53.000	0.500	6715	2835	75.1
12.00	3	211	0.169	63.000	0.600	5595	2840	107.3
16.00	3	211	0.186	84.000	0.800	4200	2340	157.2
20.00	3	211	0.234	105.000	1.000	3360	2355	247.0



Steel
850 - 1100 N/mm²

3.00	3	216	0.050	16.000	0.150	22920	3420	8.2
4.00	3	216	0.067	21.000	0.200	17190	3445	14.5
5.00	3	216	0.084	26.000	0.250	13750	3465	22.5
6.00	3	216	0.103	32.000	0.300	11460	3525	33.9
8.00	3	216	0.137	42.000	0.400	8595	3525	59.3
10.00	3	216	0.169	53.000	0.500	6875	3495	92.6
12.00	3	216	0.204	63.000	0.600	5730	3500	132.3
16.00	3	216	0.224	84.000	0.800	4295	2885	193.9
20.00	3	216	0.281	105.000	1.000	3440	2900	304.7

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

3.00	3	149	0.028	16.000	0.150	15810	1325	3.2
4.00	3	149	0.040	21.000	0.200	11855	1440	6.0
5.00	3	149	0.050	26.000	0.250	9485	1415	9.2
6.00	3	149	0.059	32.000	0.300	7905	1400	13.4
8.00	3	149	0.079	42.000	0.400	5930	1410	23.7
10.00	3	149	0.099	53.000	0.500	4745	1415	37.5
12.00	3	149	0.120	63.000	0.600	3950	1420	53.6
16.00	3	149	0.129	84.000	0.800	2965	1145	77.1
20.00	3	149	0.166	105.000	1.000	2370	1185	124.3



Suitable cutting data for other applications and materials can be found in the cutting data software **ToolExpert E-Cut**



Cylindrical end mills E-Cut

Smooth-edged, chip breaker, extra-long version 5.2xd

HM
MG10 λ 45°
 γ 10°

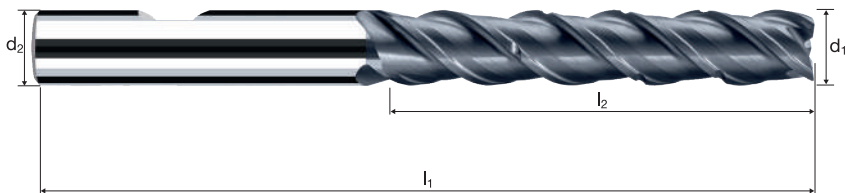


Roughing HPC Roughing HDC Finishing

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	r	α	z	POLYCHROM	
									P8423	P8323
180*	3.00	6.00	63	16.00	25.26	0.050	4.5°	3	●	
220*	4.00	6.00	70	21.00	29.39	0.100	3.0°	3	●	
260	5.00	6.00	73	26.00	33.52	0.100	1.5°	3	●	
300	6.00	6.00	73	32.00	-	0.100	0.0°	3	●	
391	8.00	8.00	84	42.00	-	0.150	0.0°	3	●	
450	10.00	10.00	100	53.00	-	0.200	0.0°	3	●	
501	12.00	12.00	117	63.00	-	0.200	0.0°	3	●	
610	16.00	16.00	144	84.00	-	0.200	0.0°	3	●	
682	20.00	20.00	169	105.00	-	0.250	0.0°	3	●	
* without chip breaker only										

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _r [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
2.00	3	90	0.015	2.000	1.200	14325	645	1.5
3.00	4	90	0.025	3.000	1.800	9550	955	5.2
4.00	4	90	0.025	4.000	2.400	7160	715	6.9
5.00	4	90	0.035	5.000	3.000	5730	800	12.0
6.00	4	90	0.040	6.000	1.500	4775	765	6.9
8.00	4	90	0.055	8.000	4.800	3580	790	30.3
10.00	4	90	0.070	10.000	6.000	2865	800	48.1
12.00	4	90	0.085	12.000	7.200	2385	810	70.1
16.00	4	90	0.110	16.000	4.000	1790	790	50.4

Hardened tool steel
48 - 52 HRC



2.00	3	70	0.010	2.000	1.200	11140	335	0.8
3.00	4	70	0.020	3.000	1.800	7425	595	3.2
4.00	4	70	0.025	4.000	2.400	5570	555	5.3
5.00	4	70	0.030	5.000	3.000	4455	535	8.0
6.00	4	70	0.035	6.000	1.500	3715	520	4.7
8.00	4	70	0.050	8.000	4.800	2785	555	21.4
10.00	4	70	0.060	10.000	6.000	2230	535	32.1
12.00	4	70	0.075	12.000	7.200	1855	555	48.1
16.00	4	70	0.100	16.000	4.000	1395	555	35.7

Hardened tool steel
52 - 56 HRC



2.00	3	50	0.010	2.000	1.200	7960	240	0.6
3.00	4	50	0.015	3.000	1.800	5305	320	1.7
4.00	4	50	0.020	4.000	2.400	3980	320	3.1
5.00	4	50	0.025	5.000	3.000	3185	320	4.8
6.00	4	50	0.030	6.000	1.500	2655	320	2.9
8.00	4	50	0.040	8.000	4.800	1990	320	12.2
10.00	4	50	0.050	10.000	6.000	1590	320	19.1
12.00	4	50	0.060	12.000	7.200	1325	320	27.5
16.00	4	50	0.080	16.000	4.000	995	320	20.4

Hardened tool steel
56 - 60 HRC



2.00	3	25	0.005	2.000	1.200	3980	60	0.1
3.00	4	25	0.010	3.000	1.800	2655	105	0.6
4.00	4	25	0.015	4.000	2.400	1990	120	1.1
5.00	4	25	0.020	5.000	3.000	1590	125	1.9
6.00	4	25	0.020	6.000	1.500	1325	105	1.0
8.00	4	25	0.030	8.000	4.800	995	120	4.6
10.00	4	25	0.035	10.000	6.000	795	110	6.7
12.00	4	25	0.045	12.000	7.200	665	120	10.3
16.00	4	25	0.060	16.000	4.000	495	120	7.6

Hardened tool steel
42 - 48 HRC



2.00	3	75	0.010	1.000	2.000	11935	360	0.7
3.00	4	75	0.015	1.500	3.000	7960	475	2.1
4.00	4	75	0.025	2.000	4.000	5970	595	4.8
5.00	4	75	0.025	2.500	5.000	4775	475	6.0
6.00	4	75	0.035	3.000	6.000	3980	555	10.0
8.00	4	75	0.045	4.000	8.000	2985	535	17.2
10.00	4	75	0.055	5.000	10.000	2385	525	26.3
12.00	4	75	0.070	6.000	12.000	1990	555	40.1
16.00	4	75	0.085	4.000	16.000	1490	505	32.5

Hardened tool steel
48 - 52 HRC



2.00	3	60	0.010	1.000	2.000	9550	285	0.6
3.00	4	60	0.015	1.500	3.000	6365	380	1.7
4.00	4	60	0.020	2.000	4.000	4775	380	3.1
5.00	4	60	0.030	2.500	5.000	3820	460	5.7
6.00	4	60	0.035	3.000	6.000	3185	445	8.0
8.00	4	60	0.045	4.000	8.000	2385	430	13.8
10.00	4	60	0.055	5.000	10.000	1910	420	21.0
12.00	4	60	0.065	6.000	12.000	1590	415	29.8
16.00	4	60	0.090	4.000	16.000	1195	430	27.5

Hardened tool steel
52 - 56 HRC



2.00	3	40	0.010	1.000	2.000	6365	190	0.4
3.00	4	40	0.015	1.500	3.000	4245	255	1.1
4.00	4	40	0.020	2.000	4.000	3185	255	2.0
5.00	4	40	0.020	2.500	5.000	2545	205	2.5
6.00	4	40	0.025	3.000	6.000	2120	210	3.8
8.00	4	40	0.035	4.000	8.000	1590	225	7.1
10.00	4	40	0.045	5.000	10.000	1275	230	11.5
12.00	4	40	0.055	6.000	12.000	1060	235	16.8
16.00	4	40	0.070	4.000	16.000	795	225	14.3

Hardened tool steel
56 - 60 HRC





2.00	3	20	0.006	1.000	2.000	3185	55	0.1
3.00	4	20	0.009	1.500	3.000	2120	75	0.3
4.00	4	20	0.013	2.000	4.000	1590	85	0.7
5.00	4	20	0.016	2.500	5.000	1275	80	1.0
6.00	4	20	0.019	3.000	6.000	1060	80	1.5
8.00	4	20	0.025	4.000	8.000	795	80	2.5
10.00	4	20	0.031	5.000	10.000	635	80	3.9
12.00	4	20	0.038	6.000	12.000	530	80	5.8
16.00	4	20	0.050	4.000	16.000	400	80	5.1

Cylindrical end mills HX

Smooth-edged, short version




HM
MG10 λ 55°
 γ -10°

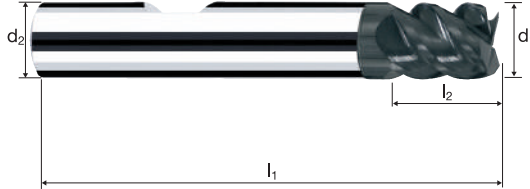

		Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	GG(G)
--	--	-----------------	-----------------	--------------	--------------	-------------	----------------	-------

Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	45°	α	z	Example: Order-N°.		POLYCHROM	DURO-S
									Coating D	Article-N° 5349	ø-Code 100	
											P5349	D5349
											P5249	D5249
100	1.00	6.00	50	1.00	11.79	0.07	13.0°	3			●	●
108	1.20	6.00	50	1.20	11.82	0.07	12.5°	3			●	●
120	1.50	6.00	50	1.50	11.56	0.07	12.0°	3			●	●
140	2.00	6.00	50	2.00	11.12	0.10	11.0°	3			●	●
148	2.20	6.00	50	2.20	11.45	0.10	10.0°	3			●	●
160	2.50	6.00	50	2.50	11.19	0.10	9.5°	3			●	●
180	3.00	6.00	50	3.00	10.76	0.10	8.5°	4			●	●
220	4.00	6.00	54	4.00	9.89	0.10	6.5°	4			●	●
260	5.00	6.00	54	5.00	9.02	0.15	3.5°	4			●	●
300	6.00	6.00	54	7.00	-	0.15	0.0°	4			●	●
391	8.00	8.00	58	9.00	-	0.15	0.0°	4			●	●
450	10.00	10.00	66	11.00	-	0.20	0.0°	4			●	●
501	12.00	12.00	73	13.00	-	0.20	0.0°	4			●	●
610	16.00	16.00	82	17.00	-	0.20	0.0°	4			●	●

Application



Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	80	0.015	3.000	1.800	8490	510	2.8
4.00	4	80	0.020	4.000	2.400	6365	510	4.9
5.00	4	80	0.025	5.000	3.000	5095	510	7.6
6.00	4	80	0.030	6.000	3.600	4245	510	11.0
8.00	4	80	0.040	8.000	4.800	3185	510	19.6
10.00	4	80	0.050	10.000	6.000	2545	510	30.6
12.00	4	80	0.060	12.000	7.200	2120	510	44.0
16.00	4	80	0.075	16.000	6.400	1590	475	48.9

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



3.00	4	40	0.015	3.000	1.800	4245	255	1.4
4.00	4	40	0.020	4.000	2.400	3185	255	2.4
5.00	4	40	0.025	5.000	3.000	2545	255	3.8
6.00	4	40	0.030	6.000	3.600	2120	255	5.5
8.00	4	40	0.040	8.000	4.800	1590	255	9.8
10.00	4	40	0.050	10.000	6.000	1275	255	15.3
12.00	4	40	0.060	12.000	7.200	1060	255	22.0
16.00	4	40	0.075	16.000	6.400	795	240	24.4

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]



3.00	4	25	0.015	3.000	1.800	2655	160	0.9
4.00	4	25	0.020	4.000	2.400	1990	160	1.5
5.00	4	25	0.025	5.000	3.000	1590	160	2.4
6.00	4	25	0.030	6.000	3.600	1325	160	3.4
8.00	4	25	0.035	8.000	4.800	995	140	5.3
10.00	4	25	0.045	10.000	6.000	795	145	8.6
12.00	4	25	0.050	12.000	7.200	665	135	11.5
16.00	4	25	0.060	16.000	6.400	495	120	12.2

Nickel-based alloys
precipitation hardened
Rm > 1000 N/mm²
[Inconel 718]



3.00	4	15	0.015	3.000	1.800	1590	95	0.5
4.00	4	15	0.020	4.000	2.400	1195	95	0.9
5.00	4	15	0.025	5.000	3.000	955	95	1.4
6.00	4	15	0.030	6.000	3.600	795	95	2.1
8.00	4	15	0.035	8.000	4.800	595	85	3.2
10.00	4	15	0.045	10.000	6.000	475	85	5.2
12.00	4	15	0.050	12.000	7.200	400	80	6.9
16.00	4	15	0.060	16.000	6.400	300	70	7.3



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



3.00	4	60	0.015	2.100	3.000	6365	380	2.4
4.00	4	60	0.020	2.800	4.000	4775	380	4.3
5.00	4	60	0.025	3.500	5.000	3820	380	6.7
6.00	4	60	0.030	4.200	6.000	3185	380	9.6
8.00	4	60	0.040	5.600	8.000	2385	380	17.1
10.00	4	60	0.045	7.000	10.000	1910	345	24.1
12.00	4	60	0.045	8.400	12.000	1590	285	28.9
16.00	4	60	0.065	6.400	16.000	1195	310	31.8

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



3.00	4	30	0.015	2.100	3.000	3185	190	1.2
4.00	4	30	0.020	2.800	4.000	2385	190	2.1
5.00	4	30	0.025	3.500	5.000	1910	190	3.3
6.00	4	30	0.030	4.200	6.000	1590	190	4.8
8.00	4	30	0.040	5.600	8.000	1195	190	8.6
10.00	4	30	0.045	7.000	10.000	955	170	12.0
12.00	4	30	0.045	8.400	12.000	795	145	14.4
16.00	4	30	0.065	6.400	16.000	595	155	15.9

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]



3.00	4	20	0.015	2.100	3.000	2120	125	0.8
4.00	4	20	0.020	2.800	4.000	1590	125	1.4
5.00	4	20	0.025	3.500	5.000	1275	125	2.2
6.00	4	20	0.030	4.200	6.000	1060	125	3.2
8.00	4	20	0.035	5.600	8.000	795	110	5.0
10.00	4	20	0.045	7.000	10.000	635	115	8.0
12.00	4	20	0.045	8.400	12.000	530	95	9.6
16.00	4	20	0.060	6.400	16.000	400	95	9.8

Nickel-based alloys
precipitation hardened
Rm > 1000 N/mm²
[Inconel 718]




3.00	4	10	0.015	2.100	3.000	1060	65	0.4
4.00	4	10	0.020	2.800	4.000	795	65	0.7
5.00	4	10	0.025	3.500	5.000	635	65	1.1
6.00	4	10	0.030	4.200	6.000	530	65	1.6
8.00	4	10	0.035	5.600	8.000	400	55	2.5
10.00	4	10	0.045	7.000	10.000	320	55	4.0
12.00	4	10	0.045	8.400	12.000	265	50	4.8
16.00	4	10	0.060	6.400	16.000	200	50	4.9

Cylindrical end mills SX

Smooth-edged, short version



HM
MG10 λ 55°
 γ 15°

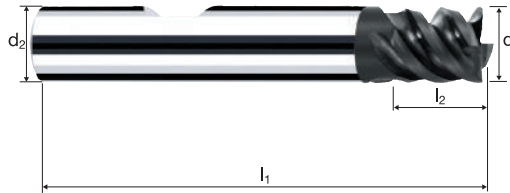

Roughing


Finishing



Rm < 850	Rm 850-1100							Inox Stainless	Ti Titanium	Nickel-Alloys Tool Steel
-------------	----------------	--	--	--	--	--	--	-------------------	----------------	-----------------------------

Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	45°	α	z	POLYCHROM	
									P5313	P5213
Example: Order-N°.	Coating P		Article-N° 5313		ø-Code 180					
180	3.00	6.00	50	3.00	10.76	0.10	8.5°	4		●
220	4.00	6.00	54	4.00	9.89	0.10	6.5°	4		●
260	5.00	6.00	54	5.00	9.02	0.15	3.5°	4		●
300	6.00	6.00	54	7.00	-	0.15	0.0°	4		●
391	8.00	8.00	58	9.00	-	0.15	0.0°	4		●
450	10.00	10.00	66	11.00	-	0.20	0.0°	4		●
501	12.00	12.00	73	13.00	-	0.20	0.0°	4		●
610	16.00	16.00	82	17.00	-	0.20	0.0°	4		●
										●
										●
										●
										●
										●
										●
										●
										●
										●
										●
										●
										●
										●
										●
										●
										●

Application



Material

Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	190	0.020	3.000	1.400	20160	1615	6.8
4.00	4	190	0.025	4.000	1.800	15120	1510	10.9
5.00	4	190	0.035	5.000	2.300	12095	1695	19.5
6.00	4	190	0.040	6.000	2.700	10080	1615	26.1
8.00	4	190	0.055	8.000	3.600	7560	1665	47.9
10.00	4	190	0.070	10.000	4.500	6050	1695	76.2
12.00	4	190	0.075	12.000	5.400	5040	1510	98.0
16.00	4	190	0.100	16.000	4.000	3780	1510	96.8

3.00	4	140	0.020	3.000	1.400	14855	1190	5.0
4.00	4	140	0.025	4.000	1.800	11140	1115	8.0
5.00	4	140	0.035	5.000	2.300	8915	1250	14.3
6.00	4	140	0.040	6.000	2.700	7425	1190	19.3
8.00	4	140	0.055	8.000	3.600	5570	1225	35.3
10.00	4	140	0.070	10.000	4.500	4455	1250	56.1
12.00	4	140	0.075	12.000	5.400	3715	1115	72.2
16.00	4	140	0.100	16.000	4.000	2785	1115	71.3

3.00	4	70	0.020	3.000	1.400	7425	595	2.5
4.00	4	70	0.025	4.000	1.800	5570	555	4.0
5.00	4	70	0.030	5.000	2.300	4455	535	6.1
6.00	4	70	0.040	6.000	2.700	3715	595	9.6
8.00	4	70	0.050	8.000	3.600	2785	555	16.0
10.00	4	70	0.065	10.000	4.500	2230	580	26.1
12.00	4	70	0.075	12.000	5.400	1855	555	36.1
16.00	4	70	0.095	16.000	4.000	1395	530	33.9

3.00	4	90	0.015	3.000	1.400	9550	575	2.4
4.00	4	90	0.020	4.000	1.800	7160	575	4.1
5.00	4	90	0.020	5.000	2.300	5730	460	5.3
6.00	4	90	0.030	6.000	2.700	4775	575	9.3
8.00	4	90	0.035	8.000	3.600	3580	500	14.4
10.00	4	90	0.045	10.000	4.500	2865	515	23.2
12.00	4	90	0.055	12.000	5.400	2385	525	34.0
16.00	4	90	0.065	16.000	4.000	1790	465	29.8

3.00	4	155	0.015	2.400	3.000	16445	985	7.1
4.00	4	155	0.020	3.200	4.000	12335	985	12.6
5.00	4	155	0.030	4.000	5.000	9870	1185	23.7
6.00	4	155	0.035	4.800	6.000	8225	1150	33.2
8.00	4	155	0.045	6.400	8.000	6165	1110	56.8
10.00	4	155	0.055	8.000	10.000	4935	1085	86.8
12.00	4	155	0.060	9.600	12.000	4110	985	113.7
16.00	4	155	0.075	6.400	16.000	3085	925	94.7

3.00	4	105	0.015	2.400	3.000	11140	670	4.8
4.00	4	105	0.020	3.200	4.000	8355	670	8.6
5.00	4	105	0.030	4.000	5.000	6685	800	16.0
6.00	4	105	0.035	4.800	6.000	5570	780	22.5
8.00	4	105	0.045	6.400	8.000	4180	750	38.5
10.00	4	105	0.055	8.000	10.000	3340	735	58.8
12.00	4	105	0.060	9.600	12.000	2785	670	77.0
16.00	4	105	0.075	6.400	16.000	2090	625	64.2


3.00	4	55	0.015	2.400	3.000	5835	350	2.5
4.00	4	55	0.020	3.200	4.000	4375	350	4.5
5.00	4	55	0.030	4.000	5.000	3500	420	8.4
6.00	4	55	0.035	4.800	6.000	2920	410	11.8
8.00	4	55	0.045	6.400	8.000	2190	395	20.2
10.00	4	55	0.055	8.000	10.000	1750	385	30.8
12.00	4	55	0.060	9.600	12.000	1460	350	40.3
16.00	4	55	0.075	6.400	16.000	1095	330	33.6

3.00	4	70	0.010	2.400	3.000	7425	295	2.1
4.00	4	70	0.015	3.200	4.000	5570	335	4.3
5.00	4	70	0.025	4.000	5.000	4455	445	8.9
6.00	4	70	0.030	4.800	6.000	3715	445	12.8
8.00	4	70	0.035	6.400	8.000	2785	390	20.0
10.00	4	70	0.045	8.000	10.000	2230	400	32.1
12.00	4	70	0.050	9.600	12.000	1855	370	42.8
16.00	4	70	0.060	6.400	16.000	1395	335	34.2

Cylindrical end mills

Smooth-edged, short version

HM λ 40°
MG10 γ 0°

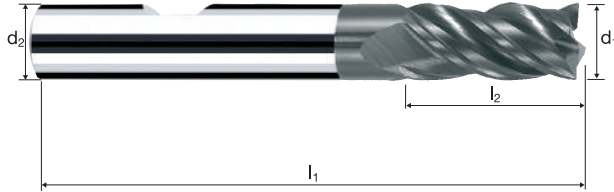


Roughing **Finishing**

Rm < 850 **Rm** 850-1100 **Rm** 1100-1300 **Rm** 1300-1500 **Inox** Stainless **Ti** Titanium **GG(G)** Tool Steel Nickel-Alloys

Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	45°	α	z	POLYCHROM	
Example: Order-N°.										
	Coating	Article-N°	ø-Code							
	P	5329	180							P5329
										P5229
180	3.00	6.00	50	6.00	13.56	0.10	7.0°	4		●
220	4.00	6.00	50	8.00	14.09	0.10	4.5°	4		●
260	5.00	6.00	50	9.00	13.22	0.15	2.5°	4		●
300	6.00	6.00	50	10.00	-	0.15	0.0°	4		●
391	8.00	8.00	54	13.00	-	0.15	0.0°	4		●
450	10.00	10.00	63	16.00	-	0.20	0.0°	4		●
501	12.00	12.00	73	19.00	-	0.20	0.0°	4		●
610	16.00	16.00	82	25.00	-	0.20	0.0°	4		●

Application



Material

Steel
< 850 N/mm²

Steel
850 - 1100 N/mm²

Titanium alloys
> 300 HB
[Ti6Al4V]

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
1.50	3	190	0.010	1.800	0.200	40320	1210
2.00	3	190	0.015	2.400	0.200	30240	1360
2.50	3	190	0.015	3.000	0.300	24190	1090
3.00	3	190	0.020	3.600	0.300	20160	1210
4.00	3	190	0.025	4.800	0.400	15120	1135
5.00	3	190	0.035	6.000	0.500	12095	1270
6.00	3	190	0.040	7.200	0.600	10080	1210
8.00	3	190	0.055	9.600	0.800	7560	1245
10.00	3	190	0.065	12.000	1.000	6050	1180

1.50	3	130	0.010	1.800	0.200	27585	830
2.00	3	130	0.015	2.400	0.200	20690	930
2.50	3	130	0.015	3.000	0.300	16550	745
3.00	3	130	0.020	3.600	0.300	13795	830
4.00	3	130	0.025	4.800	0.400	10345	775
5.00	3	130	0.035	6.000	0.500	8275	870
6.00	3	130	0.040	7.200	0.600	6895	830
8.00	3	130	0.050	9.600	0.800	5175	775
10.00	3	130	0.060	12.000	1.000	4140	745

1.50	3	50	0.005	1.800	0.200	10610	160
2.00	3	50	0.010	2.400	0.200	7960	240
2.50	3	50	0.010	3.000	0.300	6365	190
3.00	3	50	0.010	3.600	0.300	5305	160
4.00	3	50	0.015	4.800	0.400	3980	180
5.00	3	50	0.020	6.000	0.500	3185	190
6.00	3	50	0.020	7.200	0.600	2655	160
8.00	3	50	0.030	9.600	0.800	1990	180
10.00	3	50	0.035	12.000	1.000	1590	165

1.50	3	80	0.005	1.800	0.200	16975	255
2.00	3	80	0.010	2.400	0.200	12730	380
2.50	3	80	0.010	3.000	0.300	10185	305
3.00	3	80	0.015	3.600	0.300	8490	380
4.00	3	80	0.020	4.800	0.400	6365	380
5.00	3	80	0.025	6.000	0.500	5095	380
6.00	3	80	0.030	7.200	0.600	4245	380
8.00	3	80	0.040	9.600	0.800	3185	380
10.00	3	80	0.045	12.000	1.000	2545	345

Application



Material

Steel
< 850 N/mm²

Steel
850 - 1100 N/mm²

Titanium alloys
> 300 HB
[Ti6Al4V]

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
1.50	3	140	0.010	0.600	1.500	29710	890	0.8
2.00	3	140	0.010	0.800	2.000	22280	670	1.1
2.50	3	140	0.015	1.000	2.500	17825	800	2.0
3.00	3	140	0.015	1.200	3.000	14855	670	2.4
4.00	3	140	0.020	1.600	4.000	11140	670	4.3
5.00	3	140	0.030	2.000	5.000	8915	800	8.0
6.00	3	140	0.035	2.400	6.000	7425	780	11.2
8.00	3	140	0.045	3.200	8.000	5570	750	19.3
10.00	3	140	0.055	4.000	10.000	4455	735	29.4

1.50	3	85	0.010	0.600	1.500	18040	540	0.5
2.00	3	85	0.010	0.800	2.000	13530	405	0.6
2.50	3	85	0.015	1.000	2.500	10825	485	1.2
3.00	3	85	0.015	1.200	3.000	9020	405	1.5
4.00	3	85	0.020	1.600	4.000	6765	405	2.6
5.00	3	85	0.030	2.000	5.000	5410	485	4.9
6.00	3	85	0.035	2.400	6.000	4510	475	6.8
8.00	3	85	0.045	3.200	8.000	3380	455	11.7
10.00	3	85	0.050	4.000	10.000	2705	405	16.2

1.50	3	40	0.005	0.600	1.500	8490	125	0.1
2.00	3	40	0.005	0.800	2.000	6365	95	0.2
2.50	3	40	0.010	1.000	2.500	5095	155	0.4
3.00	3	40	0.010	1.200	3.000	4245	125	0.5
4.00	3	40	0.010	1.600	4.000	3185	95	0.6
5.00	3	40	0.015	2.000	5.000	2545	115	1.1
6.00	3	40	0.020	2.400	6.000	2120	125	1.8
8.00	3	40	0.025	3.200	8.000	1590	120	3.1
10.00	3	40	0.030	4.000	10.000	1275	115	4.6


1.50	3	55	0.005	0.600	1.500	11670	175	0.2
2.00	3	55	0.005	0.800	2.000	8755	130	0.2
2.50	3	55	0.010	1.000	2.500	7005	210	0.5
3.00	3	55	0.010	1.200	3.000	5835	175	0.6
4.00	3	55	0.015	1.600	4.000	4375	195	1.3
5.00	3	55	0.020	2.000	5.000	3500	210	2.1
6.00	3	55	0.025	2.400	6.000	2920	220	3.2
8.00	3	55	0.030	3.200	8.000	2190	195	5.0
10.00	3	55	0.040	4.000	10.000	1750	210	8.4

Cylindrical end mills

Smooth-edged, short version



HM
MG10 λ 30°
 γ 12°

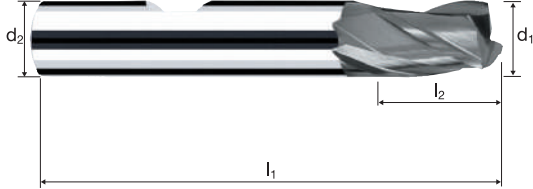

Roughing



Finishing



Rm < 850	Rm 850-1100	Rm 1100-1300						Inox Stainless	Ti Titanium	GG(G) Nickel-Alloys
-------------	----------------	-----------------	--	--	--	--	--	-------------------	----------------	------------------------

Example: Order-N°.								POLYCHROM	
Coating P		Article-N°. 5036		ø-Code 120				P5036	
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	α	z		
120	1.50	6.00	50	5.00	13.92	9.0°	3		●
140	2.00	6.00	50	5.00	13.15	8.5°	3		●
160	2.50	6.00	50	5.00	12.88	8.0°	3		●
180	3.00	6.00	50	6.00	13.96	6.5°	3		●
200	3.50	6.00	50	8.00	14.34	5.0°	3		●
220	4.00	6.00	50	8.00	14.59	4.5°	3		●
240	4.50	6.00	50	8.00	13.66	3.5°	3		●
260	5.00	6.00	50	9.00	13.72	2.5°	3		●
300	6.00	6.00	50	10.00	-	0.0°	3		●
331	7.00	8.00	54	10.00	14.72	2.5°	3		●
391	8.00	8.00	54	12.00	-	0.0°	3		●
420	9.00	10.00	63	12.00	16.72	2.0°	3		●
450	10.00	10.00	63	13.00	-	0.0°	3		●

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
1.00	2	44	0.002	0.500	1.000	14005	55
2.00	2	44	0.004	1.000	2.000	7005	55
3.00	2	44	0.006	1.500	3.000	4670	55
4.00	2	44	0.008	2.000	4.000	3500	55
5.00	2	44	0.012	2.500	5.000	2800	65
6.00	2	44	0.014	3.000	6.000	2335	65
8.00	2	44	0.018	4.000	8.000	1750	65
9.00	2	44	0.020	4.500	9.000	1555	60
10.00	2	44	0.022	5.000	10.000	1400	60

Steel
850 - 1100 N/mm²



1.00	2	36	0.002	0.500	1.000	11460	45
2.00	2	36	0.004	1.000	2.000	5730	45
3.00	2	36	0.006	1.500	3.000	3820	45
4.00	2	36	0.008	2.000	4.000	2865	45
5.00	2	36	0.012	2.500	5.000	2290	55
6.00	2	36	0.014	3.000	6.000	1910	55
8.00	2	36	0.018	4.000	8.000	1430	50
9.00	2	36	0.020	4.500	9.000	1275	50
10.00	2	36	0.022	5.000	10.000	1145	50

Steel
1100 - 1300 N/mm²



1.00	2	28	0.002	0.500	1.000	8915	35
2.00	2	28	0.004	1.000	2.000	4455	35
3.00	2	28	0.006	1.500	3.000	2970	35
4.00	2	28	0.008	2.000	4.000	2230	35
5.00	2	28	0.012	2.500	5.000	1785	45
6.00	2	28	0.014	3.000	6.000	1485	40
8.00	2	28	0.018	4.000	8.000	1115	40
9.00	2	28	0.020	4.500	9.000	990	40
10.00	2	28	0.022	5.000	10.000	890	40

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



1.00	2	25	0.002	0.500	1.000	7960	30
2.00	2	25	0.004	1.000	2.000	3980	30
3.00	2	25	0.006	1.500	3.000	2655	30
4.00	2	25	0.008	2.000	4.000	1990	30
5.00	2	25	0.012	2.500	5.000	1590	40
6.00	2	25	0.014	3.000	6.000	1325	35
8.00	2	25	0.018	4.000	8.000	995	35
9.00	2	25	0.020	4.500	9.000	885	35
10.00	2	25	0.022	5.000	10.000	795	35

Cast iron
(lamellar / spheroidal)



1.00	2	34	0.002	0.500	1.000	10825	45
2.00	2	34	0.004	1.000	2.000	5410	45
3.00	2	34	0.006	1.500	3.000	3610	45
4.00	2	34	0.008	2.000	4.000	2705	45
5.00	2	34	0.012	2.500	5.000	2165	50
6.00	2	34	0.014	3.000	6.000	1805	50
8.00	2	34	0.018	4.000	8.000	1355	50
9.00	2	34	0.020	4.500	9.000	1205	50
10.00	2	34	0.022	5.000	10.000	1080	50

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



1.00	2	18	0.002	0.500	1.000	5730	25
2.00	2	18	0.004	1.000	2.000	2865	25
3.00	2	18	0.006	1.500	3.000	1910	25
4.00	2	18	0.008	2.000	4.000	1430	25
5.00	2	18	0.012	2.500	5.000	1145	30
6.00	2	18	0.014	3.000	6.000	955	25
8.00	2	18	0.018	4.000	8.000	715	25
9.00	2	18	0.020	4.500	9.000	635	25
10.00	2	18	0.022	5.000	10.000	575	25

Unalloyed copper



1.00	2	80	0.002	0.500	1.000	25465	100
2.00	2	80	0.004	1.000	2.000	12730	100
3.00	2	80	0.006	1.500	3.000	8490	100
4.00	2	80	0.008	2.000	4.000	6365	100
5.00	2	80	0.012	2.500	5.000	5095	120
6.00	2	80	0.014	3.000	6.000	4245	120
8.00	2	80	0.018	4.000	8.000	3185	115
9.00	2	80	0.020	4.500	9.000	2830	115
10.00	2	80	0.022	5.000	10.000	2545	110

Wrought aluminium
Construction aluminium



1.00	2	100	0.002	0.500	1.000	31830	125
2.00	2	100	0.004	1.000	2.000	15915	125
3.00	2	100	0.006	1.500	3.000	10610	125
4.00	2	100	0.008	2.000	4.000	7960	125
5.00	2	100	0.012	2.500	5.000	6365	155
6.00	2	100	0.014	3.000	6.000	5305	150
8.00	2	100	0.018	4.000	8.000	3980	145
9.00	2	100	0.020	4.500	9.000	3535	140
10.00	2	100	0.022	5.000	10.000	3185	140


Cylindrical end mills

Smooth-edged, short version

HSS

HSS-E
Co8

λ 30°
 γ 15°

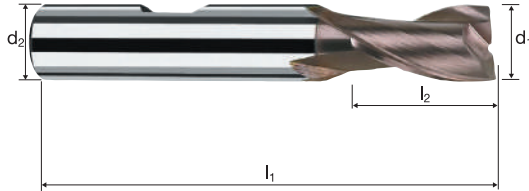

Roughing

Finishing



Rm
< 850

Rm
850-1100

Rm
1100-1300


Inox
Stainless

Ti
Titanium

GG(G)
Aluminium
Copper

Example: Order-N°.									UNICUT-4X	
									U0700	
\emptyset Code	d_1 h8	d_2 h6	l_1	l_2	l_4	α	z			
100	1.00	6.00	47	3.00	10.48	14.0°	2	●		
120	1.50	6.00	47	3.00	9.99	13.0°	2	●		
140*	2.00	6.00	48	4.00	10.71	11.0°	2	●		
160	2.50	6.00	49	5.00	12.50	8.0°	2	●		
180*	3.00	6.00	49	5.00	12.50	7.0°	2	●		
200	3.50	6.00	50	6.00	13.50	5.5°	2	●		
220*	4.00	6.00	51	7.00	14.50	4.0°	2	●		
240	4.50	6.00	51	7.00	14.50	3.0°	2	●		
260*	5.00	6.00	52	8.00	15.50	2.0°	2	●		
280	5.50	6.00	52	8.00	15.50	1.0°	2	●		
300*	6.00	6.00	52	8.00	-	0.0°	2	●		
322	6.50	10.00	60	10.00	19.50	5.5°	2	●		
331	7.00	8.00	54	10.00	17.50	2.0°	2	●		
362	7.50	10.00	60	10.00	19.50	4.0°	2	●		
391*	8.00	8.00	55	11.00	-	0.0°	2	●		
410	8.50	10.00	61	11.00	20.50	2.5°	2	●		
420	9.00	10.00	61	11.00	20.50	1.5°	2	●		
440	9.70	10.00	63	13.00	22.50	0.0°	2	●		
450*	10.00	10.00	63	13.00	-	0.0°	2	●		
* d_1 tolerance for keyway P9										

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
11.00	2	44	0.024	5.500	11.000	1275	60
12.00	2	44	0.026	6.000	12.000	1165	60
13.00	2	44	0.028	6.500	13.000	1075	60
14.00	2	44	0.032	7.000	14.000	1000	65
16.00	2	44	0.036	8.000	16.000	875	65
18.00	2	44	0.040	9.000	18.000	780	60
20.00	2	44	0.044	10.000	20.000	700	60
22.00	2	44	0.048	11.000	22.000	635	60
25.00	2	44	0.056	12.500	25.000	560	65

Steel
850 - 1100 N/mm²



11.00	2	36	0.024	5.500	11.000	1040	50
12.00	2	36	0.026	6.000	12.000	955	50
13.00	2	36	0.028	6.500	13.000	880	50
14.00	2	36	0.032	7.000	14.000	820	50
16.00	2	36	0.036	8.000	16.000	715	50
18.00	2	36	0.040	9.000	18.000	635	50
20.00	2	36	0.044	10.000	20.000	575	50
22.00	2	36	0.048	11.000	22.000	520	50
25.00	2	36	0.056	12.500	25.000	460	50

Steel
1100 - 1300 N/mm²



11.00	2	28	0.024	5.500	11.000	810	40
12.00	2	28	0.026	6.000	12.000	745	40
13.00	2	28	0.028	6.500	13.000	685	40
14.00	2	28	0.032	7.000	14.000	635	40
16.00	2	28	0.036	8.000	16.000	555	40
18.00	2	28	0.040	9.000	18.000	495	40
20.00	2	28	0.044	10.000	20.000	445	40
22.00	2	28	0.048	11.000	22.000	405	40
25.00	2	28	0.056	12.500	25.000	355	40

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



11.00	2	25	0.024	5.500	11.000	725	35
12.00	2	25	0.026	6.000	12.000	665	35
13.00	2	25	0.028	6.500	13.000	610	35
14.00	2	25	0.032	7.000	14.000	570	35
16.00	2	25	0.036	8.000	16.000	495	35
18.00	2	25	0.040	9.000	18.000	440	35
20.00	2	25	0.044	10.000	20.000	400	35
22.00	2	25	0.048	11.000	22.000	360	35
25.00	2	25	0.056	12.500	25.000	320	35

Cast iron
(lamellar / spheroidal)



11.00	2	34	0.024	5.500	11.000	985	45
12.00	2	34	0.026	6.000	12.000	900	45
13.00	2	34	0.028	6.500	13.000	835	45
14.00	2	34	0.032	7.000	14.000	775	50
16.00	2	34	0.036	8.000	16.000	675	50
18.00	2	34	0.040	9.000	18.000	600	50
20.00	2	34	0.044	10.000	20.000	540	50
22.00	2	34	0.048	11.000	22.000	490	45
25.00	2	34	0.056	12.500	25.000	435	50

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



11.00	2	18	0.024	5.500	11.000	520	25
12.00	2	18	0.026	6.000	12.000	475	25
13.00	2	18	0.028	6.500	13.000	440	25
14.00	2	18	0.032	7.000	14.000	410	25
16.00	2	18	0.036	8.000	16.000	360	25
18.00	2	18	0.040	9.000	18.000	320	25
20.00	2	18	0.044	10.000	20.000	285	25
22.00	2	18	0.048	11.000	22.000	260	25
25.00	2	18	0.056	12.500	25.000	230	25

Unalloyed copper



11.00	2	80	0.024	5.500	11.000	2315	110
12.00	2	80	0.026	6.000	12.000	2120	110
13.00	2	80	0.028	6.500	13.000	1960	110
14.00	2	80	0.032	7.000	14.000	1820	115
16.00	2	80	0.036	8.000	16.000	1590	115
18.00	2	80	0.040	9.000	18.000	1415	115
20.00	2	80	0.044	10.000	20.000	1275	110
22.00	2	80	0.048	11.000	22.000	1155	110
25.00	2	80	0.056	12.500	25.000	1020	115

Wrought aluminium
Construction aluminium





11.00	2	100	0.024	5.500	11.000	2895	140
12.00	2	100	0.026	6.000	12.000	2655	140
13.00	2	100	0.028	6.500	13.000	2450	135
14.00	2	100	0.032	7.000	14.000	2275	145
16.00	2	100	0.036	8.000	16.000	1990	145
18.00	2	100	0.040	9.000	18.000	1770	140
20.00	2	100	0.044	10.000	20.000	1590	140
22.00	2	100	0.048	11.000	22.000	1445	140
25.00	2	100	0.056	12.500	25.000	1275	145

Cylindrical end mills

Smooth-edged, short version

HSS

HSS-E
Co8 λ 30°
 γ 15°

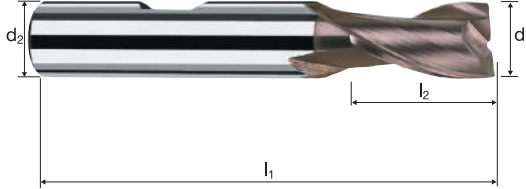

Roughing


Finishing



Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Aluminium Copper
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	------------------------------

Example: Order-N°.										UNICUT-4X
										U0700
\emptyset Code	d ₁ h8	d ₂ h6	l ₁	l ₂	l ₄	α	z			
460	10.50	12.00	70	13.00	24.50	2.0°	2		●	
470	11.00	12.00	70	13.00	24.50	1.5°	2		●	
501*	12.00	12.00	73	16.00	-	0.0°	2		●	
540	13.00	12.00	73	16.00	-	0.0°	2		●	
570*	14.00	12.00	73	16.00	-	0.0°	2		●	
581	15.00	12.00	73	16.00	-	0.0°	2		●	
610*	16.00	16.00	79	19.00	-	0.0°	2		●	
620	17.00	16.00	79	19.00	-	0.0°	2		●	
640*	18.00	16.00	79	19.00	-	0.0°	2		●	
650	19.00	16.00	79	19.00	-	0.0°	2		●	
682*	20.00	20.00	88	22.00	-	0.0°	2		●	
710*	22.00	20.00	88	22.00	-	0.0°	2		●	
772*	25.00	25.00	102	26.00	-	0.0°	2		●	
* d ₁ tolerance for keyway P9										

Application




Material

Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
3.00	4	60	0.012	4.500	1.800	6365	305	2.5	5°
4.00	4	60	0.017	6.000	2.400	4775	325	4.7	5°
5.00	4	60	0.022	7.500	3.000	3820	335	7.5	5°
6.00	4	60	0.027	9.000	3.600	3185	345	11.2	5°
8.00	4	60	0.035	12.000	4.800	2385	335	19.3	5°
10.00	4	60	0.045	15.000	6.000	1910	345	31.1	5°
12.00	4	60	0.055	18.000	7.200	1590	350	45.4	5°
16.00	4	60	0.065	24.000	9.600	1195	310	71.4	5°



Hardened tool steel
> 60 HRC




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
3.00	4	25	0.006	3.750	1.800	2655	65	0.4	3°
4.00	4	25	0.008	5.000	2.400	1990	65	0.8	4°
5.00	4	25	0.010	6.250	3.000	1590	65	1.2	5°
6.00	4	25	0.012	7.500	3.600	1325	65	1.8	5°
8.00	4	25	0.015	10.000	4.800	995	60	2.9	5°
10.00	4	25	0.020	12.500	6.000	795	65	4.9	5°
12.00	4	25	0.025	15.000	7.200	665	65	7.0	5°
16.00	4	25	0.030	20.000	9.600	495	60	11.5	5°

High speed steel,
hardened
64 - 70 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
3.00	4	15	0.005	3.000	0.750	1590	30	0.1	3°
4.00	4	15	0.009	4.000	1.000	1195	45	0.2	4°
5.00	4	15	0.012	5.000	1.250	955	45	0.3	5°
6.00	4	15	0.009	6.000	3.600	795	30	0.6	5°
8.00	4	15	0.012	8.000	4.800	595	30	1.2	5°
10.00	4	15	0.015	10.000	6.000	475	30	1.8	5°
12.00	4	15	0.018	12.000	7.200	400	30	2.6	5°
16.00	4	15	0.023	16.000	9.600	300	30	4.6	5°


Application



Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
3.00	4	50	0.013	3.000	3.000	5305	275	2.5	5°	34.3
4.00	4	50	0.017	4.000	4.000	3980	270	4.3	5°	45.7
5.00	4	50	0.022	5.000	5.000	3185	280	7.0	5°	57.2
6.00	4	50	0.027	6.000	6.000	2655	285	10.3	5°	68.6
8.00	4	50	0.035	8.000	8.000	1990	280	17.9	5°	91.4
10.00	4	50	0.045	10.000	10.000	1590	285	28.5	5°	114.3
12.00	4	50	0.055	12.000	12.000	1325	290	41.8	5°	137.2
16.00	4	50	0.080	8.000	16.000	995	320	41.0	5°	91.4



Hardened tool steel
> 60 HRC












d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
3.00	4	20	0.007	3.000	3.000	2120	60	0.5	3°	57.2
4.00	4	20	0.010	4.000	4.000	1590	65	1.0	4°	57.2
5.00	4	20	0.013	5.000	5.000	1275	65	1.6	5°	57.2
6.00	4	20	0.016	6.000	6.000	1060	70	2.5	5°	68.6
8.00	4	20	0.021	8.000	8.000	795	65	4.2	5°	91.4
10.00	4	20	0.026	10.000	10.000	635	65	6.5	5°	114.3
12.00	4	20	0.032	12.000	12.000	530	70	10.1	5°	137.2
16.00	4	20	0.050	8.000	16.000	400	80	10.2	5°	91.4

High speed steel,
hardened
64 - 70 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
3.00	4	10	0.004	1.500	3.000	1060	15	0.1	3°	28.6
4.00	4	10	0.006	2.000	4.000	795	20	0.2	4°	28.6
5.00	4	10	0.008	3.750	5.000	635	20	0.4	5°	42.9
6.00	4	10	0.009	4.500	6.000	530	20	0.5	5°	51.4
8.00	4	10	0.012	6.000	8.000	400	20	1.0	5°	68.6
10.00	4	10	0.015	7.500	10.000	320	20	1.5	5°	85.7
12.00	4	10	0.020	9.000	12.000	265	20	2.2	5°	102.9
16.00	4	10	0.030	8.000	16.000	200	25	3.2	5°	91.4

Precise cutting data for other applications and materials can be found in the cutting data software **ToolExpert 2.0**





Corner radius end mills HX

Smooth-edged, normal version, short neck
High-performance penetration edge



HM
XA λ 45°
 γ -10°

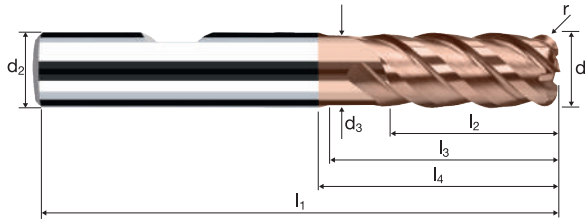


Roughing HPC Roughing HDC Finishing

				HRC 48-56	HRC 56-60	HRC > 60			HSS
--	--	--	--	--------------	--------------	-------------	--	--	-----

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z	Coating		Article-N°		ø-Code		DURO-Si	
											H	8607	178					H8607
178	3.00	6.00	2.80	57	8.00	14.00	20.37	0.200	4.5°	4								●
218	4.00	6.00	3.70	57	11.00	16.00	20.82	0.200	3.0°	4								●
258	5.00	6.00	4.60	57	13.00	18.00	21.27	0.200	1.5°	4								●
297	6.00	6.00	5.50	57	13.00	18.15	20.00	0.200	0.0°	4								●
385	8.00	8.00	7.40	63	19.00	23.63	26.00	0.200	0.0°	4								●
445	10.00	10.00	9.20	72	22.00	27.99	31.00	0.200	0.0°	4								●
496	12.00	12.00	11.00	83	26.00	33.29	37.00	0.200	0.0°	4								●
605	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	4								●
180	3.00	6.00	2.80	57	8.00	14.00	20.37	0.500	4.5°	4								●
220	4.00	6.00	3.70	57	11.00	16.00	20.82	0.500	3.0°	4								●
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.500	1.5°	4								●
300	6.00	6.00	5.50	57	13.00	18.15	20.00	0.500	0.0°	4								●
388	8.00	8.00	7.40	63	19.00	23.63	26.00	0.500	0.0°	4								●
448	10.00	10.00	9.20	72	22.00	27.99	31.00	0.500	0.0°	4								●
498	12.00	12.00	11.00	83	26.00	33.29	37.00	0.500	0.0°	4								●
606	16.00	16.00	15.00	92	32.00	38.73	43.00	0.500	0.0°	4								●

Application




Material

Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	φZ [°]
6.00	4	60	0.027	9.000	3.600	3185	345	11.2	5°
8.00	4	60	0.035	12.000	4.800	2385	335	19.3	5°
10.00	4	60	0.045	15.000	6.000	1910	345	31.1	5°
12.00	4	60	0.055	18.000	7.200	1590	350	45.4	5°
16.00	4	60	0.065	24.000	9.600	1195	310	71.4	5°



Hardened tool steel
> 60 HRC




6.00	4	25	0.012	7.500	3.600	1325	65	1.8	5°
8.00	4	25	0.015	10.000	4.800	995	60	2.9	5°
10.00	4	25	0.020	12.500	6.000	795	65	4.9	5°
12.00	4	25	0.025	15.000	7.200	665	65	7.0	5°
16.00	4	25	0.030	20.000	9.600	495	60	11.5	5°

High speed steel,
hardened
64 - 70 HRC



6.00	4	15	0.009	6.000	3.600	795	30	0.6	5°
8.00	4	15	0.012	8.000	4.800	595	30	1.2	5°
10.00	4	15	0.015	10.000	6.000	475	30	1.8	5°
12.00	4	15	0.018	12.000	7.200	400	30	2.6	5°
16.00	4	15	0.023	16.000	9.600	300	30	4.6	5°


Application



Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
6.00	4	50	0.027	6.000	6.000	2655	285	10.3	5°	68.6
8.00	4	50	0.035	8.000	8.000	1990	280	17.9	5°	91.4
10.00	4	50	0.045	10.000	10.000	1590	285	28.5	5°	114.3
12.00	4	50	0.055	12.000	12.000	1325	290	41.8	5°	137.2
16.00	4	50	0.080	8.000	16.000	995	320	41.0	5°	91.4



Hardened tool steel
> 60 HRC



6.00	4	20	0.016	6.000	6.000	1060	70	2.5	5°	68.6
8.00	4	20	0.021	8.000	8.000	795	65	4.2	5°	91.4
10.00	4	20	0.026	10.000	10.000	635	65	6.5	5°	114.3
12.00	4	20	0.032	12.000	12.000	530	70	10.1	5°	137.2
16.00	4	20	0.050	8.000	16.000	400	80	10.2	5°	91.4










High speed steel,
hardened
64 - 70 HRC



6.00	4	10	0.009	4.500	6.000	530	20	0.5	5°	51.4
8.00	4	10	0.012	6.000	8.000	400	20	1.0	5°	68.6
10.00	4	10	0.015	7.500	10.000	320	20	1.5	5°	85.7
12.00	4	10	0.020	9.000	12.000	265	20	2.2	5°	102.9
16.00	4	10	0.030	8.000	16.000	200	25	3.2	5°	91.4



Precise cutting data for other applications and materials can be found in the cutting data software **ToolExpert 2.0**






Corner radius end mills HX

Smooth-edged, normal version, short neck
High-performance penetration edge




HM
XA λ 45°
 γ -10°

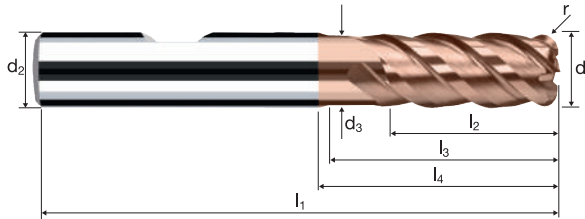

				HRC 48-56	HRC 56-60	HRC > 60			HSS
--	--	--	--	--------------	--------------	-------------	--	--	-----

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z	DURO-Si	
											H8607	H8507
302	6.00	6.00	5.50	57	13.00	18.15	20.00	1.000	0.0°	4	●	
391	8.00	8.00	7.40	63	19.00	23.63	26.00	1.000	0.0°	4	●	
450	10.00	10.00	9.20	72	22.00	27.99	31.00	1.000	0.0°	4	●	
501	12.00	12.00	11.00	83	26.00	33.29	37.00	1.000	0.0°	4	●	
608	16.00	16.00	15.00	92	32.00	38.73	43.00	1.000	0.0°	4	●	
304	6.00	6.00	5.50	57	13.00	18.15	20.00	1.500	0.0°	4	●	
395	8.00	8.00	7.40	63	19.00	23.63	26.00	2.000	0.0°	4	●	
457	10.00	10.00	9.20	72	22.00	27.99	31.00	2.500	0.0°	4	●	
507	12.00	12.00	11.00	83	26.00	33.29	37.00	3.000	0.0°	4	●	

Application



Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
4.00	4	150	0.025	6.000	1.600	11935	1195	11.5
5.00	4	150	0.035	7.500	2.000	9550	1335	20.1
6.00	4	150	0.040	9.000	2.400	7960	1275	27.5
8.00	4	150	0.055	12.000	3.200	5970	1315	50.4
10.00	4	150	0.065	15.000	4.000	4775	1240	74.5
12.00	4	150	0.080	18.000	4.800	3980	1275	110.0
16.00	4	150	0.090	24.000	6.400	2985	1075	165.0
20.00	4	150	0.110	30.000	8.000	2385	1050	252.1

Steel
1100 - 1300 N/mm²



4.00	4	115	0.025	6.000	1.600	9150	915	8.8
5.00	4	115	0.035	7.500	2.000	7320	1025	15.4
6.00	4	115	0.040	9.000	2.400	6100	975	21.1
8.00	4	115	0.055	12.000	3.200	4575	1005	38.7
10.00	4	115	0.065	15.000	4.000	3660	950	57.1
12.00	4	115	0.080	18.000	4.800	3050	975	84.3
16.00	4	115	0.090	24.000	6.400	2290	825	126.5
20.00	4	115	0.110	30.000	8.000	1830	805	193.3

Hardened tool steel
52 - 56 HRC




4.00	4	55	0.015	6.000	1.200	4375	265	1.9
5.00	4	55	0.018	7.500	1.500	3500	250	2.8
6.00	4	55	0.021	9.000	1.800	2920	245	4.0
8.00	4	55	0.027	12.000	2.400	2190	235	6.8
10.00	4	55	0.036	15.000	3.000	1750	250	11.3
12.00	4	55	0.042	18.000	3.600	1460	245	15.9
16.00	4	55	0.048	24.000	4.800	1095	210	24.2
20.00	4	55	0.060	30.000	6.000	875	210	37.8

Titanium alloys
> 300 HB
[Ti6Al4V]



4.00	4	50	0.015	6.000	1.600	3980	240	2.3
5.00	4	50	0.020	7.500	2.000	3185	255	3.8
6.00	4	50	0.020	9.000	2.400	2655	210	4.6
8.00	4	50	0.025	12.000	3.200	1990	200	7.6
10.00	4	50	0.035	15.000	4.000	1590	225	13.4
12.00	4	50	0.040	18.000	4.800	1325	210	18.3
16.00	4	50	0.050	24.000	6.400	995	200	30.6
20.00	4	50	0.060	30.000	8.000	795	190	45.8



Steel
850 - 1100 N/mm²



4.00	4	115	0.020	5.000	4.000	9150	730	14.6
5.00	4	115	0.025	6.250	5.000	7320	730	22.9
6.00	4	115	0.025	7.500	6.000	6100	610	27.5
8.00	4	115	0.035	10.000	8.000	4575	640	51.2
10.00	4	115	0.045	12.500	10.000	3660	660	82.4
12.00	4	115	0.055	15.000	12.000	3050	670	120.8
16.00	4	115	0.065	20.000	16.000	2290	595	190.3
20.00	4	115	0.080	25.000	20.000	1830	585	292.8

Steel
1100 - 1300 N/mm²



4.00	4	90	0.020	5.000	4.000	7160	575	11.5
5.00	4	90	0.025	6.250	5.000	5730	575	17.9
6.00	4	90	0.025	7.500	6.000	4775	475	21.5
8.00	4	90	0.035	10.000	8.000	3580	500	40.1
10.00	4	90	0.045	12.500	10.000	2865	515	64.5
12.00	4	90	0.055	15.000	12.000	2385	525	94.5
16.00	4	90	0.065	20.000	16.000	1790	465	149.0
20.00	4	90	0.080	25.000	20.000	1430	460	229.2

Hardened tool steel
52 - 56 HRC



4.00	4	50	0.009	4.000	4.000	3980	145	2.3
5.00	4	50	0.012	5.000	5.000	3185	155	3.8
6.00	4	50	0.015	6.000	6.000	2655	160	5.7
8.00	4	50	0.018	8.000	8.000	1990	145	9.2
10.00	4	50	0.024	10.000	10.000	1590	155	15.3
12.00	4	50	0.030	12.000	12.000	1325	160	22.9
16.00	4	50	0.033	16.000	16.000	995	130	33.6
20.00	4	50	0.042	20.000	20.000	795	135	53.5

Titanium alloys
> 300 HB
[Ti6Al4V]



4.00	4	40	0.010	5.000	4.000	3185	125	2.5
5.00	4	40	0.015	6.250	5.000	2545	155	4.8
6.00	4	40	0.020	7.500	6.000	2120	170	7.6
8.00	4	40	0.025	10.000	8.000	1590	160	12.7
10.00	4	40	0.030	12.500	10.000	1275	155	19.1
12.00	4	40	0.040	15.000	12.000	1060	170	30.6
16.00	4	40	0.045	20.000	16.000	795	145	45.8
20.00	4	40	0.055	25.000	20.000	635	140	70.0


Corner radius end mills NX

Smooth-edged, normal version



HM
MG10

λ 45°
 γ -20°

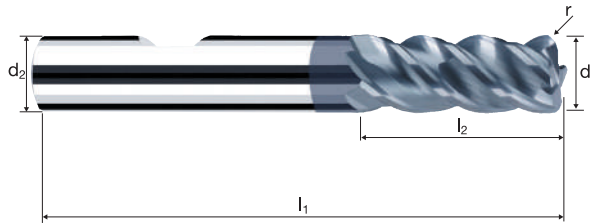

Roughing


Finishing



Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60		Ti Titanium	GG(G) Tool Steel
----------------	-----------------	-----------------	--------------	--------------	--	----------------	---------------------

										POLYCHROM	
Example: Order-N°.										P15368	
										P15268	
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	r 0/+0.03	α	z			
178	3.00	6.00	57	8.00	15.56	0.200	6.0°	4	●		
180	3.00	6.00	57	8.00	15.56	0.500	6.0°	4	●		
220	4.00	6.00	57	8.00	14.59	0.500	4.5°	4	●		
260	5.00	6.00	57	10.00	14.72	0.500	2.5°	4	●		
300	6.00	6.00	57	12.00	-	0.500	0.0°	4	●		
388	8.00	8.00	63	19.00	-	0.500	0.0°	4	●		
448	10.00	10.00	72	23.00	-	0.500	0.0°	4	●		
498	12.00	12.00	83	27.00	-	0.500	0.0°	4	●		
302	6.00	6.00	57	12.00	-	1.000	0.0°	4	●		
391	8.00	8.00	63	19.00	-	1.000	0.0°	4	●		
450	10.00	10.00	72	23.00	-	1.000	0.0°	4	●		
501	12.00	12.00	83	27.00	-	1.000	0.0°	4	●		
608	16.00	16.00	92	32.00	-	1.000	0.0°	4	●		
680	20.00	20.00	104	39.00	-	1.000	0.0°	4	●		
393	8.00	8.00	63	19.00	-	1.500	0.0°	4	●		
453	10.00	10.00	72	23.00	-	1.500	0.0°	4	●		
503	12.00	12.00	83	27.00	-	1.500	0.0°	4	●		
610	16.00	16.00	92	32.00	-	1.500	0.0°	4	●		

Application



Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _i [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
10.00	4	150	0.065	15.000	4.000	4775	1240	74.5
12.00	4	150	0.080	18.000	4.800	3980	1275	110.0
16.00	4	150	0.090	24.000	6.400	2985	1075	165.0
20.00	4	150	0.110	30.000	8.000	2385	1050	252.1

Steel
1100 - 1300 N/mm²



d1 [mm]	z	v _c [m/min]	f _i [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
10.00	4	115	0.065	15.000	4.000	3660	950	57.1
12.00	4	115	0.080	18.000	4.800	3050	975	84.3
16.00	4	115	0.090	24.000	6.400	2290	825	126.5
20.00	4	115	0.110	30.000	8.000	1830	805	193.3

Hardened tool steel
52 - 56 HRC




d1 [mm]	z	v _c [m/min]	f _i [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
10.00	4	55	0.036	15.000	3.000	1750	250	11.3
12.00	4	55	0.042	18.000	3.600	1460	245	15.9
16.00	4	55	0.048	24.000	4.800	1095	210	24.2
20.00	4	55	0.060	30.000	6.000	875	210	37.8

Titanium alloys
> 300 HB
[Ti6Al4V]



d1 [mm]	z	v _c [m/min]	f _i [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
10.00	4	50	0.035	15.000	4.000	1590	225	13.4
12.00	4	50	0.040	18.000	4.800	1325	210	18.3
16.00	4	50	0.050	24.000	6.400	995	200	30.6
20.00	4	50	0.060	30.000	8.000	795	190	45.8



Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _i [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
10.00	4	115	0.045	12.500	10.000	3660	660	82.4
12.00	4	115	0.055	15.000	12.000	3050	670	120.8
16.00	4	115	0.065	20.000	16.000	2290	595	190.3
20.00	4	115	0.080	25.000	20.000	1830	585	292.8

Steel
1100 - 1300 N/mm²



d1 [mm]	z	v _c [m/min]	f _i [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
10.00	4	90	0.045	12.500	10.000	2865	515	64.5
12.00	4	90	0.055	15.000	12.000	2385	525	94.5
16.00	4	90	0.065	20.000	16.000	1790	465	149.0
20.00	4	90	0.080	25.000	20.000	1430	460	229.2

Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _i [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
10.00	4	50	0.024	10.000	10.000	1590	155	15.3
12.00	4	50	0.030	12.000	12.000	1325	160	22.9
16.00	4	50	0.033	16.000	16.000	995	130	33.6
20.00	4	50	0.042	20.000	20.000	795	135	53.5

Titanium alloys
> 300 HB
[Ti6Al4V]



d1 [mm]	z	v _c [m/min]	f _i [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
10.00	4	40	0.030	12.500	10.000	1275	155	19.1
12.00	4	40	0.040	15.000	12.000	1060	170	30.6
16.00	4	40	0.045	20.000	16.000	795	145	45.8
20.00	4	40	0.055	25.000	20.000	635	140	70.0


Corner radius end mills NX

Smooth-edged, normal version



HM
MG10


λ 45°
 γ -20°

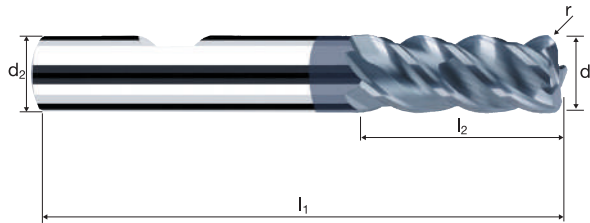

Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60		Ti Titanium	GG(G) Tool Steel
----------------	-----------------	-----------------	--------------	--------------	--	----------------	---------------------

										POLYCHROM
Example: Order-N°.										P15368
										P15268
\emptyset Code	d_1 e8	d_2 h6	l_1	l_2	l_4	r 0/+0.03	α	z		
306	6.00	6.00	57	12.00	-	2.000	0.0°	4		●
395	8.00	8.00	63	19.00	-	2.000	0.0°	4		●
505	12.00	12.00	83	27.00	-	2.000	0.0°	4		●
611	16.00	16.00	92	32.00	-	2.000	0.0°	4		●
683	20.00	20.00	104	39.00	-	2.000	0.0°	4		●
457	10.00	10.00	72	23.00	-	2.500	0.0°	4		●
506	12.00	12.00	83	27.00	-	2.500	0.0°	4		●
612	16.00	16.00	92	32.00	-	2.500	0.0°	4		●
684	20.00	20.00	104	39.00	-	2.500	0.0°	4		●
508	12.00	12.00	83	27.00	-	4.000	0.0°	4		●
614	16.00	16.00	92	32.00	-	4.000	0.0°	4		●
686	20.00	20.00	104	39.00	-	4.000	0.0°	4		●

Application



Material

Nickel-based alloys
annealed
Rm <1000 N/mm²
[Inconel 718]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	35	0.010	5.400	1.350	3715	150	1.1
4.00	4	35	0.015	7.200	1.800	2785	165	2.2
5.00	4	35	0.020	9.000	2.250	2230	180	3.6
6.00	4	35	0.020	10.800	2.700	1855	150	4.3
8.00	4	35	0.030	14.400	3.600	1395	165	8.7
10.00	4	35	0.035	18.000	4.500	1115	155	12.6
12.00	4	35	0.045	21.600	5.400	930	165	19.5
16.00	4	35	0.050	28.800	7.200	695	140	28.9

Nickel-based alloys
precipitation hardened
Rm > 1000 N/mm²
[Inconel 718]



3.00	4	25	0.010	5.400	1.350	2655	105	0.8
4.00	4	25	0.010	7.200	1.800	1990	80	1.0
5.00	4	25	0.015	9.000	2.250	1590	95	1.9
6.00	4	25	0.015	10.800	2.700	1325	80	2.3
8.00	4	25	0.025	14.400	3.600	995	100	5.2
10.00	4	25	0.030	18.000	4.500	795	95	7.7
12.00	4	25	0.035	21.600	5.400	665	95	10.8
16.00	4	25	0.040	28.800	7.200	495	80	16.5

Manganese steel
Mn >5%
[1.3964 / Nitronic]
[1.3401 / X120Mn12]



3.00	4	40	0.010	5.400	1.350	4245	170	1.2
4.00	4	40	0.015	7.200	1.800	3185	190	2.5
5.00	4	40	0.020	9.000	2.250	2545	205	4.1
6.00	4	40	0.020	10.800	2.700	2120	170	5.0
8.00	4	40	0.030	14.400	3.600	1590	190	9.9
10.00	4	40	0.035	18.000	4.500	1275	180	14.4
12.00	4	40	0.045	21.600	5.400	1060	190	22.3
16.00	4	40	0.050	28.800	7.200	795	160	33.0

Inox difficult
[Cr-Ni-Mo++/1.4529]
Heat resistant steel
[1.4841]



3.00	4	50	0.015	5.400	1.350	5305	320	2.3
4.00	4	50	0.020	7.200	1.800	3980	320	4.1
5.00	4	50	0.030	9.000	2.250	3185	380	7.7
6.00	4	50	0.035	10.800	2.700	2655	370	10.8
8.00	4	50	0.045	14.400	3.600	1990	360	18.6
10.00	4	50	0.055	18.000	4.500	1590	350	28.4
12.00	4	50	0.065	21.600	5.400	1325	345	40.2
16.00	4	50	0.070	28.800	7.200	995	280	57.8

PM high-speed steel
annealed
[Böhler S390]
[ASP 2023]




3.00	4	80	0.010	5.400	1.350	8490	340	2.5
4.00	4	80	0.015	7.200	1.800	6365	380	5.0
5.00	4	80	0.020	9.000	2.250	5095	405	8.3
6.00	4	80	0.020	10.800	2.700	4245	340	9.9
8.00	4	80	0.030	14.400	3.600	3185	380	19.8
10.00	4	80	0.035	18.000	4.500	2545	355	28.9
12.00	4	80	0.045	21.600	5.400	2120	380	44.6
16.00	4	80	0.050	28.800	7.200	1590	320	66.0

Titanium alloys
> 300 HB
[Ti6Al4V]



3.00	4	70	0.010	5.400	1.350	7425	295	2.2
4.00	4	70	0.015	7.200	1.800	5570	335	4.3
5.00	4	70	0.015	9.000	2.250	4455	265	5.4
6.00	4	70	0.020	10.800	2.700	3715	295	8.7
8.00	4	70	0.025	14.400	3.600	2785	280	14.4
10.00	4	70	0.035	18.000	4.500	2230	310	25.3
12.00	4	70	0.040	21.600	5.400	1855	295	34.7
16.00	4	70	0.045	28.800	7.200	1395	250	52.0



Nickel-based alloys
annealed
Rm <1000 N/mm²
[Inconel 718]



3.00	4	25	0.010	3.750	3.000	2655	105	1.2
4.00	4	25	0.010	5.000	4.000	1990	80	1.6
5.00	4	25	0.015	6.250	5.000	1590	95	3.0
6.00	4	25	0.015	7.500	6.000	1325	80	3.6
8.00	4	25	0.025	10.000	8.000	995	100	8.0
10.00	4	25	0.030	12.500	10.000	795	95	11.9
12.00	4	25	0.035	15.000	12.000	665	95	16.7
16.00	4	25	0.040	20.000	16.000	495	80	25.5

Nickel-based alloys
precipitation hardened
Rm > 1000 N/mm²
[Inconel 718]



3.00	4	20	0.005	3.750	3.000	2120	40	0.5
4.00	4	20	0.010	5.000	4.000	1590	65	1.3
5.00	4	20	0.010	6.250	5.000	1275	50	1.6
6.00	4	20	0.015	7.500	6.000	1060	65	2.9
8.00	4	20	0.020	10.000	8.000	795	65	5.1
10.00	4	20	0.020	12.500	10.000	635	50	6.4
12.00	4	20	0.025	15.000	12.000	530	55	9.5
16.00	4	20	0.030	20.000	16.000	400	50	15.3





Corner radius end mills ZX

Smooth-edged, normal version, short neck



HM
MG10

λ 40°
 γ 5°

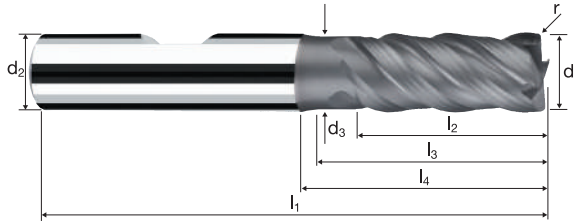


Roughing

Finishing



Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	TICUT		POLYCHROM		
											18820	18720	P8820	P8720	
Example: Order-N°: P Coating: P Article-N°: 8820 ø-Code: 299															
299	6.00	6.00	5.50	57	13.00	18.15	20.00	0.400	0.0°	4	●	■	●		
387	8.00	8.00	7.40	63	19.00	23.63	26.00	0.400	0.0°	4	●	■	●		
447	10.00	10.00	9.20	72	22.00	27.99	31.00	0.400	0.0°	4	●	■	●		
497	12.00	12.00	11.00	83	26.00	33.29	37.00	0.400	0.0°	4	●	■	●		
180	3.00	6.00	2.80	57	8.00	14.00	20.37	0.500	4.5°	4	●	■	●		
220	4.00	6.00	3.70	57	11.00	16.00	20.82	0.500	3.0°	4	●	■	●		
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.500	1.5°	4	●	■	●		
300	6.00	6.00	5.50	57	13.00	18.15	20.00	0.500	0.0°	4	●	■	●		
388	8.00	8.00	7.40	63	19.00	23.63	26.00	0.500	0.0°	4	●	■	●		
448	10.00	10.00	9.20	72	22.00	27.99	31.00	0.500	0.0°	4	●	■	●		
498	12.00	12.00	11.00	83	26.00	33.29	37.00	0.500	0.0°	4	●	■	●		
301	6.00	6.00	5.50	57	13.00	18.15	20.00	0.800	0.0°	4	●	■	●		
389	8.00	8.00	7.40	63	19.00	23.63	26.00	0.800	0.0°	4	●	■	●		
449	10.00	10.00	9.20	72	22.00	27.99	31.00	0.800	0.0°	4	●	■	●		
499	12.00	12.00	11.00	83	26.00	33.29	37.00	0.800	0.0°	4	●	■	●		
607	16.00	16.00	15.00	92	32.00	38.73	43.00	0.800	0.0°	4	●	■	●		
■ Availability and delivery dates on request															

Application



Material

Nickel-based alloys
annealed
Rm <1000 N/mm²
[Inconel 718]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	35	0.020	10.800	2.400	1855	150	3.9
8.00	4	35	0.025	14.400	3.200	1395	140	6.4
10.00	4	35	0.030	18.000	4.000	1115	135	9.6
12.00	4	35	0.040	21.600	4.800	930	150	15.4
16.00	4	35	0.045	28.800	6.400	695	125	23.1
20.00	4	35	0.055	36.000	8.000	555	125	35.3

Nickel-based alloys
precipitation hardened
Rm > 1000 N/mm²
[Inconel 718]



6.00	4	25	0.015	10.800	2.400	1325	80	2.1
8.00	4	25	0.020	14.400	3.200	995	80	3.7
10.00	4	25	0.025	18.000	4.000	795	80	5.7
12.00	4	25	0.030	21.600	4.800	665	80	8.3
16.00	4	25	0.035	28.800	6.400	495	70	12.8
20.00	4	25	0.045	36.000	8.000	400	70	20.6

Manganese steel
Mn >5%
[1.3964 / Nitronic]
[1.3401 / X120Mn12]



6.00	4	40	0.020	10.800	2.400	2120	170	4.4
8.00	4	40	0.025	14.400	3.200	1590	160	7.3
10.00	4	40	0.030	18.000	4.000	1275	155	11.0
12.00	4	40	0.040	21.600	4.800	1060	170	17.6
16.00	4	40	0.045	28.800	6.400	795	145	26.4
20.00	4	40	0.055	36.000	8.000	635	140	40.3

Inox difficult
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]



6.00	4	50	0.030	10.800	2.400	2655	320	8.3
8.00	4	50	0.040	14.400	3.200	1990	320	14.7
10.00	4	50	0.050	18.000	4.000	1590	320	22.9
12.00	4	50	0.060	21.600	4.800	1325	320	33.0
16.00	4	50	0.065	28.800	6.400	995	260	47.7
20.00	4	50	0.080	36.000	8.000	795	255	73.3

PM high-speed steel
annealed
[Böhler S390]
[ASP 2023]




6.00	4	80	0.020	10.800	2.400	4245	340	8.8
8.00	4	80	0.025	14.400	3.200	3185	320	14.7
10.00	4	80	0.030	18.000	4.000	2545	305	22.0
12.00	4	80	0.040	21.600	4.800	2120	340	35.2
16.00	4	80	0.045	28.800	6.400	1590	285	52.8
20.00	4	80	0.055	36.000	8.000	1275	280	80.7

Titanium alloys
> 300 HB
[Ti6Al4V]



6.00	4	70	0.020	10.800	2.400	3715	295	7.7
8.00	4	70	0.025	14.400	3.200	2785	280	12.8
10.00	4	70	0.030	18.000	4.000	2230	265	19.3
12.00	4	70	0.035	21.600	4.800	1855	260	27.0
16.00	4	70	0.040	28.800	6.400	1395	225	41.1
20.00	4	70	0.050	36.000	8.000	1115	225	64.2



Nickel-based alloys
annealed
Rm <1000 N/mm²
[Inconel 718]



6.00	4	25	0.015	7.200	6.000	1325	80	3.4
8.00	4	25	0.020	9.600	8.000	995	80	6.1
10.00	4	25	0.025	12.000	10.000	795	80	9.5
12.00	4	25	0.030	14.400	12.000	665	80	13.8
16.00	4	25	0.035	19.200	16.000	495	70	21.4
20.00	4	25	0.045	24.000	20.000	400	70	34.4

Nickel-based alloys
precipitation hardened
Rm > 1000 N/mm²
[Inconel 718]



6.00	4	20	0.010	7.200	6.000	1060	40	1.8
8.00	4	20	0.015	9.600	8.000	795	50	3.7
10.00	4	20	0.020	12.000	10.000	635	50	6.1
12.00	4	20	0.025	14.400	12.000	530	55	9.2
16.00	4	20	0.030	19.200	16.000	400	50	14.7
20.00	4	20	0.035	24.000	20.000	320	45	21.4


Corner radius end mills ZX

Smooth-edged, normal version, short neck



HM
MG10

λ 40°
 γ 5°

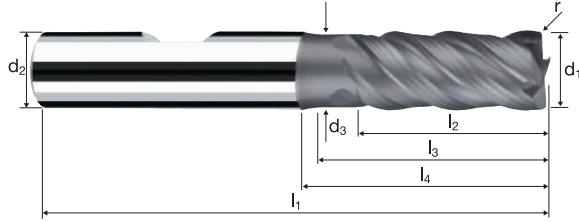


Roughing Finishing

Inox Stainless Ti Titanium Nickel-Alloys Mangan-Steels HSS

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	TICUT		POLYCHROM	
											18820	18720	P8820	P8720
302	6.00	6.00	5.50	57	13.00	18.15	20.00	1.000	0.0°	4	●	I	●	
391	8.00	8.00	7.40	63	19.00	23.63	26.00	1.000	0.0°	4	●	I	●	
450	10.00	10.00	9.20	72	22.00	27.99	31.00	1.000	0.0°	4	●	I	●	
501	12.00	12.00	11.00	83	26.00	33.29	37.00	1.000	0.0°	4	●	I	●	
608	16.00	16.00	15.00	92	32.00	38.73	43.00	1.000	0.0°	4	●	I	●	
680	20.00	20.00	19.00	104	38.00	48.23	53.00	1.000	0.0°	4	●	I	●	
453	10.00	10.00	9.20	72	22.00	27.99	31.00	1.500	0.0°	4	●	I	●	
503	12.00	12.00	11.00	83	26.00	33.29	37.00	1.500	0.0°	4	●	I	●	
610	16.00	16.00	15.00	92	32.00	38.73	43.00	1.500	0.0°	4	●	I	●	
505	12.00	12.00	11.00	83	26.00	33.29	37.00	2.000	0.0°	4	●	I	●	
611	16.00	16.00	15.00	92	32.00	38.73	43.00	2.000	0.0°	4	●	I	●	
683	20.00	20.00	19.00	104	38.00	48.23	53.00	2.000	0.0°	4	●	I	●	
I Availability and delivery dates on request														

Application



Material

Nickel-based alloys
annealed
Rm <1000 N/mm²
[Inconel 718]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
10.00	4	35	0.030	18.000	4.000	1115	135	9.6
12.00	4	35	0.040	21.600	4.800	930	150	15.4
16.00	4	35	0.045	28.800	6.400	695	125	23.1
20.00	4	35	0.055	36.000	8.000	555	125	35.3

Nickel-based alloys
precipitation hardened
Rm > 1000 N/mm²
[Inconel 718]



10.00	4	25	0.025	18.000	4.000	795	80	5.7
12.00	4	25	0.030	21.600	4.800	665	80	8.3
16.00	4	25	0.035	28.800	6.400	495	70	12.8
20.00	4	25	0.045	36.000	8.000	400	70	20.6

Manganese steel
Mn >5%
[1.3964 / Nitronic]
[1.3401 / X120Mn12]



10.00	4	40	0.030	18.000	4.000	1275	155	11.0
12.00	4	40	0.040	21.600	4.800	1060	170	17.6
16.00	4	40	0.045	28.800	6.400	795	145	26.4
20.00	4	40	0.055	36.000	8.000	635	140	40.3

Inox difficult
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]



10.00	4	50	0.050	18.000	4.000	1590	320	22.9
12.00	4	50	0.060	21.600	4.800	1325	320	33.0
16.00	4	50	0.065	28.800	6.400	995	260	47.7
20.00	4	50	0.080	36.000	8.000	795	255	73.3

PM high-speed steel
annealed
[Böhler S390]
[ASP 2023]




10.00	4	80	0.030	18.000	4.000	2545	305	22.0
12.00	4	80	0.040	21.600	4.800	2120	340	35.2
16.00	4	80	0.045	28.800	6.400	1590	285	52.8
20.00	4	80	0.055	36.000	8.000	1275	280	80.7

Titanium alloys
> 300 HB
[Ti6Al4V]



10.00	4	70	0.030	18.000	4.000	2230	265	19.3
12.00	4	70	0.035	21.600	4.800	1855	260	27.0
16.00	4	70	0.040	28.800	6.400	1395	225	41.1
20.00	4	70	0.050	36.000	8.000	1115	225	64.2



Nickel-based alloys
annealed
Rm <1000 N/mm²
[Inconel 718]



10.00	4	25	0.025	12.000	10.000	795	80	9.5
12.00	4	25	0.030	14.400	12.000	665	80	13.8
16.00	4	25	0.035	19.200	16.000	495	70	21.4
20.00	4	25	0.045	24.000	20.000	400	70	34.4

Nickel-based alloys
precipitation hardened
Rm > 1000 N/mm²
[Inconel 718]







10.00	4	20	0.020	12.000	10.000	635	50	6.1
12.00	4	20	0.025	14.400	12.000	530	55	9.2
16.00	4	20	0.030	19.200	16.000	400	50	14.7
20.00	4	20	0.035	24.000	20.000	320	45	21.4

Corner radius end mills ZX

Smooth-edged, normal version, short neck



HM
MG10 λ 40°
 γ 5°

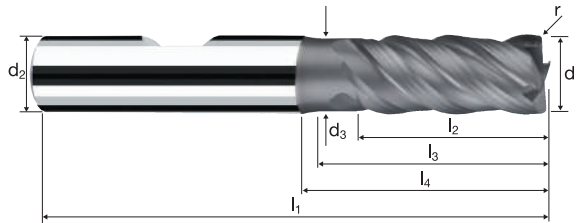

Roughing




Finishing



Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	Coating		
											TICUT	POLYCHROM	
Example: Order-N°.												Coating: P Article-N°: 8820 ø-Code: 457	
457	10.00	10.00	9.20	72	22.00	27.99	31.00	2.500	0.0°	4	●	■	
506	12.00	12.00	11.00	83	26.00	33.29	37.00	2.500	0.0°	4	●	■	
612	16.00	16.00	15.00	92	32.00	38.73	43.00	2.500	0.0°	4	●	■	
684	20.00	20.00	19.00	104	38.00	48.23	53.00	2.500	0.0°	4	●	■	
508	12.00	12.00	11.00	83	26.00	33.29	37.00	4.000	0.0°	4	●	■	
614	16.00	16.00	15.00	92	32.00	38.73	43.00	4.000	0.0°	4	●	■	
686	20.00	20.00	19.00	104	38.00	48.23	53.00	4.000	0.0°	4	●	■	
■ Availability and delivery dates on request													

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
4.00	4	150	0.030	7.200	1.600	11935	1430	16.5	16°
5.00	4	150	0.035	9.000	2.000	9550	1335	24.1	16°
6.00	4	150	0.040	10.800	2.400	7960	1275	33.0	16°
8.00	4	150	0.050	14.400	3.200	5970	1195	55.0	16°
10.00	4	150	0.065	18.000	4.000	4775	1240	89.4	16°
12.00	4	150	0.075	21.600	4.800	3980	1195	123.8	16°
16.00	4	150	0.085	24.000	6.400	2985	1015	155.9	16°



Steel
1100 - 1300 N/mm²




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
4.00	4	115	0.025	7.200	1.600	9150	915	10.5	14°
5.00	4	115	0.030	9.000	2.000	7320	880	15.8	14°
6.00	4	115	0.035	10.800	2.400	6100	855	22.1	14°
8.00	4	115	0.045	14.400	3.200	4575	825	38.0	14°
10.00	4	115	0.055	18.000	4.000	3660	805	58.0	14°
12.00	4	115	0.065	21.600	4.800	3050	795	82.2	14°
16.00	4	115	0.075	24.000	6.400	2290	685	105.2	14°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
4.00	4	90	0.020	7.200	1.600	7160	575	6.6	11°
5.00	4	90	0.025	9.000	2.000	5730	575	10.3	11°
6.00	4	90	0.030	10.800	2.400	4775	575	14.9	11°
8.00	4	90	0.035	14.400	3.200	3580	500	23.1	11°
10.00	4	90	0.045	18.000	4.000	2865	515	37.1	11°
12.00	4	90	0.055	21.600	4.800	2385	525	54.5	11°
16.00	4	90	0.065	24.000	6.400	1790	465	71.4	11°


Application



Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
4.00	4	120	0.020	6.000	4.000	9550	765	18.3	18°	18.5
5.00	4	120	0.023	7.500	5.000	7640	705	26.4	18°	23.1
6.00	4	120	0.026	9.000	6.000	6365	660	35.8	18°	27.7
8.00	4	120	0.033	12.000	8.000	4775	630	60.5	18°	36.9
10.00	4	120	0.042	15.000	10.000	3820	640	96.3	18°	46.2
12.00	4	120	0.049	18.000	12.000	3185	625	134.8	18°	55.4
16.00	4	120	0.055	24.000	16.000	2385	525	201.6	18°	73.9



Steel
1100 - 1300 N/mm²










d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
4.00	4	90	0.016	6.000	4.000	7160	460	11.0	18°	18.5
5.00	4	90	0.020	7.500	5.000	5730	460	17.2	18°	23.1
6.00	4	90	0.023	9.000	6.000	4775	440	23.7	18°	27.7
8.00	4	90	0.029	12.000	8.000	3580	415	39.9	18°	36.9
10.00	4	90	0.036	15.000	10.000	2865	415	61.9	18°	46.2
12.00	4	90	0.042	18.000	12.000	2385	400	86.6	18°	55.4
16.00	4	90	0.049	24.000	16.000	1790	350	134.4	18°	73.9

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
4.00	4	70	0.013	6.000	4.000	5570	290	7.0	13°	26.0
5.00	4	70	0.016	7.500	5.000	4455	285	10.7	13°	32.5
6.00	4	70	0.020	9.000	6.000	3715	295	16.0	13°	39.0
8.00	4	70	0.023	12.000	8.000	2785	255	24.6	13°	52.0
10.00	4	70	0.029	15.000	10.000	2230	260	38.8	13°	65.0
12.00	4	70	0.036	18.000	12.000	1855	265	57.8	13°	78.0
16.00	4	70	0.042	24.000	16.000	1395	235	90.2	13°	104.0

This way to the cutting data software
ToolExpert MFC.
Quick, easy, reliable.





Corner radius end mills MFC

Smooth-edged, normal version, short neck
High-performance penetration edge, central air/cooling channel



HM
MG10 λ 45°
 γ 10°

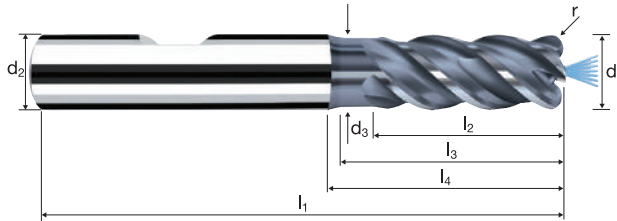


Roughing HPC Roughing HDC Finishing



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

Ø Code	d ₁ e8	d ₂ h5	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	α	z	POLYCHROM	
											P8207	P8107
218	4.00	6.00	3.70	57	8.00	16.00	20.82	0.200	3.0°	4	●	●
258	5.00	6.00	4.60	57	10.00	18.00	21.27	0.200	1.5°	4	●	●
297	6.00	6.00	5.50	57	12.00	18.15	20.00	0.200	0.0°	4	●	●
385	8.00	8.00	7.40	63	19.00	23.63	26.00	0.200	0.0°	4	●	●
445	10.00	10.00	9.20	72	23.00	27.99	31.00	0.200	0.0°	4	●	●
496	12.00	12.00	11.00	83	27.00	33.29	37.00	0.200	0.0°	4	●	●
605	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	4	●	●
220	4.00	6.00	3.70	57	8.00	16.00	20.82	0.500	3.0°	4	●	●
260	5.00	6.00	4.60	57	10.00	18.00	21.27	0.500	1.5°	4	●	●
300	6.00	6.00	5.50	57	12.00	18.15	20.00	0.500	0.0°	4	●	●
388	8.00	8.00	7.40	63	19.00	23.63	26.00	0.500	0.0°	4	●	●
448	10.00	10.00	9.20	72	23.00	27.99	31.00	0.500	0.0°	4	●	●
498	12.00	12.00	11.00	83	27.00	33.29	37.00	0.500	0.0°	4	●	●
606	16.00	16.00	15.00	92	32.00	38.73	43.00	0.500	0.0°	4	●	●
302	6.00	6.00	5.50	57	12.00	18.15	20.00	1.000	0.0°	4	●	●
391	8.00	8.00	7.40	63	19.00	23.63	26.00	1.000	0.0°	4	●	●
450	10.00	10.00	9.20	72	23.00	27.99	31.00	1.000	0.0°	4	●	●
501	12.00	12.00	11.00	83	27.00	33.29	37.00	1.000	0.0°	4	●	●
608	16.00	16.00	15.00	92	32.00	38.73	43.00	1.000	0.0°	4	●	●

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φZ [°]
8.00	4	150	0.050	14.400	3.200	5970	1195	55.0	16°
10.00	4	150	0.065	18.000	4.000	4775	1240	89.4	16°
12.00	4	150	0.075	21.600	4.800	3980	1195	123.8	16°
16.00	4	150	0.085	24.000	6.400	2985	1015	155.8	16°



Steel
1100 - 1300 N/mm²




8.00	4	115	0.045	14.400	3.200	4575	825	38.0	14°
10.00	4	115	0.055	18.000	4.000	3660	805	58.0	14°
12.00	4	115	0.065	21.600	4.800	3050	795	82.2	14°
16.00	4	115	0.075	24.000	6.400	2290	685	105.4	14°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



8.00	4	90	0.035	14.400	3.200	3580	500	23.1	11°
10.00	4	90	0.045	18.000	4.000	2865	515	37.1	11°
12.00	4	90	0.055	21.600	4.800	2385	525	54.5	11°
16.00	4	90	0.065	24.000	6.400	1790	465	71.5	11°

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
8.00	4	120	0.033	12.000	8.000	4775	630	60.5	18°	36.9
10.00	4	120	0.042	15.000	10.000	3820	640	96.3	18°	46.2
12.00	4	120	0.049	18.000	12.000	3185	625	134.8	18°	55.4
16.00	4	120	0.055	24.000	16.000	2385	525	201.7	18°	73.9



Steel
1100 - 1300 N/mm²










8.00	4	90	0.029	12.000	8.000	3580	415	39.9	18°	36.9
10.00	4	90	0.036	15.000	10.000	2865	415	61.9	18°	46.2
12.00	4	90	0.042	18.000	12.000	2385	400	86.6	18°	55.4
16.00	4	90	0.049	24.000	16.000	1790	350	134.8	18°	73.9

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



8.00	4	70	0.023	12.000	8.000	2785	255	24.6	13°	52.0
10.00	4	70	0.029	15.000	10.000	2230	260	38.8	13°	65.0
12.00	4	70	0.036	18.000	12.000	1855	265	57.8	13°	78.0
16.00	4	70	0.042	24.000	16.000	1395	235	89.8	13°	104.0

This way to the cutting data software
ToolExpert MFC.
Quick, easy, reliable.





Corner radius end mills MFC

Smooth-edged, normal version, short neck
High-performance penetration edge, central air/cooling channel



HM
MG10 λ 45°
 γ 10°

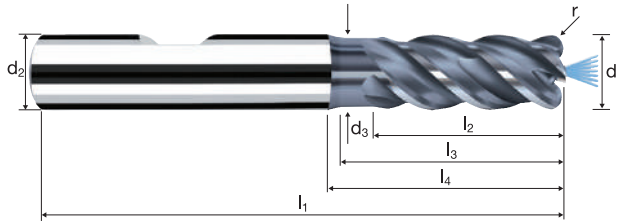


Roughing HPC Roughing HDC Finishing

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------


Ø Code	d ₁ e8	d ₂ h5	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	α	z	POLYCHROM		
											Coating	Article-N°	ø-Code
Example: Order-N°.													
<div style="display: flex; justify-content: space-around; align-items: center;"> Coating: P Article-N°: 8207 ø-Code: 393 </div>													
												P8207	
												P8107	
393	8.00	8.00	7.40	63	19.00	23.63	26.00	1.500	0.0°	4		●	
453	10.00	10.00	9.20	72	23.00	27.99	31.00	1.500	0.0°	4		●	
503	12.00	12.00	11.00	83	27.00	33.29	37.00	1.500	0.0°	4		●	
610	16.00	16.00	15.00	92	32.00	38.73	43.00	1.500	0.0°	4		●	
455	10.00	10.00	9.20	72	23.00	27.99	31.00	2.000	0.0°	4		●	
505	12.00	12.00	11.00	83	27.00	33.29	37.00	2.000	0.0°	4		●	
611	16.00	16.00	15.00	92	32.00	38.73	43.00	2.000	0.0°	4		●	
506	12.00	12.00	11.00	83	27.00	33.29	37.00	2.500	0.0°	4		●	

Application



Material

Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	190	0.020	4.500	1.200	20160	1615	8.7
4.00	4	190	0.025	6.000	1.600	15120	1510	14.5
5.00	4	190	0.035	7.500	2.000	12095	1695	25.4
6.00	4	190	0.040	9.000	2.400	10080	1615	34.8
8.00	4	190	0.055	12.000	3.200	7560	1665	63.9
10.00	4	190	0.070	15.000	4.000	6050	1695	101.6
12.00	4	190	0.075	18.000	4.800	5040	1510	130.6
16.00	4	190	0.100	24.000	6.400	3780	1510	232.2
20.00	4	190	0.130	30.000	8.000	3025	1570	377.4
3.00	4	140	0.020	4.500	1.200	14855	1190	6.4
4.00	4	140	0.025	6.000	1.600	11140	1115	10.7
5.00	4	140	0.035	7.500	2.000	8915	1250	18.7
6.00	4	140	0.040	9.000	2.400	7425	1190	25.7
8.00	4	140	0.055	12.000	3.200	5570	1225	47.1
10.00	4	140	0.070	15.000	4.000	4455	1250	74.9
12.00	4	140	0.075	18.000	4.800	3715	1115	96.3
16.00	4	140	0.100	24.000	6.400	2785	1115	171.1
20.00	4	140	0.130	30.000	8.000	2230	1160	278.1
3.00	4	70	0.020	4.500	1.200	7425	595	3.2
4.00	4	70	0.025	6.000	1.600	5570	555	5.3
5.00	4	70	0.030	7.500	2.000	4455	535	8.0
6.00	4	70	0.040	9.000	2.400	3715	595	12.8
8.00	4	70	0.050	12.000	3.200	2785	555	21.4
10.00	4	70	0.065	15.000	4.000	2230	580	34.8
12.00	4	70	0.075	18.000	4.800	1855	555	48.1
16.00	4	70	0.095	24.000	6.400	1395	530	81.3
20.00	4	70	0.120	30.000	8.000	1115	535	128.3
3.00	4	90	0.015	4.500	1.200	9550	575	3.1
4.00	4	90	0.020	6.000	1.600	7160	575	5.5
5.00	4	90	0.020	7.500	2.000	5730	460	6.9
6.00	4	90	0.030	9.000	2.400	4775	575	12.4
8.00	4	90	0.035	12.000	3.200	3580	500	19.3
10.00	4	90	0.045	15.000	4.000	2865	515	30.9
12.00	4	90	0.055	18.000	4.800	2385	525	45.4
16.00	4	90	0.065	24.000	6.400	1790	465	71.5
20.00	4	90	0.085	30.000	8.000	1430	485	116.9
3.00	4	155	0.015	3.000	3.000	16445	985	8.9
4.00	4	155	0.020	4.000	4.000	12335	985	15.8
5.00	4	155	0.030	5.000	5.000	9870	1185	29.6
6.00	4	155	0.035	6.000	6.000	8225	1150	41.4
8.00	4	155	0.045	8.000	8.000	6165	1110	71.0
10.00	4	155	0.055	10.000	10.000	4935	1085	108.5
12.00	4	155	0.060	12.000	12.000	4110	985	142.1
16.00	4	155	0.075	8.000	16.000	3085	925	118.4
20.00	4	155	0.095	10.000	20.000	2465	935	187.5
3.00	4	105	0.015	3.000	3.000	11140	670	6.0
4.00	4	105	0.020	4.000	4.000	8355	670	10.7
5.00	4	105	0.030	5.000	5.000	6685	800	20.1
6.00	4	105	0.035	6.000	6.000	5570	780	28.1
8.00	4	105	0.045	8.000	8.000	4180	750	48.1
10.00	4	105	0.055	10.000	10.000	3340	735	73.5
12.00	4	105	0.060	12.000	12.000	2785	670	96.3
16.00	4	105	0.075	8.000	16.000	2090	625	80.2
20.00	4	105	0.095	10.000	20.000	1670	635	127.0
3.00	4	55	0.015	3.000	3.000	5835	350	3.2
4.00	4	55	0.020	4.000	4.000	4375	350	5.6
5.00	4	55	0.030	5.000	5.000	3500	420	10.5
6.00	4	55	0.035	6.000	6.000	2920	410	14.7
8.00	4	55	0.045	8.000	8.000	2190	395	25.2
10.00	4	55	0.055	10.000	10.000	1750	385	38.5
12.00	4	55	0.060	12.000	12.000	1460	350	50.4
16.00	4	55	0.075	8.000	16.000	1095	330	42.0
20.00	4	55	0.095	10.000	20.000	875	335	66.5
3.00	4	70	0.010	3.000	3.000	7425	295	2.7
4.00	4	70	0.015	4.000	4.000	5570	335	5.3
5.00	4	70	0.025	5.000	5.000	4455	445	11.1
6.00	4	70	0.030	6.000	6.000	3715	445	16.0
8.00	4	70	0.035	8.000	8.000	2785	390	25.0
10.00	4	70	0.045	10.000	10.000	2230	400	40.1
12.00	4	70	0.050	12.000	12.000	1855	370	53.5
16.00	4	70	0.060	8.000	16.000	1395	335	42.8
20.00	4	70	0.075	10.000	20.000	1115	335	66.8


Corner radius end mills

Smooth-edged, normal version



HM
MG10

λ 40°
 γ 0°

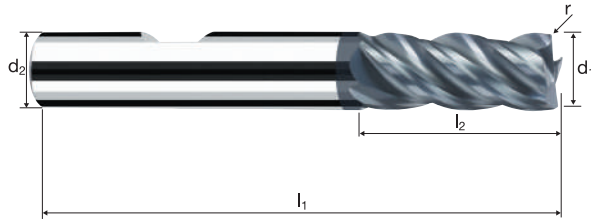


Rm < 850 Rm 850-1100 Rm 1100-1300 Rm 1300-1500 Inox Stainless Ti Titanium GG(G) Tool Steel Nickel-Alloys

Example: Order-N°.										POLYCHROM
										P15326
										P15226
\emptyset Code	d_1 e8	d_2 h6	l_1	l_2	l_4	r 0/+0.03	α	z		
180	3.00	6.00	57	8.00	15.56	0.500	6.0°	4	●	
220	4.00	6.00	57	11.00	16.89	0.500	4.0°	4	●	
260	5.00	6.00	57	13.00	17.22	0.500	2.0°	4	●	
300	6.00	6.00	57	13.00	-	0.500	0.0°	4	●	
388	8.00	8.00	63	19.00	-	0.500	0.0°	4	●	
448	10.00	10.00	72	22.00	-	0.500	0.0°	4	●	
498	12.00	12.00	83	26.00	-	0.500	0.0°	4	●	
302	6.00	6.00	57	13.00	-	1.000	0.0°	4	●	
391	8.00	8.00	63	19.00	-	1.000	0.0°	4	●	
450	10.00	10.00	72	22.00	-	1.000	0.0°	4	●	
501	12.00	12.00	83	26.00	-	1.000	0.0°	4	●	
608	16.00	16.00	92	32.00	-	1.000	0.0°	4	●	
680	20.00	20.00	104	38.00	-	1.000	0.0°	4	●	
453	10.00	10.00	72	22.00	-	1.500	0.0°	4	●	
503	12.00	12.00	83	26.00	-	1.500	0.0°	4	●	
610	16.00	16.00	92	32.00	-	1.500	0.0°	4	●	

Application

Material



Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
10.00	4	190	0.070	15.000	4.000	6050	1695	101.6
12.00	4	190	0.075	18.000	4.800	5040	1510	130.6
16.00	4	190	0.100	24.000	6.400	3780	1510	232.2
20.00	4	190	0.130	30.000	8.000	3025	1570	377.4

10.00	4	140	0.070	15.000	4.000	4455	1250	74.9
12.00	4	140	0.075	18.000	4.800	3715	1115	96.3
16.00	4	140	0.100	24.000	6.400	2785	1115	171.1
20.00	4	140	0.130	30.000	8.000	2230	1160	278.1

10.00	4	70	0.065	15.000	4.000	2230	580	34.8
12.00	4	70	0.075	18.000	4.800	1855	555	48.1
16.00	4	70	0.095	24.000	6.400	1395	530	81.3
20.00	4	70	0.120	30.000	8.000	1115	535	128.3

10.00	4	90	0.045	15.000	4.000	2865	515	30.9
12.00	4	90	0.055	18.000	4.800	2385	525	45.4
16.00	4	90	0.065	24.000	6.400	1790	465	71.5
20.00	4	90	0.085	30.000	8.000	1430	485	116.9

10.00	4	155	0.055	10.000	10.000	4935	1085	108.5
12.00	4	155	0.060	12.000	12.000	4110	985	142.1
16.00	4	155	0.075	8.000	16.000	3085	925	118.4
20.00	4	155	0.095	10.000	20.000	2465	935	187.5

10.00	4	105	0.055	10.000	10.000	3340	735	73.5
12.00	4	105	0.060	12.000	12.000	2785	670	96.3
16.00	4	105	0.075	8.000	16.000	2090	625	80.2
20.00	4	105	0.095	10.000	20.000	1670	635	127.0

10.00	4	55	0.055	10.000	10.000	1750	385	38.5
12.00	4	55	0.060	12.000	12.000	1460	350	50.4
16.00	4	55	0.075	8.000	16.000	1095	330	42.0
20.00	4	55	0.095	10.000	20.000	875	335	66.5

10.00	4	70	0.045	10.000	10.000	2230	400	40.1
12.00	4	70	0.050	12.000	12.000	1855	370	53.5
16.00	4	70	0.060	8.000	16.000	1395	335	42.8
20.00	4	70	0.075	10.000	20.000	1115	335	66.8


Corner radius end mills

Smooth-edged, normal version



HM
MG10

λ 40°
 γ 0°

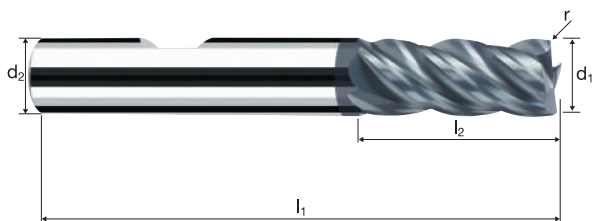

Roughing


Finishing



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	--------------------------------------

Example: Order-N°.										POLYCHROM
										P15326
										P15226
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	r 0/+0.03	α	z		
505	12.00	12.00	83	26.00	-	2.000	0.0°	4	●	
611	16.00	16.00	92	32.00	-	2.000	0.0°	4	●	
683	20.00	20.00	104	38.00	-	2.000	0.0°	4	●	
457	10.00	10.00	72	22.00	-	2.500	0.0°	4	●	
506	12.00	12.00	83	26.00	-	2.500	0.0°	4	●	
612	16.00	16.00	92	32.00	-	2.500	0.0°	4	●	
684	20.00	20.00	104	38.00	-	2.500	0.0°	4	●	
508	12.00	12.00	83	26.00	-	4.000	0.0°	4	●	
614	16.00	16.00	92	32.00	-	4.000	0.0°	4	●	
686	20.00	20.00	104	38.00	-	4.000	0.0°	4	●	

Application



Material

Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	170	0.015	4.500	1.200	18040	1080	5.8
4.00	4	170	0.020	6.000	1.600	13530	1080	10.4
5.00	4	170	0.025	7.500	2.000	10825	1080	16.2
6.00	4	170	0.030	9.000	2.400	9020	1080	23.4
8.00	4	170	0.040	12.000	3.200	6765	1080	41.6
10.00	4	170	0.050	15.000	4.000	5410	1080	64.9
12.00	4	170	0.060	18.000	4.800	4510	1080	93.5
16.00	4	170	0.075	24.000	6.400	3380	1015	155.8
20.00	4	170	0.095	30.000	8.000	2705	1030	246.8
3.00	4	120	0.015	4.500	1.200	12730	765	4.1
4.00	4	120	0.020	6.000	1.600	9550	765	7.3
5.00	4	120	0.025	7.500	2.000	7640	765	11.5
6.00	4	120	0.030	9.000	2.400	6365	765	16.5
8.00	4	120	0.040	12.000	3.200	4775	765	29.3
10.00	4	120	0.050	15.000	4.000	3820	765	45.8
12.00	4	120	0.060	18.000	4.800	3185	765	66.0
16.00	4	120	0.075	24.000	6.400	2385	715	110.0
20.00	4	120	0.095	30.000	8.000	1910	725	174.2
3.00	4	80	0.010	4.500	1.200	8490	340	1.8
4.00	4	80	0.015	6.000	1.600	6365	380	3.7
5.00	4	80	0.020	7.500	2.000	5095	405	6.1
6.00	4	80	0.025	9.000	2.400	4245	425	9.2
8.00	4	80	0.030	12.000	3.200	3185	380	14.7
10.00	4	80	0.040	15.000	4.000	2545	405	24.4
12.00	4	80	0.050	18.000	4.800	2120	425	36.7
16.00	4	80	0.060	24.000	6.400	1590	380	58.7
20.00	4	80	0.075	30.000	8.000	1275	380	91.7
3.00	4	150	0.015	4.500	1.200	15915	955	5.2
4.00	4	150	0.020	6.000	1.600	11935	955	9.2
5.00	4	150	0.030	7.500	2.000	9550	1145	17.2
6.00	4	150	0.035	9.000	2.400	7960	1115	24.1
8.00	4	150	0.045	12.000	3.200	5970	1075	41.3
10.00	4	150	0.055	15.000	4.000	4775	1050	63.0
12.00	4	150	0.065	18.000	4.800	3980	1035	89.4
16.00	4	150	0.085	24.000	6.400	2985	1015	155.8
20.00	4	150	0.105	30.000	8.000	2385	1005	240.6
3.00	4	135	0.010	3.000	3.000	14325	575	5.2
4.00	4	135	0.015	4.000	4.000	10745	645	10.3
5.00	4	135	0.020	5.000	5.000	8595	690	17.2
6.00	4	135	0.025	6.000	6.000	7160	715	25.8
8.00	4	135	0.030	8.000	8.000	5370	645	41.3
10.00	4	135	0.040	10.000	10.000	4295	690	68.8
12.00	4	135	0.045	12.000	12.000	3580	645	92.8
16.00	4	135	0.055	8.000	16.000	2685	590	75.6
20.00	4	135	0.070	10.000	20.000	2150	600	120.3
3.00	4	95	0.010	3.000	3.000	10080	405	3.6
4.00	4	95	0.015	4.000	4.000	7560	455	7.3
5.00	4	95	0.020	5.000	5.000	6050	485	12.1
6.00	4	95	0.025	6.000	6.000	5040	505	18.1
8.00	4	95	0.030	8.000	8.000	3780	455	29.0
10.00	4	95	0.040	10.000	10.000	3025	485	48.4
12.00	4	95	0.045	12.000	12.000	2520	455	65.3
16.00	4	95	0.055	8.000	16.000	1890	415	53.2
20.00	4	95	0.070	10.000	20.000	1510	425	84.7
3.00	4	65	0.010	2.100	3.000	6895	275	1.7
4.00	4	65	0.010	2.800	4.000	5175	205	2.3
5.00	4	65	0.015	3.500	5.000	4140	250	4.3
6.00	4	65	0.020	4.200	6.000	3450	275	7.0
8.00	4	65	0.025	8.000	8.000	2585	260	16.6
10.00	4	65	0.030	10.000	10.000	2070	250	24.8
12.00	4	65	0.040	12.000	12.000	1725	275	39.7
16.00	4	65	0.045	8.000	16.000	1295	235	29.8
20.00	4	65	0.055	10.000	20.000	1035	230	45.5
3.00	4	125	0.010	3.000	3.000	13265	530	4.8
4.00	4	125	0.015	4.000	4.000	9945	595	9.5
5.00	4	125	0.025	5.000	5.000	7960	795	19.9
6.00	4	125	0.025	6.000	6.000	6630	665	23.9
8.00	4	125	0.035	8.000	8.000	4975	695	44.6
10.00	4	125	0.040	10.000	10.000	3980	635	63.7
12.00	4	125	0.050	12.000	12.000	3315	665	95.5
16.00	4	125	0.065	8.000	16.000	2485	645	82.8
20.00	4	125	0.080	10.000	20.000	1990	635	127.3

Corner radius end mills

Smooth-edged, normal version, short neck




HM
MG10 λ 40°
 γ 6°

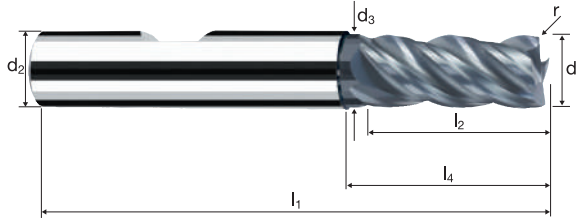

Rm < 850	Rm 850-1100	Rm 1100-1300								Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
-------------	----------------	-----------------	--	--	--	--	--	--	--	-------------------	----------------	--------------------------------------


											POLYCHROM	
Example: Order-N°.											P45319	
Coating: P Article-N°: 45319 ø-Code: 178											P45219	
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	α	z		
178	3.00	6.00	2.80	57	8.00	14.00	20.63	0.200	4.5°	4	●	
218	4.00	6.00	3.70	57	11.00	16.00	20.95	0.200	3.0°	4	●	
258	5.00	6.00	4.60	57	13.00	18.00	21.27	0.200	1.5°	4	●	
297	6.00	6.00	5.50	57	13.00	19.34	20.00	0.200	0.0°	4	●	
385	8.00	8.00	7.40	63	19.00	25.29	26.00	0.200	0.0°	4	●	
445	10.00	10.00	9.20	72	22.00	30.20	31.00	0.200	0.0°	4	●	
496	12.00	12.00	11.00	83	26.00	36.13	37.00	0.200	0.0°	4	●	
605	16.00	16.00	15.00	92	32.00	42.13	43.00	0.200	0.0°	4	●	
180	3.00	6.00	2.80	57	8.00	14.00	20.63	0.500	4.5°	4	●	
220	4.00	6.00	3.70	57	11.00	16.00	20.95	0.500	3.0°	4	●	
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.500	1.5°	4	●	
300	6.00	6.00	5.50	57	13.00	19.34	20.00	0.500	0.0°	4	●	
388	8.00	8.00	7.40	63	19.00	25.29	26.00	0.500	0.0°	4	●	
448	10.00	10.00	9.20	72	22.00	30.20	31.00	0.500	0.0°	4	●	
498	12.00	12.00	11.00	83	26.00	36.13	37.00	0.500	0.0°	4	●	
606	16.00	16.00	15.00	92	32.00	42.13	43.00	0.500	0.0°	4	●	
678	20.00	20.00	19.00	104	38.00	52.13	53.00	0.500	0.0°	4	●	

Application



Material

Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	170	0.030	9.000	2.400	9020	1080	23.4
8.00	4	170	0.040	12.000	3.200	6765	1080	41.6
10.00	4	170	0.050	15.000	4.000	5410	1080	64.9
12.00	4	170	0.060	18.000	4.800	4510	1080	93.5
16.00	4	170	0.075	24.000	6.400	3380	1015	155.8
20.00	4	170	0.095	30.000	8.000	2705	1030	246.8

6.00	4	120	0.030	9.000	2.400	6365	765	16.5
8.00	4	120	0.040	12.000	3.200	4775	765	29.3
10.00	4	120	0.050	15.000	4.000	3820	765	45.8
12.00	4	120	0.060	18.000	4.800	3185	765	66.0
16.00	4	120	0.075	24.000	6.400	2385	715	110.0
20.00	4	120	0.095	30.000	8.000	1910	725	174.2

6.00	4	80	0.025	9.000	2.400	4245	425	9.2
8.00	4	80	0.030	12.000	3.200	3185	380	14.7
10.00	4	80	0.040	15.000	4.000	2545	405	24.4
12.00	4	80	0.050	18.000	4.800	2120	425	36.7
16.00	4	80	0.060	24.000	6.400	1590	380	58.7
20.00	4	80	0.075	30.000	8.000	1275	380	91.7

6.00	4	150	0.035	9.000	2.400	7960	1115	24.1
8.00	4	150	0.045	12.000	3.200	5970	1075	41.3
10.00	4	150	0.055	15.000	4.000	4775	1050	63.0
12.00	4	150	0.065	18.000	4.800	3980	1035	89.4
16.00	4	150	0.085	24.000	6.400	2985	1015	155.8
20.00	4	150	0.105	30.000	8.000	2385	1005	240.6

6.00	4	135	0.025	6.000	6.000	7160	715	25.8
8.00	4	135	0.030	8.000	8.000	5370	645	41.3
10.00	4	135	0.040	10.000	10.000	4295	690	68.8
12.00	4	135	0.045	12.000	12.000	3580	645	92.8
16.00	4	135	0.055	8.000	16.000	2685	590	75.6
20.00	4	135	0.070	10.000	20.000	2150	600	120.3

6.00	4	95	0.025	6.000	6.000	5040	505	18.1
8.00	4	95	0.030	8.000	8.000	3780	455	29.0
10.00	4	95	0.040	10.000	10.000	3025	485	48.4
12.00	4	95	0.045	12.000	12.000	2520	455	65.3
16.00	4	95	0.055	8.000	16.000	1890	415	53.2
20.00	4	95	0.070	10.000	20.000	1510	425	84.7

6.00	4	65	0.020	4.200	6.000	3450	275	7.0
8.00	4	65	0.025	8.000	8.000	2585	260	16.6
10.00	4	65	0.030	10.000	10.000	2070	250	24.8
12.00	4	65	0.040	12.000	12.000	1725	275	39.7
16.00	4	65	0.045	8.000	16.000	1295	235	29.8
20.00	4	65	0.055	10.000	20.000	1035	230	45.5

6.00	4	125	0.025	6.000	6.000	6630	665	23.9
8.00	4	125	0.035	8.000	8.000	4975	695	44.6
10.00	4	125	0.040	10.000	10.000	3980	635	63.7
12.00	4	125	0.050	12.000	12.000	3315	665	95.5
16.00	4	125	0.065	8.000	16.000	2485	645	82.8
20.00	4	125	0.080	10.000	20.000	1990	635	127.3


Corner radius end mills

Smooth-edged, normal version, short neck



HM
MG10

λ 40°
 γ 6°

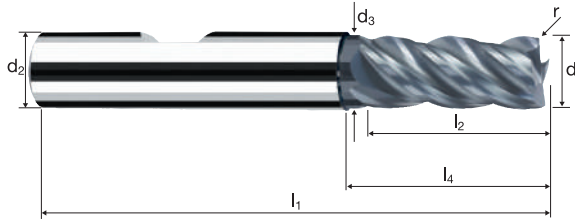

Roughing


Finishing



Rm < 850	Rm 850-1100	Rm 1100-1300						Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
-------------	----------------	-----------------	--	--	--	--	--	-------------------	----------------	--------------------------------------

Example: Order-N°.											POLYCHROM
											P45319
											P45219
\emptyset Code	d_1 e8	d_2 h6	d_3	l_1	l_2	l_3	l_4	r 0/+0.03	α	z	
301	6.00	6.00	5.50	57	13.00	19.34	20.00	0.800	0.0°	4	●
389	8.00	8.00	7.40	63	19.00	25.29	26.00	0.800	0.0°	4	●
449	10.00	10.00	9.20	72	22.00	30.20	31.00	0.800	0.0°	4	●
499	12.00	12.00	11.00	83	26.00	36.13	37.00	0.800	0.0°	4	●
302	6.00	6.00	5.50	57	13.00	19.34	20.00	1.000	0.0°	4	●
391	8.00	8.00	7.40	63	19.00	25.29	26.00	1.000	0.0°	4	●
450	10.00	10.00	9.20	72	22.00	30.20	31.00	1.000	0.0°	4	●
501	12.00	12.00	11.00	83	26.00	36.13	37.00	1.000	0.0°	4	●
608	16.00	16.00	15.00	92	32.00	42.13	43.00	1.000	0.0°	4	●
680	20.00	20.00	19.00	104	38.00	52.13	53.00	1.000	0.0°	4	●
304	6.00	6.00	5.50	57	13.00	19.34	20.00	1.500	0.0°	4	●
393	8.00	8.00	7.40	63	19.00	25.29	26.00	1.500	0.0°	4	●
453	10.00	10.00	9.20	72	22.00	30.20	31.00	1.500	0.0°	4	●
503	12.00	12.00	11.00	83	26.00	36.13	37.00	1.500	0.0°	4	●
610	16.00	16.00	15.00	92	32.00	42.13	43.00	1.500	0.0°	4	●

Application



Material

Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
10.00	4	170	0.050	15.000	4.000	5410	1080	64.9
12.00	4	170	0.060	18.000	4.800	4510	1080	93.5
16.00	4	170	0.075	24.000	6.400	3380	1015	155.8
20.00	4	170	0.095	30.000	8.000	2705	1030	246.8
10.00	4	120	0.050	15.000	4.000	3820	765	45.8
12.00	4	120	0.060	18.000	4.800	3185	765	66.0
16.00	4	120	0.075	24.000	6.400	2385	715	110.0
20.00	4	120	0.095	30.000	8.000	1910	725	174.2
10.00	4	80	0.040	15.000	4.000	2545	405	24.4
12.00	4	80	0.050	18.000	4.800	2120	425	36.7
16.00	4	80	0.060	24.000	6.400	1590	380	58.7
20.00	4	80	0.075	30.000	8.000	1275	380	91.7
10.00	4	150	0.055	15.000	4.000	4775	1050	63.0
12.00	4	150	0.065	18.000	4.800	3980	1035	89.4
16.00	4	150	0.085	24.000	6.400	2985	1015	155.8
20.00	4	150	0.105	30.000	8.000	2385	1005	240.6
10.00	4	135	0.040	10.000	10.000	4295	690	68.8
12.00	4	135	0.045	12.000	12.000	3580	645	92.8
16.00	4	135	0.055	8.000	16.000	2685	590	75.6
20.00	4	135	0.070	10.000	20.000	2150	600	120.3
10.00	4	95	0.040	10.000	10.000	3025	485	48.4
12.00	4	95	0.045	12.000	12.000	2520	455	65.3
16.00	4	95	0.055	8.000	16.000	1890	415	53.2
20.00	4	95	0.070	10.000	20.000	1510	425	84.7
10.00	4	65	0.030	10.000	10.000	2070	250	24.8
12.00	4	65	0.040	12.000	12.000	1725	275	39.7
16.00	4	65	0.045	8.000	16.000	1295	235	29.8
20.00	4	65	0.055	10.000	20.000	1035	230	45.5
10.00	4	125	0.040	10.000	10.000	3980	635	63.7
12.00	4	125	0.050	12.000	12.000	3315	665	95.5
16.00	4	125	0.065	8.000	16.000	2485	645	82.8
20.00	4	125	0.080	10.000	20.000	1990	635	127.3


Corner radius end mills

Smooth-edged, normal version, short neck



HM
MG10


λ 40°
 γ 6°

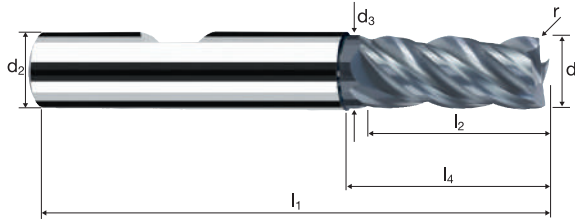

Rm < 850	Rm 850-1100	Rm 1100-1300						Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
-------------	----------------	-----------------	--	--	--	--	--	-------------------	----------------	--------------------------------------

Example: Order-N°.											POLYCHROM	
											P45319	
											P45219	
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	α	z		
306	6.00	6.00	5.50	57	13.00	19.34	20.00	2.000	0.0°	4	●	
395	8.00	8.00	7.40	63	19.00	25.29	26.00	2.000	0.0°	4	●	
455	10.00	10.00	9.20	72	22.00	30.20	31.00	2.000	0.0°	4	●	
505	12.00	12.00	11.00	83	26.00	36.13	37.00	2.000	0.0°	4	●	
611	16.00	16.00	15.00	92	32.00	42.13	43.00	2.000	0.0°	4	●	
683	20.00	20.00	19.00	104	38.00	52.13	53.00	2.000	0.0°	4	●	
457	10.00	10.00	9.20	72	22.00	30.20	31.00	2.500	0.0°	4	●	
506	12.00	12.00	11.00	83	26.00	36.13	37.00	2.500	0.0°	4	●	
612	16.00	16.00	15.00	92	32.00	42.13	43.00	2.500	0.0°	4	●	
684	20.00	20.00	19.00	104	38.00	52.13	53.00	2.500	0.0°	4	●	
508	12.00	12.00	11.00	83	26.00	36.13	37.00	4.000	0.0°	4	●	
614	16.00	16.00	15.00	92	32.00	42.13	43.00	4.000	0.0°	4	●	
686	20.00	20.00	19.00	104	38.00	52.13	53.00	4.000	0.0°	4	●	

Application




Material

Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
3.00	4	60	0.009	3.000	1.800	6365	230	1.2	5°
4.00	4	60	0.013	4.000	2.400	4775	250	2.4	5°
5.00	4	60	0.017	5.000	3.000	3820	260	3.9	5°
6.00	4	60	0.021	7.500	3.600	3185	265	7.2	5°
8.00	4	60	0.028	10.000	4.800	2385	265	12.8	5°
10.00	4	60	0.035	12.500	6.000	1910	265	20.1	5°
12.00	4	60	0.042	15.000	7.200	1590	265	28.9	5°
16.00	4	60	0.050	20.000	9.600	1195	240	45.8	5°



Hardened tool steel
> 60 HRC




3.00	4	25	0.004	3.000	1.800	2655	40	0.2	3°
4.00	4	25	0.006	4.000	2.400	1990	50	0.5	4°
5.00	4	25	0.008	5.000	3.000	1590	50	0.8	5°
6.00	4	25	0.009	6.000	3.600	1325	50	1.0	5°
8.00	4	25	0.011	8.000	4.800	995	45	1.7	5°
10.00	4	25	0.015	10.000	6.000	795	50	2.9	5°
12.00	4	25	0.018	12.000	7.200	665	50	4.1	5°
16.00	4	25	0.023	16.000	9.600	495	45	7.0	5°

High speed steel,
hardened
64 - 70 HRC



3.00	4	15	0.005	2.250	0.450	1590	30	0.0	3°
4.00	4	15	0.006	3.000	0.600	1195	30	0.1	4°
5.00	4	15	0.008	3.750	0.750	955	30	0.1	5°
6.00	4	15	0.006	4.500	3.600	795	20	0.3	5°
8.00	4	15	0.008	6.000	4.800	595	20	0.6	5°
10.00	4	15	0.010	7.500	6.000	475	20	0.9	5°
12.00	4	15	0.012	9.000	7.200	400	20	1.2	5°
16.00	4	15	0.016	12.000	9.600	300	20	2.2	5°

Application




Material

Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
3.00	4	50	0.010	3.000	3.000	5305	210	1.9	5°	34.3
4.00	4	50	0.013	4.000	4.000	3980	205	3.3	5°	45.7
5.00	4	50	0.017	5.000	5.000	3185	215	5.4	5°	57.2
6.00	4	50	0.021	6.000	6.000	2655	225	8.0	5°	68.6
8.00	4	50	0.028	8.000	8.000	1990	225	14.3	5°	91.4
10.00	4	50	0.035	10.000	10.000	1590	225	22.3	5°	114.3
12.00	4	50	0.042	12.000	12.000	1325	225	32.1	5°	137.2
16.00	4	50	0.064	8.000	16.000	995	255	32.6	5°	91.4



Hardened tool steel
> 60 HRC












3.00	4	20	0.004	3.000	3.000	2120	35	0.3	3°	57.2
4.00	4	20	0.006	4.000	4.000	1590	40	0.6	4°	57.2
5.00	4	20	0.008	5.000	5.000	1275	40	1.0	5°	57.2
6.00	4	20	0.009	6.000	6.000	1060	40	1.4	5°	68.6
8.00	4	20	0.011	8.000	8.000	795	35	2.2	5°	91.4
10.00	4	20	0.015	10.000	10.000	635	40	3.8	5°	114.3
12.00	4	20	0.020	12.000	12.000	530	40	6.1	5°	137.2
16.00	4	20	0.032	8.000	16.000	400	50	6.5	5°	91.4

High speed steel,
hardened
64 - 70 HRC



3.00	4	10	0.003	1.500	3.000	1060	15	0.1	3°	28.6
4.00	4	10	0.004	2.000	4.000	795	15	0.1	4°	28.6
5.00	4	10	0.005	2.500	5.000	635	15	0.2	5°	28.6
6.00	4	10	0.006	3.000	6.000	530	15	0.2	5°	34.3
8.00	4	10	0.008	4.000	8.000	400	15	0.4	5°	45.7
10.00	4	10	0.010	5.000	10.000	320	15	0.6	5°	57.2
12.00	4	10	0.012	6.000	12.000	265	15	0.9	5°	68.6
16.00	4	10	0.016	8.000	16.000	200	15	1.6	5°	91.4

Precise cutting data for other applications and materials can be found in the cutting data software **ToolExpert 2.0**





Corner radius end mills HX

Smooth-edged, medium length version, short neck
High-performance penetration edge



HM
XA λ 45°
 γ -10°

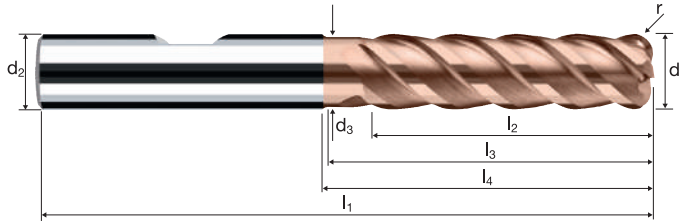


Roughing HPC Roughing HDC Finishing

				HRC 48-56	HRC 56-60	HRC > 60			HSS
--	--	--	--	--------------	--------------	-------------	--	--	-----

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z	Coating		Article-N°		ø-Code		DURO-Si		
											H	8617	178						
Example: Order-N°.																			
178	3.00	6.00	2.80	63	11.00	18.00	24.37	0.200	4.5°	4									●
218	4.00	6.00	3.70	63	13.00	22.00	26.82	0.200	3.5°	4									●
258	5.00	6.00	4.60	63	16.00	24.00	27.27	0.200	1.5°	4									●
297	6.00	6.00	5.50	63	21.00	25.34	26.00	0.200	0.0°	4									●
385	8.00	8.00	7.40	72	31.00	34.79	35.50	0.200	0.0°	4									●
445	10.00	10.00	9.20	84	37.00	42.20	43.00	0.200	0.0°	4									●
496	12.00	12.00	11.00	97	44.00	50.13	51.00	0.200	0.0°	4									●
605	16.00	16.00	15.00	108	53.00	58.13	59.00	0.200	0.0°	4									●
180	3.00	6.00	2.80	63	11.00	18.00	24.37	0.500	4.5°	4									●
220	4.00	6.00	3.70	63	13.00	22.00	26.82	0.500	3.5°	4									●
260	5.00	6.00	4.60	63	16.00	24.00	27.27	0.500	1.5°	4									●
300	6.00	6.00	5.50	63	21.00	25.34	26.00	0.500	0.0°	4									●
388	8.00	8.00	7.40	72	31.00	34.79	35.50	0.500	0.0°	4									●
448	10.00	10.00	9.20	84	37.00	42.20	43.00	0.500	0.0°	4									●
498	12.00	12.00	11.00	97	44.00	50.13	51.00	0.500	0.0°	4									●
606	16.00	16.00	15.00	108	53.00	58.13	59.00	0.500	0.0°	4									●

Application




Material

Hardened tool steel
52 - 56 HRC

H

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	φZ [°]
6.00	4	60	0.021	7.500	3.600	3185	265	7.2	5°
8.00	4	60	0.028	10.000	4.800	2385	265	12.8	5°
10.00	4	60	0.035	12.500	6.000	1910	265	20.1	5°
12.00	4	60	0.042	15.000	7.200	1590	265	28.9	5°
16.00	4	60	0.050	20.000	9.600	1195	240	45.8	5°



Hardened tool steel
> 60 HRC

H


6.00	4	25	0.009	6.000	3.600	1325	50	1.0	5°
8.00	4	25	0.011	8.000	4.800	995	45	1.7	5°
10.00	4	25	0.015	10.000	6.000	795	50	2.9	5°
12.00	4	25	0.018	12.000	7.200	665	50	4.1	5°
16.00	4	25	0.023	16.000	9.600	495	45	7.0	5°

High speed steel,
hardened
64 - 70 HRC

H

6.00	4	15	0.006	4.500	3.600	795	20	0.3	5°
8.00	4	15	0.008	6.000	4.800	595	20	0.6	5°
10.00	4	15	0.010	7.500	6.000	475	20	0.9	5°
12.00	4	15	0.012	9.000	7.200	400	20	1.2	5°
16.00	4	15	0.016	12.000	9.600	300	20	2.2	5°

Application




Material

Hardened tool steel
52 - 56 HRC

H

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
6.00	4	50	0.021	6.000	6.000	2655	225	8.0	5°	68.6
8.00	4	50	0.028	8.000	8.000	1990	225	14.3	5°	91.4
10.00	4	50	0.035	10.000	10.000	1590	225	22.3	5°	114.3
12.00	4	50	0.042	12.000	12.000	1325	225	32.1	5°	137.2
16.00	4	50	0.064	8.000	16.000	995	255	32.6	5°	91.4



Hardened tool steel
> 60 HRC

H










6.00	4	20	0.009	6.000	6.000	1060	40	1.4	5°	68.6
8.00	4	20	0.011	8.000	8.000	795	35	2.2	5°	91.4
10.00	4	20	0.015	10.000	10.000	635	40	3.8	5°	114.3
12.00	4	20	0.020	12.000	12.000	530	40	6.1	5°	137.2
16.00	4	20	0.032	8.000	16.000	400	50	6.5	5°	91.4

High speed steel,
hardened
64 - 70 HRC

H

6.00	4	10	0.006	3.000	6.000	530	15	0.2	5°	34.3
8.00	4	10	0.008	4.000	8.000	400	15	0.4	5°	45.7
10.00	4	10	0.010	5.000	10.000	320	15	0.6	5°	57.2
12.00	4	10	0.012	6.000	12.000	265	15	0.9	5°	68.6
16.00	4	10	0.016	8.000	16.000	200	15	1.6	5°	91.4

Precise cutting data for other applications and materials can be found in the cutting data software **ToolExpert 2.0**





Corner radius end mills HX

Smooth-edged, medium length version, short neck
High-performance penetration edge



HM
XA λ 45°
 γ -10°

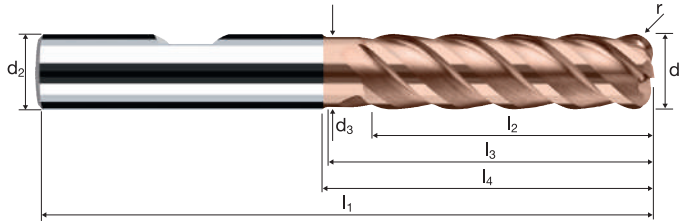


Roughing HPC Roughing HDC Finishing

				HRC 48-56	HRC 56-60	HRC > 60			HSS
--	--	--	--	--------------	--------------	-------------	--	--	-----

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z	DURO-Si	
											H8617	H8517
302	6.00	6.00	5.50	63	21.00	25.34	26.00	1.000	0.0°	4	●	
391	8.00	8.00	7.40	72	31.00	34.79	35.50	1.000	0.0°	4	●	
450	10.00	10.00	9.20	84	37.00	42.20	43.00	1.000	0.0°	4	●	
501	12.00	12.00	11.00	97	44.00	50.13	51.00	1.000	0.0°	4	●	
608	16.00	16.00	15.00	108	53.00	58.13	59.00	1.000	0.0°	4	●	
304	6.00	6.00	5.50	63	21.00	25.34	26.00	1.500	0.0°	4	●	
395	8.00	8.00	7.40	72	31.00	34.79	35.50	2.000	0.0°	4	●	
457	10.00	10.00	9.20	84	37.00	42.20	43.00	2.500	0.0°	4	●	
507	12.00	12.00	11.00	97	44.00	50.13	51.00	3.000	0.0°	4	●	

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
4.00	4	135	0.026	8.000	1.200	10745	1115	10.7	12°
5.00	4	135	0.030	10.000	1.500	8595	1030	15.5	12°
6.00	4	135	0.034	12.000	1.800	7160	975	21.0	12°
8.00	4	135	0.043	16.000	2.400	5370	925	35.5	12°
10.00	4	135	0.055	20.000	3.000	4295	945	56.7	12°
12.00	4	135	0.064	24.000	3.600	3580	915	79.2	12°
16.00	4	135	0.072	25.600	4.800	2685	775	95.0	12°



Steel
1100 - 1300 N/mm²




4.00	4	105	0.021	8.000	1.200	8355	700	6.7	12°
5.00	4	105	0.026	10.000	1.500	6685	695	10.4	12°
6.00	4	105	0.030	12.000	1.800	5570	670	14.4	12°
8.00	4	105	0.038	16.000	2.400	4180	635	24.4	12°
10.00	4	105	0.047	20.000	3.000	3340	630	37.7	12°
12.00	4	105	0.055	24.000	3.600	2785	615	52.9	12°
16.00	4	105	0.064	25.600	4.800	2090	535	65.7	12°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



4.00	4	80	0.017	8.000	1.200	6365	435	4.2	8°
5.00	4	80	0.021	10.000	1.500	5095	430	6.4	8°
6.00	4	80	0.026	12.000	1.800	4245	440	9.5	8°
8.00	4	80	0.030	16.000	2.400	3185	380	14.7	8°
10.00	4	80	0.038	20.000	3.000	2545	385	23.2	8°
12.00	4	80	0.047	24.000	3.600	2120	400	34.5	8°
16.00	4	80	0.055	25.600	4.800	1590	350	43.0	8°

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
4.00	4	110	0.017	6.000	4.000	8755	595	14.3	12°	28.2
5.00	4	110	0.020	7.500	5.000	7005	560	21.0	12°	35.3
6.00	4	110	0.022	9.000	6.000	5835	515	27.7	12°	42.3
8.00	4	110	0.028	12.000	8.000	4375	490	47.1	12°	56.5
10.00	4	110	0.036	15.000	10.000	3500	505	75.6	12°	70.6
12.00	4	110	0.042	18.000	12.000	2920	490	105.9	12°	84.7
16.00	4	110	0.047	24.000	16.000	2190	410	158.0	12°	112.9



Steel
1100 - 1300 N/mm²










4.00	4	85	0.014	6.000	4.000	6765	380	9.1	12°	28.2
5.00	4	85	0.017	7.500	5.000	5410	370	13.8	12°	35.3
6.00	4	85	0.020	9.000	6.000	4510	360	19.5	12°	42.3
8.00	4	85	0.025	12.000	8.000	3380	340	32.5	12°	56.5
10.00	4	85	0.031	15.000	10.000	2705	335	50.3	12°	70.6
12.00	4	85	0.036	18.000	12.000	2255	325	70.1	12°	84.7
16.00	4	85	0.042	24.000	16.000	1690	285	109.1	12°	112.9

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



4.00	4	65	0.011	6.000	4.000	5175	230	5.5	12°	28.2
5.00	4	65	0.014	7.500	5.000	4140	230	8.7	12°	35.3
6.00	4	65	0.017	9.000	6.000	3450	235	12.7	12°	42.3
8.00	4	65	0.020	12.000	8.000	2585	205	19.9	12°	56.5
10.00	4	65	0.025	15.000	10.000	2070	205	31.0	12°	70.6
12.00	4	65	0.031	18.000	12.000	1725	215	46.2	12°	84.7
16.00	4	65	0.036	24.000	16.000	1295	185	71.5	12°	112.9

This way to the cutting data software
ToolExpert MFC.
Quick, easy, reliable.






Corner radius end mills MFC

Smooth-edged, chip breaker, medium length version
High-performance penetration edge, central air/cooling channel



HM
MG10 λ 45°
 γ 10°

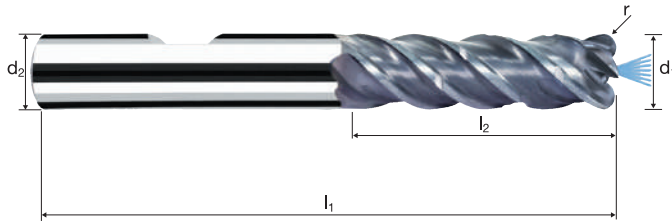


Roughing HPC Roughing HDC Finishing

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

										POLYCHROM	
Example: Order-N°.											
										P8217	
										P8117	
\emptyset Code	d_1 e8	d_2 h5	l_1	l_2	l_4	r 0/+0.03	α	z			
218*	4.00	6.00	63	13.00	19.59	0.200	3.5°	4	●		
258*	5.00	6.00	63	16.00	20.72	0.200	1.5°	4	●		
297	6.00	6.00	63	21.00	-	0.200	0.0°	4	●		
385	8.00	8.00	72	31.00	-	0.200	0.0°	4	●		
445	10.00	10.00	84	37.00	-	0.200	0.0°	4	●		
496	12.00	12.00	97	44.00	-	0.200	0.0°	4	●		
605	16.00	16.00	108	53.00	-	0.200	0.0°	4	●		
220*	4.00	6.00	63	13.00	19.59	0.500	3.5°	4	●		
260*	5.00	6.00	63	16.00	20.72	0.500	1.5°	4	●		
300	6.00	6.00	63	21.00	-	0.500	0.0°	4	●		
388	8.00	8.00	72	31.00	-	0.500	0.0°	4	●		
448	10.00	10.00	84	37.00	-	0.500	0.0°	4	●		
498	12.00	12.00	97	44.00	-	0.500	0.0°	4	●		
606	16.00	16.00	108	53.00	-	0.500	0.0°	4	●		
302	6.00	6.00	63	21.00	-	1.000	0.0°	4	●		
391	8.00	8.00	72	31.00	-	1.000	0.0°	4	●		
450	10.00	10.00	84	37.00	-	1.000	0.0°	4	●		
501	12.00	12.00	97	44.00	-	1.000	0.0°	4	●		
608	16.00	16.00	108	53.00	-	1.000	0.0°	4	●		
* without chip breaker only											

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	φZ [°]
8.00	4	135	0.043	16.000	2.400	5370	925	35.5	12°
10.00	4	135	0.055	20.000	3.000	4295	945	56.7	12°
12.00	4	135	0.064	24.000	3.600	3580	915	79.2	12°
16.00	4	135	0.072	25.600	4.800	2685	775	95.0	12°



Steel
1100 - 1300 N/mm²




8.00	4	105	0.038	16.000	2.400	4180	635	24.4	12°
10.00	4	105	0.047	20.000	3.000	3340	630	37.7	12°
12.00	4	105	0.055	24.000	3.600	2785	615	52.9	12°
16.00	4	105	0.064	25.600	4.800	2090	535	65.7	12°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



8.00	4	80	0.030	16.000	2.400	3185	380	14.7	8°
10.00	4	80	0.038	20.000	3.000	2545	385	23.2	8°
12.00	4	80	0.047	24.000	3.600	2120	400	34.5	8°
16.00	4	80	0.055	25.600	4.800	1590	350	43.0	8°

Application




Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
8.00	4	110	0.028	12.000	8.000	4375	490	47.1	12°	56.5
10.00	4	110	0.036	15.000	10.000	3500	505	75.6	12°	70.6
12.00	4	110	0.042	18.000	12.000	2920	490	105.9	12°	84.7
16.00	4	110	0.047	24.000	16.000	2190	410	158.0	12°	112.9



Steel
1100 - 1300 N/mm²










8.00	4	85	0.025	12.000	8.000	3380	340	32.5	12°	56.5
10.00	4	85	0.031	15.000	10.000	2705	335	50.3	12°	70.6
12.00	4	85	0.036	18.000	12.000	2255	325	70.1	12°	84.7
16.00	4	85	0.042	24.000	16.000	1690	285	109.1	12°	112.9

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



8.00	4	65	0.020	12.000	8.000	2585	205	19.9	12°	56.5
10.00	4	65	0.025	15.000	10.000	2070	205	31.0	12°	70.6
12.00	4	65	0.031	18.000	12.000	1725	215	46.2	12°	84.7
16.00	4	65	0.036	24.000	16.000	1295	185	71.5	12°	112.9

This way to the cutting data software
ToolExpert MFC.
Quick, easy, reliable.





Corner radius end mills MFC

Smooth-edged, chip breaker, medium length version
High-performance penetration edge, central air/cooling channel



HM
MG10 λ 45°
 γ 10°

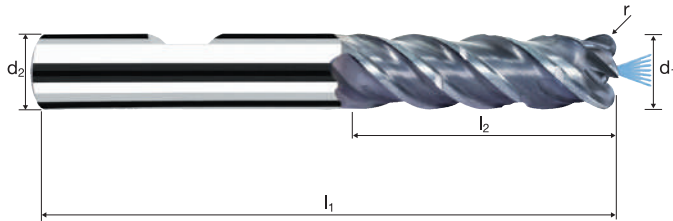

Roughing HPC Roughing HDC Finishing

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

										POLYCHROM	
Example: Order-N°.											
										P8217	
										P8117	
Ø Code	d ₁ e8	d ₂ h5	l ₁	l ₂	l ₄	r 0/+0.03	α	z			
393	8.00	8.00	72	31.00	-	1.500	0.0°	4	●		
453	10.00	10.00	84	37.00	-	1.500	0.0°	4	●		
503	12.00	12.00	97	44.00	-	1.500	0.0°	4	●		
610	16.00	16.00	108	53.00	-	1.500	0.0°	4	●		
455	10.00	10.00	84	37.00	-	2.000	0.0°	4	●		
505	12.00	12.00	97	44.00	-	2.000	0.0°	4	●		
611	16.00	16.00	108	53.00	-	2.000	0.0°	4	●		
506	12.00	12.00	97	44.00	-	2.500	0.0°	4	●		


Application	Material	d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
	Steel < 850 N/mm ² 	4.00	3	180	0.020	6.000	2.400	14325	860	12.4	20°
		5.00	4	180	0.025	7.500	3.000	11460	1145	25.8	20°
	Steel 850 - 1100 N/mm ² 	6.00	4	180	0.030	9.000	3.600	9550	1145	37.1	20°
		8.00	4	180	0.040	12.000	4.800	7160	1145	66.0	20°
		10.00	4	180	0.050	15.000	6.000	5730	1145	103.1	20°
		12.00	4	180	0.055	18.000	7.200	4775	1050	136.1	20°
		16.00	4	180	0.055	24.000	9.600	3580	790	181.5	20°
		20.00	4	180	0.060	30.000	12.000	2865	690	247.5	20°
		4.00	3	130	0.020	6.000	2.400	10345	620	8.9	18°
		5.00	4	130	0.025	7.500	3.000	8275	830	18.6	18°
		6.00	4	130	0.030	9.000	3.600	6895	830	26.8	18°
		8.00	4	130	0.040	12.000	4.800	5175	830	47.7	18°
10.00	4	130	0.050	15.000	6.000	4140	830	74.5	18°		
12.00	4	130	0.055	18.000	7.200	3450	760	98.3	18°		
16.00	4	130	0.055	24.000	9.600	2585	570	131.1	18°		
20.00	4	130	0.060	30.000	12.000	2070	495	178.8	18°		
	Titanium alloys > 300 HB [Ti6Al4V] 	4.00	3	45	0.015	6.000	2.400	3580	160	2.3	12°
		5.00	4	45	0.020	7.500	3.000	2865	230	5.2	12°
		6.00	4	45	0.025	9.000	3.600	2385	240	7.7	12°
		8.00	4	45	0.030	12.000	4.800	1790	215	12.4	12°
		10.00	4	45	0.040	15.000	6.000	1430	230	20.6	12°
		12.00	4	45	0.045	18.000	7.200	1195	215	27.8	12°
		16.00	4	45	0.045	24.000	9.600	895	160	37.1	12°
		20.00	4	45	0.050	30.000	12.000	715	145	51.6	12°
		4.00	3	60	0.015	6.000	2.400	4775	215	3.1	12°
		5.00	4	60	0.020	7.500	3.000	3820	305	6.9	12°
6.00	4	60	0.025	9.000	3.600	3185	320	10.3	12°		
8.00	4	60	0.030	12.000	4.800	2385	285	16.5	12°		
10.00	4	60	0.040	15.000	6.000	1910	305	27.5	12°		
12.00	4	60	0.045	18.000	7.200	1590	285	37.1	12°		
16.00	4	60	0.045	24.000	8.400	1195	215	43.3	12°		
20.00	4	60	0.050	30.000	12.000	955	190	68.8	12°		
	Steel < 850 N/mm ² 	4.00	3	150	0.020	5.000	4.000	11935	715	14.3	20°
		5.00	4	150	0.025	6.300	5.000	9550	955	30.1	20°
	Steel 850 - 1100 N/mm ² 	6.00	4	150	0.030	7.500	6.000	7960	955	43.0	20°
		8.00	4	150	0.040	10.000	8.000	5970	955	76.4	20°
		10.00	4	150	0.050	12.500	10.000	4775	955	119.4	20°
		12.00	4	150	0.055	15.000	12.000	3980	875	157.6	20°
		16.00	4	150	0.055	20.000	16.000	2985	655	210.1	20°
		20.00	4	150	0.060	25.000	20.000	2385	575	286.5	20°
		4.00	3	80	0.020	5.000	4.000	6365	380	7.6	20°
		5.00	4	80	0.025	6.300	5.000	5095	510	16.0	20°
		6.00	4	80	0.030	7.500	6.000	4245	510	22.9	20°
		8.00	4	80	0.040	10.000	8.000	3185	510	40.7	20°
10.00	4	80	0.050	12.500	10.000	2545	510	63.7	20°		
12.00	4	80	0.055	15.000	12.000	2120	465	84.0	20°		
16.00	4	80	0.055	20.000	16.000	1590	350	112.0	20°		
20.00	4	80	0.060	25.000	20.000	1275	305	152.8	20°		
	Titanium alloys > 300 HB [Ti6Al4V] 	4.00	3	35	0.015	5.000	4.000	2785	125	2.5	14°
		5.00	4	35	0.020	6.300	5.000	2230	180	5.6	14°
		6.00	4	35	0.025	7.500	6.000	1855	185	8.4	14°
		8.00	4	35	0.030	10.000	8.000	1395	165	13.4	14°
		10.00	4	35	0.040	12.500	10.000	1115	180	22.3	14°
		12.00	4	35	0.045	15.000	12.000	930	165	30.1	14°
		16.00	4	35	0.045	20.000	16.000	695	125	40.1	14°
		20.00	4	35	0.050	25.000	20.000	555	110	55.7	14°
		4.00	3	50	0.015	5.000	4.000	3980	180	3.6	14°
		5.00	4	50	0.020	6.300	5.000	3185	255	8.0	14°
6.00	4	50	0.025	7.500	6.000	2655	265	11.9	14°		
8.00	4	50	0.030	10.000	8.000	1990	240	19.1	14°		
10.00	4	50	0.040	12.500	10.000	1590	255	31.8	14°		
12.00	4	50	0.045	15.000	12.000	1325	240	43.0	14°		
16.00	4	50	0.045	20.000	16.000	995	180	57.3	14°		
20.00	4	50	0.050	25.000	20.000	795	160	79.6	14°		

Cylindrical end mills SupraCarb®

Profiled, normal version, short neck
High-performance penetration edge, central air/cooling channel

Base-X
B


HM
MG10 λ 38°
 γ 0°

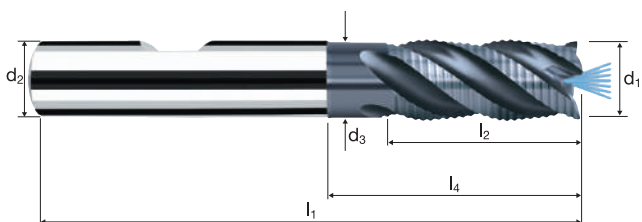

Rm < 850	Rm 850-1100	Rm 1100-1300							Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	--	--	--	--	--	--	-------------------	----------------	---------------------

Ø Code	d ₁ e8	d ₂ h5	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	POLYCHROM									
											Example: Order-N°.		Coating		Article-N°.		ø-Code			
											P	8402	220							
220	4.00	6.00	3.70	57	11.00	16.00	20.95	0.100	3.0°	3	●	P8402								
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.100	1.5°	4	●	P8302								
300	6.00	6.00	5.50	57	13.00	19.34	20.00	0.100	0.0°	4	●									
391	8.00	8.00	7.40	63	19.00	25.29	26.00	0.150	0.0°	4	●									
450	10.00	10.00	9.20	72	22.00	30.20	31.00	0.200	0.0°	4	●									
501	12.00	12.00	11.00	83	26.00	36.13	37.00	0.200	0.0°	4	●									
610	16.00	16.00	15.00	92	32.00	42.13	43.00	0.200	0.0°	4	●									
682	20.00	20.00	19.00	104	38.00	52.13	53.00	0.200	0.0°	4	●									

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	3	180	0.015	3.600	1.800	19100	860	5.6
4.00	3	180	0.020	4.800	2.400	14325	860	9.9
5.00	4	180	0.025	6.000	3.000	11460	1145	20.6
6.00	4	180	0.030	7.200	3.600	9550	1145	29.7
8.00	4	180	0.040	9.600	4.800	7160	1145	52.8
10.00	4	180	0.050	12.000	6.000	5730	1145	82.5
12.00	4	180	0.055	14.400	7.200	4775	1050	108.9
16.00	4	180	0.055	19.200	9.600	3580	790	145.2
20.00	4	180	0.060	24.000	12.000	2865	690	198.0

Steel
850 - 1100 N/mm²



3.00	3	130	0.015	3.600	1.800	13795	620	4.0
4.00	3	130	0.020	4.800	2.400	10345	620	7.2
5.00	4	130	0.025	6.000	3.000	8275	830	14.9
6.00	4	130	0.030	7.200	3.600	6895	830	21.5
8.00	4	130	0.040	9.600	4.800	5175	830	38.1
10.00	4	130	0.050	12.000	6.000	4140	830	59.6
12.00	4	130	0.055	14.400	7.200	3450	760	78.7
16.00	4	130	0.055	19.200	9.600	2585	570	104.9
20.00	4	130	0.060	24.000	12.000	2070	495	143.0

Titanium alloys
> 300 HB
[Ti6Al4V]



3.00	3	45	0.010	3.600	1.800	4775	145	0.9
4.00	3	45	0.015	4.800	2.400	3580	160	1.9
5.00	4	45	0.020	6.000	3.000	2865	230	4.1
6.00	4	45	0.025	7.200	3.600	2385	240	6.2
8.00	4	45	0.030	9.600	4.800	1790	215	9.9
10.00	4	45	0.040	12.000	6.000	1430	230	16.5
12.00	4	45	0.045	14.400	7.200	1195	215	22.3
16.00	4	45	0.045	19.200	9.600	895	160	29.7
20.00	4	45	0.050	24.000	12.000	715	145	41.3

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



3.00	3	60	0.010	3.600	1.800	6365	190	1.2
4.00	3	60	0.015	4.800	2.400	4775	215	2.5
5.00	4	60	0.020	6.000	3.000	3820	305	5.5
6.00	4	60	0.025	7.200	3.600	3185	320	8.3
8.00	4	60	0.030	9.600	4.800	2385	285	13.2
10.00	4	60	0.040	12.000	6.000	1910	305	22.0
12.00	4	60	0.045	14.400	7.200	1590	285	29.7
16.00	4	60	0.045	16.800	8.400	1195	215	30.3
20.00	4	60	0.050	24.000	12.000	955	190	55.0



Steel
< 850 N/mm²



3.00	3	150	0.015	3.000	3.000	15915	715	6.4
4.00	3	150	0.020	4.000	4.000	11935	715	11.5
5.00	4	150	0.025	5.000	5.000	9550	955	23.9
6.00	4	150	0.030	6.000	6.000	7960	955	34.4
8.00	4	150	0.040	8.000	8.000	5970	955	61.1
10.00	4	150	0.050	10.000	10.000	4775	955	95.5
12.00	4	150	0.055	12.000	12.000	3980	875	126.1
16.00	4	150	0.055	16.000	16.000	2985	655	168.1
20.00	4	150	0.060	20.000	20.000	2385	575	229.2

Steel
850 - 1100 N/mm²



3.00	3	80	0.015	3.000	3.000	8490	380	3.4
4.00	3	80	0.020	4.000	4.000	6365	380	6.1
5.00	4	80	0.025	5.000	5.000	5095	510	12.7
6.00	4	80	0.030	6.000	6.000	4245	510	18.3
8.00	4	80	0.040	8.000	8.000	3185	510	32.6
10.00	4	80	0.050	10.000	10.000	2545	510	50.9
12.00	4	80	0.055	12.000	12.000	2120	465	67.2
16.00	4	80	0.055	16.000	16.000	1590	350	89.6
20.00	4	80	0.060	20.000	20.000	1275	305	122.2

Titanium alloys
> 300 HB
[Ti6Al4V]



3.00	3	35	0.010	3.000	3.000	3715	110	1.0
4.00	3	35	0.015	4.000	4.000	2785	125	2.0
5.00	4	35	0.020	5.000	5.000	2230	180	4.5
6.00	4	35	0.025	6.000	6.000	1855	185	6.7
8.00	4	35	0.030	8.000	8.000	1395	165	10.7
10.00	4	35	0.040	10.000	10.000	1115	180	17.8
12.00	4	35	0.045	12.000	12.000	930	165	24.1
16.00	4	35	0.045	16.000	16.000	695	125	32.1
20.00	4	35	0.050	20.000	20.000	555	110	44.6

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




3.00	3	50	0.010	3.000	3.000	5305	160	1.4
4.00	3	50	0.015	4.000	4.000	3980	180	2.9
5.00	4	50	0.020	5.000	5.000	3185	255	6.4
6.00	4	50	0.025	6.000	6.000	2655	265	9.5
8.00	4	50	0.030	8.000	8.000	1990	240	15.3
10.00	4	50	0.040	10.000	10.000	1590	255	25.5
12.00	4	50	0.045	12.000	12.000	1325	240	34.4
16.00	4	50	0.045	16.000	16.000	995	180	45.8
20.00	4	50	0.050	20.000	20.000	795	160	63.7

Cylindrical end mills SupraCarb®

Profiled, normal version, short neck



HM MG10	λ 38° γ 0°

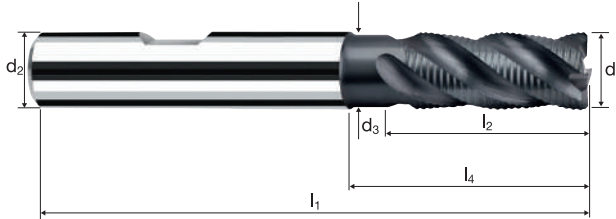


Roughing	Finishing

Rm < 850	Rm 850-1100	Rm 1100-1300						Inox Stainless	Ti Titanium	GG(G) Tool Steel
----------	-------------	--------------	--	--	--	--	--	----------------	-------------	------------------

Example: Order-N°.												POLYCHROM
												P15336
												P15236
∅ Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z		
180	3.00	6.00	2.80	57	8.00	14.00	20.63	0.25	4.5°	3		●
220	4.00	6.00	3.70	57	11.00	16.00	20.95	0.30	3.0°	3		●
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.35	1.5°	4		●
300	6.00	6.00	5.50	57	13.00	19.34	20.00	0.35	0.0°	4		●
391	8.00	8.00	7.40	63	19.00	25.29	26.00	0.45	0.0°	4		●
450	10.00	10.00	9.20	72	22.00	30.20	31.00	0.60	0.0°	4		●
501	12.00	12.00	11.00	83	26.00	36.13	37.00	0.60	0.0°	4		●
570	14.00	14.00	13.00	83	26.00	36.13	37.00	0.60	0.0°	4		●
610	16.00	16.00	15.00	92	32.00	42.13	43.00	0.70	0.0°	4		●
612	16.00	16.00	15.00	92	32.00	42.13	43.00	0.70	0.0°	6		●
640	18.00	18.00	17.00	92	32.00	42.13	43.00	0.70	0.0°	4		●
682	20.00	20.00	19.00	104	38.00	52.13	53.00	0.70	0.0°	4		●
684	20.00	20.00	19.00	104	38.00	52.13	53.00	0.70	0.0°	6		●

Application



Material

Steel
< 850 N/mm²




Steel
850 - 1100 N/mm²



Titanium alloys
> 300 HB
[Ti6Al4V]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Titanium alloys
> 300 HB
[Ti6Al4V]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	3	180	0.015	3.600	1.800	19100	860	5.6
4.00	3	180	0.020	4.800	2.400	14325	860	9.9
5.00	4	180	0.025	6.000	3.000	11460	1145	20.6
6.00	4	180	0.030	7.200	3.600	9550	1145	29.7
8.00	4	180	0.040	9.600	4.800	7160	1145	52.8
10.00	4	180	0.050	12.000	6.000	5730	1145	82.5
12.00	4	180	0.055	14.400	7.200	4775	1050	108.9
16.00	4	180	0.055	19.200	9.600	3580	790	145.2
20.00	4	180	0.060	24.000	12.000	2865	690	198.0
3.00	3	130	0.015	3.600	1.800	13795	620	4.0
4.00	3	130	0.020	4.800	2.400	10345	620	7.2
5.00	4	130	0.025	6.000	3.000	8275	830	14.9
6.00	4	130	0.030	7.200	3.600	6895	830	21.5
8.00	4	130	0.040	9.600	4.800	5175	830	38.1
10.00	4	130	0.050	12.000	6.000	4140	830	59.6
12.00	4	130	0.055	14.400	7.200	3450	760	78.7
16.00	4	130	0.055	19.200	9.600	2585	570	104.9
20.00	4	130	0.060	24.000	12.000	2070	495	143.0
3.00	3	45	0.010	3.600	1.800	4775	145	0.9
4.00	3	45	0.015	4.800	2.400	3580	160	1.9
5.00	4	45	0.020	6.000	3.000	2865	230	4.1
6.00	4	45	0.025	7.200	3.600	2385	240	6.2
8.00	4	45	0.030	9.600	4.800	1790	215	9.9
10.00	4	45	0.040	12.000	6.000	1430	230	16.5
12.00	4	45	0.045	14.400	7.200	1195	215	22.3
16.00	4	45	0.045	19.200	9.600	895	160	29.7
20.00	4	45	0.050	24.000	12.000	715	145	41.3
3.00	3	55	0.010	3.600	1.800	5835	175	1.1
4.00	3	55	0.015	4.800	2.400	4375	195	2.3
5.00	4	55	0.020	6.000	3.000	3500	280	5.0
6.00	4	55	0.025	7.200	3.600	2920	290	7.6
8.00	4	55	0.030	9.600	4.800	2190	265	12.1
10.00	4	55	0.040	12.000	6.000	1750	280	20.2
12.00	4	55	0.045	14.400	7.200	1460	265	27.2
16.00	4	55	0.045	19.200	9.600	1095	195	36.3
20.00	4	55	0.050	24.000	12.000	875	175	50.4
3.00	3	150	0.015	3.000	3.000	15915	715	6.4
4.00	3	150	0.020	4.000	4.000	11935	715	11.5
5.00	4	150	0.025	5.000	5.000	9550	955	23.9
6.00	4	150	0.030	6.000	6.000	7960	955	34.4
8.00	4	150	0.040	8.000	8.000	5970	955	61.1
10.00	4	150	0.050	10.000	10.000	4775	955	95.5
12.00	4	150	0.055	12.000	12.000	3980	875	126.1
16.00	4	150	0.055	16.000	16.000	2985	655	168.1
20.00	4	150	0.060	20.000	20.000	2385	575	229.2
3.00	3	80	0.015	3.000	3.000	8490	380	3.4
4.00	3	80	0.020	4.000	4.000	6365	380	6.1
5.00	4	80	0.025	5.000	5.000	5095	510	12.7
6.00	4	80	0.030	6.000	6.000	4245	510	18.3
8.00	4	80	0.040	8.000	8.000	3185	510	32.6
10.00	4	80	0.050	10.000	10.000	2545	510	50.9
12.00	4	80	0.055	12.000	12.000	2120	465	67.2
16.00	4	80	0.055	16.000	16.000	1590	350	89.6
20.00	4	80	0.060	20.000	20.000	1275	305	122.2
3.00	3	35	0.010	3.000	3.000	3715	110	1.0
4.00	3	35	0.015	4.000	4.000	2785	125	2.0
5.00	4	35	0.020	5.000	5.000	2230	180	4.5
6.00	4	35	0.025	6.000	6.000	1855	185	6.7
8.00	4	35	0.030	8.000	8.000	1395	165	10.7
10.00	4	35	0.040	10.000	10.000	1115	180	17.8
12.00	4	35	0.045	12.000	12.000	930	165	24.1
16.00	4	35	0.045	16.000	16.000	695	125	32.1
20.00	4	35	0.050	20.000	20.000	555	110	44.6
3.00	3	45	0.010	3.000	3.000	4775	145	1.3
4.00	3	45	0.015	4.000	4.000	3580	160	2.6
5.00	4	45	0.020	5.000	5.000	2865	230	5.7
6.00	4	45	0.025	6.000	6.000	2385	240	8.6
8.00	4	45	0.030	8.000	8.000	1790	215	13.8
10.00	4	45	0.040	10.000	10.000	1430	230	22.9
12.00	4	45	0.045	12.000	12.000	1195	215	30.9
16.00	4	45	0.045	16.000	16.000	895	160	41.3
20.00	4	45	0.050	20.000	20.000	715	145	57.3

Cylindrical end mills

Profiled, normal version



HM λ **38°**
MG10 γ **0°**

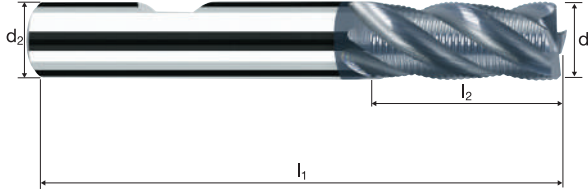


Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	-------

Example: Order-N°.										POLYCHROM
										P45371
\emptyset Code	d_1 e8	d_2 h6	l_1	l_2	l_4	45°	α	z		
180	3.00	6.00	57	8.00	15.56	0.25	6.0°	3		●
220	4.00	6.00	57	11.00	16.89	0.30	4.0°	3		●
260	5.00	6.00	57	13.00	17.22	0.35	2.0°	4		●
300	6.00	6.00	57	13.00	-	0.35	0.0°	4		●
391	8.00	8.00	63	19.00	-	0.45	0.0°	4		●
450	10.00	10.00	72	22.00	-	0.60	0.0°	4		●
501	12.00	12.00	83	26.00	-	0.60	0.0°	4		●
610	16.00	16.00	92	32.00	-	0.70	0.0°	4		●
612	16.00	16.00	92	32.00	-	0.70	0.0°	6		●
682	20.00	20.00	104	38.00	-	0.70	0.0°	4		●
684	20.00	20.00	104	38.00	-	0.70	0.0°	6		●

Application

Material



Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
5.00	4	55	0.025	5.000	2.300	3500	350	4.0
6.00	4	55	0.030	6.000	2.700	2920	350	5.7
8.00	4	55	0.040	8.000	3.600	2190	350	10.1
10.00	4	55	0.050	10.000	4.500	1750	350	15.8
12.00	4	55	0.080	12.000	5.400	1460	465	30.3
16.00	4	55	0.105	16.000	7.200	1095	460	52.9
20.00	4	55	0.130	20.000	9.000	875	455	81.9
22.00	4	55	0.145	22.000	9.900	795	460	100.5
25.00	4	55	0.165	25.000	11.300	700	460	130.6

Steel
1100 - 1300 N/mm²



5.00	4	42	0.025	5.000	2.300	2675	265	3.1
6.00	4	42	0.030	6.000	2.700	2230	265	4.3
8.00	4	42	0.040	8.000	3.600	1670	265	7.7
10.00	4	42	0.050	10.000	4.500	1335	265	12.0
12.00	4	42	0.080	12.000	5.400	1115	355	23.1
16.00	4	42	0.105	16.000	7.200	835	350	40.4
20.00	4	42	0.130	20.000	9.000	670	350	62.6
22.00	4	42	0.145	22.000	9.900	610	350	76.8
25.00	4	42	0.165	25.000	11.300	535	355	99.7

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



5.00	4	25	0.025	5.000	2.300	1590	160	1.8
6.00	4	25	0.030	6.000	2.700	1325	160	2.6
8.00	4	25	0.040	8.000	3.600	995	160	4.6
10.00	4	25	0.050	10.000	4.500	795	160	7.2
12.00	4	25	0.080	12.000	5.400	665	210	13.8
16.00	4	25	0.105	16.000	7.200	495	210	24.1
20.00	4	25	0.130	20.000	9.000	400	205	37.2
22.00	4	25	0.145	22.000	9.900	360	210	45.7
25.00	4	25	0.165	25.000	11.300	320	210	59.3

Cast iron
(lamellar / spheroidal)



5.00	4	47	0.025	5.000	2.300	2990	300	3.4
6.00	4	47	0.030	6.000	2.700	2495	300	4.8
8.00	4	47	0.040	8.000	3.600	1870	300	8.6
10.00	4	47	0.050	10.000	4.500	1495	300	13.5
12.00	4	47	0.080	12.000	5.400	1245	400	25.9
16.00	4	47	0.105	16.000	7.200	935	395	45.2
20.00	4	47	0.130	20.000	9.000	750	390	70.0
22.00	4	47	0.145	22.000	9.900	680	395	85.9
25.00	4	47	0.165	25.000	11.300	600	395	111.6



Steel
850 - 1100 N/mm²



5.00	4	53	0.020	5.000	5.000	3375	270	6.7
6.00	4	53	0.020	6.000	6.000	2810	225	8.1
8.00	4	53	0.030	8.000	8.000	2110	255	16.2
10.00	4	53	0.035	10.000	10.000	1685	235	23.6
12.00	4	53	0.060	12.000	12.000	1405	335	48.6
16.00	4	53	0.080	16.000	16.000	1055	335	86.4
20.00	4	53	0.100	20.000	20.000	845	335	135.0
22.00	4	53	0.110	22.000	22.000	765	335	163.3
25.00	4	53	0.125	25.000	25.000	675	335	210.9

Steel
1100 - 1300 N/mm²



5.00	4	40	0.020	5.000	5.000	2545	205	5.1
6.00	4	40	0.020	6.000	6.000	2120	170	6.1
8.00	4	40	0.030	8.000	8.000	1590	190	12.2
10.00	4	40	0.035	10.000	10.000	1275	180	17.8
12.00	4	40	0.060	12.000	12.000	1060	255	36.7
16.00	4	40	0.080	16.000	16.000	795	255	65.2
20.00	4	40	0.100	20.000	20.000	635	255	101.9
22.00	4	40	0.110	22.000	22.000	580	255	123.2
25.00	4	40	0.125	25.000	25.000	510	255	159.2

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



5.00	4	22	0.020	5.000	5.000	1400	110	2.8
6.00	4	22	0.020	6.000	6.000	1165	95	3.4
8.00	4	22	0.030	8.000	8.000	875	105	6.7
10.00	4	22	0.035	10.000	10.000	700	100	9.8
12.00	4	22	0.060	12.000	12.000	585	140	20.2
16.00	4	22	0.080	16.000	16.000	440	140	35.9
20.00	4	22	0.100	20.000	20.000	350	140	56.0
22.00	4	22	0.110	22.000	22.000	320	140	67.8
25.00	4	22	0.125	25.000	25.000	280	140	87.5

Cast iron
(lamellar / spheroidal)



5.00	4	42	0.020	5.000	5.000	2675	215	5.3
6.00	4	42	0.020	6.000	6.000	2230	180	6.4
8.00	4	42	0.030	8.000	8.000	1670	200	12.8
10.00	4	42	0.035	10.000	10.000	1335	185	18.7
12.00	4	42	0.060	12.000	12.000	1115	265	38.5
16.00	4	42	0.080	16.000	16.000	835	265	68.4
20.00	4	42	0.100	20.000	20.000	670	265	107.0
22.00	4	42	0.110	22.000	22.000	610	265	129.4
25.00	4	42	0.125	25.000	25.000	535	265	167.1


Cylindrical end mills

Profiled NRC, normal version

HSS

HSS
PM/F

λ 30°
 γ 12°

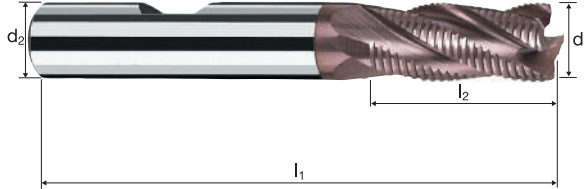

Roughing

Finishing



Rm
< 850


Rm
850-1100

Rm
1100-1300

GG(G)

Example: Order-N°.										UNICUT-4X	
										U0619	
\emptyset Code	d_1 k8	d_2 h6	l_1	l_2	l_4	45°	α	z			
260	5.00	6.00	57	13.00	20.55	0.40	1.5°	4	●		
300	6.00	6.00	57	13.00	-	0.40	0.0°	4	●		
331	7.00	8.00	60	16.00	23.50	0.40	1.5°	4	●		
391	8.00	8.00	63	19.00	-	0.40	0.0°	4	●		
402	8.00	10.00	69	19.00	28.50	0.40	2.5°	4	●		
420	9.00	10.00	69	19.00	28.50	0.40	1.5°	4	●		
450	10.00	10.00	72	22.00	-	0.40	0.0°	4	●		
470	11.00	12.00	79	22.00	33.50	0.40	1.0°	4	●		
501	12.00	12.00	83	26.00	-	0.40	0.0°	4	●		
570	14.00	12.00	83	26.00	-	0.40	0.0°	4	●		
610	16.00	16.00	92	32.00	-	0.50	0.0°	4	●		
640	18.00	16.00	92	32.00	-	0.50	0.0°	4	●		
682	20.00	20.00	104	38.00	-	0.50	0.0°	4	●		
710	22.00	20.00	104	38.00	-	0.70	0.0°	4	●		
772	25.00	25.00	121	45.00	-	0.70	0.0°	4	●		

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	68	0.030	9.000	2.400	3610	435	9.4
8.00	4	68	0.040	12.000	3.200	2705	435	16.6
10.00	4	68	0.050	15.000	4.000	2165	435	26.0
12.00	4	68	0.080	18.000	4.800	1805	575	49.9
16.00	4	68	0.105	24.000	6.400	1355	570	87.3
20.00	4	68	0.130	30.000	8.000	1080	565	135.1
25.00	4	68	0.165	37.500	10.000	865	570	214.3

Steel
850 - 1100 N/mm²



6.00	4	52	0.030	9.000	2.400	2760	330	7.2
8.00	4	52	0.040	12.000	3.200	2070	330	12.7
10.00	4	52	0.050	15.000	4.000	1655	330	19.9
12.00	4	52	0.080	18.000	4.800	1380	440	38.1
16.00	4	52	0.105	24.000	6.400	1035	435	66.7
20.00	4	52	0.130	30.000	8.000	830	430	103.3
25.00	4	52	0.165	37.500	10.000	660	435	163.9

Steel
1100 - 1300 N/mm²



6.00	4	40	0.030	9.000	2.400	2120	255	5.5
8.00	4	40	0.040	12.000	3.200	1590	255	9.8
10.00	4	40	0.050	15.000	4.000	1275	255	15.3
12.00	4	40	0.080	18.000	4.800	1060	340	29.3
16.00	4	40	0.105	24.000	6.400	795	335	51.3
20.00	4	40	0.130	30.000	8.000	635	330	79.5
25.00	4	40	0.165	37.500	10.000	510	335	126.1

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



6.00	4	30	0.030	9.000	2.400	1590	190	4.1
8.00	4	30	0.040	12.000	3.200	1195	190	7.3
10.00	4	30	0.050	15.000	4.000	955	190	11.5
12.00	4	30	0.080	18.000	4.800	795	255	22.0
16.00	4	30	0.105	24.000	6.400	595	250	38.5
20.00	4	30	0.130	30.000	8.000	475	250	59.6
25.00	4	30	0.165	37.500	10.000	380	250	94.5



Steel
< 850 N/mm²



6.00	4	62	0.020	6.000	6.000	3290	265	9.5
8.00	4	62	0.030	8.000	8.000	2465	295	18.9
10.00	4	62	0.035	10.000	10.000	1975	275	27.6
12.00	4	62	0.060	12.000	12.000	1645	395	56.8
16.00	4	62	0.080	16.000	16.000	1235	395	101.0
20.00	4	62	0.100	20.000	20.000	985	395	157.9
25.00	4	62	0.125	25.000	25.000	790	395	246.7

Steel
850 - 1100 N/mm²



6.00	4	50	0.020	6.000	6.000	2655	210	7.6
8.00	4	50	0.030	8.000	8.000	1990	240	15.3
10.00	4	50	0.035	10.000	10.000	1590	225	22.3
12.00	4	50	0.060	12.000	12.000	1325	320	45.8
16.00	4	50	0.080	16.000	16.000	995	320	81.5
20.00	4	50	0.100	20.000	20.000	795	320	127.3
25.00	4	50	0.125	25.000	25.000	635	320	198.9

Steel
1100 - 1300 N/mm²



6.00	4	37	0.020	6.000	6.000	1965	155	5.7
8.00	4	37	0.030	8.000	8.000	1470	175	11.3
10.00	4	37	0.035	10.000	10.000	1180	165	16.5
12.00	4	37	0.060	12.000	12.000	980	235	33.9
16.00	4	37	0.080	16.000	16.000	735	235	60.3
20.00	4	37	0.100	20.000	20.000	590	235	94.2
25.00	4	37	0.125	25.000	25.000	470	235	147.2

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




6.00	4	25	0.020	6.000	6.000	1325	105	3.8
8.00	4	25	0.030	8.000	8.000	995	120	7.6
10.00	4	25	0.035	10.000	10.000	795	110	11.1
12.00	4	25	0.060	12.000	12.000	665	160	22.9
16.00	4	25	0.080	16.000	16.000	495	160	40.7
20.00	4	25	0.100	20.000	20.000	400	160	63.7
25.00	4	25	0.125	25.000	25.000	320	160	99.5

Cylindrical end mills

Profiled, normal version

HSS

HSS
PM/F λ 45°
 γ 2°

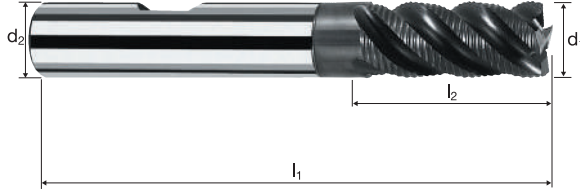

Roughing

Finishing



Rm

< 850

Rm

850-1100

Rm


1100-1300

Inox

Stainless

Example: Order-N°.								POLYCHROM	
		Coating	Article-N°.	ø-Code				P0540	
		P	0540	300					
Ø Code	d ₁ k8	d ₂ h6	l ₁	l ₂	45°	z			
300	6.00	6.00	57	13.00	0.35	4	●		
391	8.00	8.00	63	19.00	0.45	4	●		
450	10.00	10.00	72	22.00	0.60	4	●		
501	12.00	12.00	83	26.00	0.60	4	●		
610	16.00	16.00	92	32.00	0.70	4	●		
682	20.00	20.00	104	38.00	0.70	4	●		
772	25.00	25.00	121	45.00	0.85	4	●		

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
5.00	3	60	0.025	5.000	2.000	3820	285	2.9
6.00	3	60	0.025	6.000	2.400	3185	240	3.4
8.00	4	60	0.035	8.000	3.200	2385	335	8.6
10.00	4	60	0.045	10.000	4.000	1910	345	13.8
12.00	4	60	0.070	12.000	4.800	1590	445	25.7
16.00	4	60	0.095	16.000	6.400	1195	455	46.4
20.00	4	60	0.115	20.000	8.000	955	440	70.3
22.00	4	60	0.130	22.000	8.800	870	450	87.4
25.00	4	60	0.145	25.000	10.000	765	445	110.8

Steel
850 - 1100 N/mm²



5.00	3	48	0.025	5.000	2.000	3055	230	2.3
6.00	3	48	0.025	6.000	2.400	2545	190	2.8
8.00	4	48	0.035	8.000	3.200	1910	265	6.8
10.00	4	48	0.045	10.000	4.000	1530	275	11.0
12.00	4	48	0.070	12.000	4.800	1275	355	20.5
16.00	4	48	0.095	16.000	6.400	955	365	37.2
20.00	4	48	0.115	20.000	8.000	765	350	56.2
22.00	4	48	0.130	22.000	8.800	695	360	69.9
25.00	4	48	0.145	25.000	10.000	610	355	88.6

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



5.00	3	25	0.025	5.000	2.000	1590	120	1.2
6.00	3	25	0.025	6.000	2.400	1325	100	1.4
8.00	4	25	0.035	8.000	3.200	995	140	3.6
10.00	4	25	0.045	10.000	4.000	795	145	5.7
12.00	4	25	0.070	12.000	4.800	665	185	10.7
16.00	4	25	0.095	16.000	6.400	495	190	19.4
20.00	4	25	0.115	20.000	8.000	400	185	29.3
22.00	4	25	0.130	22.000	8.800	360	190	36.4
25.00	4	25	0.145	25.000	10.000	320	185	46.2

Cast iron
(lamellar / spheroidal)



5.00	3	42	0.025	5.000	2.000	2675	200	2.0
6.00	3	42	0.025	6.000	2.400	2230	165	2.4
8.00	4	42	0.035	8.000	3.200	1670	235	6.0
10.00	4	42	0.045	10.000	4.000	1335	240	9.6
12.00	4	42	0.070	12.000	4.800	1115	310	18.0
16.00	4	42	0.095	16.000	6.400	835	320	32.5
20.00	4	42	0.115	20.000	8.000	670	305	49.2
22.00	4	42	0.130	22.000	8.800	610	315	61.2
25.00	4	42	0.145	25.000	10.000	535	310	77.5



Steel
< 850 N/mm²



5.00	3	55	0.015	5.000	5.000	3500	160	3.9
6.00	3	55	0.020	6.000	6.000	2920	175	6.3
8.00	4	55	0.025	8.000	8.000	2190	220	14.0
10.00	4	55	0.035	10.000	10.000	1750	245	24.5
12.00	4	55	0.055	12.000	12.000	1460	320	46.2
16.00	4	55	0.070	16.000	16.000	1095	305	78.4
20.00	4	55	0.090	20.000	20.000	875	315	126.1
22.00	4	55	0.095	22.000	22.000	795	300	146.4
25.00	4	55	0.110	25.000	25.000	700	310	192.6

Steel
850 - 1100 N/mm²



5.00	3	45	0.015	5.000	5.000	2865	130	3.2
6.00	3	45	0.020	6.000	6.000	2385	145	5.2
8.00	4	45	0.025	8.000	8.000	1790	180	11.5
10.00	4	45	0.035	10.000	10.000	1430	200	20.1
12.00	4	45	0.055	12.000	12.000	1195	265	37.8
16.00	4	45	0.070	16.000	16.000	895	250	64.2
20.00	4	45	0.090	20.000	20.000	715	260	103.1
22.00	4	45	0.095	22.000	22.000	650	245	119.7
25.00	4	45	0.110	25.000	25.000	575	250	157.6

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



5.00	3	22	0.015	5.000	5.000	1400	65	1.6
6.00	3	22	0.020	6.000	6.000	1165	70	2.5
8.00	4	22	0.025	8.000	8.000	875	90	5.6
10.00	4	22	0.035	10.000	10.000	700	100	9.8
12.00	4	22	0.055	12.000	12.000	585	130	18.5
16.00	4	22	0.070	16.000	16.000	440	125	31.4
20.00	4	22	0.090	20.000	20.000	350	125	50.4
22.00	4	22	0.095	22.000	22.000	320	120	58.5
25.00	4	22	0.110	25.000	25.000	280	125	77.0

Cast iron
(lamellar / spheroidal)



5.00	3	36	0.015	5.000	5.000	2290	105	2.6
6.00	3	36	0.020	6.000	6.000	1910	115	4.1
8.00	4	36	0.025	8.000	8.000	1430	145	9.2
10.00	4	36	0.035	10.000	10.000	1145	160	16.0
12.00	4	36	0.055	12.000	12.000	955	210	30.3
16.00	4	36	0.070	16.000	16.000	715	200	51.3
20.00	4	36	0.090	20.000	20.000	575	205	82.5
22.00	4	36	0.095	22.000	22.000	520	200	95.8
25.00	4	36	0.110	25.000	25.000	460	200	126.1


Cylindrical end mills

Profiled NRF, normal version

HSS

HSS-E
Co8

λ 25°
 γ 10°

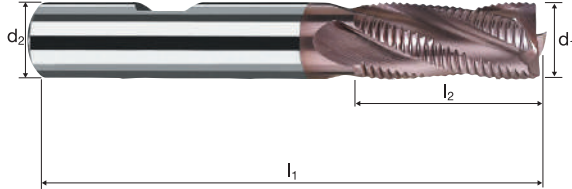

Roughing

Finishing



Rm
< 850

Rm
850-1100

Rm
1100-1300


Inox
Stainless

Ti
Titanium

GG(G)

Example: Order-N°.										UNICUT-4X	
										U0610	
\emptyset Code	d_1 k12	d_2 h6	l_1	l_2	l_4	45°	α	z	Coating Article-N° ø-Code U 0610 260		
260	5.00	6.00	57	13.00	20.55	0.40	1.0°	3			
300	6.00	6.00	57	13.00	-	0.40	0.0°	3			
342	7.00	10.00	66	16.00	25.50	0.40	3.5°	3			
391	8.00	8.00	63	19.00	-	0.40	0.0°	4			
402	8.00	10.00	69	19.00	28.50	0.40	2.5°	4			
420	9.00	10.00	69	19.00	28.50	0.40	1.5°	4			
450	10.00	10.00	72	22.00	-	0.40	0.0°	4			
470	11.00	12.00	79	22.00	33.50	0.40	1.0°	4			
501	12.00	12.00	83	26.00	-	0.40	0.0°	4			
540	13.00	12.00	83	26.00	-	0.40	0.0°	4			
570	14.00	12.00	83	26.00	-	0.40	0.0°	4			
581	15.00	12.00	83	26.00	-	0.50	0.0°	4			
610	16.00	16.00	92	32.00	-	0.50	0.0°	4			
640	18.00	16.00	92	32.00	-	0.50	0.0°	4			
671	20.00	16.00	98	38.00	-	0.50	0.0°	4			
682	20.00	20.00	104	38.00	-	0.50	0.0°	4			
710	22.00	20.00	104	38.00	-	0.70	0.0°	4			
741	24.00	20.00	111	45.00	-	0.70	0.0°	4			
761	25.00	20.00	111	45.00	-	0.70	0.0°	4			
772	25.00	25.00	121	45.00	-	0.70	0.0°	4			

Application



Material

Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Cast iron
(lamellar / spheroidal)




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
28.00	6	60	0.115	28.000	11.200	680	470	147.6
30.00	6	60	0.120	30.000	12.000	635	460	165.0
32.00	6	60	0.130	32.000	12.800	595	465	190.7
36.00	6	60	0.145	36.000	14.400	530	460	239.3
40.00	6	60	0.160	40.000	16.000	475	460	293.4
28.00	6	48	0.115	28.000	11.200	545	375	118.1
30.00	6	48	0.120	30.000	12.000	510	365	132.0
32.00	6	48	0.130	32.000	12.800	475	370	152.5
36.00	6	48	0.145	36.000	14.400	425	370	191.4
40.00	6	48	0.160	40.000	16.000	380	365	234.7
28.00	6	25	0.115	28.000	11.200	285	195	61.5
30.00	6	25	0.120	30.000	12.000	265	190	68.8
32.00	6	25	0.130	32.000	12.800	250	195	79.5
36.00	6	25	0.145	36.000	14.400	220	190	99.7
40.00	6	25	0.160	40.000	16.000	200	190	122.2
28.00	6	42	0.115	28.000	11.200	475	330	103.3
30.00	6	42	0.120	30.000	12.000	445	320	115.5
32.00	6	42	0.130	32.000	12.800	420	325	133.5
36.00	6	42	0.145	36.000	14.400	370	325	167.5
40.00	6	42	0.160	40.000	16.000	335	320	205.3
28.00	6	55	0.085	28.000	28.000	625	320	250.0
30.00	6	55	0.090	30.000	30.000	585	315	283.6
32.00	6	55	0.095	32.000	32.000	545	310	319.3
36.00	6	55	0.105	36.000	36.000	485	305	397.1
40.00	6	55	0.120	40.000	40.000	440	315	504.2
28.00	6	45	0.085	28.000	28.000	510	260	204.5
30.00	6	45	0.090	30.000	30.000	475	260	232.0
32.00	6	45	0.095	32.000	32.000	450	255	261.3
36.00	6	45	0.105	36.000	36.000	400	250	324.9
40.00	6	45	0.120	40.000	40.000	360	260	412.5
28.00	6	22	0.085	28.000	28.000	250	130	100.0
30.00	6	22	0.090	30.000	30.000	235	125	113.4
32.00	6	22	0.095	32.000	32.000	220	125	127.7
36.00	6	22	0.105	36.000	36.000	195	125	158.8
40.00	6	22	0.120	40.000	40.000	175	125	201.7
28.00	6	36	0.085	28.000	28.000	410	210	163.6
30.00	6	36	0.090	30.000	30.000	380	205	185.6
32.00	6	36	0.095	32.000	32.000	360	205	209.0
36.00	6	36	0.105	36.000	36.000	320	200	259.9
40.00	6	36	0.120	40.000	40.000	285	205	330.0

Cylindrical end mills

Profiled NRF, normal version

HSS

HSS-E λ 25°
Co8 γ 10°

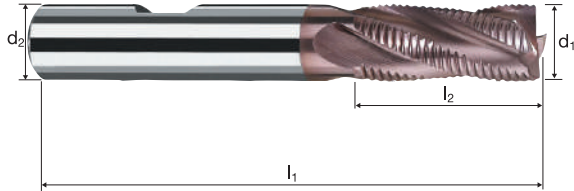

Roughing

Finishing



Rm

< 850

Rm

850-1100

Rm

1100-1300

Inox

Stainless


Ti

Titanium

GG(G)

Example: Order-N°.		Coating U	Article-N°. 0610	ø-Code 800						UNICUT-4X
Ø Code	d ₁ k12	d ₂ h6	l ₁	l ₂	l ₄	45°	α	z		U0610
800	28.00	25.00	121	45.00	-	0.70	0.0°	6		●
810	30.00	25.00	121	45.00	-	0.70	0.0°	6		●
832	32.00	32.00	133	53.00	-	0.70	0.0°	6		●
860	36.00	32.00	133	53.00	-	0.90	0.0°	6		●
881	40.00	32.00	143	63.00	-	0.90	0.0°	6		●

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	64	0.025	6.000	2.400	3395	340	4.9
8.00	4	64	0.035	8.000	3.200	2545	355	9.1
10.00	4	64	0.045	10.000	4.000	2035	365	14.7
12.00	4	64	0.070	12.000	4.800	1700	475	27.4
16.00	4	64	0.095	16.000	6.400	1275	485	49.5
18.00	4	64	0.105	18.000	7.200	1130	475	61.6
20.00	4	64	0.115	20.000	8.000	1020	470	75.0
25.00	6	64	0.145	25.000	10.000	815	710	177.2
32.00	7	64	0.130	32.000	12.800	635	580	237.3

Steel
850 - 1100 N/mm²



6.00	4	52	0.025	6.000	2.400	2760	275	4.0
8.00	4	52	0.035	8.000	3.200	2070	290	7.4
10.00	4	52	0.045	10.000	4.000	1655	300	11.9
12.00	4	52	0.070	12.000	4.800	1380	385	22.2
16.00	4	52	0.095	16.000	6.400	1035	395	40.3
18.00	4	52	0.105	18.000	7.200	920	385	50.1
20.00	4	52	0.115	20.000	8.000	830	380	60.9
25.00	6	52	0.145	25.000	10.000	660	575	144.0
32.00	7	52	0.130	32.000	12.800	515	470	192.8

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




6.00	4	26	0.025	6.000	2.400	1380	140	2.0
8.00	4	26	0.035	8.000	3.200	1035	145	3.7
10.00	4	26	0.045	10.000	4.000	830	150	6.0
12.00	4	26	0.070	12.000	4.800	690	195	11.1
16.00	4	26	0.095	16.000	6.400	515	195	20.1
18.00	4	26	0.105	18.000	7.200	460	195	25.0
20.00	4	26	0.115	20.000	8.000	415	190	30.5
25.00	6	26	0.145	25.000	10.000	330	290	72.0
32.00	7	26	0.130	32.000	12.800	260	235	96.4

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



6.00	4	22	0.025	6.000	2.400	1165	115	1.7
8.00	4	22	0.035	8.000	3.200	875	125	3.1
10.00	4	22	0.045	10.000	4.000	700	125	5.0
12.00	4	22	0.070	12.000	4.800	585	165	9.4
16.00	4	22	0.095	16.000	6.400	440	165	17.0
18.00	4	22	0.105	18.000	7.200	390	165	21.2
20.00	4	22	0.115	20.000	8.000	350	160	25.8
25.00	6	22	0.145	25.000	10.000	280	245	60.9
32.00	7	22	0.130	32.000	12.800	220	200	81.6



Steel
< 850 N/mm²



6.00	4	58	0.020	6.000	6.000	3075	245	8.9
8.00	4	58	0.025	8.000	8.000	2310	230	14.8
10.00	4	58	0.035	10.000	10.000	1845	260	25.8
12.00	4	58	0.055	12.000	12.000	1540	340	48.7
16.00	4	58	0.070	16.000	16.000	1155	325	82.7
18.00	4	58	0.080	18.000	18.000	1025	330	106.3
20.00	4	58	0.090	20.000	20.000	925	330	132.9

Steel
850 - 1100 N/mm²



6.00	4	48	0.020	6.000	6.000	2545	205	7.3
8.00	4	48	0.025	8.000	8.000	1910	190	12.2
10.00	4	48	0.035	10.000	10.000	1530	215	21.4
12.00	4	48	0.055	12.000	12.000	1275	280	40.3
16.00	4	48	0.070	16.000	16.000	955	265	68.4
18.00	4	48	0.080	18.000	18.000	850	270	88.0
20.00	4	48	0.090	20.000	20.000	765	275	110.0

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



6.00	4	23	0.020	6.000	6.000	1220	100	3.5
8.00	4	23	0.025	8.000	8.000	915	90	5.9
10.00	4	23	0.035	10.000	10.000	730	100	10.2
12.00	4	23	0.055	12.000	12.000	610	135	19.3
16.00	4	23	0.070	16.000	16.000	460	130	32.8
18.00	4	23	0.080	18.000	18.000	405	130	42.2
20.00	4	23	0.090	20.000	20.000	365	130	52.7

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



6.00	4	20	0.020	6.000	6.000	1060	85	3.1
8.00	4	20	0.025	8.000	8.000	795	80	5.1
10.00	4	20	0.035	10.000	10.000	635	90	8.9
12.00	4	20	0.055	12.000	12.000	530	115	16.8
16.00	4	20	0.070	16.000	16.000	400	110	28.5
18.00	4	20	0.080	18.000	18.000	355	115	36.7
20.00	4	20	0.090	20.000	20.000	320	115	45.8


Cylindrical end mills

Profiled NRF, normal version

HSS

HSS-E
Co8

λ 30°
 γ 12°

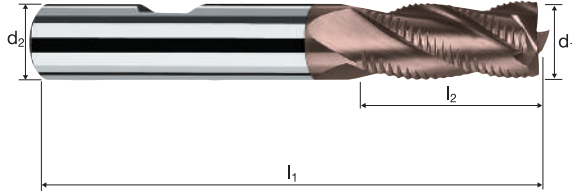

Roughing

Finishing



Rm

< 850

Rm

850-1100

Rm

1100-1300

Inox

Stainless


Ti

Titanium

GG(G)

Example: Order-N°.										UNICUT-4X	
										U0609	
\emptyset Code	d_1 k12	d_2 h6	l_1	l_2	l_4	45°	α	z			
300	6.00	6.00	57	13.00	-	0.40	0.0°	4	●		
342	7.00	10.00	66	16.00	25.50	0.40	3.0°	4	●		
402	8.00	10.00	69	19.00	28.50	0.40	2.5°	4	●		
420	9.00	10.00	69	19.00	28.50	0.40	1.5°	4	●		
450	10.00	10.00	72	22.00	-	0.40	0.0°	4	●		
470	11.00	12.00	79	22.00	33.50	0.40	1.0°	4	●		
501	12.00	12.00	83	26.00	-	0.40	0.0°	4	●		
540	13.00	12.00	83	26.00	-	0.40	0.0°	4	●		
570	14.00	12.00	83	26.00	-	0.40	0.0°	4	●		
592	15.00	16.00	86	26.00	37.50	0.50	1.0°	4	●		
610	16.00	16.00	92	32.00	-	0.50	0.0°	4	●		
640	18.00	16.00	92	32.00	-	0.50	0.0°	4	●		
682	20.00	20.00	104	38.00	-	0.50	0.0°	4	●		
686	20.00	20.00	104	38.00	-	0.50	0.0°	6	●		
710	22.00	20.00	104	38.00	-	0.70	0.0°	6	●		
772	25.00	25.00	121	45.00	-	0.70	0.0°	6	●		
832	32.00	32.00	133	53.00	-	0.70	0.0°	7	●		

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
8.00	4	65	0.035	8.000	3.200	2585	360	9.3
10.00	4	65	0.045	10.000	4.000	2070	370	14.9
12.00	4	65	0.070	12.000	4.800	1725	485	27.8
16.00	4	65	0.095	16.000	6.400	1295	490	50.3
20.00	4	65	0.115	20.000	8.000	1035	475	76.1
25.00	6	65	0.145	25.000	10.000	830	720	180.0
32.00	7	65	0.130	32.000	12.800	645	590	241.0

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
8.00	4	54	0.035	8.000	3.200	2150	300	7.7
10.00	4	54	0.045	10.000	4.000	1720	310	12.4
12.00	4	54	0.070	12.000	4.800	1430	400	23.1
16.00	4	54	0.095	16.000	6.400	1075	410	41.8
20.00	4	54	0.115	20.000	8.000	860	395	63.3
25.00	6	54	0.145	25.000	10.000	690	600	149.5
32.00	7	54	0.130	32.000	12.800	535	490	200.2

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
8.00	4	28	0.035	8.000	3.200	1115	155	4.0
10.00	4	28	0.045	10.000	4.000	890	160	6.4
12.00	4	28	0.070	12.000	4.800	745	210	12.0
16.00	4	28	0.095	16.000	6.400	555	210	21.7
20.00	4	28	0.115	20.000	8.000	445	205	32.8
25.00	6	28	0.145	25.000	10.000	355	310	77.5
32.00	7	28	0.130	32.000	12.800	280	255	103.8

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
8.00	4	22	0.035	8.000	3.200	875	125	3.1
10.00	4	22	0.045	10.000	4.000	700	125	5.0
12.00	4	22	0.070	12.000	4.800	585	165	9.4
16.00	4	22	0.095	16.000	6.400	440	165	17.0
20.00	4	22	0.115	20.000	8.000	350	160	25.8
25.00	6	22	0.145	25.000	10.000	280	245	60.9
32.00	7	22	0.130	32.000	12.800	220	200	81.6



Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
8.00	4	60	0.025	8.000	8.000	2385	240	15.3
10.00	4	60	0.035	10.000	10.000	1910	265	26.7
12.00	4	60	0.055	12.000	12.000	1590	350	50.4
16.00	4	60	0.070	16.000	16.000	1195	335	85.6
20.00	4	60	0.090	20.000	20.000	955	345	137.5
25.00	6	60	0.110	25.000	25.000	765	505	315.1
32.00	7	60	0.095	32.000	32.000	595	395	406.4

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
8.00	4	50	0.025	8.000	8.000	1990	200	12.7
10.00	4	50	0.035	10.000	10.000	1590	225	22.3
12.00	4	50	0.055	12.000	12.000	1325	290	42.0
16.00	4	50	0.070	16.000	16.000	995	280	71.3
20.00	4	50	0.090	20.000	20.000	795	285	114.6
25.00	6	50	0.110	25.000	25.000	635	420	262.6
32.00	7	50	0.095	32.000	32.000	495	330	338.7

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
8.00	4	25	0.025	8.000	8.000	995	100	6.4
10.00	4	25	0.035	10.000	10.000	795	110	11.1
12.00	4	25	0.055	12.000	12.000	665	145	21.0
16.00	4	25	0.070	16.000	16.000	495	140	35.7
20.00	4	25	0.090	20.000	20.000	400	145	57.3
25.00	6	25	0.110	25.000	25.000	320	210	131.3
32.00	7	25	0.095	32.000	32.000	250	165	169.3

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]




d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
8.00	4	20	0.025	8.000	8.000	795	80	5.1
10.00	4	20	0.035	10.000	10.000	635	90	8.9
12.00	4	20	0.055	12.000	12.000	530	115	16.8
16.00	4	20	0.070	16.000	16.000	400	110	28.5
20.00	4	20	0.090	20.000	20.000	320	115	45.8
25.00	6	20	0.110	25.000	25.000	255	170	105.0
32.00	7	20	0.095	32.000	32.000	200	130	135.5

Cylindrical end mills

Profiled NRF, normal version, Pericool




HSS-E Co8	λ 30°
	γ 12°

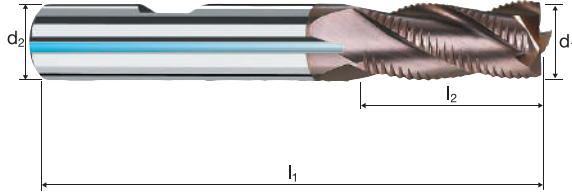

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	-------

Example: Order-N°.										UNICUT-4X
		Coating U	Article-N° 0695		ø-Code 402					U0695
Ø Code	d ₁ k12	d ₂ h6	l ₁	l ₂	l ₄	45°	α	z		
402	8.00	10.00	69	19.00	69.00	0.40	1.0°	4		●
450	10.00	10.00	72	22.00	-	0.40	0.0°	4		●
501	12.00	12.00	83	26.00	-	0.40	0.0°	4		●
610	16.00	16.00	92	32.00	-	0.50	0.0°	4		●
682	20.00	20.00	104	38.00	-	0.50	0.0°	4		●
772	25.00	25.00	121	45.00	-	0.70	0.0°	6		●
832	32.00	32.00	133	53.00	-	0.70	0.0°	7		●

Application



Material

Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Titanium alloys
> 300 HB
[Ti6Al4V]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Titanium alloys
> 300 HB
[Ti6Al4V]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	180	0.035	9.600	1.200	9550	1335	15.4
8.00	4	180	0.045	12.800	1.600	7160	1290	26.4
10.00	4	180	0.060	16.000	2.000	5730	1375	44.0
12.00	4	180	0.070	19.200	2.400	4775	1335	61.6
16.00	4	180	0.075	25.600	3.200	3580	1075	88.0
20.00	4	180	0.080	32.000	4.000	2865	915	117.3
6.00	4	130	0.035	9.600	1.200	6895	965	11.1
8.00	4	130	0.045	12.800	1.600	5175	930	19.1
10.00	4	130	0.060	16.000	2.000	4140	995	31.8
12.00	4	130	0.070	19.200	2.400	3450	965	44.5
16.00	4	130	0.075	25.600	3.200	2585	775	63.6
20.00	4	130	0.080	32.000	4.000	2070	660	84.7
6.00	4	45	0.025	9.600	1.200	2385	240	2.8
8.00	4	45	0.035	12.800	1.600	1790	250	5.1
10.00	4	45	0.045	16.000	2.000	1430	260	8.3
12.00	4	45	0.055	19.200	2.400	1195	265	12.1
16.00	4	45	0.060	25.600	3.200	895	215	17.6
20.00	4	45	0.065	32.000	4.000	715	185	23.8
6.00	4	60	0.025	9.600	1.200	3185	320	3.7
8.00	4	60	0.035	12.800	1.600	2385	335	6.8
10.00	4	60	0.045	16.000	2.000	1910	345	11.0
12.00	4	60	0.055	19.200	2.400	1590	350	16.1
16.00	4	60	0.060	25.600	3.200	1195	285	23.5
20.00	4	60	0.065	32.000	4.000	955	250	31.8
6.00	4	150	0.030	3.300	6.000	7960	955	18.9
8.00	4	150	0.040	4.400	8.000	5970	955	33.6
10.00	4	150	0.050	5.500	10.000	4775	955	52.5
12.00	4	150	0.055	6.600	12.000	3980	875	69.3
16.00	4	150	0.055	8.800	16.000	2985	655	92.4
20.00	4	150	0.060	11.000	20.000	2385	575	126.1
6.00	4	80	0.030	3.300	6.000	4245	510	10.1
8.00	4	80	0.040	4.400	8.000	3185	510	17.9
10.00	4	80	0.050	5.500	10.000	2545	510	28.0
12.00	4	80	0.055	6.600	12.000	2120	465	37.0
16.00	4	80	0.055	8.800	16.000	1590	350	49.3
20.00	4	80	0.060	11.000	20.000	1275	305	67.2
6.00	4	35	0.025	3.300	6.000	1855	185	3.7
8.00	4	35	0.030	4.400	8.000	1395	165	5.9
10.00	4	35	0.040	5.500	10.000	1115	180	9.8
12.00	4	35	0.045	6.600	12.000	930	165	13.2
16.00	4	35	0.045	8.800	16.000	695	125	17.6
20.00	4	35	0.050	11.000	20.000	555	110	24.5
6.00	4	50	0.025	3.300	6.000	2655	265	5.3
8.00	4	50	0.030	4.400	8.000	1990	240	8.4
10.00	4	50	0.040	5.500	10.000	1590	255	14.0
12.00	4	50	0.045	6.600	12.000	1325	240	18.9
16.00	4	50	0.045	8.800	16.000	995	180	25.2
20.00	4	50	0.050	11.000	20.000	795	160	35.0


Cylindrical end mills SupraCarb®

Profiled, medium length version



HM
MG10


λ 38°
 γ 0°

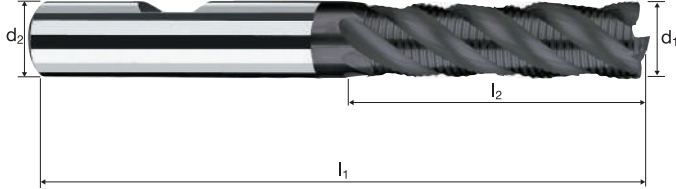

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	---------------------

Example: Order-N°.								POLYCHROM	
		Coating	Article-N°.	ø-Code				P15338	
		P	15338	300				P15238	
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	45°	z			
300	6.00	6.00	63	19.00	0.35	4			●
391	8.00	8.00	72	28.00	0.45	4			●
450	10.00	10.00	84	34.00	0.60	4			●
501	12.00	12.00	97	40.00	0.60	4			●
610	16.00	16.00	108	48.00	0.70	4			●
682	20.00	20.00	122	56.00	0.70	4			●

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	3	180	0.015	4.800	0.600	19100	860	2.5
4.00	3	180	0.020	6.400	0.800	14325	860	4.4
5.00	4	180	0.025	8.000	1.000	11460	1145	9.2
6.00	4	180	0.035	9.600	1.200	9550	1335	15.4
8.00	4	180	0.045	12.800	1.600	7160	1290	26.4
10.00	4	180	0.060	16.000	2.000	5730	1375	44.0
12.00	4	180	0.070	19.200	2.400	4775	1335	61.6
16.00	4	180	0.075	25.600	3.200	3580	1075	88.0
20.00	4	180	0.080	32.000	4.000	2865	915	117.3

Steel
850 - 1100 N/mm²



3.00	3	130	0.015	4.800	0.600	13795	620	1.8
4.00	3	130	0.020	6.400	0.800	10345	620	3.2
5.00	4	130	0.025	8.000	1.000	8275	830	6.6
6.00	4	130	0.035	9.600	1.200	6895	965	11.1
8.00	4	130	0.045	12.800	1.600	5175	930	19.1
10.00	4	130	0.060	16.000	2.000	4140	995	31.8
12.00	4	130	0.070	19.200	2.400	3450	965	44.5
16.00	4	130	0.075	25.600	3.200	2585	775	63.6
20.00	4	130	0.080	32.000	4.000	2070	660	84.7

Titanium alloys
> 300 HB
[Ti6Al4V]




3.00	3	45	0.010	4.800	0.600	4775	145	0.4
4.00	3	45	0.015	6.400	0.800	3580	160	0.8
5.00	4	45	0.020	8.000	1.000	2865	230	1.8
6.00	4	45	0.025	9.600	1.200	2385	240	2.8
8.00	4	45	0.035	12.800	1.600	1790	250	5.1
10.00	4	45	0.045	16.000	2.000	1430	260	8.3
12.00	4	45	0.055	19.200	2.400	1195	265	12.1
16.00	4	45	0.060	25.600	3.200	895	215	17.6
20.00	4	45	0.065	32.000	4.000	715	185	23.8

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



3.00	3	55	0.010	4.800	0.600	5835	175	0.5
4.00	3	55	0.015	6.400	0.800	4375	195	1.0
5.00	4	55	0.020	8.000	1.000	3500	280	2.2
6.00	4	55	0.025	9.600	1.200	2920	290	3.4
8.00	4	55	0.035	12.800	1.600	2190	305	6.3
10.00	4	55	0.045	16.000	2.000	1750	315	10.1
12.00	4	55	0.055	19.200	2.400	1460	320	14.8
16.00	4	55	0.060	25.600	3.200	1095	265	21.5
20.00	4	55	0.065	32.000	4.000	875	230	29.1



Steel
< 850 N/mm²



3.00	3	150	0.015	1.650	3.000	15915	715	3.5
4.00	3	150	0.020	2.200	4.000	11935	715	6.3
5.00	4	150	0.025	2.750	5.000	9550	955	13.1
6.00	4	150	0.030	3.300	6.000	7960	955	18.9
8.00	4	150	0.040	4.400	8.000	5970	955	33.6
10.00	4	150	0.050	5.500	10.000	4775	955	52.5
12.00	4	150	0.055	6.600	12.000	3980	875	69.3
16.00	4	150	0.055	8.800	16.000	2985	655	92.4
20.00	4	150	0.060	11.000	20.000	2385	575	126.1

Steel
850 - 1100 N/mm²



3.00	3	80	0.015	1.650	3.000	8490	380	1.9
4.00	3	80	0.020	2.200	4.000	6365	380	3.4
5.00	4	80	0.025	2.750	5.000	5095	510	7.0
6.00	4	80	0.030	3.300	6.000	4245	510	10.1
8.00	4	80	0.040	4.400	8.000	3185	510	17.9
10.00	4	80	0.050	5.500	10.000	2545	510	28.0
12.00	4	80	0.055	6.600	12.000	2120	465	37.0
16.00	4	80	0.055	8.800	16.000	1590	350	49.3
20.00	4	80	0.060	11.000	20.000	1275	305	67.2

Titanium alloys
> 300 HB
[Ti6Al4V]



3.00	3	35	0.010	1.650	3.000	3715	110	0.6
4.00	3	35	0.015	2.200	4.000	2785	125	1.1
5.00	4	35	0.020	2.750	5.000	2230	180	2.5
6.00	4	35	0.025	3.300	6.000	1855	185	3.7
8.00	4	35	0.030	4.400	8.000	1395	165	5.9
10.00	4	35	0.040	5.500	10.000	1115	180	9.8
12.00	4	35	0.045	6.600	12.000	930	165	13.2
16.00	4	35	0.045	8.800	16.000	695	125	17.6
20.00	4	35	0.050	11.000	20.000	555	110	24.5

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



3.00	3	45	0.010	1.650	3.000	4775	145	0.7
4.00	3	45	0.015	2.200	4.000	3580	160	1.4
5.00	4	45	0.020	2.750	5.000	2865	230	3.2
6.00	4	45	0.025	3.300	6.000	2385	240	4.7
8.00	4	45	0.030	4.400	8.000	1790	215	7.6
10.00	4	45	0.040	5.500	10.000	1430	230	12.6
12.00	4	45	0.045	6.600	12.000	1195	215	17.0
16.00	4	45	0.045	8.800	16.000	895	160	22.7
20.00	4	45	0.050	11.000	20.000	715	145	31.5


Cylindrical end mills

Profiled, medium length version



HM
MG10

λ 38°
 γ 0°

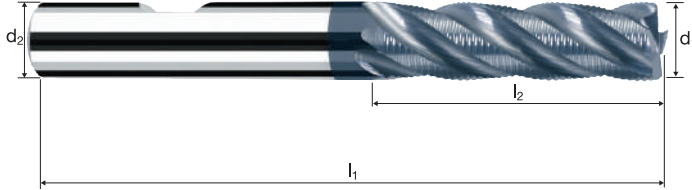

Roughing

Finishing




ToolSchool

P15238 / P15338
P15239 / P15339

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	-------

Example: Order-N°.										POLYCHROM
										P45372
										P
										45372
										180
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	45°	α	z		
180	3.00	6.00	63	14.00	21.56	0.25	6.0°	3		●
220	4.00	6.00	63	17.00	23.09	0.30	4.0°	3		●
260	5.00	6.00	63	19.00	23.22	0.35	2.0°	4		●
300	6.00	6.00	63	19.00	-	0.35	0.0°	4		●
391	8.00	8.00	72	28.00	-	0.45	0.0°	4		●
450	10.00	10.00	84	34.00	-	0.60	0.0°	4		●
501	12.00	12.00	97	40.00	-	0.60	0.0°	4		●
610	16.00	16.00	108	48.00	-	0.70	0.0°	4		●
612	16.00	16.00	108	48.00	-	0.70	0.0°	6		●
682	20.00	20.00	122	56.00	-	0.70	0.0°	4		●
684	20.00	20.00	122	56.00	-	0.70	0.0°	6		●

Application



Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	38	0.025	12.000	1.500	2015	200	3.6
8.00	4	38	0.030	16.000	2.000	1510	180	5.8
10.00	4	38	0.040	20.000	2.500	1210	195	9.7
12.00	4	38	0.060	24.000	3.000	1010	240	17.4
16.00	4	38	0.085	32.000	4.000	755	255	32.9
20.00	4	38	0.105	40.000	5.000	605	255	50.8
25.00	4	38	0.130	50.000	6.250	485	250	78.6

Steel
1100 - 1300 N/mm²



6.00	4	30	0.025	12.000	1.500	1590	160	2.9
8.00	4	30	0.030	16.000	2.000	1195	145	4.6
10.00	4	30	0.040	20.000	2.500	955	155	7.6
12.00	4	30	0.060	24.000	3.000	795	190	13.8
16.00	4	30	0.085	32.000	4.000	595	205	26.0
20.00	4	30	0.105	40.000	5.000	475	200	40.1
25.00	4	30	0.130	50.000	6.250	380	200	62.1

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]




6.00	4	24	0.025	12.000	1.500	1275	125	2.3
8.00	4	24	0.030	16.000	2.000	955	115	3.7
10.00	4	24	0.040	20.000	2.500	765	120	6.1
12.00	4	24	0.060	24.000	3.000	635	155	11.0
16.00	4	24	0.085	32.000	4.000	475	160	20.8
20.00	4	24	0.105	40.000	5.000	380	160	32.1
25.00	4	24	0.130	50.000	6.250	305	160	49.7

Cast iron
(lamellar / spheroidal)



6.00	4	34	0.025	12.000	1.500	1805	180	3.2
8.00	4	34	0.030	16.000	2.000	1355	160	5.2
10.00	4	34	0.040	20.000	2.500	1080	175	8.7
12.00	4	34	0.060	24.000	3.000	900	215	15.6
16.00	4	34	0.085	32.000	4.000	675	230	29.4
20.00	4	34	0.105	40.000	5.000	540	225	45.5
25.00	4	34	0.130	50.000	6.250	435	225	70.3



Steel
850 - 1100 N/mm²



6.00	4	35	0.020	4.200	6.000	1855	150	3.7
8.00	4	35	0.030	5.600	8.000	1395	165	7.5
10.00	4	35	0.035	7.000	10.000	1115	155	10.9
12.00	4	35	0.060	8.400	12.000	930	225	22.5
16.00	4	35	0.080	11.200	16.000	695	225	39.9
20.00	4	35	0.100	14.000	20.000	555	225	62.4
25.00	4	35	0.125	17.500	25.000	445	225	97.5

Steel
1100 - 1300 N/mm²



6.00	4	25	0.020	4.200	6.000	1325	105	2.7
8.00	4	25	0.030	5.600	8.000	995	120	5.3
10.00	4	25	0.035	7.000	10.000	795	110	7.8
12.00	4	25	0.060	8.400	12.000	665	160	16.0
16.00	4	25	0.080	11.200	16.000	495	160	28.5
20.00	4	25	0.100	14.000	20.000	400	160	44.6
25.00	4	25	0.125	17.500	25.000	320	160	69.6

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



6.00	4	18	0.020	4.200	6.000	955	75	1.9
8.00	4	18	0.030	5.600	8.000	715	85	3.9
10.00	4	18	0.035	7.000	10.000	575	80	5.6
12.00	4	18	0.060	8.400	12.000	475	115	11.6
16.00	4	18	0.080	11.200	16.000	360	115	20.5
20.00	4	18	0.100	14.000	20.000	285	115	32.1
25.00	4	18	0.125	17.500	25.000	230	115	50.1

Cast iron
(lamellar / spheroidal)





6.00	4	29	0.020	4.200	6.000	1540	125	3.1
8.00	4	29	0.030	5.600	8.000	1155	140	6.2
10.00	4	29	0.035	7.000	10.000	925	130	9.0
12.00	4	29	0.060	8.400	12.000	770	185	18.6
16.00	4	29	0.080	11.200	16.000	575	185	33.1
20.00	4	29	0.100	14.000	20.000	460	185	51.7
25.00	4	29	0.125	17.500	25.000	370	185	80.8

Cylindrical end mills

Profiled NRC, medium length version



HSS	λ 30°
PM/F	γ 12°

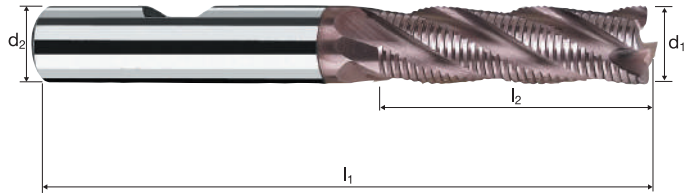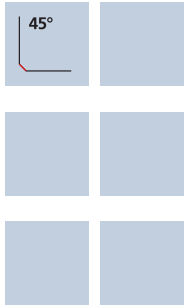


Rm < 850	Rm 850-1100	Rm 1100-1300								GG(G)
-------------	----------------	-----------------	--	--	--	--	--	--	--	-------

Example: Order-N°.										UNICUT-4X	
										U0659	
Ø Code	d ₁ k8	d ₂ h6	l ₁	l ₂	l ₄	45°	z	<div style="display: flex; justify-content: space-between;"> Coating Article-N° ø-Code </div> <div style="display: flex; justify-content: space-between;"> U 0659 300 </div>			
300	6.00	6.00	63	19.00	-	0.40	4	●			
402	8.00	10.00	78	28.00	37.50	0.40	4	●			
450	10.00	10.00	84	34.00	-	0.40	4	●			
501	12.00	12.00	97	40.00	-	0.40	4	●			
610	16.00	16.00	108	48.00	-	0.50	4	●			
682	20.00	20.00	122	56.00	-	0.50	4	●			
772	25.00	25.00	144	68.00	-	0.70	4	●			

Application

Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	3	36	0.020	12.000	1.500	1910	115	2.1
8.00	4	36	0.030	16.000	2.000	1430	170	5.5
10.00	4	36	0.035	20.000	2.500	1145	160	8.0
12.00	4	36	0.055	24.000	3.000	955	210	15.1
16.00	4	36	0.075	32.000	4.000	715	215	27.5
20.00	4	36	0.095	40.000	5.000	575	220	43.5
25.00	4	36	0.115	50.000	6.250	460	210	65.9
30.00	6	36	0.095	60.000	7.500	380	220	98.0
32.00	6	36	0.105	64.000	8.000	360	225	115.5

Steel
850 - 1100 N/mm²

6.00	3	30	0.020	12.000	1.500	1590	95	1.7
8.00	4	30	0.030	16.000	2.000	1195	145	4.6
10.00	4	30	0.035	20.000	2.500	955	135	6.7
12.00	4	30	0.055	24.000	3.000	795	175	12.6
16.00	4	30	0.075	32.000	4.000	595	180	22.9
20.00	4	30	0.095	40.000	5.000	475	180	36.3
25.00	4	30	0.115	50.000	6.250	380	175	54.9
30.00	6	30	0.095	60.000	7.500	320	180	81.6
32.00	6	30	0.105	64.000	8.000	300	190	96.3

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

6.00	3	15	0.020	12.000	1.500	795	50	0.9
8.00	4	15	0.030	16.000	2.000	595	70	2.3
10.00	4	15	0.035	20.000	2.500	475	65	3.3
12.00	4	15	0.055	24.000	3.000	400	90	6.3
16.00	4	15	0.075	32.000	4.000	300	90	11.5
20.00	4	15	0.095	40.000	5.000	240	90	18.1
25.00	4	15	0.115	50.000	6.250	190	90	27.5
30.00	6	15	0.095	60.000	7.500	160	90	40.8
32.00	6	15	0.105	64.000	8.000	150	95	48.1

Cast iron
(lamellar / spheroidal)

6.00	3	28	0.020	12.000	1.500	1485	90	1.6
8.00	4	28	0.030	16.000	2.000	1115	135	4.3
10.00	4	28	0.035	20.000	2.500	890	125	6.2
12.00	4	28	0.055	24.000	3.000	745	165	11.8
16.00	4	28	0.075	32.000	4.000	555	165	21.4
20.00	4	28	0.095	40.000	5.000	445	170	33.9
25.00	4	28	0.115	50.000	6.250	355	165	51.2
30.00	6	28	0.095	60.000	7.500	295	170	76.2
32.00	6	28	0.105	64.000	8.000	280	175	89.8

Steel
< 850 N/mm²

6.00	3	30	0.020	4.200	6.000	1590	95	2.4
8.00	4	30	0.025	5.600	8.000	1195	120	5.3
10.00	4	30	0.035	7.000	10.000	955	135	9.4
12.00	4	30	0.055	8.400	12.000	795	175	17.6
16.00	4	30	0.070	11.200	16.000	595	165	29.9
20.00	4	30	0.090	14.000	20.000	475	170	48.1
25.00	4	30	0.110	17.500	25.000	380	170	73.5
30.00	6	30	0.090	21.000	30.000	320	170	108.3
32.00	6	30	0.095	22.400	32.000	300	170	121.9

Steel
850 - 1100 N/mm²

6.00	3	26	0.020	4.200	6.000	1380	85	2.1
8.00	4	26	0.025	5.600	8.000	1035	105	4.6
10.00	4	26	0.035	7.000	10.000	830	115	8.1
12.00	4	26	0.055	8.400	12.000	690	150	15.3
16.00	4	26	0.070	11.200	16.000	515	145	26.0
20.00	4	26	0.090	14.000	20.000	415	150	41.7
25.00	4	26	0.110	17.500	25.000	330	145	63.7
30.00	6	26	0.090	21.000	30.000	275	150	93.9
32.00	6	26	0.095	22.400	32.000	260	145	105.7

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

6.00	3	14	0.020	4.200	6.000	745	45	1.1
8.00	4	14	0.025	5.600	8.000	555	55	2.5
10.00	4	14	0.035	7.000	10.000	445	60	4.4
12.00	4	14	0.055	8.400	12.000	370	80	8.2
16.00	4	14	0.070	11.200	16.000	280	80	14.0
20.00	4	14	0.090	14.000	20.000	225	80	22.5
25.00	4	14	0.110	17.500	25.000	180	80	34.3
30.00	6	14	0.090	21.000	30.000	150	80	50.5
32.00	6	14	0.095	22.400	32.000	140	80	56.9

Cast iron
(lamellar / spheroidal)


6.00	3	22	0.020	4.200	6.000	1165	70	1.8
8.00	4	22	0.025	5.600	8.000	875	90	3.9
10.00	4	22	0.035	7.000	10.000	700	100	6.9
12.00	4	22	0.055	8.400	12.000	585	130	12.9
16.00	4	22	0.070	11.200	16.000	440	125	22.0
20.00	4	22	0.090	14.000	20.000	350	125	35.3
25.00	4	22	0.110	17.500	25.000	280	125	53.9
30.00	6	22	0.090	21.000	30.000	235	125	79.4
32.00	6	22	0.095	22.400	32.000	220	125	89.4

Cylindrical end mills

Profiled NRF, medium length version

HSS

HSS-E λ 25°
Co8 γ 10°

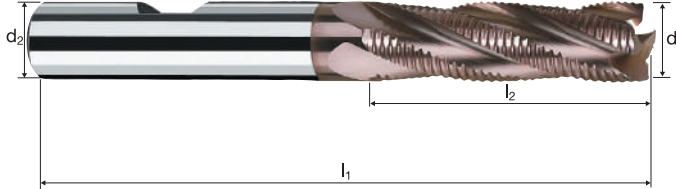

Roughing

Finishing



Rm

< 850

Rm

850-1100

Rm

1100-1300

Inox

Stainless

Ti


Titanium

GG(G)

Example: Order-N°.											UNICUT-4X	
											U0650	
Ø	d ₁	d ₂										
Code	k12	h6	l ₁	l ₂	l ₄	45°	α	z	Coating: U Article-N°: 0650 ø-Code: 260			
260	5.00	6.00	63	19.00	26.55	0.40	1.5°	3				●
300	6.00	6.00	63	19.00	-	0.40	0.0°	3				●
402	8.00	10.00	78	28.00	37.50	0.40	2.0°	4				●
450	10.00	10.00	84	34.00	-	0.40	0.0°	4				●
501	12.00	12.00	97	40.00	-	0.40	0.0°	4				●
570	14.00	12.00	97	40.00	-	0.40	0.0°	4				●
610	16.00	16.00	108	48.00	-	0.50	0.0°	4				●
640	18.00	16.00	108	48.00	-	0.50	0.0°	4				●
682	20.00	20.00	122	56.00	-	0.50	0.0°	4				●
710	22.00	20.00	122	56.00	-	0.70	0.0°	4				●
772	25.00	25.00	144	68.00	-	0.70	0.0°	4				●
800	28.00	25.00	144	68.00	-	0.70	0.0°	6				●
810	30.00	25.00	144	68.00	-	0.70	0.0°	6				●
832	32.00	32.00	160	80.00	-	0.70	0.0°	6				●

Application

Material



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Titanium alloys
> 300 HB
[Ti6Al4V]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Titanium alloys
> 300 HB
[Ti6Al4V]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	180	0.035	7.200	1.800	9550	1335	17.3
8.00	4	180	0.045	9.600	2.400	7160	1290	29.7
10.00	4	180	0.060	12.000	3.000	5730	1375	49.5
12.00	4	180	0.070	14.400	3.600	4775	1335	69.3
16.00	4	180	0.075	19.200	4.800	3580	1075	99.0
20.00	4	180	0.080	24.000	6.000	2865	915	132.0

6.00	4	130	0.035	7.200	1.800	6895	965	12.5
8.00	4	130	0.045	9.600	2.400	5175	930	21.5
10.00	4	130	0.060	12.000	3.000	4140	995	35.8
12.00	4	130	0.070	14.400	3.600	3450	965	50.1
16.00	4	130	0.075	19.200	4.800	2585	775	71.5
20.00	4	130	0.080	24.000	6.000	2070	660	95.3

6.00	4	45	0.025	7.200	1.800	2385	240	3.1
8.00	4	45	0.035	9.600	2.400	1790	250	5.8
10.00	4	45	0.045	12.000	3.000	1430	260	9.3
12.00	4	45	0.055	14.400	3.600	1195	265	13.6
16.00	4	45	0.060	19.200	4.800	895	215	19.8
20.00	4	45	0.065	24.000	6.000	715	185	26.8

6.00	4	60	0.025	7.200	1.800	3185	320	4.1
8.00	4	60	0.035	9.600	2.400	2385	335	7.7
10.00	4	60	0.045	12.000	3.000	1910	345	12.4
12.00	4	60	0.055	14.400	3.600	1590	350	18.2
16.00	4	60	0.060	19.200	4.800	1195	285	26.4
20.00	4	60	0.065	24.000	6.000	955	250	35.8

6.00	4	150	0.030	3.600	6.000	7960	955	20.6
8.00	4	150	0.040	4.800	8.000	5970	955	36.7
10.00	4	150	0.050	6.000	10.000	4775	955	57.3
12.00	4	150	0.055	7.200	12.000	3980	875	75.6
16.00	4	150	0.055	9.600	16.000	2985	655	100.8
20.00	4	150	0.060	12.000	20.000	2385	575	137.5

6.00	4	80	0.030	3.600	6.000	4245	510	11.0
8.00	4	80	0.040	4.800	8.000	3185	510	19.6
10.00	4	80	0.050	6.000	10.000	2545	510	30.6
12.00	4	80	0.055	7.200	12.000	2120	465	40.3
16.00	4	80	0.055	9.600	16.000	1590	350	53.8
20.00	4	80	0.060	12.000	20.000	1275	305	73.3

6.00	4	35	0.025	3.600	6.000	1855	185	4.0
8.00	4	35	0.030	4.800	8.000	1395	165	6.4
10.00	4	35	0.040	6.000	10.000	1115	180	10.7
12.00	4	35	0.045	7.200	12.000	930	165	14.4
16.00	4	35	0.045	9.600	16.000	695	125	19.3
20.00	4	35	0.050	12.000	20.000	555	110	26.7


6.00	4	50	0.025	3.600	6.000	2655	265	5.7
8.00	4	50	0.030	4.800	8.000	1990	240	9.2
10.00	4	50	0.040	6.000	10.000	1590	255	15.3
12.00	4	50	0.045	7.200	12.000	1325	240	20.6
16.00	4	50	0.045	9.600	16.000	995	180	27.5
20.00	4	50	0.050	12.000	20.000	795	160	38.2

Cylindrical end mills SupraCarb®

Profiled, medium length version, neck

HM
MG10

λ 38°
 γ 0°

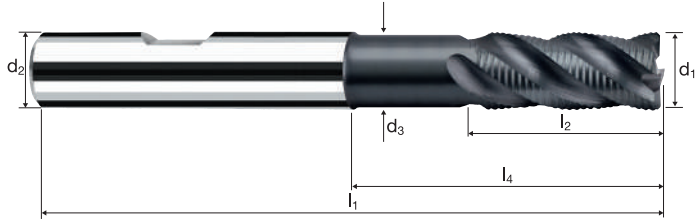

Roughing

Finishing

Rm < 850

Rm 850-1100

Rm 1100-1300


Inox
Stainless

Ti
Titanium

GG(G)
Tool Steel

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	z	POLYCHROM	
										Order-N°.	
Example: Order-N°. Coating: P Article-N°: 15339 ø-Code: 300											
300	6.00	6.00	5.50	63	13.00	25.34	26.00	0.35	4		●
391	8.00	8.00	7.40	72	19.00	34.29	35.00	0.45	4		●
450	10.00	10.00	9.20	84	22.00	42.20	43.00	0.60	4		●
501	12.00	12.00	11.00	97	26.00	50.13	51.00	0.60	4		●
610	16.00	16.00	15.00	108	32.00	58.13	59.00	0.70	4		●
682	20.00	20.00	19.00	122	38.00	70.13	71.00	0.70	4		●


Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	3	180	0.015	3.000	2.100	19100	860	5.4
4.00	3	180	0.020	4.000	2.800	14325	860	9.6
5.00	4	180	0.030	5.000	3.500	11460	1375	24.1
6.00	4	180	0.035	6.000	4.200	9550	1335	33.7
8.00	4	180	0.045	8.000	5.600	7160	1290	57.8
10.00	4	180	0.055	10.000	7.000	5730	1260	88.2
12.00	4	180	0.060	12.000	8.400	4775	1145	115.5
16.00	4	180	0.065	16.000	11.200	3580	930	166.8

Steel
850 - 1100 N/mm²

3.00	3	130	0.015	3.000	2.100	13795	620	3.9
4.00	3	130	0.020	4.000	2.800	10345	620	7.0
5.00	4	130	0.030	5.000	3.500	8275	995	17.4
6.00	4	130	0.035	6.000	4.200	6895	965	24.3
8.00	4	130	0.045	8.000	5.600	5175	930	41.7
10.00	4	130	0.055	10.000	7.000	4140	910	63.7
12.00	4	130	0.060	12.000	8.400	3450	830	83.4
16.00	4	130	0.065	16.000	11.200	2585	670	120.5

Titanium alloys
> 300 HB
[Ti6Al4V]

3.00	3	45	0.015	3.000	2.100	4775	215	1.4
4.00	3	45	0.020	4.000	2.800	3580	215	2.4
5.00	4	45	0.020	5.000	3.500	2865	230	4.0
6.00	4	45	0.025	6.000	4.200	2385	240	6.0
8.00	4	45	0.035	8.000	5.600	1790	250	11.2
10.00	4	45	0.045	10.000	7.000	1430	260	18.0
12.00	4	45	0.050	12.000	8.400	1195	240	24.1
16.00	4	45	0.050	16.000	11.200	895	180	32.1

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

3.00	3	60	0.015	3.000	2.100	6365	285	1.8
4.00	3	60	0.020	4.000	2.800	4775	285	3.2
5.00	4	60	0.020	5.000	3.500	3820	305	5.3
6.00	4	60	0.025	6.000	4.200	3185	320	8.0
8.00	4	60	0.035	8.000	5.600	2385	335	15.0
10.00	4	60	0.045	10.000	7.000	1910	345	24.1
12.00	4	60	0.050	12.000	8.400	1590	320	32.1
16.00	4	60	0.050	16.000	11.200	1195	240	42.8

Steel
< 850 N/mm²

3.00	3	150	0.015	3.000	3.000	15915	715	6.4
4.00	3	150	0.020	4.000	4.000	11935	715	11.5
5.00	4	150	0.025	5.000	5.000	9550	955	23.9
6.00	4	150	0.030	6.000	6.000	7960	955	34.4
8.00	4	150	0.040	8.000	8.000	5970	955	61.1
10.00	4	150	0.050	10.000	10.000	4775	955	95.5
12.00	4	150	0.055	12.000	12.000	3980	875	126.1
16.00	4	150	0.055	16.000	16.000	2985	655	168.1

Steel
850 - 1100 N/mm²

3.00	3	80	0.015	3.000	3.000	8490	380	3.4
4.00	3	80	0.020	4.000	4.000	6365	380	6.1
5.00	4	80	0.025	5.000	5.000	5095	510	12.7
6.00	4	80	0.030	6.000	6.000	4245	510	18.3
8.00	4	80	0.040	8.000	8.000	3185	510	32.6
10.00	4	80	0.050	10.000	10.000	2545	510	50.9
12.00	4	80	0.055	12.000	12.000	2120	465	67.2
16.00	4	80	0.055	16.000	16.000	1590	350	89.6

Titanium alloys
> 300 HB
[Ti6Al4V]

3.00	3	35	0.010	3.000	3.000	3715	110	1.0
4.00	3	35	0.015	4.000	4.000	2785	125	2.0
5.00	4	35	0.020	5.000	5.000	2230	180	4.5
6.00	4	35	0.025	6.000	6.000	1855	185	6.7
8.00	4	35	0.030	8.000	8.000	1395	165	10.7
10.00	4	35	0.040	10.000	10.000	1115	180	17.8
12.00	4	35	0.045	12.000	12.000	930	165	24.1
16.00	4	35	0.045	16.000	16.000	695	125	32.1

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]


3.00	3	50	0.010	3.000	3.000	5305	160	1.4
4.00	3	50	0.015	4.000	4.000	3980	180	2.9
5.00	4	50	0.020	5.000	5.000	3185	255	6.4
6.00	4	50	0.025	6.000	6.000	2655	265	9.5
8.00	4	50	0.030	8.000	8.000	1990	240	15.3
10.00	4	50	0.040	10.000	10.000	1590	255	25.5
12.00	4	50	0.045	12.000	12.000	1325	240	34.4
16.00	4	50	0.045	16.000	16.000	995	180	45.8

Cylindrical end mills SupraCarb®

Profiled, short version

Base-X
B

HM λ 38°
MG10 γ 0°

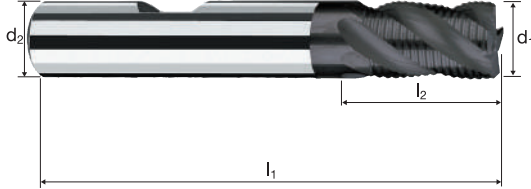

Roughing


Finishing



Rm < 850 **Rm** 850-1100 **Rm** 1100-1300 **Inox** Stainless **Ti** Titanium **GG(G)** Tool Steel

Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	45°	z	POLYCHROM	
								Order-N°	
									P
Example: Order-N°. 15360 180 <small>Coating Article-N° ø-Code</small>									
180	3.00	6.00	50	5.00	12.56	0.25	3		●
220	4.00	6.00	54	8.00	14.09	0.30	3		●
260	5.00	6.00	54	9.00	13.22	0.35	4		●
300	6.00	6.00	54	10.00	-	0.35	4		●
391	8.00	8.00	58	12.00	-	0.45	4		●
450	10.00	10.00	66	14.00	-	0.60	4		●
501	12.00	12.00	73	16.00	-	0.60	4		●
610	16.00	16.00	82	22.00	-	0.70	4		●
612	16.00	16.00	82	22.00	-	0.70	6		●

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	180	0.030	7.200	1.500	9550	1145	12.4
8.00	4	180	0.040	9.600	2.000	7160	1145	22.0
10.00	4	180	0.055	12.000	2.500	5730	1260	37.8
12.00	4	180	0.065	14.400	3.000	4775	1240	53.6
16.00	4	180	0.070	19.200	4.000	3580	1005	77.0
20.00	4	180	0.075	24.000	5.000	2865	860	103.1

Steel
850 - 1100 N/mm²



6.00	4	130	0.030	7.200	1.500	6895	830	8.9
8.00	4	130	0.040	9.600	2.000	5175	830	15.9
10.00	4	130	0.055	12.000	2.500	4140	910	27.3
12.00	4	130	0.065	14.400	3.000	3450	895	38.7
16.00	4	130	0.070	19.200	4.000	2585	725	55.6
20.00	4	130	0.075	24.000	5.000	2070	620	74.5

Titanium alloys
> 300 HB
[Ti6Al4V]



6.00	4	45	0.025	7.200	1.500	2385	240	2.6
8.00	4	45	0.035	9.600	2.000	1790	250	4.8
10.00	4	45	0.045	12.000	2.500	1430	260	7.7
12.00	4	45	0.055	14.400	3.000	1195	265	11.3
16.00	4	45	0.060	19.200	4.000	895	215	16.5
20.00	4	45	0.065	24.000	5.000	715	185	22.3

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



6.00	4	60	0.025	7.200	1.500	3185	320	3.4
8.00	4	60	0.035	9.600	2.000	2385	335	6.4
10.00	4	60	0.045	12.000	2.500	1910	345	10.3
12.00	4	60	0.055	14.400	3.000	1590	350	15.1
16.00	4	60	0.060	19.200	4.000	1195	285	22.0
20.00	4	60	0.065	24.000	5.000	955	250	29.8



Steel
< 850 N/mm²



6.00	4	150	0.025	3.000	6.000	7960	795	14.3
8.00	4	150	0.035	4.000	8.000	5970	835	26.7
10.00	4	150	0.045	5.000	10.000	4775	860	43.0
12.00	4	150	0.050	6.000	12.000	3980	795	57.3
16.00	4	150	0.050	8.000	16.000	2985	595	76.4
20.00	4	150	0.055	10.000	20.000	2385	525	105.0

Steel
850 - 1100 N/mm²



6.00	4	80	0.025	3.000	6.000	4245	425	7.6
8.00	4	80	0.035	4.000	8.000	3185	445	14.3
10.00	4	80	0.045	5.000	10.000	2545	460	22.9
12.00	4	80	0.050	6.000	12.000	2120	425	30.6
16.00	4	80	0.050	8.000	16.000	1590	320	40.7
20.00	4	80	0.055	10.000	20.000	1275	280	56.0

Titanium alloys
> 300 HB
[Ti6Al4V]



6.00	4	35	0.020	3.000	6.000	1855	150	2.7
8.00	4	35	0.030	4.000	8.000	1395	165	5.3
10.00	4	35	0.035	5.000	10.000	1115	155	7.8
12.00	4	35	0.040	6.000	12.000	930	150	10.7
16.00	4	35	0.040	8.000	16.000	695	110	14.3
20.00	4	35	0.045	10.000	20.000	555	100	20.1

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



6.00	4	50	0.020	3.000	6.000	2655	210	3.8
8.00	4	50	0.030	4.000	8.000	1990	240	7.6
10.00	4	50	0.035	5.000	10.000	1590	225	11.1
12.00	4	50	0.040	6.000	12.000	1325	210	15.3
16.00	4	50	0.040	8.000	16.000	995	160	20.4
20.00	4	50	0.045	10.000	20.000	795	145	28.6


Cylindrical end mills SupraCarb®

Profiled, long version, neck



HM
MG10

λ 38°
 γ 0°

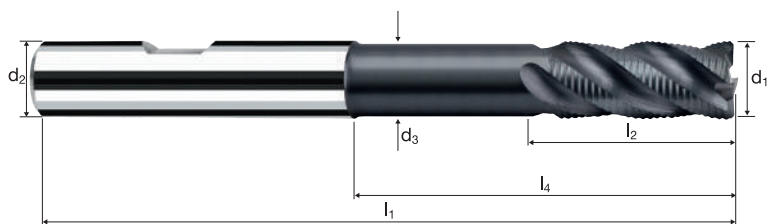

Roughing


Finishing



Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	---------------------

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	z	POLYCHROM				
										Order-N°	Article-N°	ø-Code		
300	6.00	6.00	5.50	70	13.00	32.34	33.00	0.35	4	P	15348	300		
391	8.00	8.00	7.40	80	19.00	42.29	43.00	0.45	4					
450	10.00	10.00	9.20	100	22.00	58.20	59.00	0.60	4					
501	12.00	12.00	11.00	110	26.00	63.13	64.00	0.60	4					
610	16.00	16.00	15.00	123	32.00	73.13	74.00	0.70	4					
682	20.00	20.00	19.00	141	38.00	89.13	90.00	0.70	4					

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _r [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	3	28	0.020	15.000	2.400	1485	90	3.2
8.00	4	28	0.030	20.000	3.200	1115	135	8.6
10.00	4	28	0.035	25.000	4.000	890	125	12.5
12.00	4	28	0.055	30.000	4.800	745	165	23.5
16.00	4	28	0.075	40.000	6.400	555	165	42.8
20.00	4	28	0.095	50.000	8.000	445	170	67.7
25.00	4	28	0.115	62.500	10.000	355	165	102.5
32.00	6	28	0.105	80.000	12.800	280	175	179.7
40.00	6	28	0.130	100.000	16.000	225	175	278.1

Steel
850 - 1100 N/mm²



6.00	3	22	0.020	15.000	2.400	1165	70	2.5
8.00	4	22	0.030	20.000	3.200	875	105	6.7
10.00	4	22	0.035	25.000	4.000	700	100	9.8
12.00	4	22	0.055	30.000	4.800	585	130	18.5
16.00	4	22	0.075	40.000	6.400	440	130	33.6
20.00	4	22	0.095	50.000	8.000	350	135	53.2
25.00	4	22	0.115	62.500	10.000	280	130	80.5
32.00	6	22	0.105	80.000	12.800	220	140	141.2
40.00	6	22	0.130	100.000	16.000	175	135	218.5

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



6.00	3	11	0.020	15.000	2.400	585	35	1.3
8.00	4	11	0.030	20.000	3.200	440	55	3.4
10.00	4	11	0.035	25.000	4.000	350	50	4.9
12.00	4	11	0.055	30.000	4.800	290	65	9.2
16.00	4	11	0.075	40.000	6.400	220	65	16.8
20.00	4	11	0.095	50.000	8.000	175	65	26.6
25.00	4	11	0.115	62.500	10.000	140	65	40.3
32.00	6	11	0.105	80.000	12.800	110	70	70.6
40.00	6	11	0.130	100.000	16.000	90	70	109.2

Cast iron
(lamellar / spheroidal)



6.00	3	20	0.020	15.000	2.400	1060	65	2.3
8.00	4	20	0.030	20.000	3.200	795	95	6.1
10.00	4	20	0.035	25.000	4.000	635	90	8.9
12.00	4	20	0.055	30.000	4.800	530	115	16.8
16.00	4	20	0.075	40.000	6.400	400	120	30.6
20.00	4	20	0.095	50.000	8.000	320	120	48.4
25.00	4	20	0.115	62.500	10.000	255	115	73.2
32.00	6	20	0.105	80.000	12.800	200	125	128.3
40.00	6	20	0.130	100.000	16.000	160	125	198.6



Steel
< 850 N/mm²



6.00	3	25	0.020	3.000	6.000	1325	80	1.4
8.00	4	25	0.025	4.000	8.000	995	100	3.2
10.00	4	25	0.035	5.000	10.000	795	110	5.6
12.00	4	25	0.055	6.000	12.000	665	145	10.5
16.00	4	25	0.070	8.000	16.000	495	140	17.8
20.00	4	25	0.090	10.000	20.000	400	145	28.6
25.00	4	25	0.110	12.500	25.000	320	140	43.8
32.00	6	25	0.095	16.000	32.000	250	140	72.6
40.00	6	25	0.120	20.000	40.000	200	145	114.6

Steel
850 - 1100 N/mm²



6.00	3	18	0.020	3.000	6.000	955	55	1.0
8.00	4	18	0.025	4.000	8.000	715	70	2.3
10.00	4	18	0.035	5.000	10.000	575	80	4.0
12.00	4	18	0.055	6.000	12.000	475	105	7.6
16.00	4	18	0.070	8.000	16.000	360	100	12.8
20.00	4	18	0.090	10.000	20.000	285	105	20.6
25.00	4	18	0.110	12.500	25.000	230	100	31.5
32.00	6	18	0.095	16.000	32.000	180	100	52.3
40.00	6	18	0.120	20.000	40.000	145	105	82.5

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



6.00	3	10	0.020	3.000	6.000	530	30	0.6
8.00	4	10	0.025	4.000	8.000	400	40	1.3
10.00	4	10	0.035	5.000	10.000	320	45	2.2
12.00	4	10	0.055	6.000	12.000	265	60	4.2
16.00	4	10	0.070	8.000	16.000	200	55	7.1
20.00	4	10	0.090	10.000	20.000	160	55	11.5
25.00	4	10	0.110	12.500	25.000	125	55	17.5
32.00	6	10	0.095	16.000	32.000	100	55	29.0
40.00	6	10	0.120	20.000	40.000	80	55	45.8

Cast iron
(lamellar / spheroidal)




6.00	3	16	0.020	3.000	6.000	850	50	0.9
8.00	4	16	0.025	4.000	8.000	635	65	2.0
10.00	4	16	0.035	5.000	10.000	510	70	3.6
12.00	4	16	0.055	6.000	12.000	425	95	6.7
16.00	4	16	0.070	8.000	16.000	320	90	11.4
20.00	4	16	0.090	10.000	20.000	255	90	18.3
25.00	4	16	0.110	12.500	25.000	205	90	28.0
32.00	6	16	0.095	16.000	32.000	160	90	46.4
40.00	6	16	0.120	20.000	40.000	125	90	73.3

Cylindrical end mills

Profiled NRF, long version

HSS

HSS-E λ 25°
Co8 γ 10°

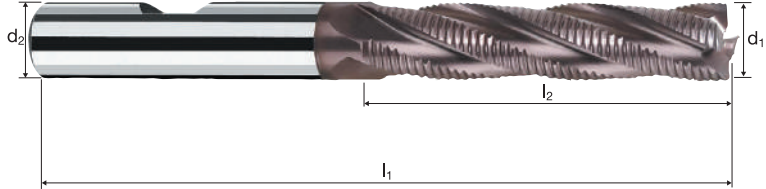

Roughing

Finishing



Rm
< 850

Rm
850-1100


Rm
1100-1300

Inox
Stainless

GG(G)

Example: Order-N°.										UNICUT-4X	
										U0665	
\emptyset Code	d_1 k12	d_2 h6	l_1	l_2	l_4	45°	α	z			
260	5.00	6.00	68	24.00	31.55	0.40	1.0°	3	●		
300	6.00	6.00	68	24.00	-	0.40	0.0°	3	●		
342	7.00	10.00	80	30.00	39.50	0.40	2.5°	3	●		
391	8.00	8.00	82	38.00	-	0.40	0.0°	4	●		
402	8.00	10.00	88	38.00	47.50	0.40	1.0°	4	●		
420	9.00	10.00	88	38.00	47.50	0.40	0.0°	4	●		
450	10.00	10.00	95	45.00	-	0.40	0.0°	4	●		
470	11.00	12.00	102	45.00	56.50	0.40	0.0°	4	●		
501	12.00	12.00	110	53.00	-	0.40	0.0°	4	●		
540	13.00	12.00	110	53.00	-	0.40	0.0°	4	●		
570	14.00	12.00	110	53.00	-	0.40	0.0°	4	●		
610	16.00	16.00	123	63.00	-	0.50	0.0°	4	●		
640	18.00	16.00	123	63.00	-	0.50	0.0°	4	●		
682	20.00	20.00	141	75.00	-	0.50	0.0°	4	●		
710	22.00	20.00	141	75.00	-	0.70	0.0°	4	●		
772	25.00	25.00	166	90.00	-	0.70	0.0°	4	●		
800	28.00	25.00	166	90.00	-	0.70	0.0°	6	●		
810	30.00	25.00	166	90.00	-	0.70	0.0°	6	●		
832	32.00	32.00	186	106.00	-	0.70	0.0°	6	●		
860	36.00	32.00	186	106.00	-	0.90	0.0°	6	●		
892	40.00	40.00	217	125.00	-	0.90	0.0°	6	●		

Application



Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _r [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	27	0.015	6.000	1.200	1430	85	0.6
8.00	4	27	0.020	8.000	1.600	1075	85	1.1
10.00	4	27	0.025	10.000	2.000	860	85	1.7
12.00	4	27	0.035	12.000	2.400	715	100	2.9
16.00	4	27	0.050	16.000	3.200	535	105	5.5
20.00	4	27	0.060	20.000	4.000	430	105	8.3
25.00	4	27	0.080	25.000	5.000	345	110	13.8

Steel
1100 - 1300 N/mm²



6.00	4	22	0.015	6.000	1.200	1165	70	0.5
8.00	4	22	0.020	8.000	1.600	875	70	0.9
10.00	4	22	0.025	10.000	2.000	700	70	1.4
12.00	4	22	0.035	12.000	2.400	585	80	2.4
16.00	4	22	0.050	16.000	3.200	440	90	4.5
20.00	4	22	0.060	20.000	4.000	350	85	6.7
25.00	4	22	0.080	25.000	5.000	280	90	11.2

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]




6.00	4	16	0.015	6.000	1.200	850	50	0.4
8.00	4	16	0.020	8.000	1.600	635	50	0.7
10.00	4	16	0.025	10.000	2.000	510	50	1.0
12.00	4	16	0.035	12.000	2.400	425	60	1.7
16.00	4	16	0.050	16.000	3.200	320	65	3.3
20.00	4	16	0.060	20.000	4.000	255	60	4.9
25.00	4	16	0.080	25.000	5.000	205	65	8.1

Cast iron
(lamellar / spheroidal)



6.00	4	24	0.015	6.000	1.200	1275	75	0.6
8.00	4	24	0.020	8.000	1.600	955	75	1.0
10.00	4	24	0.025	10.000	2.000	765	75	1.5
12.00	4	24	0.035	12.000	2.400	635	90	2.6
16.00	4	24	0.050	16.000	3.200	475	95	4.9
20.00	4	24	0.060	20.000	4.000	380	90	7.3
25.00	4	24	0.080	25.000	5.000	305	100	12.2



Steel
850 - 1100 N/mm²



6.00	4	24	0.020	3.000	6.000	1275	100	1.8
8.00	4	24	0.025	4.000	8.000	955	95	3.1
10.00	4	24	0.030	5.000	10.000	765	90	4.6
12.00	4	24	0.045	6.000	12.000	635	115	8.3
16.00	4	24	0.065	8.000	16.000	475	125	15.9
20.00	4	24	0.080	10.000	20.000	380	120	24.4
25.00	4	24	0.100	12.500	25.000	305	120	38.2

Steel
1100 - 1300 N/mm²



6.00	4	20	0.020	3.000	6.000	1060	85	1.5
8.00	4	20	0.025	4.000	8.000	795	80	2.5
10.00	4	20	0.030	5.000	10.000	635	75	3.8
12.00	4	20	0.045	6.000	12.000	530	95	6.9
16.00	4	20	0.065	8.000	16.000	400	105	13.2
20.00	4	20	0.080	10.000	20.000	320	100	20.4
25.00	4	20	0.100	12.500	25.000	255	100	31.8

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]



6.00	4	14	0.020	3.000	6.000	745	60	1.1
8.00	4	14	0.025	4.000	8.000	555	55	1.8
10.00	4	14	0.030	5.000	10.000	445	55	2.7
12.00	4	14	0.045	6.000	12.000	370	65	4.8
16.00	4	14	0.065	8.000	16.000	280	70	9.3
20.00	4	14	0.080	10.000	20.000	225	70	14.3
25.00	4	14	0.100	12.500	25.000	180	70	22.3

Cast iron
(lamellar / spheroidal)




6.00	4	21	0.020	3.000	6.000	1115	90	1.6
8.00	4	21	0.025	4.000	8.000	835	85	2.7
10.00	4	21	0.030	5.000	10.000	670	80	4.0
12.00	4	21	0.045	6.000	12.000	555	100	7.2
16.00	4	21	0.065	8.000	16.000	420	110	13.9
20.00	4	21	0.080	10.000	20.000	335	105	21.4
25.00	4	21	0.100	12.500	25.000	265	105	33.4

Cylindrical end mills

Profiled NRC, extra-long version, neck

HSS

HSS λ 30°
PM/F γ 12°

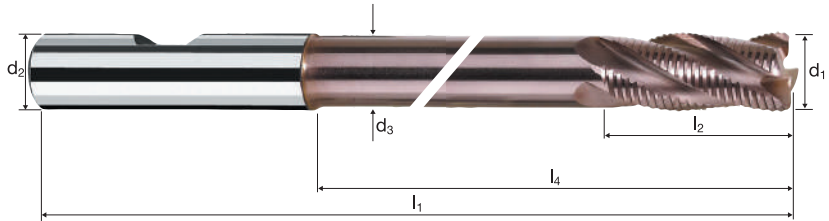

Roughing

Finishing



Rm
< 850

Rm
850-1100

Rm
1100-1300

GG(G)

Example:
Order-N°.

Coating
U

Article-N°
0621

















ø-Code
300



UNICUT-4X

U0621

Ø Code	d ₁ k8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	z	
300	6.00	6.00	5.50	81	13.00	43.34	44.00	0.40	4	●
391	8.00	8.00	7.40	101	19.00	63.29	64.00	0.40	4	●
450	10.00	10.00	9.20	117	22.00	75.20	76.00	0.40	4	●
501	12.00	12.00	11.00	136	26.00	89.13	90.00	0.40	4	●
610	16.00	16.00	14.50	155	32.00	105.03	106.00	0.50	4	●
682	20.00	20.00	18.00	179	38.00	127.00	128.00	0.50	4	●
772	25.00	25.00	23.00	211	45.00	153.00	154.00	0.70	4	●



Application	Material	d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
	Steel 850 - 1100 N/mm ² 	3.00	5	160	0.025	8.000	0.030	16975	2120
		4.00	5	160	0.029	11.000	0.030	12730	1845
		5.00	5	160	0.033	13.000	0.060	10185	1680
		6.00	5	160	0.036	13.000	0.060	8490	1530
		8.00	7	160	0.041	19.000	0.100	6365	1825
		10.00	7	160	0.046	22.000	0.100	5095	1640
		12.00	7	160	0.051	26.000	0.120	4245	1515
		16.00	7	160	0.059	32.000	0.120	3185	1315
		20.00	7	160	0.065	38.000	0.150	2545	1160
		Steel 1100 - 1300 N/mm ² 	Steel 1100 - 1300 N/mm ² 	3.00	5	140	0.025	8.000	0.030
4.00	5			140	0.029	11.000	0.030	11140	1615
5.00	5			140	0.033	13.000	0.060	8915	1470
6.00	5			140	0.036	13.000	0.060	7425	1335
8.00	7			140	0.041	19.000	0.100	5570	1600
10.00	7			140	0.046	22.000	0.100	4455	1435
12.00	7			140	0.051	26.000	0.120	3715	1325
16.00	7			140	0.059	32.000	0.120	2785	1150
20.00	7			140	0.065	38.000	0.150	2230	1015
Hardened tool steel 52 - 56 HRC 	Hardened tool steel 52 - 56 HRC 			3.00	5	120	0.025	8.000	0.030
		4.00	5	120	0.029	11.000	0.030	9550	1385
		5.00	5	120	0.033	13.000	0.060	7640	1260
		6.00	5	120	0.036	13.000	0.060	6365	1145
		8.00	7	120	0.041	19.000	0.100	4775	1370
		10.00	7	120	0.046	22.000	0.100	3820	1230
		12.00	7	120	0.051	26.000	0.120	3185	1135
		16.00	7	120	0.059	32.000	0.120	2385	985
		20.00	7	120	0.065	38.000	0.150	1910	870
		Hardened tool steel 56 - 60 HRC 	Hardened tool steel 56 - 60 HRC 	3.00	5	80	0.025	8.000	0.030
4.00	5			80	0.029	11.000	0.030	6365	925
5.00	5			80	0.033	13.000	0.060	5095	840
6.00	5			80	0.036	13.000	0.060	4245	765
8.00	7			80	0.041	19.000	0.100	3185	915
10.00	7			80	0.046	22.000	0.100	2545	820
12.00	7			80	0.051	26.000	0.120	2120	760
16.00	7			80	0.059	32.000	0.120	1590	655
20.00	7			80	0.065	38.000	0.150	1275	580
Wrought aluminium Construction aluminium 	Wrought aluminium Construction aluminium 			3.00	5	396	0.025	8.000	0.030
		4.00	5	450	0.029	11.000	0.030	35810	5190
		5.00	5	450	0.033	13.000	0.060	28650	4725
		6.00	5	450	0.036	13.000	0.060	23875	4295
		8.00	7	450	0.041	19.000	0.100	17905	5140
		10.00	7	450	0.046	22.000	0.100	14325	4610
		12.00	7	450	0.051	26.000	0.120	11935	4260
		16.00	7	450	0.045	24.000	0.200	8950	2820
		20.00	7	450	0.065	38.000	0.150	7160	3260
		Cast iron (lamellar / spheroidal) 	Cast iron (lamellar / spheroidal) 	3.00	5	180	0.025	8.000	0.030
4.00	5			180	0.029	11.000	0.030	14325	2075
5.00	5			180	0.033	13.000	0.060	11460	1890
6.00	5			180	0.036	13.000	0.060	9550	1720
8.00	7			180	0.041	19.000	0.100	7160	2055
10.00	7			180	0.046	22.000	0.100	5730	1845
12.00	7			180	0.051	26.000	0.120	4775	1705
16.00	7			180	0.059	32.000	0.120	3580	1480
20.00	7			180	0.065	38.000	0.150	2865	1305
Titanium alloys > 300 HB [Ti6Al4V] 	Titanium alloys > 300 HB [Ti6Al4V] 			3.00	5	70	0.025	8.000	0.030
		4.00	5	70	0.029	11.000	0.030	5570	810
		5.00	5	70	0.033	13.000	0.060	4455	735
		6.00	5	70	0.036	13.000	0.060	3715	670
		8.00	7	70	0.041	19.000	0.100	2785	800
		10.00	7	70	0.046	22.000	0.100	2230	715
		12.00	7	70	0.051	26.000	0.120	1855	665
		16.00	7	70	0.059	32.000	0.120	1395	575
		20.00	7	70	0.065	38.000	0.150	1115	505
		Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	3.00	5	80	0.025	8.000	0.030
4.00	5			80	0.029	11.000	0.030	6365	925
5.00	5			80	0.033	13.000	0.060	5095	840
6.00	5			80	0.036	13.000	0.060	4245	765
8.00	7			80	0.041	19.000	0.100	3185	915
10.00	7			80	0.046	22.000	0.100	2545	820
12.00	7			80	0.051	26.000	0.120	2120	760
16.00	7			80	0.059	32.000	0.120	1590	655
20.00	7			80	0.065	38.000	0.150	1275	580

Cylindrical end mills MulticutXF

Finishing, normal version




HM	λ 65°
XA	γ 8°

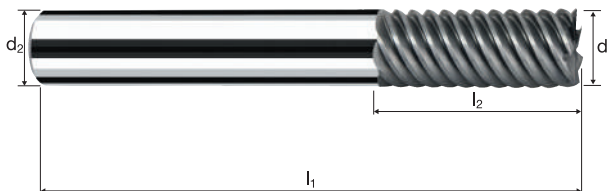

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	GG(G) Tool Steel	Aluminium
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	------------------	-----------

Example: Order-N°.										DURO-SI	POLYCHROM
										H15250	P15250
\emptyset Code	d ₁ e8	d ₂ h5	l ₁	l ₂	l ₄	45°	α	z			
180	3.00	6.00	57	8.00	15.36	-	6.0°	5	●	●	
220	4.00	6.00	57	11.00	16.79	-	4.0°	5	●	●	
260	5.00	6.00	57	13.00	16.92	-	2.0°	5	●	●	
300	6.00	6.00	57	13.00	-	0.15	0.0°	5	●	●	
391	8.00	8.00	63	19.00	-	0.15	0.0°	7	●	●	
450	10.00	10.00	72	22.00	-	0.20	0.0°	7	●	●	
501	12.00	12.00	83	26.00	-	0.20	0.0°	7	●	●	
610	16.00	16.00	92	32.00	-	0.20	0.0°	7	●	●	
682	20.00	20.00	104	38.00	-	0.20	0.0°	7	●	●	

Application



Material


Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
3.00	4	130	0.030	8.000	0.060	13795	1655
4.00	5	130	0.035	11.000	0.060	10345	1810
5.00	5	130	0.039	13.000	0.120	8275	1615
6.00	6	130	0.043	13.000	0.120	6895	1780
8.00	6	130	0.050	19.000	0.200	5175	1550
10.00	7	130	0.056	23.000	0.200	4140	1620
12.00	7	130	0.061	27.000	0.240	3450	1470
16.00	8	130	0.070	32.000	0.240	2585	1450
20.00	8	130	0.078	40.000	0.300	2070	1290
3.00	4	110	0.030	8.000	0.060	11670	1400
4.00	5	110	0.035	11.000	0.060	8755	1530
5.00	5	110	0.039	13.000	0.120	7005	1365
6.00	6	110	0.043	13.000	0.120	5835	1505
8.00	6	110	0.050	19.000	0.200	4375	1315
10.00	7	110	0.056	23.000	0.200	3500	1375
12.00	7	110	0.061	27.000	0.240	2920	1245
16.00	8	110	0.070	32.000	0.240	2190	1225
20.00	8	110	0.078	40.000	0.300	1750	1090
3.00	4	55	0.030	8.000	0.060	5835	700
4.00	5	55	0.035	11.000	0.060	4375	765
5.00	5	55	0.039	13.000	0.120	3500	685
6.00	6	55	0.043	13.000	0.120	2920	755
8.00	6	55	0.050	19.000	0.200	2190	655
10.00	7	55	0.056	23.000	0.200	1750	685
12.00	7	55	0.061	27.000	0.240	1460	625
16.00	8	55	0.070	32.000	0.240	1095	615
20.00	8	55	0.078	40.000	0.300	875	545
3.00	4	160	0.025	8.000	0.030	16975	1700
4.00	5	160	0.029	11.000	0.030	12730	1845
5.00	5	160	0.033	13.000	0.060	10185	1680
6.00	6	160	0.036	13.000	0.060	8490	1835
8.00	6	160	0.041	19.000	0.100	6365	1565
10.00	7	160	0.046	23.000	0.100	5095	1640
12.00	7	160	0.051	27.000	0.120	4245	1515
16.00	8	160	0.059	32.000	0.120	3185	1500
20.00	8	160	0.065	40.000	0.150	2545	1325
3.00	4	140	0.025	8.000	0.030	14855	1485
4.00	5	140	0.029	11.000	0.030	11140	1615
5.00	5	140	0.033	13.000	0.060	8915	1470
6.00	6	140	0.036	13.000	0.060	7425	1605
8.00	6	140	0.041	19.000	0.100	5570	1370
10.00	7	140	0.046	23.000	0.100	4455	1435
12.00	7	140	0.051	27.000	0.120	3715	1325
16.00	8	140	0.059	32.000	0.120	2785	1315
20.00	8	140	0.065	40.000	0.150	2230	1160
3.00	4	70	0.025	8.000	0.030	7425	745
4.00	5	70	0.029	11.000	0.030	5570	810
5.00	5	70	0.033	13.000	0.060	4455	735
6.00	6	70	0.036	13.000	0.060	3715	800
8.00	6	70	0.041	19.000	0.100	2785	685
10.00	7	70	0.046	23.000	0.100	2230	715
12.00	7	70	0.051	27.000	0.120	1855	665
16.00	8	70	0.059	32.000	0.120	1395	655
20.00	8	70	0.065	40.000	0.150	1115	580





Suitable cutting data for other applications and materials can be found in the cutting data software **ToolExpert E-Cut**

Cylindrical end mills E-Cut

Finishing, normal version

HM
MG10

λ 55°
 γ 10°

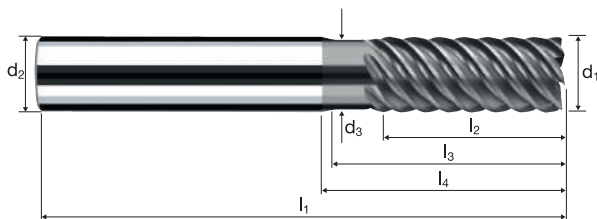


Roughing

Finishing



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	POLYCHROM	
											Example: Order-N°.	Coating
												P8401
												P8301
180	3.00	6.00	2.80	57	8.00	14.00	20.37	0.050	4.5°	4		●
220	4.00	6.00	3.70	57	11.00	16.00	20.82	0.100	3.0°	5		●
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.100	1.5°	5		●
300	6.00	6.00	5.50	57	13.00	18.15	20.00	0.100	0.0°	6		●
391	8.00	8.00	7.40	63	19.00	23.63	26.00	0.150	0.0°	6		●
450	10.00	10.00	9.20	72	23.00	27.99	31.00	0.200	0.0°	7		●
501	12.00	12.00	11.00	83	27.00	33.29	37.00	0.200	0.0°	7		●
610	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	8		●
682	20.00	20.00	19.00	104	40.00	48.23	53.00	0.250	0.0°	8		●



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
6.00	6	150	0.016	9.000	0.100	7960	765
8.00	6	150	0.020	12.000	0.100	5970	715
10.00	6	150	0.026	15.000	0.100	4775	745
12.00	6	150	0.030	18.000	0.100	3980	715
16.00	6	150	0.040	24.000	0.200	2985	715
20.00	6	150	0.050	30.000	0.200	2385	715

Steel
850 - 1100 N/mm²

6.00	6	120	0.016	9.000	0.100	6365	610
8.00	6	120	0.020	12.000	0.100	4775	575
10.00	6	120	0.026	15.000	0.100	3820	595
12.00	6	120	0.030	18.000	0.100	3185	575
16.00	6	120	0.040	24.000	0.200	2385	575
20.00	6	120	0.050	30.000	0.200	1910	575

Steel
1100 - 1300 N/mm²

6.00	6	100	0.016	9.000	0.100	5305	510
8.00	6	100	0.020	12.000	0.100	3980	475
10.00	6	100	0.026	15.000	0.100	3185	495
12.00	6	100	0.030	18.000	0.100	2655	475
16.00	6	100	0.040	24.000	0.200	1990	475
20.00	6	100	0.050	30.000	0.200	1590	475

Cast iron
(lamellar / spheroidal)

6.00	6	120	0.016	9.000	0.100	6365	610
8.00	6	120	0.020	12.000	0.100	4775	575
10.00	6	120	0.026	15.000	0.100	3820	595
12.00	6	120	0.030	18.000	0.100	3185	575
16.00	6	120	0.040	24.000	0.200	2385	575
20.00	6	120	0.050	30.000	0.200	1910	575

Titanium alloys
> 300 HB
[Ti6Al4V]

6.00	6	50	0.016	9.000	0.100	2655	255
8.00	6	50	0.020	12.000	0.100	1990	240
10.00	6	50	0.026	15.000	0.100	1590	250
12.00	6	50	0.030	18.000	0.100	1325	240
16.00	6	50	0.040	24.000	0.200	995	240
20.00	6	50	0.050	30.000	0.200	795	240

Unalloyed copper

6.00	6	180	0.016	9.000	0.100	9550	915
8.00	6	180	0.020	12.000	0.100	7160	860
10.00	6	180	0.026	15.000	0.100	5730	895
12.00	6	180	0.030	18.000	0.100	4775	860
16.00	6	180	0.040	24.000	0.200	3580	860
20.00	6	180	0.050	30.000	0.200	2865	860


Cylindrical end mills

Finishing, normal version



HM
MG10

λ 45°
 γ 8°

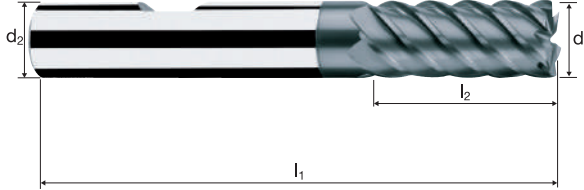

Roughing

Finishing












ToolSchool

P46200 / P46300
P8301 / P8401

Rm < 850	Rm 850-1100	Rm 1100-1300						Ti Titanium	GG(G) Copper
-------------	----------------	-----------------	--	--	--	--	--	----------------	-----------------

Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	45°	z	POLYCHROM	
								P45360
								P45260
300	6.00	6.00	57	13.00	0.15	6		●
391	8.00	8.00	63	19.00	0.15	6		●
450	10.00	10.00	72	22.00	0.20	6		●
501	12.00	12.00	83	26.00	0.20	6		●
610	16.00	16.00	92	32.00	0.20	6		●
682	20.00	20.00	104	38.00	0.20	6		●



Application	Material	d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
	Steel 850 - 1100 N/mm ² 	3.00	5	130	0.021	14.000	0.030	13795	1450
		4.00	5	130	0.024	17.000	0.030	10345	1240
		5.00	5	130	0.027	19.000	0.060	8275	1115
		6.00	5	130	0.030	19.000	0.060	6895	1035
		8.00	7	130	0.034	28.000	0.100	5175	1230
		10.00	7	130	0.039	34.000	0.100	4140	1130
		12.00	7	130	0.042	40.000	0.120	3450	1015
		16.00	7	130	0.049	48.000	0.120	2585	885
		20.00	7	130	0.055	56.000	0.150	2070	795
			Steel 1100 - 1300 N/mm ² 	3.00	5	110	0.021	14.000	0.030
4.00	5			110	0.024	17.000	0.030	8755	1050
5.00	5			110	0.027	19.000	0.060	7005	945
6.00	5			110	0.030	19.000	0.060	5835	875
8.00	7			110	0.034	28.000	0.100	4375	1040
10.00	7			110	0.039	34.000	0.100	3500	955
12.00	7			110	0.042	40.000	0.120	2920	860
16.00	7			110	0.049	48.000	0.120	2190	750
20.00	7			110	0.055	56.000	0.150	1750	675
	Hardened tool steel 52 - 56 HRC 			3.00	5	100	0.021	14.000	0.030
		4.00	5	100	0.024	17.000	0.030	7960	955
		5.00	5	100	0.027	19.000	0.060	6365	860
		6.00	5	100	0.030	19.000	0.060	5305	795
		8.00	7	100	0.034	28.000	0.100	3980	945
		10.00	7	100	0.039	34.000	0.100	3185	870
		12.00	7	100	0.042	40.000	0.120	2655	780
		16.00	7	100	0.049	48.000	0.120	1990	680
		20.00	7	100	0.055	56.000	0.150	1590	615
			Hardened tool steel 56 - 60 HRC 	3.00	5	60	0.021	14.000	0.030
4.00	5			60	0.024	17.000	0.030	4775	575
5.00	5			60	0.027	19.000	0.060	3820	515
6.00	5			60	0.030	19.000	0.060	3185	475
8.00	7			60	0.034	28.000	0.100	2385	570
10.00	7			60	0.039	34.000	0.100	1910	520
12.00	7			60	0.042	40.000	0.120	1590	470
16.00	7			60	0.049	48.000	0.120	1195	410
20.00	7			60	0.055	56.000	0.150	955	370
	Wrought aluminium Construction aluminium 			3.00	5	360	0.021	14.000	0.030
		4.00	5	360	0.024	17.000	0.030	28650	3440
		5.00	5	360	0.027	19.000	0.060	22920	3095
		6.00	5	360	0.030	19.000	0.060	19100	2865
		8.00	7	360	0.034	28.000	0.100	14325	3410
		10.00	7	360	0.039	34.000	0.100	11460	3130
		12.00	7	360	0.042	40.000	0.120	9550	2805
		16.00	7	360	0.045	40.000	0.250	7160	2255
		20.00	7	360	0.055	56.000	0.150	5730	2205
			Cast iron (lamellar / spheroidal) 	3.00	5	140	0.021	14.000	0.030
4.00	5			140	0.024	17.000	0.030	11140	1335
5.00	5			140	0.027	19.000	0.060	8915	1205
6.00	5			140	0.030	19.000	0.060	7425	1115
8.00	7			140	0.034	28.000	0.100	5570	1325
10.00	7			140	0.039	34.000	0.100	4455	1215
12.00	7			140	0.042	40.000	0.120	3715	1090
16.00	7			140	0.049	48.000	0.120	2785	955
20.00	7			140	0.055	56.000	0.150	2230	860
	Titanium alloys > 300 HB [Ti6Al4V] 			3.00	5	50	0.021	14.000	0.030
		4.00	5	50	0.024	17.000	0.030	3980	475
		5.00	5	50	0.027	19.000	0.060	3185	430
		6.00	5	50	0.030	19.000	0.060	2655	400
		8.00	7	50	0.034	28.000	0.100	1990	475
		10.00	7	50	0.039	34.000	0.100	1590	435
		12.00	7	50	0.042	40.000	0.120	1325	390
		16.00	7	50	0.049	48.000	0.120	995	340
		20.00	7	50	0.055	56.000	0.150	795	305
			Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	3.00	5	60	0.021	14.000	0.030
4.00	5			60	0.024	17.000	0.030	4775	575
5.00	5			60	0.027	19.000	0.060	3820	515
6.00	5			60	0.030	19.000	0.060	3185	475
8.00	7			60	0.034	28.000	0.100	2385	570
10.00	7			60	0.039	34.000	0.100	1910	520
12.00	7			60	0.042	40.000	0.120	1590	470
16.00	7			60	0.049	48.000	0.120	1195	410
20.00	7			60	0.055	56.000	0.150	955	370

Cylindrical end mills MulticutXF

Finishing, medium length version




HM XA	λ 65° γ 8°
----------	------------------------------

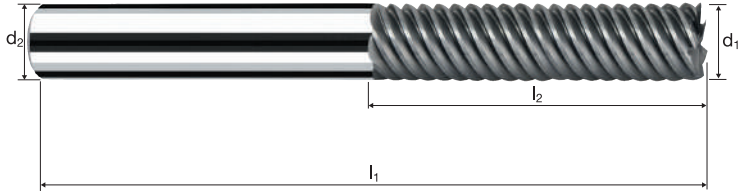

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	GG(G) Tool Steel Aluminium
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	----------------------------------

Ø Code	d ₁ e8	d ₂ h5	l ₁	l ₂	l ₄	45°	α	z	DURO-SI	POLYCHROM
									H15251	P15251
Example: Order-N°.	Coating: P		Article-N°: 15251		ø-Code: 180					
180	3.00	6.00	63	14.00	21.56	-	4.5°	5	●	●
220	4.00	6.00	63	17.00	23.09	-	3.0°	5	●	●
260	5.00	6.00	63	19.00	23.22	-	1.5°	5	●	●
300	6.00	6.00	63	19.00	-	0.15	0.0°	5	●	●
391	8.00	8.00	72	28.00	-	0.15	0.0°	7	●	●
450	10.00	10.00	84	34.00	-	0.20	0.0°	7	●	●
501	12.00	12.00	97	40.00	-	0.20	0.0°	7	●	●
610	16.00	16.00	108	48.00	-	0.20	0.0°	7	●	●
682	20.00	20.00	122	56.00	-	0.20	0.0°	7	●	●

Application



Material


Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
3.00	4	100	0.025	11.000	0.060	10610	1060
4.00	5	100	0.029	13.000	0.060	7960	1155
5.00	5	100	0.033	16.000	0.120	6365	1050
6.00	6	100	0.036	21.000	0.120	5305	1145
8.00	6	100	0.041	31.000	0.200	3980	980
10.00	7	100	0.046	37.000	0.200	3185	1025
12.00	7	100	0.051	44.000	0.240	2655	945
16.00	8	100	0.059	53.000	0.240	1990	940
20.00	8	100	0.066	62.000	0.300	1590	840
3.00	4	90	0.025	11.000	0.060	9550	955
4.00	5	90	0.029	13.000	0.060	7160	1040
5.00	5	90	0.033	16.000	0.120	5730	945
6.00	6	90	0.036	21.000	0.120	4775	1030
8.00	6	90	0.041	31.000	0.200	3580	880
10.00	7	90	0.046	37.000	0.200	2865	920
12.00	7	90	0.051	44.000	0.240	2385	850
16.00	8	90	0.059	53.000	0.240	1790	845
20.00	8	90	0.066	62.000	0.300	1430	755
3.00	4	40	0.025	11.000	0.060	4245	425
4.00	5	40	0.029	13.000	0.060	3185	460
5.00	5	40	0.033	16.000	0.120	2545	420
6.00	6	40	0.036	21.000	0.120	2120	460
8.00	6	40	0.041	31.000	0.200	1590	390
10.00	7	40	0.046	37.000	0.200	1275	410
12.00	7	40	0.051	44.000	0.240	1060	380
16.00	8	40	0.059	53.000	0.240	795	375
20.00	8	40	0.066	62.000	0.300	635	335
3.00	4	130	0.021	11.000	0.030	13795	1160
4.00	5	130	0.024	13.000	0.030	10345	1240
5.00	5	130	0.027	16.000	0.060	8275	1115
6.00	6	130	0.030	21.000	0.060	6895	1240
8.00	6	130	0.034	31.000	0.100	5175	1055
10.00	7	130	0.039	37.000	0.100	4140	1130
12.00	7	130	0.042	44.000	0.120	3450	1015
16.00	8	130	0.049	53.000	0.120	2585	1015
20.00	8	130	0.055	62.000	0.150	2070	910
3.00	4	110	0.021	11.000	0.030	11670	980
4.00	5	110	0.024	13.000	0.030	8755	1050
5.00	5	110	0.027	16.000	0.060	7005	945
6.00	6	110	0.030	21.000	0.060	5835	1050
8.00	6	110	0.034	31.000	0.100	4375	895
10.00	7	110	0.039	37.000	0.100	3500	955
12.00	7	110	0.042	44.000	0.120	2920	860
16.00	8	110	0.049	53.000	0.120	2190	860
20.00	8	110	0.055	62.000	0.150	1750	770
3.00	4	60	0.021	11.000	0.030	6365	535
4.00	5	60	0.024	13.000	0.030	4775	575
5.00	5	60	0.027	16.000	0.060	3820	515
6.00	6	60	0.030	21.000	0.060	3185	575
8.00	6	60	0.034	31.000	0.100	2385	485
10.00	7	60	0.039	37.000	0.100	1910	520
12.00	7	60	0.042	44.000	0.120	1590	470
16.00	8	60	0.049	53.000	0.120	1195	470
20.00	8	60	0.055	62.000	0.150	955	420




Suitable cutting data for other applications and materials can be found in the cutting data software **ToolExpert E-Cut**

Cylindrical end mills E-Cut

Finishing, chip breaker, medium length version




HM
MG10 λ 55°
 γ 10°

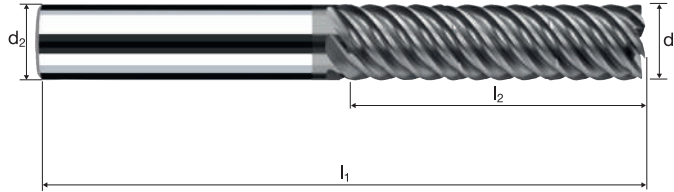

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

Example: Order-N°.										POLYCHROM	
										P8311	
\emptyset Code	d_1 e8	d_2 h6	l_1	l_2	l_4	r	α	z			
180*	3.00	6.00	63	11.00	20.26	0.050	4.5°	4		●	
220*	4.00	6.00	63	13.00	21.39	0.100	3.5°	5		●	
260*	5.00	6.00	63	16.00	23.52	0.100	1.5°	5		●	
300	6.00	6.00	63	21.00	-	0.100	0.0°	6		●	
391	8.00	8.00	72	31.00	-	0.150	0.0°	6		●	
450	10.00	10.00	84	37.00	-	0.200	0.0°	7		●	
501	12.00	12.00	97	44.00	-	0.200	0.0°	7		●	
610	16.00	16.00	108	53.00	-	0.200	0.0°	8		●	
682	20.00	20.00	122	62.00	-	0.250	0.0°	8		●	
* without chip breaker only											



Material

Steel
< 850 N/mm²

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Cast iron
(lamellar / spheroidal)

Titanium alloys
> 300 HB
[Ti6Al4V]

Unalloyed copper

d1 [mm]	z	v _c [m/min]	f _f [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
---------	---	------------------------	---------------------	---------------------	---------------------	------------------------	-------------------------

6.00	6	120	0.016	15.000	0.150	6365	610
8.00	6	120	0.020	20.000	0.150	4775	575
10.00	6	120	0.026	25.000	0.150	3820	595
12.00	6	120	0.030	30.000	0.150	3185	575
16.00	6	120	0.040	40.000	0.250	2385	575
20.00	6	120	0.050	50.000	0.250	1910	575

6.00	6	100	0.016	15.000	0.150	5305	510
8.00	6	100	0.020	20.000	0.150	3980	475
10.00	6	100	0.026	25.000	0.150	3185	495
12.00	6	100	0.030	30.000	0.150	2655	475
16.00	6	100	0.040	40.000	0.250	1990	475
20.00	6	100	0.050	50.000	0.250	1590	475

6.00	6	80	0.016	15.000	0.150	4245	405
8.00	6	80	0.020	20.000	0.150	3185	380
10.00	6	80	0.026	25.000	0.150	2545	395
12.00	6	80	0.030	30.000	0.150	2120	380
16.00	6	80	0.040	40.000	0.250	1590	380
20.00	6	80	0.050	50.000	0.250	1275	380

6.00	6	100	0.016	15.000	0.150	5305	510
8.00	6	100	0.020	20.000	0.150	3980	475
10.00	6	100	0.026	25.000	0.150	3185	495
12.00	6	100	0.030	30.000	0.150	2655	475
16.00	6	100	0.040	40.000	0.250	1990	475
20.00	6	100	0.050	50.000	0.250	1590	475

6.00	6	40	0.016	15.000	0.150	2120	205
8.00	6	40	0.020	20.000	0.150	1590	190
10.00	6	40	0.026	25.000	0.150	1275	200
12.00	6	40	0.030	30.000	0.150	1060	190
16.00	6	40	0.040	40.000	0.250	795	190
20.00	6	40	0.050	50.000	0.250	635	190


6.00	6	150	0.016	15.000	0.150	7960	765
8.00	6	150	0.020	20.000	0.150	5970	715
10.00	6	150	0.026	25.000	0.150	4775	745
12.00	6	150	0.030	30.000	0.150	3980	715
16.00	6	150	0.040	40.000	0.250	2985	715
20.00	6	150	0.050	50.000	0.250	2385	715

Cylindrical end mills

Finishing, medium length version




HM MG10	λ 45° γ 8°
------------	------------------------------

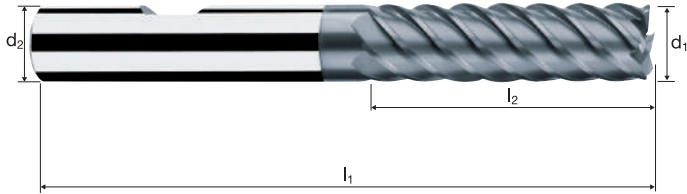

ToolSchool P46210 / P46310
P8311

Rm < 850	Rm 850-1100	Rm 1100-1300					Ti Titanium	GG(G) Copper
-------------	----------------	-----------------	--	--	--	--	----------------	-----------------

Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	45°	z	POLYCHROM	
							P45362	P45262
300	6.00	6.00	63	19.00	0.15	6	●	●
391	8.00	8.00	72	28.00	0.15	6	●	●
450	10.00	10.00	84	34.00	0.20	6	●	●
501	12.00	12.00	97	40.00	0.20	6	●	●
610	16.00	16.00	108	48.00	0.20	6	●	●
682	20.00	20.00	122	56.00	0.20	6	●	●



Material

Steel
850 - 1100 N/mm²

d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
6.00	5	100	0.028	26.000	0.060	5305	745
8.00	7	100	0.032	36.000	0.100	3980	890
10.00	7	100	0.036	45.000	0.100	3185	800
12.00	7	100	0.039	53.000	0.120	2655	725
16.00	7	100	0.045	63.000	0.120	1990	625
20.00	7	100	0.050	75.000	0.150	1590	555

Steel
1100 - 1300 N/mm²

6.00	5	90	0.028	26.000	0.060	4775	670
8.00	7	90	0.032	36.000	0.100	3580	800
10.00	7	90	0.036	45.000	0.100	2865	720
12.00	7	90	0.039	53.000	0.120	2385	650
16.00	7	90	0.045	63.000	0.120	1790	565
20.00	7	90	0.050	75.000	0.150	1430	500

Hardened tool steel
52 - 56 HRC

6.00	5	80	0.028	26.000	0.060	4245	595
8.00	7	80	0.032	36.000	0.100	3185	715
10.00	7	80	0.036	45.000	0.100	2545	640
12.00	7	80	0.039	53.000	0.120	2120	580
16.00	7	80	0.045	63.000	0.120	1590	500
20.00	7	80	0.050	75.000	0.150	1275	445

Hardened tool steel
56 - 60 HRC

6.00	5	50	0.028	26.000	0.060	2655	370
8.00	7	50	0.032	36.000	0.100	1990	445
10.00	7	50	0.036	45.000	0.100	1590	400
12.00	7	50	0.039	53.000	0.120	1325	360
16.00	7	50	0.045	63.000	0.120	995	315
20.00	7	50	0.050	75.000	0.150	795	280

Wrought aluminium
Construction aluminium

6.00	5	290	0.028	26.000	0.060	15385	2155
8.00	7	290	0.032	36.000	0.100	11540	2585
10.00	7	290	0.036	45.000	0.100	9230	2325
12.00	7	290	0.039	53.000	0.120	7690	2100
16.00	7	360	0.045	56.000	0.250	7160	2255
20.00	7	290	0.050	75.000	0.150	4615	1615

Cast iron
(lamellar / spheroidal)

6.00	5	110	0.028	26.000	0.060	5835	815
8.00	7	110	0.032	36.000	0.100	4375	980
10.00	7	110	0.036	45.000	0.100	3500	880
12.00	7	110	0.039	53.000	0.120	2920	795
16.00	7	110	0.045	63.000	0.120	2190	690
20.00	7	110	0.050	75.000	0.150	1750	615

Titanium alloys
> 300 HB
[Ti6Al4V]

6.00	5	40	0.028	26.000	0.060	2120	295
8.00	7	40	0.032	36.000	0.100	1590	355
10.00	7	40	0.036	45.000	0.100	1275	320
12.00	7	40	0.039	53.000	0.120	1060	290
16.00	7	40	0.045	63.000	0.120	795	250
20.00	7	40	0.050	75.000	0.150	635	225

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



6.00	5	50	0.028	26.000	0.060	2655	370
8.00	7	50	0.032	36.000	0.100	1990	445
10.00	7	50	0.036	45.000	0.100	1590	400
12.00	7	50	0.039	53.000	0.120	1325	360
16.00	7	50	0.045	63.000	0.120	995	315
20.00	7	50	0.050	75.000	0.150	795	280

Cylindrical end mills MulticutXF

Finishing, long version




HM	λ 65°
XA	γ 8°

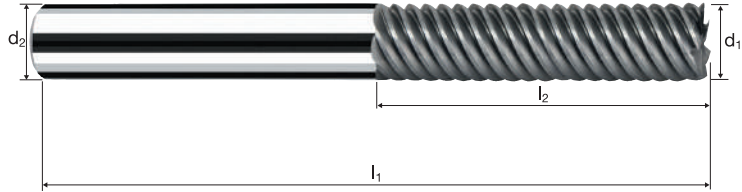

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	GG(G) Tool Steel Aluminium
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	----------------------------------

Example: Order-N°.								DURO-SI		POLYCHROM	
								P		15254	
Ø Code	d ₁ e8	d ₂ h5	l ₁	l ₂	45°	z					
300	6.00	6.00	70	26.00	0.15	5	●	●			
391	8.00	8.00	80	36.00	0.15	7	●	●			
450	10.00	10.00	100	45.00	0.20	7	●	●			
501	12.00	12.00	110	53.00	0.20	7	●	●			
610	16.00	16.00	123	63.00	0.20	7	●	●			
682	20.00	20.00	141	75.00	0.20	7	●	●			



Material

Steel
850 - 1100 N/mm²

P
 P

d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
6.00	5	80	0.026	32.000	0.060	4245	550
8.00	7	80	0.030	42.000	0.100	3185	670
10.00	7	80	0.033	53.000	0.100	2545	590
12.00	7	80	0.036	63.000	0.120	2120	535
16.00	7	80	0.042	84.000	0.120	1590	470
20.00	7	80	0.047	105.000	0.150	1275	420

Steel
1100 - 1300 N/mm²

P
 P

6.00	5	70	0.026	32.000	0.060	3715	485
8.00	7	70	0.030	42.000	0.100	2785	585
10.00	7	70	0.033	53.000	0.100	2230	515
12.00	7	70	0.036	63.000	0.120	1855	470
16.00	7	70	0.042	84.000	0.120	1395	410
20.00	7	70	0.047	105.000	0.150	1115	365

Hardened tool steel
52 - 56 HRC

P

6.00	5	60	0.026	32.000	0.060	3185	415
8.00	7	60	0.030	42.000	0.100	2385	500
10.00	7	60	0.033	53.000	0.100	1910	440
12.00	7	60	0.036	63.000	0.120	1590	400
16.00	7	60	0.042	84.000	0.120	1195	350
20.00	7	60	0.047	105.000	0.150	955	315

Hardened tool steel
56 - 60 HRC

H

6.00	5	40	0.026	32.000	0.060	2120	275
8.00	7	40	0.030	42.000	0.100	1590	335
10.00	7	40	0.033	53.000	0.100	1275	295
12.00	7	40	0.036	63.000	0.120	1060	265
16.00	7	40	0.042	84.000	0.120	795	235
20.00	7	40	0.047	105.000	0.150	635	210

Wrought aluminium
Construction aluminium

P

6.00	5	230	0.026	32.000	0.060	12200	1585
8.00	7	230	0.030	42.000	0.100	9150	1920
10.00	7	230	0.033	53.000	0.100	7320	1690
12.00	7	230	0.036	63.000	0.120	6100	1535
20.00	7	230	0.047	105.000	0.150	3660	1205

Cast iron
(lamellar / spheroidal)

P
 P

6.00	5	90	0.026	32.000	0.060	4775	620
8.00	7	90	0.030	42.000	0.100	3580	750
10.00	7	90	0.033	53.000	0.100	2865	660
12.00	7	90	0.036	63.000	0.120	2385	600
16.00	7	90	0.042	84.000	0.120	1790	525
20.00	7	90	0.047	105.000	0.150	1430	470

Titanium alloys
> 300 HB
[Ti6Al4V]

P

6.00	5	30	0.026	32.000	0.060	1590	205
8.00	7	30	0.030	42.000	0.100	1195	250
10.00	7	30	0.033	53.000	0.100	955	220
12.00	7	30	0.036	63.000	0.120	795	200
16.00	7	30	0.042	84.000	0.120	595	175
20.00	7	30	0.047	105.000	0.150	475	155

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

P



6.00	5	40	0.026	32.000	0.060	2120	275
8.00	7	40	0.030	42.000	0.100	1590	335
10.00	7	40	0.033	53.000	0.100	1275	295
12.00	7	40	0.036	63.000	0.120	1060	265
16.00	7	40	0.042	84.000	0.120	795	235
20.00	7	40	0.047	105.000	0.150	635	210

Cylindrical end mills MulticutXF

Finishing, extra-long version 5.2xd




HM	λ 65°
XA	γ 8°

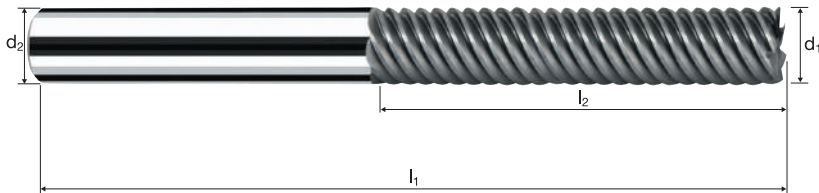

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	GG(G) Tool Steel Aluminium
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------------

Ø Code	d ₁ e8	d ₂ h5	l ₁	l ₂	45°	z	Coating		Article-N°		ø-Code			
							DURO-Si		POLYCHROM					
							H8521	P8521						
Example:														
Order-N°.	P	8521	300											
300	6.00	6.00	73	32.00	0.15	5	●	●						
391	8.00	8.00	84	42.00	0.15	7	●	●						
450	10.00	10.00	100	53.00	0.20	7	●	●						
501	12.00	12.00	117	63.00	0.20	7	●	●						
610	16.00	16.00	144	84.00	0.20	7	●	●						
682	20.00	20.00	169	105.00	0.20	7	●	●						

Application




Material

Steel
< 850 N/mm²

Steel
850 - 1100 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Steel
< 850 N/mm²

Steel
850 - 1100 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _i [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
6.00	6	60	0.031	32.000	0.090	3185	590
8.00	6	60	0.035	42.000	0.150	2385	500
10.00	7	60	0.040	53.000	0.150	1910	535
12.00	7	60	0.043	63.000	0.180	1590	480
16.00	8	60	0.050	84.000	0.180	1195	475
20.00	8	60	0.056	105.000	0.225	955	430
6.00	6	60	0.031	32.000	0.090	3185	590
8.00	6	60	0.035	42.000	0.150	2385	500
10.00	7	60	0.040	53.000	0.150	1910	535
12.00	7	60	0.043	63.000	0.180	1590	480
16.00	8	60	0.050	84.000	0.180	1195	475
20.00	8	60	0.056	105.000	0.225	955	430
6.00	6	30	0.031	32.000	0.090	1590	295
8.00	6	30	0.035	42.000	0.150	1195	250
10.00	7	30	0.040	53.000	0.150	955	265
12.00	7	30	0.043	63.000	0.180	795	240
16.00	8	30	0.050	84.000	0.180	595	240
20.00	8	30	0.056	105.000	0.225	475	215
6.00	6	80	0.026	32.000	0.060	4245	660
8.00	6	80	0.030	42.000	0.100	3185	575
10.00	7	80	0.033	53.000	0.100	2545	590
12.00	7	80	0.036	63.000	0.120	2120	535
16.00	8	80	0.042	84.000	0.120	1590	535
20.00	8	80	0.047	105.000	0.150	1275	480
6.00	6	70	0.026	32.000	0.060	3715	580
8.00	6	70	0.030	42.000	0.100	2785	500
10.00	7	70	0.033	53.000	0.100	2230	515
12.00	7	70	0.036	63.000	0.120	1855	470
16.00	8	70	0.042	84.000	0.120	1395	470
20.00	8	70	0.047	105.000	0.150	1115	420
6.00	6	40	0.026	32.000	0.060	2120	330
8.00	6	40	0.030	42.000	0.100	1590	285
10.00	7	40	0.033	53.000	0.100	1275	295
12.00	7	40	0.036	63.000	0.120	1060	265
16.00	8	40	0.042	84.000	0.120	795	265
20.00	8	40	0.047	105.000	0.150	635	240

Suitable cutting data for other applications and materials can be found in the cutting data software **ToolExpert E-Cut**



Cylindrical end mills E-Cut

Finishing, chip breaker, extra-long version 5.2xd



HM
MG10

λ 55°
 γ 10°

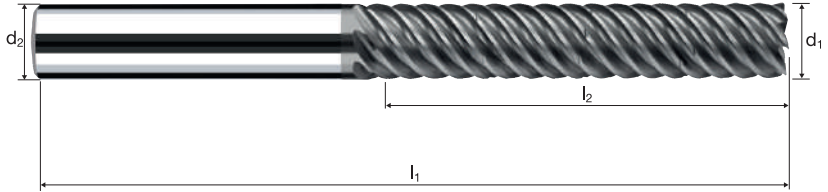


Roughing Finishing

▬▬▬▬▬ ▬▬▬▬▬▬▬

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	---------------------

Example: Order-N°.									POLYCHROM
									P8321
Ø Code	d ₁ e8	d ₂ h6	Article-N°.		ø-Code				
			P	8321	300				
300	6.00	6.00	73	32.00	0.100	6			●
391	8.00	8.00	84	42.00	0.150	6			●
450	10.00	10.00	100	53.00	0.200	7			●
501	12.00	12.00	117	63.00	0.200	7			●
610	16.00	16.00	144	84.00	0.200	8			●
682	20.00	20.00	169	105.00	0.250	8			●

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
3.00	4	180	0.005	0.050	1.800	19100	380
4.00	4	180	0.006	0.050	2.400	14325	345
5.00	4	180	0.007	0.075	3.000	11460	320
6.00	4	180	0.008	0.075	3.600	9550	305
8.00	4	180	0.009	0.100	4.800	7160	260
10.00	4	180	0.010	0.100	6.000	5730	230
12.00	4	180	0.011	0.150	7.200	4775	210
16.00	4	180	0.013	0.150	9.600	3580	185

Hardened tool steel
48 - 52 HRC



3.00	4	180	0.005	0.050	1.800	19100	380
4.00	4	180	0.006	0.050	2.400	14325	345
5.00	4	180	0.007	0.075	3.000	11460	320
6.00	4	180	0.008	0.075	3.600	9550	305
8.00	4	180	0.009	0.100	4.800	7160	260
10.00	4	180	0.010	0.100	6.000	5730	230
12.00	4	180	0.011	0.150	7.200	4775	210
16.00	4	180	0.013	0.150	9.600	3580	185

Hardened tool steel
52 - 56 HRC



3.00	4	160	0.005	0.050	1.800	16975	340
4.00	4	160	0.006	0.050	2.400	12730	305
5.00	4	160	0.007	0.075	3.000	10185	285
6.00	4	160	0.008	0.075	3.600	8490	270
8.00	4	160	0.009	0.100	4.800	6365	230
10.00	4	160	0.010	0.100	6.000	5095	205
12.00	4	160	0.011	0.150	7.200	4245	185
16.00	4	160	0.013	0.150	9.600	3185	165

Titanium alloys
> 300 HB
[Ti6Al4V]



3.00	4	125	0.005	0.050	1.800	13265	265
4.00	4	125	0.006	0.050	2.400	9945	240
5.00	4	125	0.007	0.075	3.000	7960	225
6.00	4	125	0.008	0.075	3.600	6630	210
8.00	4	125	0.009	0.100	4.800	4975	180
10.00	4	125	0.010	0.100	6.000	3980	160
12.00	4	125	0.011	0.150	7.200	3315	145
16.00	4	125	0.013	0.150	9.600	2485	130

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



3.00	4	250	0.005	0.050	1.800	26525	530
4.00	4	250	0.006	0.050	2.400	19895	475
5.00	4	250	0.007	0.075	3.000	15915	445
6.00	4	250	0.008	0.075	3.600	13265	425
8.00	4	250	0.009	0.100	4.800	9945	360
10.00	4	250	0.010	0.100	6.000	7960	320
12.00	4	250	0.011	0.150	7.200	6630	290
16.00	4	250	0.013	0.150	9.600	4975	260

Wrought aluminium
Construction aluminium






3.00	4	280	0.006	0.050	1.800	29710	715
4.00	4	370	0.007	0.050	2.400	29445	825
5.00	4	400	0.008	0.075	3.250	25465	815
6.00	4	400	0.010	0.075	3.900	21220	850
8.00	4	450	0.012	0.100	5.600	17905	860
10.00	4	450	0.015	0.100	7.000	14325	860
12.00	4	500	0.018	0.150	8.400	13265	955
16.00	4	500	0.020	0.150	11.200	9945	795

Cylindrical end mills NX

Face finishing, normal version, neck











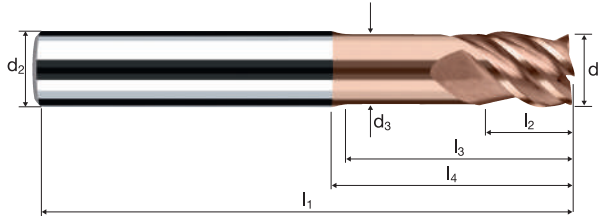
HM
XA λ 45°
 γ 10°



Roughing Finishing

			Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	Aluminium Copper
--	--	--	------------------------	---------------------	--	--	--------------------------	-----------------------	-----------------------------------

												DURO-Si
Example: Order-N°.												
												H8502
\emptyset Code	d ₁ e8	d ₂ h5	d ₃	l ₁	l ₂	l ₃	l ₄	45° _{theo.}	α	z		
180	3.00	6.00	2.80	57	4.00	14.00	20.37	0.10	4.5°	4	●	
220	4.00	6.00	3.70	57	5.00	16.00	20.82	0.10	3.0°	4	●	
260	5.00	6.00	4.60	57	6.00	18.00	21.27	0.10	1.5°	4	●	
300	6.00	6.00	5.50	57	7.00	18.15	20.00	0.10	0.0°	4	●	
391	8.00	8.00	7.40	63	9.00	23.63	26.00	0.15	0.0°	4	●	
450	10.00	10.00	9.20	72	11.00	27.99	31.00	0.15	0.0°	4	●	
501	12.00	12.00	11.00	83	13.00	33.29	37.00	0.20	0.0°	4	●	
610	16.00	16.00	15.00	92	17.00	38.73	43.00	0.20	0.0°	4	●	


Application	Material	d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]		
	Hardened tool steel 42 - 48 HRC   X	0.20	2	26	0.008	0.033	0.040	41380	625	0.8		
		0.30	2	40	0.011	0.050	0.060	42440	965	2.9		
		0.40	2	53	0.015	0.067	0.080	42175	1275	6.8		
		0.50	2	66	0.019	0.083	0.100	42015	1590	13.2		
		0.60	2	79	0.023	0.100	0.120	41910	1900	22.8		
		0.80	2	106	0.030	0.134	0.160	42175	2550	54.7		
		1.00	2	132	0.038	0.167	0.200	42015	3175	106.1		
		1.50	2	140	0.057	0.250	0.300	29710	3370	252.7		
		2.00	2	140	0.076	0.334	0.400	22280	3370	450.1		
			Hardened tool steel 48 - 52 HRC   X	0.20	2	26	0.007	0.033	0.040	41380	595	0.8
				0.30	2	40	0.011	0.050	0.060	42440	915	2.8
				0.40	2	53	0.014	0.067	0.080	42175	1215	6.5
				0.50	2	66	0.018	0.083	0.100	42015	1515	12.6
				0.60	2	79	0.022	0.100	0.120	41910	1810	21.7
				0.80	2	106	0.029	0.134	0.160	42175	2430	52.1
1.00	2			120	0.036	0.167	0.200	38195	2750	91.9		
1.50	2			120	0.054	0.250	0.300	25465	2750	206.3		
2.00	2			120	0.072	0.334	0.400	19100	2750	367.4		
	Hardened tool steel 52 - 56 HRC   X			0.20	2	26	0.006	0.033	0.040	41380	495	0.7
				0.30	2	40	0.009	0.050	0.060	42440	765	2.3
				0.40	2	53	0.012	0.067	0.080	42175	1010	5.4
				0.50	2	66	0.015	0.083	0.100	42015	1260	10.5
				0.60	2	79	0.018	0.100	0.120	41910	1510	18.1
				0.80	2	100	0.024	0.134	0.160	39790	1910	40.9
		1.00	2	100	0.030	0.167	0.200	31830	1910	63.8		
		1.50	2	100	0.045	0.250	0.300	21220	1910	143.2		
		2.00	2	100	0.060	0.334	0.400	15915	1910	255.2		
			Hardened tool steel 56 - 60 HRC X	0.20	2	26	0.005	0.033	0.040	41380	445	0.6
				0.30	2	40	0.008	0.050	0.060	42440	690	2.1
				0.40	2	53	0.011	0.067	0.080	42175	910	4.9
				0.50	2	60	0.014	0.083	0.100	38195	1030	8.6
				0.60	2	60	0.016	0.100	0.120	31830	1030	12.4
				0.80	2	60	0.022	0.134	0.160	23875	1030	22.1
1.00	2			60	0.027	0.167	0.200	19100	1030	34.4		
1.50	2			60	0.041	0.250	0.300	12730	1030	77.3		
2.00	2			60	0.054	0.334	0.400	9550	1030	137.8		
	Hardened tool steel 42 - 48 HRC X			0.20	2	26	0.004	0.013	0.200	41380	365	0.9
				0.30	2	40	0.007	0.019	0.300	42440	560	3.2
				0.40	2	53	0.009	0.025	0.400	42175	740	7.4
				0.50	2	66	0.011	0.032	0.500	42015	925	14.8
				0.60	2	79	0.013	0.038	0.600	41910	1105	25.2
				0.80	2	106	0.018	0.051	0.800	42175	1485	60.6
		1.00	2	120	0.022	0.064	1.000	38195	1680	107.6		
		1.50	2	120	0.033	0.095	1.500	25465	1680	239.5		
		2.00	2	120	0.044	0.127	2.000	19100	1680	426.9		
			Hardened tool steel 48 - 52 HRC X	0.20	2	26	0.004	0.013	0.200	41380	365	0.9
				0.30	2	40	0.007	0.019	0.300	42440	560	3.2
				0.40	2	53	0.009	0.025	0.400	42175	740	7.4
				0.50	2	66	0.011	0.032	0.500	42015	925	14.8
				0.60	2	79	0.013	0.038	0.600	41910	1105	25.2
				0.80	2	100	0.018	0.051	0.800	39790	1400	57.1
1.00	2			100	0.022	0.064	1.000	31830	1400	89.6		
1.50	2			100	0.033	0.095	1.500	21220	1400	199.6		
2.00	2			100	0.044	0.127	2.000	15915	1400	355.7		
	Hardened tool steel 52 - 56 HRC X			0.20	2	26	0.004	0.013	0.200	41380	330	0.9
				0.30	2	40	0.006	0.019	0.300	42440	510	2.9
				0.40	2	53	0.008	0.025	0.400	42175	675	6.7
				0.50	2	66	0.010	0.032	0.500	42015	840	13.4
				0.60	2	79	0.012	0.038	0.600	41910	1005	22.9
				0.80	2	80	0.016	0.051	0.800	31830	1020	41.6
		1.00	2	80	0.020	0.064	1.000	25465	1020	65.2		
		1.50	2	80	0.030	0.095	1.500	16975	1020	145.1		
		2.00	2	80	0.040	0.127	2.000	12730	1020	258.7		
			Hardened tool steel 56 - 60 HRC X	0.20	2	26	0.004	0.013	0.200	41380	300	0.8
				0.30	2	40	0.005	0.019	0.300	42440	460	2.6
				0.40	2	40	0.007	0.025	0.400	31830	460	4.6
				0.50	2	40	0.009	0.032	0.500	25465	460	7.3
				0.60	2	40	0.011	0.038	0.600	21220	460	10.5
				0.80	2	40	0.014	0.051	0.800	15915	460	18.7
1.00	2			40	0.018	0.064	1.000	12730	460	29.3		
1.50	2			40	0.027	0.095	1.500	8490	460	65.3		
2.00	2			40	0.036	0.127	2.000	6365	460	116.4		

Cylindrical end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 1xd



HM λ 25°
XA γ -10°

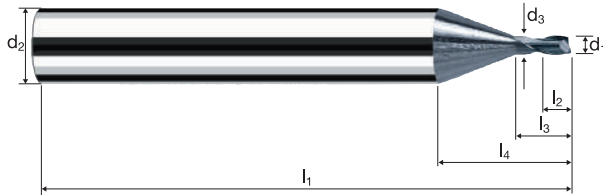


Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------

Example: Order-N°.											X-AL
											X6500
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	45°	α	z	
010	0.10	6.00	0.09	57	0.10	0.10	17.27	-	15.0°	2	●
020	0.20	6.00	0.18	57	0.20	0.20	17.10	-	15.0°	2	●
030	0.30	6.00	0.25	57	0.30	0.30	16.94	-	15.0°	2	●
040	0.40	6.00	0.35	57	0.40	0.40	16.78	-	14.5°	2	●
050	0.50	6.00	0.45	57	0.50	0.50	11.50	-	14.5°	2	●
060	0.60	6.00	0.55	57	0.60	0.60	11.43	-	14.5°	2	●
080	0.80	6.00	0.75	57	0.80	0.80	11.30	-	14.0°	2	●
100	1.00	6.00	0.95	57	1.00	1.00	11.19	0.07	14.0°	2	●
120	1.50	6.00	1.40	57	1.50	1.50	10.86	0.07	13.0°	2	●
140	2.00	6.00	1.90	57	2.00	2.00	10.52	0.10	12.0°	2	●

Application

Material



Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
0.20	2	26	0.003	0.016	0.040	41380	210	0.1
0.30	2	40	0.003	0.024	0.060	42440	215	0.3
0.40	2	53	0.004	0.032	0.080	42175	320	0.8
0.50	2	66	0.005	0.040	0.100	42015	425	1.7
0.60	2	79	0.006	0.048	0.120	41910	530	3.0
0.80	2	106	0.009	0.065	0.160	42175	745	7.7
1.00	2	132	0.010	0.081	0.200	42015	845	13.7
1.50	2	140	0.015	0.121	0.300	29710	900	32.6
2.00	2	140	0.020	0.162	0.400	22280	900	58.2

Hardened tool steel
48 - 52 HRC



0.20	2	26	0.002	0.016	0.040	41380	200	0.1
0.30	2	40	0.002	0.024	0.060	42440	205	0.3
0.40	2	53	0.004	0.032	0.080	42175	305	0.8
0.50	2	66	0.005	0.040	0.100	42015	405	1.6
0.60	2	79	0.006	0.048	0.120	41910	505	2.9
0.80	2	106	0.008	0.065	0.160	42175	710	7.4
1.00	2	120	0.010	0.081	0.200	38195	735	11.9
1.50	2	120	0.014	0.121	0.300	25465	735	26.6
2.00	2	120	0.019	0.162	0.400	19100	735	47.5

Hardened tool steel
52 - 56 HRC




0.20	2	26	0.002	0.016	0.040	41380	165	0.1
0.30	2	40	0.002	0.024	0.060	42440	170	0.2
0.40	2	53	0.003	0.032	0.080	42175	255	0.6
0.50	2	66	0.004	0.040	0.100	42015	335	1.3
0.60	2	79	0.005	0.048	0.120	41910	420	2.4
0.80	2	100	0.007	0.065	0.160	39790	555	5.8
1.00	2	100	0.008	0.081	0.200	31830	510	8.3
1.50	2	100	0.012	0.121	0.300	21220	510	18.5
2.00	2	100	0.016	0.162	0.400	15915	510	33.0

Hardened tool steel
56 - 60 HRC



0.20	2	26	0.002	0.016	0.040	41380	150	0.1
0.30	2	40	0.002	0.024	0.060	42440	155	0.2
0.40	2	53	0.003	0.032	0.080	42175	230	0.6
0.50	2	60	0.004	0.040	0.100	38195	275	1.1
0.60	2	60	0.004	0.048	0.120	31830	285	1.7
0.80	2	60	0.006	0.065	0.160	23875	300	3.1
1.00	2	60	0.007	0.081	0.200	19100	275	4.5
1.50	2	60	0.011	0.121	0.300	12730	275	10.0
2.00	2	60	0.014	0.162	0.400	9550	275	17.8



Hardened tool steel
42 - 48 HRC



0.20	2	26	0.001	0.006	0.200	41380	90	0.1
0.30	2	40	0.002	0.009	0.300	42440	185	0.5
0.40	2	53	0.003	0.013	0.400	42175	280	1.4
0.50	2	66	0.003	0.016	0.500	42015	275	2.2
0.60	2	79	0.004	0.019	0.600	41910	370	4.2
0.80	2	106	0.007	0.025	0.800	42175	555	11.1
1.00	2	120	0.008	0.031	1.000	38195	590	18.2
1.50	2	120	0.011	0.047	1.500	25465	560	39.5
2.00	2	120	0.015	0.063	2.000	19100	590	74.1

Hardened tool steel
48 - 52 HRC



0.20	2	26	0.001	0.006	0.200	41380	90	0.1
0.30	2	40	0.002	0.009	0.300	42440	185	0.5
0.40	2	53	0.003	0.013	0.400	42175	280	1.4
0.50	2	66	0.003	0.016	0.500	42015	275	2.2
0.60	2	79	0.004	0.019	0.600	41910	370	4.2
0.80	2	100	0.007	0.025	0.800	39790	525	10.5
1.00	2	100	0.008	0.031	1.000	31830	490	15.2
1.50	2	100	0.011	0.047	1.500	21220	465	32.9
2.00	2	100	0.015	0.063	2.000	15915	490	61.8

Hardened tool steel
52 - 56 HRC



0.20	2	26	0.001	0.006	0.200	41380	85	0.1
0.30	2	40	0.002	0.009	0.300	42440	170	0.5
0.40	2	53	0.003	0.013	0.400	42175	255	1.3
0.50	2	66	0.003	0.016	0.500	42015	250	2.0
0.60	2	79	0.004	0.019	0.600	41910	335	3.8
0.80	2	80	0.006	0.025	0.800	31830	380	7.6
1.00	2	80	0.007	0.031	1.000	25465	355	11.1
1.50	2	80	0.010	0.047	1.500	16975	340	23.9
2.00	2	80	0.014	0.063	2.000	12730	355	44.9

Hardened tool steel
56 - 60 HRC





0.20	2	26	0.001	0.006	0.200	41380	75	0.1
0.30	2	40	0.002	0.009	0.300	42440	155	0.4
0.40	2	40	0.003	0.013	0.400	31830	170	0.9
0.50	2	40	0.003	0.016	0.500	25465	140	1.1
0.60	2	40	0.004	0.019	0.600	21220	155	1.7
0.80	2	40	0.005	0.025	0.800	15915	170	3.4
1.00	2	40	0.006	0.031	1.000	12730	160	5.0
1.50	2	40	0.009	0.047	1.500	8490	155	10.8
2.00	2	40	0.013	0.063	2.000	6365	160	20.2

Cylindrical end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 2xd




HM XA	λ 25° γ -10°
----------	--------------------------------

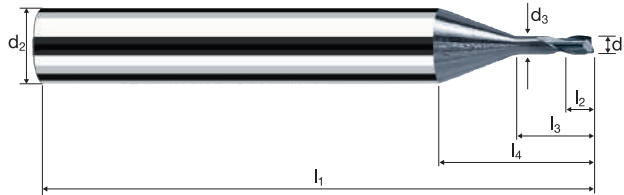

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL
											X6501
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	45°	α	z	
010	0.10	6.00	0.09	57	0.06	0.20	17.30	-	15.0°	2	●
020	0.20	6.00	0.18	57	0.12	0.40	17.06	-	14.5°	2	●
030	0.30	6.00	0.25	57	0.18	0.60	16.97	-	14.5°	2	●
040	0.40	6.00	0.35	57	0.24	0.80	16.76	-	14.0°	2	●
050	0.50	6.00	0.45	57	0.30	1.00	11.51	-	14.0°	2	●
060	0.60	6.00	0.55	57	0.36	1.20	11.53	-	13.5°	2	●
080	0.80	6.00	0.75	57	0.48	1.60	11.55	-	13.0°	2	●
100	1.00	6.00	0.95	57	1.00	2.00	12.08	0.07	12.5°	2	●
120	1.50	6.00	1.40	57	1.50	3.00	12.24	0.07	11.5°	2	●
140	2.00	6.00	1.90	57	2.00	4.00	12.31	0.10	10.0°	2	●

Application




Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC



Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_r [mm/min]	Q [mm ³ /min]
0.20	2	26	0.001	0.011	0.040	41380	125	0.1
0.40	2	53	0.003	0.021	0.080	42175	250	0.4
0.50	2	66	0.004	0.027	0.100	42015	315	0.8
0.80	2	106	0.006	0.043	0.160	42175	530	3.7
1.00	2	132	0.008	0.054	0.200	42015	635	6.9
1.50	2	140	0.011	0.080	0.300	29710	675	16.2
2.00	2	140	0.015	0.107	0.400	22280	675	28.8
2.50	2	140	0.019	0.132	0.500	17825	675	44.5
3.00	2	140	0.023	0.161	0.600	14855	675	65.1
0.20	2	26	0.001	0.011	0.040	41380	120	0.1
0.40	2	53	0.003	0.021	0.080	42175	240	0.4
0.50	2	66	0.004	0.027	0.100	42015	300	0.8
0.80	2	106	0.006	0.043	0.160	42175	505	3.5
1.00	2	120	0.007	0.054	0.200	38195	550	5.9
1.50	2	120	0.011	0.080	0.300	25465	550	13.2
2.00	2	120	0.014	0.107	0.400	19100	550	23.5
2.50	2	120	0.018	0.132	0.500	15280	550	36.3
3.00	2	120	0.022	0.161	0.600	12730	550	53.1
0.20	2	26	0.001	0.011	0.040	41380	100	0.0
0.40	2	53	0.002	0.021	0.080	42175	200	0.3
0.50	2	66	0.003	0.027	0.100	42015	250	0.7
0.80	2	100	0.005	0.043	0.160	39790	400	2.7
1.00	2	100	0.006	0.054	0.200	31830	380	4.1
1.50	2	100	0.009	0.080	0.300	21220	380	9.2
2.00	2	100	0.012	0.107	0.400	15915	380	16.3
2.50	2	100	0.015	0.132	0.500	12730	380	25.2
3.00	2	100	0.018	0.161	0.600	10610	380	36.9
0.20	2	26	0.001	0.011	0.040	41380	90	0.0
0.40	2	53	0.002	0.021	0.080	42175	180	0.3
0.50	2	60	0.003	0.027	0.100	38195	205	0.6
0.80	2	60	0.004	0.043	0.160	23875	215	1.5
1.00	2	60	0.005	0.054	0.200	19100	205	2.2
1.50	2	60	0.008	0.080	0.300	12730	205	5.0
2.00	2	60	0.011	0.107	0.400	9550	205	8.8
2.50	2	60	0.014	0.132	0.500	7640	205	13.6
3.00	2	60	0.016	0.161	0.600	6365	205	19.9
0.20	2	26	0.001	0.004	0.200	41380	90	0.1
0.40	2	53	0.002	0.008	0.400	42175	185	0.6
0.50	2	66	0.003	0.010	0.500	42015	275	1.4
0.80	2	106	0.004	0.017	0.800	42175	370	5.0
1.00	2	120	0.007	0.021	1.000	38195	505	10.6
1.50	2	120	0.009	0.031	1.500	25465	450	20.8
2.00	2	120	0.012	0.042	2.000	19100	460	38.8
2.50	2	120	0.015	0.052	2.500	15280	470	61.2
3.00	2	120	0.019	0.063	3.000	12730	475	90.0
0.20	2	26	0.001	0.004	0.200	41380	90	0.1
0.40	2	53	0.002	0.008	0.400	42175	185	0.6
0.50	2	66	0.003	0.010	0.500	42015	275	1.4
0.80	2	100	0.004	0.017	0.800	39790	350	4.8
1.00	2	100	0.007	0.021	1.000	31830	420	8.8
1.50	2	100	0.009	0.031	1.500	21220	375	17.4
2.00	2	100	0.012	0.042	2.000	15915	385	32.4
2.50	2	100	0.015	0.052	2.500	12730	390	51.0
3.00	2	100	0.019	0.063	3.000	10610	395	75.0
0.20	2	26	0.001	0.004	0.200	41380	85	0.1
0.40	2	53	0.002	0.008	0.400	42175	170	0.5
0.50	2	66	0.003	0.010	0.500	42015	250	1.3
0.80	2	80	0.004	0.017	0.800	31830	255	3.5
1.00	2	80	0.006	0.021	1.000	25465	305	6.4
1.50	2	80	0.008	0.031	1.500	16975	270	12.6
2.00	2	80	0.011	0.042	2.000	12730	280	23.5
2.50	2	80	0.014	0.052	2.500	10185	285	37.1
3.00	2	80	0.017	0.063	3.000	8490	290	54.5
0.20	2	26	0.001	0.004	0.200	41380	75	0.1
0.40	2	40	0.002	0.008	0.400	31830	115	0.4
0.50	2	40	0.003	0.010	0.500	25465	140	0.7
0.80	2	40	0.004	0.017	0.800	15915	115	1.6
1.00	2	40	0.005	0.021	1.000	12730	140	2.9
1.50	2	40	0.007	0.031	1.500	8490	120	5.7
2.00	2	40	0.010	0.042	2.000	6365	125	10.6
2.50	2	40	0.013	0.052	2.500	5095	130	16.7
3.00	2	40	0.015	0.063	3.000	4245	130	24.5

Cylindrical end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 3xd



HM
XA λ 25°
 γ -10°

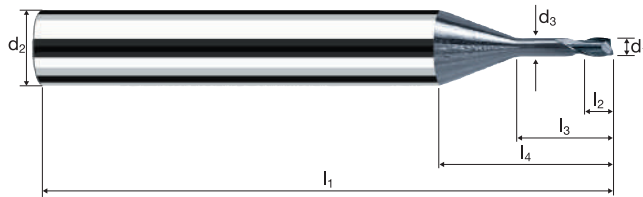


Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------

Example: Order-N°.											X-AL
Coating Article-N° ø-Code											
X 6502 010											
\varnothing Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	X6502
010	0.10	6.00	0.09	57	0.06	0.30	17.30	-	15.0°	2	●
020	0.20	6.00	0.18	57	0.12	0.60	17.22	-	14.5°	2	●
030	0.30	6.00	0.25	57	0.18	0.90	17.14	-	14.0°	2	●
040	0.40	6.00	0.35	57	0.24	1.20	17.16	-	14.0°	2	●
050	0.50	6.00	0.45	57	0.30	1.50	12.01	-	13.5°	2	●
060	0.60	6.00	0.55	57	0.36	1.80	12.13	-	13.0°	2	●
080	0.80	6.00	0.75	57	0.48	2.40	12.35	-	12.5°	2	●
100	1.00	6.00	0.95	57	1.00	3.00	13.08	0.07	11.5°	2	●
108	1.20	6.00	1.10	57	1.20	3.60	13.40	0.07	11.0°	2	●
120	1.50	6.00	1.40	57	1.50	4.50	13.74	0.07	10.0°	2	●
140	2.00	6.00	1.90	57	2.00	6.00	14.31	0.10	8.5°	2	●
160	2.50	6.00	2.30	57	2.50	7.50	15.06	0.10	7.5°	2	●
180	3.00	6.00	2.80	57	3.00	9.00	15.63	0.10	6.0°	2	●

Application

Material



Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_r [mm/min]	Q [mm ³ /min]
0.20	2	26	0.001	0.008	0.040	41380	105	0.0
0.30	2	40	0.003	0.012	0.060	42440	215	0.2
0.40	2	53	0.004	0.016	0.080	42175	320	0.4
0.50	2	66	0.004	0.020	0.100	42015	320	0.6
0.60	2	79	0.004	0.024	0.120	41910	315	0.9
0.80	2	106	0.005	0.032	0.160	42175	425	2.2
1.00	2	132	0.006	0.040	0.200	42015	530	4.2
1.50	2	140	0.010	0.060	0.300	29710	600	10.8
2.00	2	140	0.014	0.080	0.400	22280	620	19.8

Hardened tool steel
48 - 52 HRC



0.20	2	26	0.001	0.008	0.040	41380	100	0.0
0.30	2	40	0.002	0.012	0.060	42440	205	0.1
0.40	2	53	0.004	0.016	0.080	42175	305	0.4
0.50	2	66	0.004	0.020	0.100	42015	305	0.6
0.60	2	79	0.004	0.024	0.120	41910	300	0.9
0.80	2	106	0.005	0.032	0.160	42175	405	2.1
1.00	2	120	0.006	0.040	0.200	38195	460	3.7
1.50	2	120	0.010	0.060	0.300	25465	490	8.8
2.00	2	120	0.013	0.080	0.400	19100	505	16.1

Hardened tool steel
52 - 56 HRC




0.20	2	26	0.001	0.008	0.040	41380	85	0.0
0.30	2	40	0.002	0.012	0.060	42440	170	0.1
0.40	2	53	0.003	0.016	0.080	42175	255	0.3
0.50	2	66	0.003	0.020	0.100	42015	250	0.5
0.60	2	79	0.003	0.024	0.120	41910	250	0.7
0.80	2	100	0.004	0.032	0.160	39790	320	1.6
1.00	2	100	0.005	0.040	0.200	31830	320	2.5
1.50	2	100	0.008	0.060	0.300	21220	340	6.1
2.00	2	100	0.011	0.080	0.400	15915	350	11.2

Hardened tool steel
56 - 60 HRC



0.20	2	26	0.001	0.008	0.040	41380	75	0.0
0.30	2	40	0.002	0.012	0.060	42440	155	0.1
0.40	2	53	0.003	0.016	0.080	42175	230	0.3
0.50	2	60	0.003	0.020	0.100	38195	205	0.4
0.60	2	60	0.003	0.024	0.120	31830	170	0.5
0.80	2	60	0.004	0.032	0.160	23875	170	0.9
1.00	2	60	0.004	0.040	0.200	19100	170	1.4
1.50	2	60	0.007	0.060	0.300	12730	185	3.3
2.00	2	60	0.010	0.080	0.400	9550	190	6.1



Hardened tool steel
42 - 48 HRC



0.20	2	26	0.001	0.003	0.200	41380	90	0.1
0.30	2	40	0.002	0.005	0.300	42440	185	0.3
0.40	2	53	0.002	0.006	0.400	42175	185	0.4
0.50	2	66	0.003	0.008	0.500	42015	275	1.1
0.60	2	79	0.003	0.009	0.600	41910	275	1.5
0.80	2	106	0.004	0.013	0.800	42175	370	3.9
1.00	2	120	0.005	0.016	1.000	38195	420	6.7
1.50	2	120	0.009	0.023	1.500	25465	450	15.5
2.00	2	120	0.011	0.031	2.000	19100	420	26.1

Hardened tool steel
48 - 52 HRC



0.20	2	26	0.001	0.003	0.200	41380	90	0.1
0.30	2	40	0.002	0.005	0.300	42440	185	0.3
0.40	2	53	0.002	0.006	0.400	42175	185	0.4
0.50	2	66	0.003	0.008	0.500	42015	275	1.1
0.60	2	79	0.003	0.009	0.600	41910	275	1.5
0.80	2	100	0.004	0.013	0.800	39790	350	3.6
1.00	2	100	0.005	0.016	1.000	31830	350	5.6
1.50	2	100	0.009	0.023	1.500	21220	375	12.9
2.00	2	100	0.011	0.031	2.000	15915	350	21.7

Hardened tool steel
52 - 56 HRC



0.20	2	26	0.001	0.003	0.200	41380	85	0.0
0.30	2	40	0.002	0.005	0.300	42440	170	0.3
0.40	2	53	0.002	0.006	0.400	42175	170	0.4
0.50	2	66	0.003	0.008	0.500	42015	250	1.0
0.60	2	79	0.003	0.009	0.600	41910	250	1.4
0.80	2	80	0.004	0.013	0.800	31830	255	2.6
1.00	2	80	0.005	0.016	1.000	25465	255	4.1
1.50	2	80	0.008	0.023	1.500	16975	270	9.4
2.00	2	80	0.010	0.031	2.000	12730	255	15.8

Hardened tool steel
56 - 60 HRC




0.20	2	26	0.001	0.003	0.200	41380	75	0.0
0.30	2	40	0.002	0.005	0.300	42440	155	0.2
0.40	2	40	0.002	0.006	0.400	31830	115	0.3
0.50	2	40	0.003	0.008	0.500	25465	140	0.6
0.60	2	40	0.003	0.009	0.600	21220	115	0.6
0.80	2	40	0.004	0.013	0.800	15915	115	1.2
1.00	2	40	0.004	0.016	1.000	12730	115	1.8
1.50	2	40	0.007	0.023	1.500	8490	120	4.2
2.00	2	40	0.009	0.031	2.000	6365	115	7.1

Cylindrical end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 4xd




HM	λ 25°
XA	γ -10°

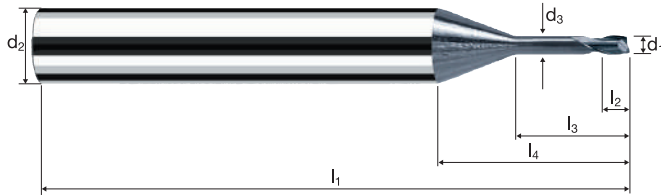

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	Example: Order-N°.		X-AL
											Coating X	Article-N° 6503	ø-Code 010
010	0.10	6.00	0.09	57	0.06	0.40	17.38	-	14.5°	2			●
020	0.20	6.00	0.18	57	0.12	0.80	17.42	-	14.5°	2			●
030	0.30	6.00	0.25	57	0.18	1.20	17.44	-	14.0°	2			●
040	0.40	6.00	0.35	57	0.24	1.60	17.56	-	13.5°	2			●
050	0.50	6.00	0.45	57	0.30	2.00	12.51	-	13.0°	2			●
060	0.60	6.00	0.55	57	0.36	2.40	12.73	-	12.5°	2			●
080	0.80	6.00	0.75	57	0.48	3.20	13.15	-	11.5°	2			●
100	1.00	6.00	0.95	57	1.00	4.00	14.08	0.07	11.0°	2			●
120	1.50	6.00	1.40	57	1.50	6.00	15.24	0.07	9.0°	2			●
140	2.00	6.00	1.90	61	2.00	8.00	16.31	0.10	7.5°	2			●

Application



Material

H hardened tool steel
42 - 48 HRC




H hardened tool steel
48 - 52 HRC



H hardened tool steel
52 - 56 HRC



H hardened tool steel
56 - 60 HRC



H hardened tool steel
42 - 48 HRC



H hardened tool steel
48 - 52 HRC



H hardened tool steel
52 - 56 HRC



H hardened tool steel
56 - 60 HRC




d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_r [mm/min]	Q [mm ³ /min]
0.20	2	26	0.001	0.006	0.040	41380	105	0.0
0.40	2	53	0.003	0.013	0.080	42175	215	0.2
0.50	2	66	0.004	0.016	0.100	42015	320	0.5
0.80	2	106	0.005	0.026	0.160	42175	425	1.8
1.00	2	132	0.006	0.032	0.200	42015	530	3.4
1.50	2	140	0.010	0.048	0.300	29710	600	8.6
2.00	2	140	0.013	0.064	0.400	22280	560	14.4
2.50	2	140	0.016	0.080	0.500	17825	585	23.4
3.00	2	140	0.020	0.096	0.600	14855	600	34.5
0.20	2	26	0.001	0.006	0.040	41380	100	0.0
0.40	2	53	0.002	0.013	0.080	42175	200	0.2
0.50	2	66	0.004	0.016	0.100	42015	305	0.5
0.80	2	106	0.005	0.026	0.160	42175	405	1.7
1.00	2	120	0.006	0.032	0.200	38195	460	2.9
1.50	2	120	0.010	0.048	0.300	25465	490	7.0
2.00	2	120	0.012	0.064	0.400	19100	460	11.7
2.50	2	120	0.016	0.080	0.500	15280	475	19.1
3.00	2	120	0.019	0.096	0.600	12730	490	28.2
0.20	2	26	0.001	0.006	0.040	41380	85	0.0
0.40	2	53	0.002	0.013	0.080	42175	170	0.2
0.50	2	66	0.003	0.016	0.100	42015	250	0.4
0.80	2	100	0.004	0.026	0.160	39790	320	1.3
1.00	2	100	0.005	0.032	0.200	31830	320	2.0
1.50	2	100	0.008	0.048	0.300	21220	340	4.9
2.00	2	100	0.010	0.064	0.400	15915	320	8.1
2.50	2	100	0.013	0.080	0.500	12730	330	13.2
3.00	2	100	0.016	0.096	0.600	10610	340	19.6
0.20	2	26	0.001	0.006	0.040	41380	75	0.0
0.40	2	53	0.002	0.013	0.080	42175	150	0.2
0.50	2	60	0.003	0.016	0.100	38195	205	0.3
0.80	2	60	0.004	0.026	0.160	23875	170	0.7
1.00	2	60	0.004	0.032	0.200	19100	170	1.1
1.50	2	60	0.007	0.048	0.300	12730	185	2.6
2.00	2	60	0.009	0.064	0.400	9550	170	4.4
2.50	2	60	0.012	0.080	0.500	7640	180	7.2
3.00	2	60	0.014	0.096	0.600	6365	185	10.6
0.20	2	26	0.001	0.003	0.200	41380	90	0.1
0.40	2	53	0.002	0.005	0.400	42175	185	0.4
0.50	2	66	0.003	0.006	0.500	42015	275	0.8
0.80	2	106	0.004	0.010	0.800	42175	370	3.0
1.00	2	120	0.005	0.013	1.000	38195	420	5.5
1.50	2	120	0.009	0.019	1.500	25465	450	12.8
2.00	2	120	0.011	0.025	2.000	19100	420	21.0
2.50	2	120	0.014	0.031	2.500	15280	435	33.9
3.00	2	120	0.016	0.038	3.000	12730	420	47.9
0.20	2	26	0.001	0.003	0.200	41380	90	0.1
0.40	2	53	0.002	0.005	0.400	42175	185	0.4
0.50	2	66	0.003	0.006	0.500	42015	275	0.8
0.80	2	100	0.004	0.010	0.800	39790	350	2.8
1.00	2	100	0.005	0.013	1.000	31830	350	4.6
1.50	2	100	0.009	0.019	1.500	21220	375	10.6
2.00	2	100	0.011	0.025	2.000	15915	350	17.5
2.50	2	100	0.014	0.031	2.500	12730	365	28.2
3.00	2	100	0.016	0.038	3.000	10610	350	39.9
0.20	2	26	0.001	0.003	0.200	41380	85	0.0
0.40	2	53	0.002	0.005	0.400	42175	170	0.3
0.50	2	66	0.003	0.006	0.500	42015	250	0.8
0.80	2	80	0.004	0.010	0.800	31830	255	2.0
1.00	2	80	0.005	0.013	1.000	25465	255	3.3
1.50	2	80	0.008	0.019	1.500	16975	270	7.7
2.00	2	80	0.010	0.025	2.000	12730	255	12.7
2.50	2	80	0.013	0.031	2.500	10185	265	20.5
3.00	2	80	0.015	0.038	3.000	8490	255	29.0
0.20	2	26	0.001	0.003	0.200	41380	75	0.0
0.40	2	40	0.002	0.005	0.400	31830	115	0.2
0.50	2	40	0.003	0.006	0.500	25465	140	0.4
0.80	2	40	0.004	0.010	0.800	15915	115	0.9
1.00	2	40	0.004	0.013	1.000	12730	115	1.5
1.50	2	40	0.007	0.019	1.500	8490	120	3.5
2.00	2	40	0.009	0.025	2.000	6365	115	5.7
2.50	2	40	0.012	0.031	2.500	5095	120	9.2
3.00	2	40	0.014	0.038	3.000	4245	115	13.1

Cylindrical end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 5xd




HM	λ 25°
XA	γ -10°

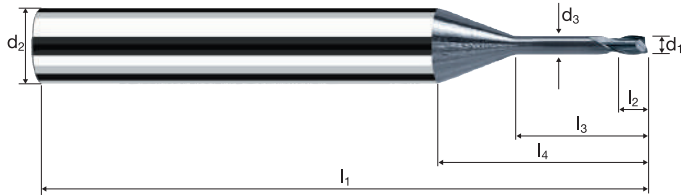

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	Ordering Information	
											Coating	Article-N°
Example: Order-N°. X 6504 010												X-AL
												X6504
010	0.10	6.00	0.09	57	0.06	0.50	17.48	-	14.5°	2	X	6504
020	0.20	6.00	0.18	57	0.12	1.00	17.62	-	14.0°	2	X	6504
030	0.30	6.00	0.25	57	0.18	1.50	17.74	-	13.5°	2	X	6504
040	0.40	6.00	0.35	57	0.24	2.00	17.96	-	13.0°	2	X	6504
050	0.50	6.00	0.45	57	0.30	2.50	13.01	-	12.5°	2	X	6504
060	0.60	6.00	0.55	57	0.36	3.00	13.33	-	12.0°	2	X	6504
080	0.80	6.00	0.75	57	0.48	4.00	13.95	-	11.0°	2	X	6504
100	1.00	6.00	0.95	57	1.00	5.00	15.08	0.07	10.0°	2	X	6504
108	1.20	6.00	1.10	57	1.20	6.00	15.80	0.07	9.5°	2	X	6504
120	1.50	6.00	1.40	61	1.50	7.50	16.74	0.07	8.5°	2	X	6504
140	2.00	6.00	1.90	61	2.00	10.00	18.31	0.10	7.0°	2	X	6504
160	2.50	6.00	2.30	61	2.50	12.50	20.06	0.10	5.5°	2	X	6504
180	3.00	6.00	2.80	66	3.00	15.00	21.63	0.10	4.5°	2	X	6504

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
0.20	2	26	0.001	0.005	0.040	41380	105	0.0
0.30	2	40	0.003	0.008	0.060	42440	215	0.1
0.40	2	53	0.003	0.011	0.080	42175	215	0.2
0.50	2	66	0.004	0.013	0.100	42015	320	0.4
0.60	2	79	0.004	0.016	0.120	41910	315	0.6
0.80	2	106	0.005	0.021	0.160	42175	425	1.4
1.00	2	132	0.006	0.027	0.200	42015	530	2.9
1.50	2	140	0.010	0.040	0.300	29710	600	7.2
2.00	2	140	0.013	0.053	0.400	22280	560	11.9

Hardened tool steel
48 - 52 HRC



0.20	2	26	0.001	0.005	0.040	41380	100	0.0
0.30	2	40	0.002	0.008	0.060	42440	205	0.1
0.40	2	53	0.002	0.011	0.080	42175	200	0.2
0.50	2	66	0.004	0.013	0.100	42015	305	0.4
0.60	2	79	0.004	0.016	0.120	41910	300	0.6
0.80	2	106	0.005	0.021	0.160	42175	405	1.4
1.00	2	120	0.006	0.027	0.200	38195	460	2.5
1.50	2	120	0.010	0.040	0.300	25465	490	5.9
2.00	2	120	0.012	0.053	0.400	19100	460	9.7

Hardened tool steel
52 - 56 HRC




0.20	2	26	0.001	0.005	0.040	41380	85	0.0
0.30	2	40	0.002	0.008	0.060	42440	170	0.1
0.40	2	53	0.002	0.011	0.080	42175	170	0.1
0.50	2	66	0.003	0.013	0.100	42015	250	0.3
0.60	2	79	0.003	0.016	0.120	41910	250	0.5
0.80	2	100	0.004	0.021	0.160	39790	320	1.1
1.00	2	100	0.005	0.027	0.200	31830	320	1.7
1.50	2	100	0.008	0.040	0.300	21220	340	4.1
2.00	2	100	0.010	0.053	0.400	15915	320	6.7

Hardened tool steel
56 - 60 HRC



0.20	2	26	0.001	0.005	0.040	41380	75	0.0
0.30	2	40	0.002	0.008	0.060	42440	155	0.1
0.40	2	53	0.002	0.011	0.080	42175	150	0.1
0.50	2	60	0.003	0.013	0.100	38195	205	0.3
0.60	2	60	0.003	0.016	0.120	31830	170	0.3
0.80	2	60	0.004	0.021	0.160	23875	170	0.6
1.00	2	60	0.004	0.027	0.200	19100	170	0.9
1.50	2	60	0.007	0.040	0.300	12730	185	2.2
2.00	2	60	0.009	0.053	0.400	9550	170	3.6



Hardened tool steel
42 - 48 HRC



0.20	2	26	0.001	0.002	0.200	41380	90	0.0
0.30	2	40	0.002	0.003	0.300	42440	185	0.2
0.40	2	53	0.002	0.004	0.400	42175	185	0.3
0.50	2	66	0.003	0.005	0.500	42015	275	0.7
0.60	2	79	0.003	0.006	0.600	41910	275	1.0
0.80	2	106	0.004	0.009	0.800	42175	370	2.5
1.00	2	120	0.005	0.010	1.000	38195	420	4.2
1.50	2	120	0.009	0.016	1.500	25465	450	10.8
2.00	2	120	0.011	0.021	2.000	19100	420	17.6

Hardened tool steel
48 - 52 HRC



0.20	2	26	0.001	0.002	0.200	41380	90	0.0
0.30	2	40	0.002	0.003	0.300	42440	185	0.2
0.40	2	53	0.002	0.004	0.400	42175	185	0.3
0.50	2	66	0.003	0.005	0.500	42015	275	0.7
0.60	2	79	0.003	0.006	0.600	41910	275	1.0
0.80	2	100	0.004	0.009	0.800	39790	350	2.4
1.00	2	100	0.005	0.010	1.000	31830	350	3.5
1.50	2	100	0.009	0.016	1.500	21220	375	9.0
2.00	2	100	0.011	0.021	2.000	15915	350	14.7

Hardened tool steel
52 - 56 HRC



0.20	2	26	0.001	0.002	0.200	41380	85	0.0
0.30	2	40	0.002	0.003	0.300	42440	170	0.2
0.40	2	53	0.002	0.004	0.400	42175	170	0.3
0.50	2	66	0.003	0.005	0.500	42015	250	0.6
0.60	2	79	0.003	0.006	0.600	41910	250	0.9
0.80	2	80	0.004	0.009	0.800	31830	255	1.7
1.00	2	80	0.005	0.010	1.000	25465	255	2.5
1.50	2	80	0.008	0.016	1.500	16975	270	6.5
2.00	2	80	0.010	0.021	2.000	12730	255	10.7

Hardened tool steel
56 - 60 HRC




0.20	2	26	0.001	0.002	0.200	41380	75	0.0
0.30	2	40	0.002	0.003	0.300	42440	155	0.1
0.40	2	40	0.002	0.004	0.400	31830	115	0.2
0.50	2	40	0.003	0.005	0.500	25465	140	0.3
0.60	2	40	0.003	0.006	0.600	21220	115	0.4
0.80	2	40	0.004	0.009	0.800	15915	115	0.8
1.00	2	40	0.004	0.010	1.000	12730	115	1.1
1.50	2	40	0.007	0.016	1.500	8490	120	2.9
2.00	2	40	0.009	0.021	2.000	6365	115	4.8

Cylindrical end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 6xd




HM
XA λ 25°
 γ -10°

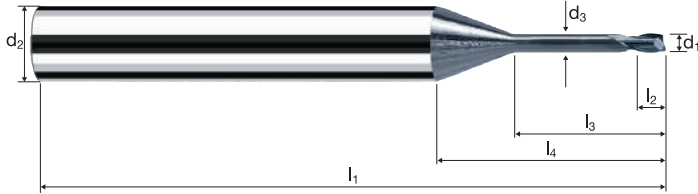

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Ø Code	Example: Order-N°.										X-AL
	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	X6505
020	0.20	6.00	0.18	57	0.12	1.20	17.82	-	14.0°	2	●
030	0.30	6.00	0.25	57	0.18	1.80	18.04	-	13.0°	2	●
040	0.40	6.00	0.35	57	0.24	2.40	18.36	-	12.5°	2	●
050	0.50	6.00	0.45	57	0.30	3.00	13.51	-	12.0°	2	●
060	0.60	6.00	0.55	57	0.36	3.60	13.93	-	11.5°	2	●
080	0.80	6.00	0.75	57	0.48	4.80	14.75	-	10.5°	2	●
100	1.00	6.00	0.95	57	1.00	6.00	16.08	0.07	9.5°	2	●
120	1.50	6.00	1.40	61	1.50	9.00	18.24	0.07	7.5°	2	●
140	2.00	6.00	1.90	66	2.00	12.00	20.31	0.10	6.0°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC

X

X

Hardened tool steel
48 - 52 HRC

X

X

Hardened tool steel
52 - 56 HRC


X

X

Hardened tool steel
56 - 60 HRC

X

X



Hardened tool steel
42 - 48 HRC

X

X

Hardened tool steel
48 - 52 HRC

X

X

Hardened tool steel
52 - 56 HRC

X

X

Hardened tool steel
56 - 60 HRC

X

X


d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
0.20	2	26	0.001	0.004	0.040	41380	105	0.0
0.40	2	53	0.003	0.008	0.080	42175	215	0.1
0.50	2	66	0.004	0.010	0.100	42015	320	0.3
0.80	2	106	0.005	0.016	0.160	42175	425	1.1
1.00	2	132	0.006	0.020	0.200	42015	530	2.1
1.50	2	140	0.010	0.030	0.300	29710	600	5.4
2.00	2	140	0.013	0.040	0.400	22280	560	9.0
2.50	2	140	0.016	0.050	0.500	17825	585	14.6
3.00	2	140	0.019	0.060	0.600	14855	560	20.2
0.20	2	26	0.001	0.004	0.040	41380	100	0.0
0.40	2	53	0.002	0.008	0.080	42175	200	0.1
0.50	2	66	0.004	0.010	0.100	42015	305	0.3
0.80	2	106	0.005	0.016	0.160	42175	405	1.0
1.00	2	120	0.006	0.020	0.200	38195	460	1.8
1.50	2	120	0.010	0.030	0.300	25465	490	4.4
2.00	2	120	0.012	0.040	0.400	19100	460	7.3
2.50	2	120	0.016	0.050	0.500	15280	475	11.9
3.00	2	120	0.018	0.060	0.600	12730	460	16.5
0.20	2	26	0.001	0.004	0.040	41380	85	0.0
0.40	2	53	0.002	0.008	0.080	42175	170	0.1
0.50	2	66	0.003	0.010	0.100	42015	250	0.3
0.80	2	100	0.004	0.016	0.160	39790	320	0.8
1.00	2	100	0.005	0.020	0.200	31830	320	1.3
1.50	2	100	0.008	0.030	0.300	21220	340	3.1
2.00	2	100	0.010	0.040	0.400	15915	320	5.1
2.50	2	100	0.013	0.050	0.500	12730	330	8.3
3.00	2	100	0.015	0.060	0.600	10610	320	11.5
0.20	2	26	0.001	0.004	0.040	41380	75	0.0
0.40	2	53	0.002	0.008	0.080	42175	150	0.1
0.50	2	60	0.003	0.010	0.100	38195	205	0.2
0.80	2	60	0.004	0.016	0.160	23875	170	0.4
1.00	2	60	0.004	0.020	0.200	19100	170	0.7
1.50	2	60	0.007	0.030	0.300	12730	185	1.7
2.00	2	60	0.009	0.040	0.400	9550	170	2.8
2.50	2	60	0.012	0.050	0.500	7640	180	4.5
3.00	2	60	0.014	0.060	0.600	6365	170	6.2
0.20	2	26	0.001	0.002	0.200	41380	90	0.0
0.40	2	53	0.002	0.003	0.400	42175	185	0.2
0.50	2	66	0.003	0.004	0.500	42015	275	0.6
0.80	2	106	0.004	0.006	0.800	42175	370	1.8
1.00	2	120	0.005	0.008	1.000	38195	420	3.4
1.50	2	120	0.009	0.012	1.500	25465	450	8.1
2.00	2	120	0.011	0.016	2.000	19100	420	13.4
2.50	2	120	0.014	0.020	2.500	15280	435	21.8
3.00	2	120	0.016	0.023	3.000	12730	420	29.0
0.20	2	26	0.001	0.002	0.200	41380	90	0.0
0.40	2	53	0.002	0.003	0.400	42175	185	0.2
0.50	2	66	0.003	0.004	0.500	42015	275	0.6
0.80	2	100	0.004	0.006	0.800	39790	350	1.7
1.00	2	100	0.005	0.008	1.000	31830	350	2.8
1.50	2	100	0.009	0.012	1.500	21220	375	6.7
2.00	2	100	0.011	0.016	2.000	15915	350	11.2
2.50	2	100	0.014	0.020	2.500	12730	365	18.2
3.00	2	100	0.016	0.023	3.000	10610	350	24.2
0.20	2	26	0.001	0.002	0.200	41380	85	0.0
0.40	2	53	0.002	0.003	0.400	42175	170	0.2
0.50	2	66	0.003	0.004	0.500	42015	250	0.5
0.80	2	80	0.004	0.006	0.800	31830	255	1.2
1.00	2	80	0.005	0.008	1.000	25465	255	2.0
1.50	2	80	0.008	0.012	1.500	16975	270	4.9
2.00	2	80	0.010	0.016	2.000	12730	255	8.1
2.50	2	80	0.013	0.020	2.500	10185	265	13.2
3.00	2	80	0.015	0.023	3.000	8490	255	17.6
0.20	2	26	0.001	0.002	0.200	41380	75	0.0
0.40	2	40	0.002	0.003	0.400	31830	115	0.1
0.50	2	40	0.003	0.004	0.500	25465	140	0.3
0.80	2	40	0.004	0.006	0.800	15915	115	0.6
1.00	2	40	0.004	0.008	1.000	12730	115	0.9
1.50	2	40	0.007	0.012	1.500	8490	120	2.2
2.00	2	40	0.009	0.016	2.000	6365	115	3.7
2.50	2	40	0.012	0.020	2.500	5095	120	6.0
3.00	2	40	0.014	0.023	3.000	4245	115	7.9

Cylindrical end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 8xd




HM XA	λ 25° γ -10°
----------	--------------------------------

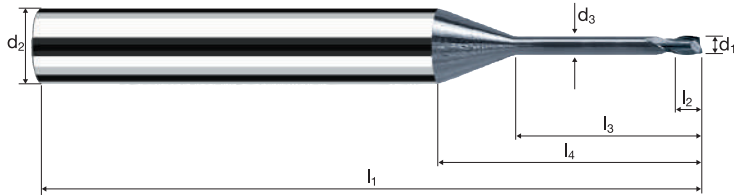

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	Example: Order-N°.	
											Coating X	Article-N° 6506
											X-AL	
												X6506
020	0.20	6.00	0.18	57	0.12	1.60	18.22	-	13.5°	2		●
030	0.30	6.00	0.25	57	0.18	2.40	18.64	-	12.5°	2		●
040	0.40	6.00	0.35	57	0.24	3.20	19.16	-	12.0°	2		●
050	0.50	6.00	0.45	57	0.30	4.00	14.51	-	11.0°	2		●
060	0.60	6.00	0.55	57	0.36	4.80	15.13	-	10.5°	2		●
080	0.80	6.00	0.75	57	0.48	6.40	16.35	-	9.5°	2		●
100	1.00	6.00	0.95	61	1.00	8.00	18.08	0.07	8.5°	2		●
108	1.20	6.00	1.10	61	1.20	9.60	19.40	0.07	7.5°	2		●
120	1.50	6.00	1.40	61	1.50	12.00	21.24	0.07	6.5°	2		●
140	2.00	6.00	1.90	66	2.00	16.00	24.31	0.10	5.0°	2		●
160	2.50	6.00	2.30	69	2.50	20.00	27.56	0.10	4.0°	2		●
180	3.00	6.00	2.80	75	3.00	24.00	30.63	0.10	3.0°	2		●

Application




Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC



Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _r [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
0.20	2	26	0.001	0.004	0.040	41380	105	0.0
0.40	2	53	0.003	0.008	0.080	42175	215	0.1
0.50	2	66	0.004	0.010	0.100	42015	320	0.3
0.80	2	106	0.005	0.016	0.160	42175	425	1.1
1.00	2	132	0.006	0.020	0.200	42015	530	2.1
1.50	2	140	0.010	0.030	0.300	29710	600	5.4
2.00	2	140	0.013	0.040	0.400	22280	560	9.0
2.50	2	140	0.016	0.050	0.500	17825	585	14.6
3.00	2	140	0.019	0.060	0.600	14855	560	20.2
0.20	2	26	0.001	0.004	0.040	41380	100	0.0
0.40	2	53	0.002	0.008	0.080	42175	200	0.1
0.50	2	66	0.004	0.010	0.100	42015	305	0.3
0.80	2	106	0.005	0.016	0.160	42175	405	1.0
1.00	2	120	0.006	0.020	0.200	38195	460	1.8
1.50	2	120	0.010	0.030	0.300	25465	490	4.4
2.00	2	120	0.012	0.040	0.400	19100	460	7.3
2.50	2	120	0.016	0.050	0.500	15280	475	11.9
3.00	2	120	0.018	0.060	0.600	12730	460	16.5
0.20	2	26	0.001	0.004	0.040	41380	85	0.0
0.40	2	53	0.002	0.008	0.080	42175	170	0.1
0.50	2	66	0.003	0.010	0.100	42015	250	0.3
0.80	2	100	0.004	0.016	0.160	39790	320	0.8
1.00	2	100	0.005	0.020	0.200	31830	320	1.3
1.50	2	100	0.008	0.030	0.300	21220	340	3.1
2.00	2	100	0.010	0.040	0.400	15915	320	5.1
2.50	2	100	0.013	0.050	0.500	12730	330	8.3
3.00	2	100	0.015	0.060	0.600	10610	320	11.5
0.20	2	26	0.001	0.004	0.040	41380	75	0.0
0.40	2	53	0.002	0.008	0.080	42175	150	0.1
0.50	2	60	0.003	0.010	0.100	38195	205	0.2
0.80	2	60	0.004	0.016	0.160	23875	170	0.4
1.00	2	60	0.004	0.020	0.200	19100	170	0.7
1.50	2	60	0.007	0.030	0.300	12730	185	1.7
2.00	2	60	0.009	0.040	0.400	9550	170	2.8
2.50	2	60	0.012	0.050	0.500	7640	180	4.5
3.00	2	60	0.014	0.060	0.600	6365	170	6.2
0.20	2	26	0.001	0.001	0.200	41380	90	0.0
0.40	2	53	0.002	0.003	0.400	42175	185	0.2
0.50	2	66	0.003	0.003	0.500	42015	275	0.4
0.80	2	106	0.004	0.005	0.800	42175	370	1.5
1.00	2	120	0.005	0.006	1.000	38195	420	2.5
1.50	2	120	0.009	0.009	1.500	25465	450	6.1
2.00	2	120	0.011	0.013	2.000	19100	420	10.9
2.50	2	120	0.014	0.016	2.500	15280	435	17.5
3.00	2	120	0.016	0.019	3.000	12730	420	23.9
0.20	2	26	0.001	0.001	0.200	41380	90	0.0
0.40	2	53	0.002	0.003	0.400	42175	185	0.2
0.50	2	66	0.003	0.003	0.500	42015	275	0.4
0.80	2	100	0.004	0.005	0.800	39790	350	1.4
1.00	2	100	0.005	0.006	1.000	31830	350	2.1
1.50	2	100	0.009	0.009	1.500	21220	375	5.0
2.00	2	100	0.011	0.013	2.000	15915	350	9.1
2.50	2	100	0.014	0.016	2.500	12730	365	14.6
3.00	2	100	0.016	0.019	3.000	10610	350	20.0
0.20	2	26	0.001	0.001	0.200	41380	85	0.0
0.40	2	53	0.002	0.003	0.400	42175	170	0.2
0.50	2	66	0.003	0.003	0.500	42015	250	0.4
0.80	2	80	0.004	0.005	0.800	31830	255	1.0
1.00	2	80	0.005	0.006	1.000	25465	255	1.5
1.50	2	80	0.008	0.009	1.500	16975	270	3.7
2.00	2	80	0.010	0.013	2.000	12730	255	6.6
2.50	2	80	0.013	0.016	2.500	10185	265	10.6
3.00	2	80	0.015	0.019	3.000	8490	255	14.5
0.20	2	26	0.001	0.001	0.200	41380	75	0.0
0.40	2	40	0.002	0.003	0.400	31830	115	0.1
0.50	2	40	0.003	0.003	0.500	25465	140	0.2
0.80	2	40	0.004	0.005	0.800	15915	115	0.5
1.00	2	40	0.004	0.006	1.000	12730	115	0.7
1.50	2	40	0.007	0.009	1.500	8490	120	1.7
2.00	2	40	0.009	0.013	2.000	6365	115	3.0
2.50	2	40	0.012	0.016	2.500	5095	120	4.8
3.00	2	40	0.014	0.019	3.000	4245	115	6.5

Cylindrical end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 10xd



HM XA	λ 25° γ -10°

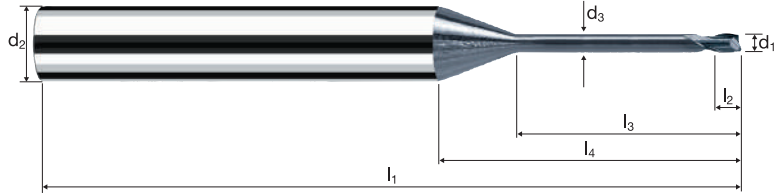

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--------------------	--------------------------	-----------------------	---------------------------------------

Example: Order-N°.											X-AL	
											X6508	
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	45°	α	z		
020	0.20	6.00	0.18	57	0.12	2.00	18.62	-	13.0°	2		●
030	0.30	6.00	0.25	57	0.18	3.00	19.24	-	12.0°	2		●
040	0.40	6.00	0.35	57	0.24	4.00	19.96	-	11.0°	2		●
050	0.50	6.00	0.45	57	0.30	5.00	15.51	-	10.5°	2		●
060	0.60	6.00	0.55	57	0.36	6.00	16.33	-	10.0°	2		●
080	0.80	6.00	0.75	61	0.48	8.00	17.95	-	8.5°	2		●
100	1.00	6.00	0.95	61	1.00	10.00	20.08	0.07	7.5°	2		●
120	1.50	6.00	1.40	66	1.50	15.00	24.24	0.07	5.5°	2		●
140	2.00	6.00	1.90	69	2.00	20.00	28.31	0.10	4.5°	2		●
160	2.50	6.00	2.30	75	2.50	25.00	32.56	0.10	3.5°	2		●
180	3.00	6.00	2.80	80	3.00	30.00	36.63	0.10	2.5°	2		●

Application	Material	d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]		
	Steel 850 - 1100 N/mm ² 	0.20	2	26	0.001	0.100	0.020	41380	116	0.3		
		0.30	2	40	0.002	0.150	0.030	42440	178	0.8		
		0.40	2	53	0.003	0.200	0.040	42175	236	1.9		
		0.50	2	66	0.004	0.350	0.100	42015	294	10.3		
		0.60	2	79	0.004	0.420	0.120	41910	352	17.8		
		0.80	2	106	0.006	0.560	0.160	42175	472	42.4		
		1.00	2	130	0.007	0.700	0.200	41380	579	81.1		
		1.50	2	130	0.011	1.500	0.450	27585	579	391.1		
		2.00	2	130	0.014	2.000	0.600	20690	579	695.2		
			Steel 1100 - 1300 N/mm ² 	0.20	2	26	0.001	0.100	0.020	41380	99	0.2
				0.30	2	40	0.002	0.150	0.030	42440	153	0.7
				0.40	2	53	0.002	0.200	0.040	42175	202	1.6
0.50	2			66	0.003	0.350	0.100	42015	252	8.8		
0.60	2			79	0.004	0.420	0.120	41910	302	15.2		
0.80	2			100	0.005	0.560	0.160	39790	382	34.3		
1.00	2			100	0.006	0.700	0.200	31830	382	53.5		
1.50	2			100	0.009	1.500	0.450	21220	382	257.9		
2.00	2			100	0.012	2.000	0.600	15915	382	458.4		
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 			0.20	2	26	0.001	0.100	0.020	41380	83	0.2
				0.30	2	40	0.002	0.150	0.030	42440	127	0.6
				0.40	2	53	0.002	0.200	0.040	42175	169	1.4
		0.50	2	66	0.003	0.350	0.100	42015	210	7.4		
		0.60	2	79	0.003	0.420	0.120	41910	252	12.7		
		0.80	2	80	0.004	0.560	0.160	31830	255	22.8		
		1.00	2	80	0.005	0.700	0.200	25465	255	35.7		
		1.50	2	80	0.008	1.500	0.450	16975	255	171.9		
		2.00	2	80	0.010	2.000	0.600	12730	255	305.5		
			Titanium alloys > 300 HB [Ti6Al4V] 	0.20	2	26	0.001	0.100	0.020	41380	83	0.2
				0.30	2	40	0.002	0.150	0.030	42440	127	0.6
				0.40	2	50	0.002	0.200	0.040	39790	159	1.3
0.50	2			50	0.003	0.350	0.100	31830	159	5.6		
0.60	2			50	0.003	0.420	0.120	26525	159	8.0		
0.80	2			50	0.004	0.560	0.160	19895	159	14.3		
1.00	2			50	0.005	0.700	0.200	15915	159	22.3		
1.50	2			50	0.008	1.500	0.450	10610	159	107.5		
2.00	2			50	0.010	2.000	0.600	7960	159	191.1		

Application	Material	d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]		
	Steel 850 - 1100 N/mm ² 	0.20	2	26	0.001	0.050	0.200	41380	93	1.0		
		0.30	2	40	0.002	0.075	0.300	42440	143	3.2		
		0.40	2	53	0.002	0.100	0.400	42175	186	7.4		
		0.50	2	66	0.003	0.250	0.500	42015	235	29.4		
		0.60	2	79	0.003	0.300	0.600	41910	282	50.7		
		0.80	2	106	0.004	0.400	0.800	42175	378	121.0		
		1.00	2	117	0.006	0.500	1.000	37240	417	208.6		
		1.50	2	117	0.008	0.750	1.500	24830	417	469.3		
		2.00	2	117	0.011	1.000	2.000	18620	417	834.2		
			Steel 1100 - 1300 N/mm ² 	0.20	2	26	0.001	0.050	0.200	41380	79	0.8
				0.30	2	40	0.001	0.075	0.300	42440	122	2.8
				0.40	2	53	0.002	0.100	0.400	42175	160	6.4
0.50	2			66	0.002	0.250	0.500	42015	202	25.2		
0.60	2			79	0.003	0.300	0.600	41910	241	43.5		
0.80	2			90	0.004	0.400	0.800	35810	275	88.0		
1.00	2			90	0.005	0.500	1.000	28650	275	137.5		
1.50	2			90	0.007	0.750	1.500	19100	275	309.4		
2.00	2			90	0.010	1.000	2.000	14325	275	550.0		
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 			0.20	2	26	0.001	0.050	0.200	41380	66	0.7
				0.30	2	40	0.001	0.075	0.300	42440	102	2.3
				0.40	2	53	0.002	0.100	0.400	42175	135	5.4
		0.50	2	66	0.002	0.250	0.500	42015	168	21.0		
		0.60	2	72	0.002	0.300	0.600	38195	183	33.0		
		0.80	2	72	0.003	0.400	0.800	28650	183	58.7		
		1.00	2	72	0.004	0.500	1.000	22920	183	91.7		
		1.50	2	72	0.006	0.750	1.500	15280	183	206.4		
		2.00	2	72	0.008	1.000	2.000	11460	183	366.8		
			Titanium alloys > 300 HB [Ti6Al4V] 	0.20	2	26	0.001	0.050	0.200	41380	66	0.7
				0.30	2	40	0.001	0.075	0.300	42440	102	2.3
				0.40	2	45	0.002	0.100	0.400	35810	115	4.6
0.50	2			45	0.002	0.250	0.500	28650	115	14.4		
0.60	2			45	0.002	0.300	0.600	23875	115	20.7		
0.80	2			45	0.003	0.400	0.800	17905	115	36.7		
1.00	2			45	0.004	0.500	1.000	14325	115	57.3		
1.50	2			45	0.006	0.750	1.500	9550	115	129.0		
2.00	2			45	0.008	1.000	2.000	7160	115	229.2		


Cylindrical end mills Microcut

Shank \varnothing 4mm, 1xd

Base-X
B






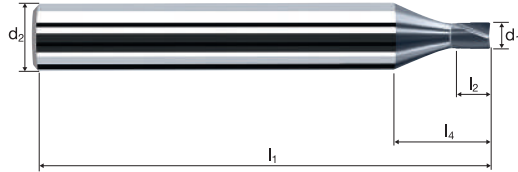










HM	λ	0°
XA	γ	0°

new!



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--------------------------	-----------------------	---

\varnothing Code	d_1 0/-0.01	d_2 h4	l_1	l_2	l_4	45°	α	z	Example: Order-N°.		X-AL	
									Coating	Article-N°.	\varnothing -Code	X6800
020	0.20	4.00	50	0.16	11.39	-	9.7°	2	X	6800	020	●
030	0.30	4.00	50	0.24	11.21	-	9.6°	2				●
040	0.40	4.00	50	0.32	11.03	-	9.5°	2				●
050	0.50	4.00	50	0.40	7.67	-	13.1°	2				●
060	0.60	4.00	50	0.48	7.58	-	12.8°	2				●
080	0.80	4.00	50	0.64	7.41	-	12.4°	2				●
100	1.00	4.00	50	1.20	7.66	0.04	11.3°	2				●
120	1.50	4.00	50	1.80	7.42	0.04	9.8°	2				●
140	2.00	4.00	50	2.40	7.19	0.07	8.1°	2				●

Application	Material	d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]			
	Steel 850 - 1100 N/mm ² 	0.20	2	26	0.001	0.100	0.020	41380	116	0.3			
		0.40	2	53	0.003	0.200	0.040	42175	236	1.9			
		0.50	2	66	0.004	0.350	0.100	42015	294	10.3			
		0.80	2	106	0.006	0.560	0.160	42175	472	42.4			
		1.00	2	130	0.007	0.700	0.200	41380	579	81.1			
		1.50	2	130	0.011	1.500	0.450	27585	579	391.1			
		2.00	2	130	0.014	2.000	0.600	20690	579	695.2			
		2.50	2	130	0.018	2.500	0.750	16550	579	1086.2			
		3.00	2	130	0.021	3.000	0.900	13795	579	1564.4			
		Steel 1100 - 1300 N/mm ² 	Steel 1100 - 1300 N/mm ² 	0.20	2	26	0.001	0.100	0.020	41380	99	0.2	
				0.40	2	53	0.002	0.200	0.040	42175	202	1.6	
				0.50	2	66	0.003	0.350	0.100	42015	252	8.8	
0.80	2			100	0.005	0.560	0.160	39790	382	34.3			
1.00	2			100	0.006	0.700	0.200	31830	382	53.5			
1.50	2			100	0.009	1.500	0.450	21220	382	257.9			
2.00	2			100	0.012	2.000	0.600	15915	382	458.4			
2.50	2			100	0.015	2.500	0.750	12730	382	716.1			
3.00	2			100	0.018	3.000	0.900	10610	382	1031.4			
Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 			0.20	2	26	0.001	0.100	0.020	41380	83	0.2	
				0.40	2	53	0.002	0.200	0.040	42175	169	1.4	
				0.50	2	66	0.003	0.350	0.100	42015	210	7.4	
		0.80	2	80	0.004	0.560	0.160	31830	255	22.8			
		1.00	2	80	0.005	0.700	0.200	25465	255	35.7			
		1.50	2	80	0.008	1.500	0.450	16975	255	171.9			
		2.00	2	80	0.010	2.000	0.600	12730	255	305.5			
		2.50	2	80	0.013	2.500	0.750	10185	255	477.4			
		3.00	2	80	0.015	3.000	0.900	8490	255	687.7			
		Titanium alloys > 300 HB [Ti6Al4V] 	Titanium alloys > 300 HB [Ti6Al4V] 	0.20	2	26	0.001	0.100	0.020	41380	83	0.2	
				0.40	2	50	0.002	0.200	0.040	39790	159	1.3	
				0.50	2	50	0.003	0.350	0.100	31830	159	5.6	
0.80	2			50	0.004	0.560	0.160	19895	159	14.3			
1.00	2			50	0.005	0.700	0.200	15915	159	22.3			
1.50	2			50	0.008	1.500	0.450	10610	159	107.5			
2.00	2			50	0.010	2.000	0.600	7960	159	191.1			
2.50	2			50	0.013	2.500	0.750	6365	159	298.3			
3.00	2			50	0.015	3.000	0.900	5305	159	429.9			
Application 	Steel 850 - 1100 N/mm ² 			<th>d_1 [mm]</th> <th>z</th> <th>v_c [m/min]</th> <th>f_z [mm]</th> <th>a_p [mm]</th> <th>a_e [mm]</th> <th>n [min⁻¹]</th> <th>v_f [mm/min]</th> <th>Q [mm³/min]</th>	d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
					0.20	2	26	0.001	0.040	0.200	41380	93	0.8
					0.40	2	53	0.002	0.080	0.400	42175	186	6.0
		0.50	2		66	0.003	0.150	0.500	42015	235	17.7		
		0.80	2		106	0.004	0.240	0.800	42175	378	72.6		
		1.00	2		111	0.006	0.300	1.000	35330	396	118.7		
		1.50	2		111	0.008	0.600	1.500	23555	396	356.2		
		2.00	2		111	0.011	0.800	2.000	17665	396	633.1		
		2.50	2		111	0.014	1.000	2.500	14135	396	989.5		
		3.00	2		111	0.017	1.200	3.000	11775	396	1424.2		
		Steel 1100 - 1300 N/mm ² 	Steel 1100 - 1300 N/mm ² 		0.20	2	26	0.001	0.040	0.200	41380	79	0.7
					0.40	2	53	0.002	0.080	0.400	42175	160	5.2
0.50	2			66	0.002	0.150	0.500	42015	202	15.2			
0.80	2			85	0.004	0.240	0.800	33820	260	49.9			
1.00	2			85	0.005	0.300	1.000	27055	260	77.9			
1.50	2			85	0.007	0.600	1.500	18040	260	233.8			
2.00	2			85	0.010	0.800	2.000	13530	260	415.7			
2.50	2			85	0.012	1.000	2.500	10825	260	649.5			
3.00	2			85	0.014	1.200	3.000	9020	260	935.3			
Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 			0.20	2	26	0.001	0.040	0.200	41380	66	0.6	
				0.40	2	53	0.002	0.080	0.400	42175	135	4.3	
				0.50	2	66	0.002	0.150	0.500	42015	168	12.6	
		0.80	2	68	0.003	0.240	0.800	27055	173	33.3			
		1.00	2	68	0.004	0.300	1.000	21645	173	52.0			
		1.50	2	68	0.006	0.600	1.500	14430	173	155.9			
		2.00	2	68	0.008	0.800	2.000	10825	173	277.1			
		2.50	2	68	0.010	1.000	2.500	8660	173	433.0			
		3.00	2	68	0.012	1.200	3.000	7215	173	623.5			
		Titanium alloys > 300 HB [Ti6Al4V] 	Titanium alloys > 300 HB [Ti6Al4V] 	0.20	2	26	0.001	0.040	0.200	41380	66	0.6	
				0.40	2	43	0.002	0.080	0.400	34220	110	3.5	
				0.50	2	43	0.002	0.150	0.500	27375	110	8.2	
0.80	2			43	0.003	0.240	0.800	17110	110	21.0			
1.00	2			43	0.004	0.300	1.000	13685	110	32.9			
1.50	2			43	0.006	0.600	1.500	9125	110	98.6			
2.00	2			43	0.008	0.800	2.000	6845	110	175.2			
2.50	2			43	0.010	1.000	2.500	5475	110	273.8			
3.00	2			43	0.012	1.200	3.000	4560	109	393.9			

Cylindrical end mills Microcut


Shank \varnothing 4mm, cylindrical neck, 3xd



HM	λ	0°
XA	γ	0°




new!

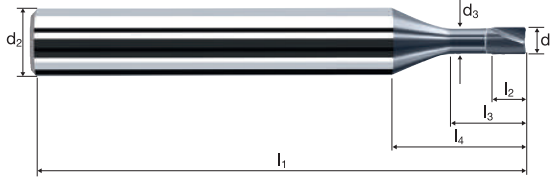

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
----------	-------------	--------------	--------------	-----------	-----------	----------------	-------------	--

Example: Order-N°.											X-AL		
											X6802		
\varnothing Code	Coating			Article-N°.			\varnothing -Code		45°		α	z	
	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4						
020	0.20	4.00	0.18	50	0.16	0.60	11.55	-	9.5°	2		●	
030	0.30	4.00	0.25	50	0.24	0.90	11.47	-	9.4°	2		●	
040	0.40	4.00	0.35	50	0.32	1.20	11.49	-	9.1°	2		●	
050	0.50	4.00	0.45	50	0.40	1.50	8.28	-	12.1°	2		●	
060	0.60	4.00	0.55	50	0.48	1.80	8.40	-	11.6°	2		●	
080	0.80	4.00	0.75	50	0.64	2.40	8.62	-	10.7°	2		●	
100	1.00	4.00	0.95	50	1.20	3.00	8.85	0.04	9.8°	2		●	
108	1.20	4.00	1.10	50	1.44	3.60	8.96	0.04	9.1°	2		●	
120	1.50	4.00	1.40	50	1.80	4.50	9.30	0.04	7.9°	2		●	
140	2.00	4.00	1.90	50	2.40	6.00	9.87	0.07	6.0°	2		●	
160	2.50	4.00	2.30	50	3.00	7.50	10.34	0.07	4.3°	2		●	
180	3.00	4.00	2.80	50	3.60	9.00	10.91	0.07	2.8°	2		●	

Application



Material

Steel
850 - 1100 N/mm²

d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ² /min]
0.20	2	26	0.001	0.050	0.020	41380	116	0.1
0.40	2	53	0.003	0.100	0.040	42175	236	1.0
0.50	2	66	0.004	0.250	0.100	42015	294	7.4
0.80	2	104	0.006	0.400	0.160	41380	464	29.7
1.00	2	104	0.007	0.500	0.200	33105	464	46.4
1.50	2	104	0.011	1.050	0.450	22070	464	219.0
2.00	2	104	0.014	1.400	0.600	16550	463	389.3
2.50	2	104	0.018	1.750	0.750	13240	463	608.2
3.00	2	104	0.021	2.100	0.900	11035	464	876.0

Steel
1100 - 1300 N/mm²

0.20	2	26	0.001	0.050	0.020	41380	99	0.1
0.40	2	53	0.002	0.100	0.040	42175	202	0.8
0.50	2	66	0.003	0.250	0.100	42015	252	6.3
0.80	2	80	0.005	0.400	0.160	31830	306	19.6
1.00	2	80	0.006	0.500	0.200	25465	306	30.6
1.50	2	80	0.009	1.050	0.450	16975	306	144.4
2.00	2	80	0.012	1.400	0.600	12730	306	256.6
2.50	2	80	0.015	1.750	0.750	10185	306	401.1
3.00	2	80	0.018	2.100	0.900	8490	306	577.6


Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

0.20	2	26	0.001	0.050	0.020	41380	83	0.1
0.40	2	53	0.002	0.100	0.040	42175	169	0.7
0.50	2	64	0.003	0.250	0.100	40745	204	5.1
0.80	2	64	0.004	0.400	0.160	25465	204	13.1
1.00	2	64	0.005	0.500	0.200	20370	204	20.4
1.50	2	64	0.008	1.050	0.450	13580	204	96.3
2.00	2	64	0.010	1.400	0.600	10185	204	171.1
2.50	2	64	0.013	1.750	0.750	8150	204	267.5
3.00	2	64	0.015	2.100	0.900	6790	204	385.0

Titanium alloys
> 300 HB
[Ti6Al4V]

0.20	2	26	0.001	0.050	0.020	41380	83	0.1
0.40	2	40	0.002	0.100	0.040	31830	127	0.5
0.50	2	40	0.003	0.250	0.100	25465	127	3.2
0.80	2	40	0.004	0.400	0.160	15915	127	8.2
1.00	2	40	0.005	0.500	0.200	12730	127	12.8
1.50	2	40	0.008	1.050	0.450	8490	127	60.2
2.00	2	40	0.010	1.400	0.600	6365	127	107.0
2.50	2	40	0.013	1.750	0.750	5095	127	167.2
3.00	2	40	0.015	2.100	0.900	4245	127	240.8

Application



Material

Steel
850 - 1100 N/mm²

d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ² /min]
0.20	2	26	0.001	0.020	0.200	41380	93	0.4
0.40	2	53	0.002	0.040	0.400	42175	186	3.0
0.50	2	66	0.003	0.100	0.500	42015	235	11.8
0.80	2	88	0.004	0.160	0.800	35015	314	40.2
1.00	2	88	0.006	0.200	1.000	28010	314	62.8
1.50	2	88	0.008	0.450	1.500	18675	314	211.8
2.00	2	88	0.011	0.600	2.000	14005	314	376.5
2.50	2	88	0.014	0.750	2.500	11205	314	588.2
3.00	2	88	0.017	0.900	3.000	9335	314	847.0

Steel
1100 - 1300 N/mm²

0.20	2	26	0.001	0.020	0.200	41380	79	0.3
0.40	2	53	0.002	0.040	0.400	42175	160	2.6
0.50	2	66	0.002	0.100	0.500	42015	202	10.1
0.80	2	68	0.004	0.160	0.800	27055	208	26.6
1.00	2	68	0.005	0.200	1.000	21645	208	41.6
1.50	2	68	0.007	0.450	1.500	14430	208	140.3
2.00	2	68	0.010	0.600	2.000	10825	208	249.4
2.50	2	68	0.012	0.750	2.500	8660	208	389.7
3.00	2	68	0.014	0.900	3.000	7215	208	561.1

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

0.20	2	26	0.001	0.020	0.200	41380	66	0.3
0.40	2	53	0.002	0.040	0.400	42175	135	2.2
0.50	2	54	0.002	0.100	0.500	34375	138	6.9
0.80	2	54	0.003	0.160	0.800	21485	138	17.6
1.00	2	54	0.004	0.200	1.000	17190	138	27.5
1.50	2	54	0.006	0.450	1.500	11460	138	92.8
2.00	2	54	0.008	0.600	2.000	8595	138	165.0
2.50	2	54	0.010	0.750	2.500	6875	138	257.8
3.00	2	54	0.012	0.900	3.000	5730	138	371.3

Titanium alloys
> 300 HB
[Ti6Al4V]

0.20	2	26	0.001	0.020	0.200	41380	66	0.3
0.40	2	34	0.002	0.040	0.400	27055	87	1.4
0.50	2	34	0.002	0.100	0.500	21645	87	4.4
0.80	2	34	0.003	0.160	0.800	13530	87	11.1
1.00	2	34	0.004	0.200	1.000	10825	87	17.3
1.50	2	34	0.006	0.450	1.500	7215	87	58.5
2.00	2	34	0.008	0.600	2.000	5410	87	103.9
2.50	2	34	0.010	0.750	2.500	4330	87	162.4
3.00	2	34	0.012	0.900	3.000	3610	87	233.8


Cylindrical end mills Microcut

Shank \varnothing 4mm, cylindrical neck, 5xd



HM	λ	0°
XA	γ	0°


new!

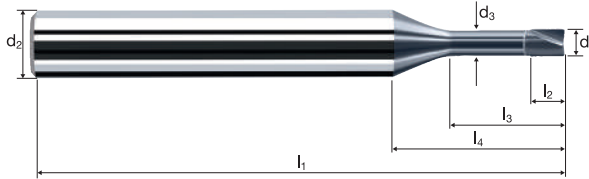

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------------	----------------	--

Example: Order-N°.											X-AL
Coating Article-N°. \varnothing -Code											X6804
X 6804 020											
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	45°	α	z	
020	0.20	4.00	0.18	50	0.16	1.00	11.95	-	9.2°	2	●
030	0.30	4.00	0.25	50	0.24	1.50	12.07	-	8.9°	2	●
040	0.40	4.00	0.35	50	0.32	2.00	12.29	-	8.5°	2	●
050	0.50	4.00	0.45	50	0.40	2.50	9.28	-	10.9°	2	●
060	0.60	4.00	0.55	50	0.48	3.00	9.60	-	10.2°	2	●
080	0.80	4.00	0.75	50	0.64	4.00	10.22	-	9.1°	2	●
100	1.00	4.00	0.95	50	1.20	5.00	10.85	0.04	8.1°	2	●
108	1.20	4.00	1.10	50	1.44	6.00	11.36	0.04	7.2°	2	●
120	1.50	4.00	1.40	50	1.80	7.50	12.30	0.04	6.0°	2	●
140	2.00	4.00	1.90	50	2.40	10.00	13.87	0.07	4.3°	2	●
160	2.50	4.00	2.30	50	3.00	12.50	15.34	0.07	3.0°	2	●
180	3.00	4.00	2.80	50	3.60	15.00	16.91	0.07	1.9°	2	●

Application



Material

Steel
850 - 1100 N/mm²



d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ² /min]
0.50	2	66	0.004	0.100	0.050	42015	294	1.5
0.60	2	73	0.004	0.120	0.060	38730	325	2.4
0.80	2	73	0.006	0.160	0.080	29045	325	4.2
1.00	2	73	0.007	0.200	0.100	23235	325	6.5
1.20	2	73	0.008	0.360	0.120	19365	325	14.1
1.50	2	73	0.011	0.450	0.150	15490	325	22.0
2.00	2	73	0.014	0.600	0.200	11620	325	39.1
2.50	2	73	0.018	0.750	0.250	9295	325	61.0
3.00	2	73	0.021	0.900	0.300	7745	325	87.9

Steel
1100 - 1300 N/mm²



0.50	2	56	0.003	0.100	0.050	35650	214	1.1
0.60	2	56	0.004	0.120	0.060	29710	214	1.6
0.80	2	56	0.005	0.160	0.080	22280	214	2.8
1.00	2	56	0.006	0.200	0.100	17825	214	4.3
1.20	2	56	0.007	0.360	0.120	14855	214	9.3
1.50	2	56	0.009	0.450	0.150	11885	214	14.5
2.00	2	56	0.012	0.600	0.200	8915	214	25.7
2.50	2	56	0.015	0.750	0.250	7130	214	40.1
3.00	2	56	0.018	0.900	0.300	5940	214	57.8

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



0.50	2	45	0.002	0.100	0.050	28650	129	0.7
0.60	2	45	0.003	0.120	0.060	23875	129	1.0
0.80	2	45	0.004	0.160	0.080	17905	129	1.7
1.00	2	45	0.005	0.200	0.100	14325	129	2.6
1.20	2	45	0.005	0.360	0.120	11935	129	5.6
1.50	2	45	0.007	0.450	0.150	9550	129	8.7
2.00	2	45	0.009	0.600	0.200	7160	129	15.5
2.50	2	45	0.011	0.750	0.250	5730	129	24.2
3.00	2	45	0.014	0.900	0.300	4775	129	34.8

Titanium alloys
> 300 HB
[Ti6Al4V]



0.50	2	28	0.002	0.100	0.050	17825	80	0.4
0.60	2	28	0.003	0.120	0.060	14855	80	0.6
0.80	2	28	0.004	0.160	0.080	11140	80	1.1
1.00	2	28	0.005	0.200	0.100	8915	80	1.6
1.20	2	28	0.005	0.360	0.120	7425	80	3.5
1.50	2	28	0.007	0.450	0.150	5940	80	5.4
2.00	2	28	0.009	0.600	0.200	4455	80	9.6
2.50	2	28	0.011	0.750	0.250	3565	80	15.1
3.00	2	28	0.014	0.900	0.300	2970	80	21.7

Application



Material

Steel
850 - 1100 N/mm²



d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ² /min]
0.50	2	66	0.003	0.050	0.500	42015	235	5.9
0.60	2	66	0.003	0.060	0.600	35015	235	8.5
0.80	2	66	0.004	0.080	0.800	26260	235	15.1
1.00	2	66	0.006	0.100	1.000	21010	235	23.6
1.20	2	66	0.007	0.120	1.200	17505	235	33.9
1.50	2	66	0.008	0.150	1.500	14005	235	53.0
2.00	2	66	0.011	0.200	2.000	10505	235	94.1
2.50	2	66	0.014	0.250	2.500	8405	235	147.1
3.00	2	66	0.017	0.300	3.000	7005	235	211.9

Steel
1100 - 1300 N/mm²



0.50	2	50	0.002	0.050	0.500	31830	153	3.8
0.60	2	50	0.003	0.060	0.600	26525	153	5.5
0.80	2	50	0.004	0.080	0.800	19895	153	9.8
1.00	2	50	0.005	0.100	1.000	15915	153	15.3
1.20	2	50	0.006	0.120	1.200	13265	153	22.0
1.50	2	50	0.007	0.150	1.500	10610	153	34.4
2.00	2	50	0.010	0.200	2.000	7960	153	61.1
2.50	2	50	0.012	0.250	2.500	6365	153	95.5
3.00	2	50	0.014	0.300	3.000	5305	153	137.5

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



0.50	2	40	0.002	0.050	0.500	25465	92	2.3
0.60	2	40	0.002	0.060	0.600	21220	92	3.3
0.80	2	40	0.003	0.080	0.800	15915	92	5.9
1.00	2	40	0.004	0.100	1.000	12730	92	9.2
1.20	2	40	0.004	0.120	1.200	10610	92	13.2
1.50	2	40	0.005	0.150	1.500	8490	92	20.7
2.00	2	40	0.007	0.200	2.000	6365	92	36.7
2.50	2	40	0.009	0.250	2.500	5095	92	57.3
3.00	2	40	0.011	0.300	3.000	4245	92	82.6

Titanium alloys
> 300 HB
[Ti6Al4V]




0.50	2	25	0.002	0.050	0.500	15915	57	1.5
0.60	2	25	0.002	0.060	0.600	13265	57	2.1
0.80	2	25	0.003	0.080	0.800	9945	57	3.7
1.00	2	25	0.004	0.100	1.000	7960	57	5.8
1.20	2	25	0.004	0.120	1.200	6630	57	8.3
1.50	2	25	0.005	0.150	1.500	5305	57	12.9
2.00	2	25	0.007	0.200	2.000	3980	57	22.9
2.50	2	25	0.009	0.250	2.500	3185	57	35.8
3.00	2	25	0.011	0.300	3.000	2655	57	51.6

Cylindrical end mills Microcut


Shank \varnothing 4mm, cylindrical neck, 8xd



HM λ 0°
XA γ 0°






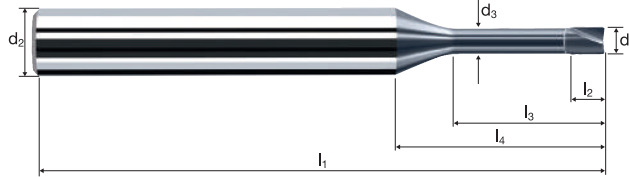












new!



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--------------------------	-----------------------	---

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	Coating	Article-N°	Ø-Code	X-AL
											X	6807	050	X6807
050	0.50	4.00	0.45	50	0.40	4.00	10.78	-	9.4°	2				●
060	0.60	4.00	0.55	50	0.48	4.80	11.40	-	8.7°	2				●
080	0.80	4.00	0.75	50	0.64	6.40	12.62	-	7.4°	2				●
100	1.00	4.00	0.95	50	1.20	8.00	13.85	0.04	6.4°	2				●
108	1.20	4.00	1.10	50	1.44	9.60	14.96	0.04	5.5°	2				●
120	1.50	4.00	1.40	50	1.80	12.00	16.80	0.04	4.5°	2				●
140	2.00	4.00	1.90	50	2.40	16.00	19.87	0.07	3.1°	2				●
160	2.50	4.00	2.30	57	3.00	20.00	22.84	0.07	2.1°	2				●
180	3.00	4.00	2.80	57	3.60	24.00	25.91	0.07	1.3°	2				●

Application	Material	d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]		
	Steel 850 - 1100 N/mm ² 	0.50	2	66	0.004	0.100	0.050	42015	294	1.5		
		0.60	2	66	0.004	0.120	0.060	35015	294	2.1		
		0.80	2	66	0.006	0.160	0.080	26260	294	3.8		
		1.00	2	66	0.007	0.200	0.100	21010	294	5.9		
		1.50	2	66	0.011	0.300	0.150	14005	294	13.3		
		2.00	2	66	0.014	0.400	0.200	10505	294	23.6		
		2.50	2	66	0.018	0.500	0.250	8405	294	36.8		
		3.00	2	66	0.021	0.600	0.300	7005	294	53.0		
			Steel 1100 - 1300 N/mm ² 	0.50	2	50	0.003	0.100	0.050	31830	191	1.0
				0.60	2	50	0.004	0.120	0.060	26525	191	1.4
0.80	2			50	0.005	0.160	0.080	19895	191	2.5		
1.00	2			50	0.006	0.200	0.100	15915	191	3.8		
1.50	2			50	0.009	0.300	0.150	10610	191	8.6		
2.00	2			50	0.012	0.400	0.200	7960	191	15.3		
2.50	2			50	0.015	0.500	0.250	6365	191	23.9		
3.00	2			50	0.018	0.600	0.300	5305	191	34.4		
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 			0.50	2	40	0.002	0.100	0.050	25465	115	0.6
				0.60	2	40	0.003	0.120	0.060	21220	115	0.9
		0.80	2	40	0.004	0.160	0.080	15915	115	1.5		
		1.00	2	40	0.005	0.200	0.100	12730	115	2.3		
		1.50	2	40	0.007	0.300	0.150	8490	115	5.2		
		2.00	2	40	0.009	0.400	0.200	6365	115	9.2		
		2.50	2	40	0.011	0.500	0.250	5095	115	14.4		
		3.00	2	40	0.014	0.600	0.300	4245	115	20.7		
			Titanium alloys > 300 HB [Ti6Al4V] 	0.50	2	25	0.002	0.100	0.050	15915	72	0.4
				0.60	2	25	0.003	0.120	0.060	13265	72	0.5
0.80	2			25	0.004	0.160	0.080	9945	72	0.9		
1.00	2			25	0.005	0.200	0.100	7960	72	1.5		
1.50	2			25	0.007	0.300	0.150	5305	72	3.2		
2.00	2			25	0.009	0.400	0.200	3980	72	5.8		
2.50	2			25	0.011	0.500	0.250	3185	72	9.0		
3.00	2			25	0.014	0.600	0.300	2655	72	12.9		
	Steel 850 - 1100 N/mm ² 			0.50	2	59	0.003	0.050	0.500	37560	210	5.3
				0.60	2	59	0.003	0.060	0.600	31300	210	7.6
		0.80	2	59	0.004	0.080	0.800	23475	210	13.5		
		1.00	2	59	0.006	0.100	1.000	18780	210	21.1		
		1.50	2	59	0.008	0.150	1.500	12520	210	47.3		
		2.00	2	59	0.011	0.200	2.000	9390	210	84.1		
		2.50	2	59	0.014	0.250	2.500	7510	210	131.5		
		3.00	2	59	0.017	0.300	3.000	6260	210	189.3		
			Steel 1100 - 1300 N/mm ² 	0.50	2	45	0.002	0.050	0.500	28650	138	3.5
				0.60	2	45	0.003	0.060	0.600	23875	138	5.0
0.80	2			45	0.004	0.080	0.800	17905	138	8.8		
1.00	2			45	0.005	0.100	1.000	14325	138	13.8		
1.50	2			45	0.007	0.150	1.500	9550	138	31.0		
2.00	2			45	0.010	0.200	2.000	7160	138	55.0		
2.50	2			45	0.012	0.250	2.500	5730	138	86.0		
3.00	2			45	0.014	0.300	3.000	4775	138	123.8		
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 			0.50	2	36	0.002	0.050	0.500	22920	83	2.1
				0.60	2	36	0.002	0.060	0.600	19100	83	3.0
		0.80	2	36	0.003	0.080	0.800	14325	83	5.3		
		1.00	2	36	0.004	0.100	1.000	11460	83	8.3		
		1.50	2	36	0.005	0.150	1.500	7640	83	18.6		
		2.00	2	36	0.007	0.200	2.000	5730	83	33.0		
		2.50	2	36	0.009	0.250	2.500	4585	83	51.6		
		3.00	2	36	0.011	0.300	3.000	3820	83	74.3		
			Titanium alloys > 300 HB [Ti6Al4V] 	0.50	2	23	0.002	0.050	0.500	14640	53	1.3
				0.60	2	23	0.002	0.060	0.600	12200	53	1.9
0.80	2			23	0.003	0.080	0.800	9150	53	3.4		
1.00	2			23	0.004	0.100	1.000	7320	53	5.3		
1.50	2			23	0.005	0.150	1.500	4880	53	11.9		
2.00	2			23	0.007	0.200	2.000	3660	53	21.1		
2.50	2			23	0.009	0.250	2.500	2930	53	33.0		
3.00	2			23	0.011	0.300	3.000	2440	53	47.5		

Cylindrical end mills Microcut


Shank \varnothing 4mm, cylindrical neck, 10xd



HM	λ	0°
XA	γ	0°






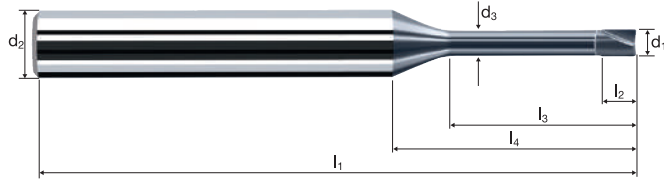






new!



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60		Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--	--------------------------	-----------------------	---

Example: Order-Nº.											X-AL	
											X6809	
Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z		
											Coating	

Application	Material	d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
	Steel 850 - 1100 N/mm ² 	1.00	2	59	0.007	0.200	0.100	18780	263	5.3
		1.50	2	59	0.011	0.300	0.150	12520	263	11.9
		2.00	2	59	0.014	0.400	0.200	9390	263	21.1
		3.00	2	59	0.021	0.600	0.300	6260	263	47.3
	Steel 1100 - 1300 N/mm ² 	1.00	2	45	0.006	0.200	0.100	14325	172	3.5
		1.50	2	45	0.009	0.300	0.150	9550	172	7.8
		2.00	2	45	0.012	0.400	0.200	7160	172	13.8
		3.00	2	45	0.018	0.600	0.300	4775	172	31.0
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	1.00	2	36	0.005	0.200	0.100	11460	103	2.1
		1.50	2	36	0.007	0.300	0.150	7640	103	4.7
		2.00	2	36	0.009	0.400	0.200	5730	103	8.3
		3.00	2	36	0.014	0.600	0.300	3820	103	18.6
	Titanium alloys > 300 HB [Ti6Al4V] 	1.00	2	23	0.005	0.200	0.100	7320	66	1.3
		1.50	2	23	0.007	0.300	0.150	4880	66	3.0
		2.00	2	23	0.009	0.400	0.200	3660	66	5.3
		3.00	2	23	0.014	0.600	0.300	2440	66	11.9


Application	Material	d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
	Steel 850 - 1100 N/mm ² 	1.00	2	53	0.006	0.100	1.000	16870	189	18.9
		1.50	2	53	0.008	0.150	1.500	11245	189	42.5
		2.00	2	53	0.011	0.200	2.000	8435	189	75.6
		3.00	2	53	0.017	0.300	3.000	5625	189	170.1
	Steel 1100 - 1300 N/mm ² 	1.00	2	41	0.005	0.100	1.000	13050	125	12.6
		1.50	2	41	0.007	0.150	1.500	8700	125	28.2
		2.00	2	41	0.010	0.200	2.000	6525	125	50.1
		3.00	2	41	0.014	0.300	3.000	4350	125	112.8
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	1.00	2	33	0.004	0.100	1.000	10505	76	7.6
		1.50	2	33	0.005	0.150	1.500	7005	76	17.1
		2.00	2	33	0.007	0.200	2.000	5250	76	30.3
		3.00	2	33	0.011	0.300	3.000	3500	76	68.1
	Titanium alloys > 300 HB [Ti6Al4V] 	1.00	2	20	0.004	0.100	1.000	6365	46	4.6
		1.50	2	20	0.005	0.150	1.500	4245	46	10.3
		2.00	2	20	0.007	0.200	2.000	3185	46	18.4
		3.00	2	20	0.011	0.300	3.000	2120	46	41.2

Cylindrical end mills Microcut

Shank \varnothing 4mm, cylindrical neck, 12xd

HM	λ	0°
XA	γ	0°


new!

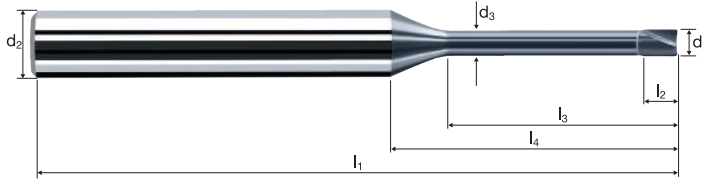

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--------------------------	-----------------------	---

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	Example:	
											Order-N°.	
											Coating	Article-N°.
											X	6810
												100
											X-AL	
											X6810	
100	1.00	4.00	0.95	50	1.20	12.00	17.85	0.04	5.0°	2		●
120	1.50	4.00	1.40	57	1.80	18.00	22.80	0.04	3.3°	2		●
140	2.00	4.00	1.90	57	2.40	24.00	27.87	0.07	2.3°	2		●
180	3.00	4.00	2.80	75	3.60	36.00	37.91	0.07	1.0°	2		●

Application



Material

Steel
850 - 1100 N/mm²



d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
1.00	2	53	0.007	0.200	0.100	16870	236	4.7
1.50	2	53	0.011	0.300	0.150	11245	236	10.6
2.00	2	53	0.014	0.400	0.200	8435	236	18.9
3.00	2	53	0.021	0.600	0.300	5625	236	42.6

Steel
1100 - 1300 N/mm²



1.00	2	41	0.006	0.200	0.100	13050	157	3.2
1.50	2	41	0.009	0.300	0.150	8700	157	7.1
2.00	2	41	0.012	0.400	0.200	6525	157	12.6
3.00	2	41	0.018	0.600	0.300	4350	157	28.2

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



1.00	2	33	0.005	0.200	0.100	10505	95	1.9
1.50	2	33	0.007	0.300	0.150	7005	95	4.3
2.00	2	33	0.009	0.400	0.200	5250	95	7.6
3.00	2	33	0.014	0.600	0.300	3500	95	17.0

Titanium alloys
> 300 HB
[Ti6Al4V]



1.00	2	20	0.005	0.200	0.100	6365	57	1.2
1.50	2	20	0.007	0.300	0.150	4245	57	2.6
2.00	2	20	0.009	0.400	0.200	3185	57	4.6
3.00	2	20	0.014	0.600	0.300	2120	57	10.3

Application



Material

Steel
850 - 1100 N/mm²



d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
1.00	2	48	0.006	0.100	1.000	15280	171	17.1
1.50	2	48	0.008	0.150	1.500	10185	171	38.5
2.00	2	48	0.011	0.200	2.000	7640	171	68.5
3.00	2	48	0.017	0.300	3.000	5095	171	154.1

Steel
1100 - 1300 N/mm²



1.00	2	37	0.005	0.100	1.000	11775	113	11.3
1.50	2	37	0.007	0.150	1.500	7850	113	25.5
2.00	2	37	0.010	0.200	2.000	5890	113	45.3
3.00	2	37	0.014	0.300	3.000	3925	113	101.7

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



1.00	2	29	0.004	0.100	1.000	9230	67	6.7
1.50	2	29	0.005	0.150	1.500	6155	67	15.0
2.00	2	29	0.007	0.200	2.000	4615	67	26.6
3.00	2	29	0.011	0.300	3.000	3075	66	59.8

Titanium alloys
> 300 HB
[Ti6Al4V]



1.00	2	18	0.004	0.100	1.000	5730	41	4.2
1.50	2	18	0.005	0.150	1.500	3820	41	9.3
2.00	2	18	0.007	0.200	2.000	2865	41	16.5
3.00	2	18	0.011	0.300	3.000	1910	41	37.2


Cylindrical end mills Microcut

Shank \varnothing 4mm, cylindrical neck, 15xd






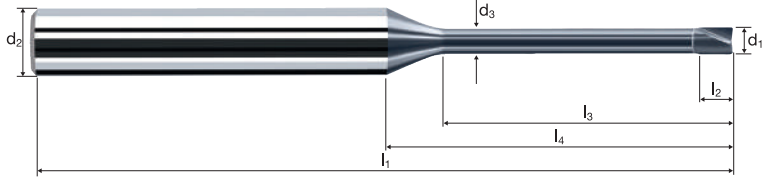

HM	λ	0°
XA	γ	0°






new!



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--------------------------	-----------------------	---

Example: Order-N°.											X-AL
											X6811
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	45°	α	z	
100	1.00	4.00	0.95	50	1.20	15.00	20.85	0.04	4.3°	2	●
120	1.50	4.00	1.40	57	1.80	22.50	27.30	0.04	2.8°	2	●
140	2.00	4.00	1.90	61	2.40	30.00	33.87	0.07	1.9°	2	●
180	3.00	4.00	2.80	75	3.60	45.00	46.91	0.07	0.8°	2	●

Application	Material	d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
	Steel 850 - 1100 N/mm ² 	1.00	2	48	0.007	0.200	0.100	15280	214	4.3
		1.50	2	48	0.011	0.300	0.150	10185	214	9.7
		2.00	2	48	0.014	0.400	0.200	7640	214	17.1
		3.00	2	48	0.021	0.600	0.300	5095	214	38.5
Steel 1100 - 1300 N/mm ² 	1.00	2	37	0.006	0.200	0.100	11775	141	2.9	
	1.50	2	37	0.009	0.300	0.150	7850	141	6.4	
	2.00	2	37	0.012	0.400	0.200	5890	141	11.3	
	3.00	2	37	0.018	0.600	0.300	3925	141	25.5	
Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	1.00	2	29	0.005	0.200	0.100	9230	83	1.7	
	1.50	2	29	0.007	0.300	0.150	6155	83	3.8	
	2.00	2	29	0.009	0.400	0.200	4615	83	6.7	
	3.00	2	29	0.014	0.600	0.300	3075	83	15.0	
Titanium alloys > 300 HB [Ti6Al4V] 	1.00	2	18	0.005	0.200	0.100	5730	52	1.1	
	1.50	2	18	0.007	0.300	0.150	3820	52	2.3	
	2.00	2	18	0.009	0.400	0.200	2865	52	4.2	
	3.00	2	18	0.014	0.600	0.300	1910	52	9.3	

Application	Material	d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
	Steel 850 - 1100 N/mm ² 	1.00	2	43	0.007	0.100	1.000	13685	192	19.2
		1.50	2	43	0.011	0.150	1.500	9125	192	43.1
		2.00	2	43	0.014	0.200	2.000	6845	192	76.7
		3.00	2	43	0.021	0.300	3.000	4560	192	172.4
Steel 1100 - 1300 N/mm ² 	1.00	2	33	0.006	0.100	1.000	10505	126	12.6	
	1.50	2	33	0.009	0.150	1.500	7005	126	28.4	
	2.00	2	33	0.012	0.200	2.000	5250	126	50.4	
	3.00	2	33	0.018	0.300	3.000	3500	126	113.4	
Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	1.00	2	26	0.005	0.100	1.000	8275	75	7.5	
	1.50	2	26	0.007	0.150	1.500	5515	75	16.8	
	2.00	2	26	0.009	0.200	2.000	4140	75	29.8	
	3.00	2	26	0.014	0.300	3.000	2760	75	67.1	
Titanium alloys > 300 HB [Ti6Al4V] 	1.00	2	17	0.005	0.100	1.000	5410	49	4.9	
	1.50	2	17	0.007	0.150	1.500	3610	49	11.0	
	2.00	2	17	0.009	0.200	2.000	2705	49	19.5	
	3.00	2	17	0.014	0.300	3.000	1805	49	43.9	

Cylindrical end mills Microcut


Shank \varnothing 4mm, cylindrical neck, 20xd



HM	λ	0°
XA	γ	0°




new!

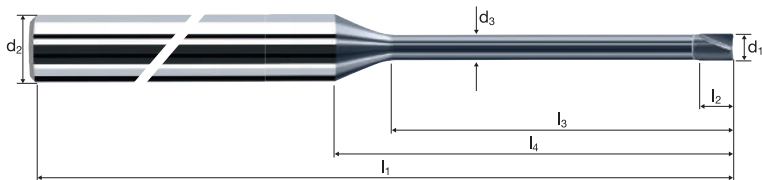

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
----------	-------------	--------------	--------------	-----------	-----------	----------------	-------------	--

Example: Order-Nº. X 6812 100											X-AL
											X6812
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	45°	α	z	
100	1.00	4.00	0.95	57	1.20	20.00	25.85	0.04	3.5°	2	●
120	1.50	4.00	1.40	66	1.80	30.00	34.80	0.04	2.3°	2	●
140	2.00	4.00	1.90	75	2.40	40.00	43.87	0.07	1.5°	2	●
180	3.00	4.00	2.80	100	3.60	60.00	61.91	0.07	0.7°	2	●

Application




Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
0.20	2	26	0.004	0.160	0.030	41380	330	1.6
0.50	2	66	0.012	0.400	0.080	42015	1010	32.3
0.80	2	106	0.018	0.640	0.120	42175	1520	116.6
1.00	2	132	0.022	0.800	0.150	42015	1850	221.8
1.20	2	158	0.026	0.960	0.180	41910	2180	376.6
1.50	2	180	0.034	1.200	0.230	38195	2595	716.9
2.00	2	180	0.044	1.600	0.300	28650	2520	1210.1
2.50	2	180	0.056	2.000	0.380	22920	2565	1950.8
3.00	2	180	0.066	2.400	0.450	19100	2520	2722.7

0.20	2	26	0.004	0.160	0.030	41380	330	1.6
0.50	2	66	0.010	0.400	0.080	42015	840	26.9
0.80	2	106	0.016	0.640	0.120	42175	1350	103.7
1.00	2	132	0.020	0.800	0.150	42015	1680	201.7
1.20	2	158	0.024	0.960	0.180	41910	2010	347.6
1.50	2	160	0.030	1.200	0.230	33955	2035	562.3
2.00	2	160	0.040	1.600	0.300	25465	2035	977.8
2.50	2	160	0.050	2.000	0.380	20370	2035	1548.3
3.00	2	160	0.060	2.400	0.450	16975	2035	2200.2

0.20	2	26	0.004	0.160	0.030	41380	330	1.6
0.50	2	66	0.010	0.400	0.080	42015	840	26.9
0.80	2	80	0.014	0.640	0.120	31830	890	68.4
1.00	2	80	0.018	0.800	0.150	25465	915	110.0
1.20	2	80	0.020	0.960	0.180	21220	850	146.7
1.50	2	80	0.028	1.200	0.230	16975	950	262.4
2.00	2	80	0.036	1.600	0.300	12730	915	440.0
2.50	2	80	0.044	2.000	0.380	10185	895	681.2
3.00	2	80	0.052	2.400	0.450	8490	885	953.4

0.20	2	26	0.002	0.160	0.030	41380	165	0.8
0.50	2	60	0.008	0.400	0.080	38195	610	19.6
0.80	2	60	0.012	0.640	0.120	23875	575	44.0
1.00	2	60	0.016	0.800	0.150	19100	610	73.3
1.20	2	60	0.018	0.960	0.180	15915	575	99.0
1.50	2	60	0.024	1.200	0.230	12730	610	168.7
2.00	2	60	0.030	1.600	0.300	9550	575	275.0
2.50	2	60	0.040	2.000	0.380	7640	610	464.5
3.00	2	60	0.046	2.400	0.450	6365	585	632.5

0.20	2	26	0.004	0.020	0.200	41380	330	1.3
0.50	2	66	0.010	0.060	0.500	42015	840	25.2
0.80	2	106	0.014	0.100	0.800	42175	1180	94.5
1.00	2	132	0.018	0.120	1.000	42015	1515	181.5
1.20	2	158	0.022	0.140	1.200	41910	1845	309.8
1.50	2	160	0.028	0.180	1.500	33955	1900	513.4
2.00	2	160	0.036	0.240	2.000	25465	1835	880.1
2.50	2	160	0.046	0.300	2.500	20370	1875	1405.7
3.00	2	160	0.054	0.360	3.000	16975	1835	1980.1

0.20	2	26	0.004	0.020	0.200	41380	330	1.3
0.50	2	66	0.010	0.060	0.500	42015	840	25.2
0.80	2	106	0.014	0.100	0.800	42175	1180	94.5
1.00	2	132	0.018	0.120	1.000	42015	1515	181.5
1.20	2	140	0.020	0.140	1.200	37135	1485	249.6
1.50	2	140	0.026	0.180	1.500	29710	1545	417.1
2.00	2	140	0.034	0.240	2.000	22280	1515	727.3
2.50	2	140	0.044	0.300	2.500	17825	1570	1176.5
3.00	2	140	0.052	0.360	3.000	14855	1545	1668.5


0.20	2	26	0.004	0.020	0.200	41380	330	1.3
0.50	2	66	0.008	0.060	0.500	42015	670	20.2
0.80	2	70	0.012	0.100	0.800	27850	670	53.5
1.00	2	70	0.016	0.120	1.000	22280	715	85.6
1.20	2	70	0.020	0.140	1.200	18570	745	124.8
1.50	2	70	0.024	0.180	1.500	14855	715	192.5
2.00	2	70	0.032	0.240	2.000	11140	715	342.2
2.50	2	70	0.040	0.300	2.500	8915	715	534.8
3.00	2	70	0.048	0.360	3.000	7425	715	770.1

0.20	2	26	0.004	0.020	0.200	41380	330	1.3
0.50	2	50	0.008	0.060	0.500	31830	510	15.3
0.80	2	50	0.012	0.100	0.800	19895	475	38.2
1.00	2	50	0.014	0.120	1.000	15915	445	53.5
1.20	2	50	0.018	0.140	1.200	13265	475	80.2
1.50	2	50	0.022	0.180	1.500	10610	465	126.1
2.00	2	50	0.028	0.240	2.000	7960	445	213.9
2.50	2	50	0.036	0.300	2.500	6365	460	343.8
3.00	2	50	0.044	0.360	3.000	5305	465	504.2

Cylindrical end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 3xd


HM	λ 25°
MG10	γ 6°

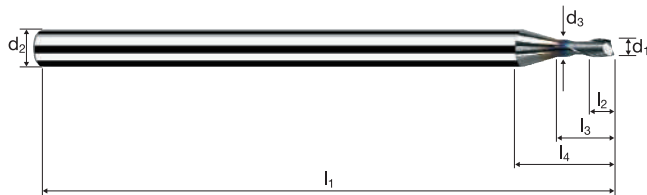

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500			Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
--------------------	-----------------------	------------------------	------------------------	--	--	--------------------------	-----------------------	---

											MICRO
Example: Order-N°.											
Coating: M Article-N°: 5712 \varnothing -Code: 020											
\varnothing Code	d_1 ± 0.01	d_2 h6	d_3	l_1	l_2	l_3	l_4	45°	α	z	M5712
020	0.20	3.00	0.18	40	0.24	0.60	8.86	-	9.5°	2	●
030	0.30	3.00	0.25	40	0.36	0.90	8.96	-	9.0°	2	●
040	0.40	3.00	0.35	40	0.48	1.20	8.98	-	9.0°	2	●
050	0.50	3.00	0.45	40	0.60	1.50	6.65	-	11.5°	2	●
060	0.60	3.00	0.55	40	0.72	1.80	6.77	-	11.0°	2	●
080	0.80	3.00	0.75	40	0.96	2.40	6.99	-	10.0°	2	●
100	1.00	3.00	0.95	50	1.20	3.00	7.22	0.07	8.5°	2	●
108	1.20	3.00	1.10	50	1.44	3.60	7.54	0.07	7.5°	2	●
120	1.50	3.00	1.40	50	1.80	4.50	7.88	0.07	6.0°	2	●
140	2.00	3.00	1.90	50	2.40	6.00	8.45	0.10	4.0°	2	●
160	2.50	3.00	2.30	50	3.00	7.50	9.20	0.10	2.0°	2	●
180	3.00	3.00	2.80	50	3.60	8.56	9.00	0.10	0.0°	2	●

Application




Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

Gold

Steel850 - 1300 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

Gold


Steel850 - 1300 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
0.50	3	66	0.010	0.400	0.080	42015	1260	40.3
0.60	3	79	0.012	0.480	0.090	41910	1510	65.2
0.80	3	80	0.016	0.640	0.120	31830	1530	117.3
1.00	3	80	0.020	0.800	0.150	25465	1530	183.3
1.20	3	80	0.024	0.960	0.180	21220	1530	264.0
1.50	3	80	0.030	1.200	0.230	16975	1530	421.7
2.00	3	80	0.040	1.600	0.300	12730	1530	733.4
2.50	3	80	0.050	2.000	0.380	10185	1530	1161.2
3.00	3	80	0.060	2.400	0.450	8490	1530	1650.1
0.50	3	50	0.008	0.400	0.080	31830	765	24.4
0.60	3	50	0.010	0.480	0.090	26525	795	34.4
0.80	3	50	0.012	0.640	0.120	19895	715	55.0
1.00	3	50	0.016	0.800	0.150	15915	765	91.7
1.20	3	50	0.020	0.960	0.180	13265	795	137.5
1.50	3	50	0.024	1.200	0.230	10610	765	210.8
2.00	3	50	0.032	1.600	0.300	7960	765	366.7
2.50	3	50	0.040	2.000	0.380	6365	765	580.6
3.00	3	50	0.048	2.400	0.450	5305	765	825.1
0.50	3	180	0.012	0.400	0.080	114590	4125	132.0
0.60	3	180	0.014	0.480	0.090	95495	4010	173.3
0.80	3	180	0.020	0.640	0.120	71620	4295	330.0
1.00	3	180	0.024	0.800	0.150	57295	4125	495.0
1.20	3	180	0.028	0.960	0.180	47745	4010	693.0
1.50	3	180	0.036	1.200	0.230	38195	4125	1138.6
2.00	3	180	0.048	1.600	0.300	28650	4125	1980.1
2.50	3	180	0.060	2.000	0.380	22920	4125	3135.2
3.00	3	180	0.072	2.400	0.450	19100	4125	4455.3
0.50	3	66	0.010	0.400	0.080	42015	1260	40.3
0.60	3	79	0.012	0.480	0.090	41910	1510	65.2
0.80	3	106	0.016	0.640	0.120	42175	2025	155.5
1.00	3	120	0.020	0.800	0.150	38195	2290	275.0
1.20	3	120	0.024	0.960	0.180	31830	2290	396.0
1.50	3	120	0.030	1.200	0.230	25465	2290	632.5
2.00	3	120	0.040	1.600	0.300	19100	2290	1100.1
2.50	3	120	0.050	2.000	0.380	15280	2290	1741.8
3.00	3	120	0.060	2.400	0.450	12730	2290	2475.2
0.50	3	60	0.008	0.060	0.500	38195	915	27.5
0.60	3	60	0.008	0.070	0.600	31830	765	32.1
0.80	3	60	0.012	0.100	0.800	23875	860	68.8
1.00	3	60	0.014	0.120	1.000	19100	800	96.3
1.20	3	60	0.018	0.140	1.200	15915	860	144.4
1.50	3	60	0.022	0.180	1.500	12730	840	226.9
2.00	3	60	0.028	0.240	2.000	9540	800	385.0
2.50	3	60	0.036	0.300	2.500	7640	825	618.8
3.00	3	60	0.042	0.360	3.000	6365	800	866.3
0.50	3	40	0.006	0.060	0.500	25465	460	13.8
0.60	3	40	0.006	0.070	0.600	21220	380	16.0
0.80	3	40	0.010	0.100	0.800	15915	475	38.2
1.00	3	40	0.012	0.120	1.000	12730	460	55.0
1.20	3	40	0.014	0.140	1.200	10610	445	74.9
1.50	3	40	0.018	0.180	1.500	8490	460	123.8
2.00	3	40	0.022	0.240	2.000	6365	420	201.7
2.50	3	40	0.028	0.300	2.500	5095	430	320.9
3.00	3	40	0.034	0.360	3.000	4245	435	467.5
0.50	3	160	0.010	0.060	0.500	101860	3055	91.7
0.60	3	160	0.010	0.070	0.600	84885	2545	107.0
0.80	3	160	0.014	0.100	0.800	63660	2675	213.9
1.00	3	160	0.016	0.120	1.000	50930	2445	293.4
1.20	3	160	0.022	0.140	1.200	42440	2800	470.6
1.50	3	160	0.026	0.180	1.500	33955	2650	715.1
2.00	3	160	0.034	0.240	2.000	25465	2595	1246.8
2.50	3	160	0.044	0.300	2.500	20370	2690	2016.8
3.00	3	160	0.050	0.360	3.000	16975	2545	2750.2
0.50	3	66	0.008	0.060	0.500	42015	1010	30.3
0.60	3	79	0.008	0.070	0.600	41910	1005	42.2
0.80	3	100	0.012	0.100	0.800	39790	1430	114.6
1.00	3	100	0.014	0.120	1.000	31830	1335	160.4
1.20	3	100	0.018	0.140	1.200	26525	1430	240.6
1.50	3	100	0.022	0.180	1.500	21220	1400	378.2
2.00	3	100	0.028	0.240	2.000	15915	1335	641.7
2.50	3	100	0.036	0.300	2.500	12730	1375	1031.3
3.00	3	100	0.042	0.360	3.000	10610	1335	1443.9

Cylindrical end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 3xd


HM λ 25°
XA γ -10°

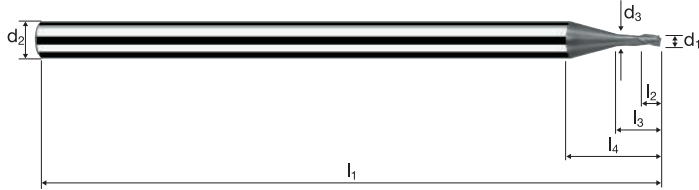

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	--

										MICRO	
Example: Order-N°.		Coating M	Article-N° 15752	ø-Code 050							M15752
\varnothing Code	d_1 ± 0.01	d_2 h6	d_3	l_1	l_2	l_3	l_4	α	z		
050	0.50	3.00	0.45	40	0.60	1.50	6.65	11.5°	3	●	
060	0.60	3.00	0.55	40	0.72	1.80	6.77	11.0°	3	●	
080	0.80	3.00	0.75	40	0.96	2.40	6.99	10.0°	3	●	
100	1.00	3.00	0.95	50	1.20	3.00	7.22	8.5°	3	●	
108	1.20	3.00	1.10	50	1.44	3.60	7.54	7.5°	3	●	
120	1.50	3.00	1.40	60	1.80	4.50	7.88	6.0°	3	●	
140	2.00	3.00	1.90	60	2.40	6.00	8.45	4.0°	3	●	
160	2.50	3.00	2.30	60	3.00	7.50	9.20	2.0°	3	●	
180	3.00	3.00	2.80	60	3.60	8.56	9.00	0.0°	3	●	

Application




Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
0.50	2	66	0.012	0.400	0.070	42015	1010	28.2
0.60	2	79	0.014	0.480	0.080	41910	1175	45.1
0.80	2	106	0.018	0.640	0.100	42175	1520	97.2
1.00	2	132	0.022	0.800	0.130	42015	1850	192.3
1.20	2	158	0.026	0.960	0.160	41910	2180	334.7
1.50	2	180	0.034	1.200	0.200	38195	2595	623.4
2.00	2	180	0.044	1.600	0.260	28650	2520	1048.7
2.50	2	180	0.056	2.000	0.330	22920	2565	1694.1
3.00	2	180	0.066	2.400	0.390	19100	2520	2359.7
0.50	2	66	0.010	0.400	0.070	42015	840	23.5
0.60	2	79	0.012	0.480	0.080	41910	1005	38.6
0.80	2	106	0.016	0.640	0.100	42175	1350	86.4
1.00	2	132	0.020	0.800	0.130	42015	1680	174.8
1.20	2	158	0.024	0.960	0.160	41910	2010	309.0
1.50	2	160	0.030	1.200	0.200	33955	2035	488.9
2.00	2	160	0.040	1.600	0.260	25465	2035	847.5
2.50	2	160	0.050	2.000	0.330	20370	2035	1344.5
3.00	2	160	0.060	2.400	0.390	16975	2035	1906.8
0.50	2	66	0.010	0.400	0.070	42015	840	23.5
0.60	2	79	0.012	0.480	0.080	41910	1005	38.6
0.80	2	80	0.014	0.640	0.100	31830	890	57.0
1.00	2	80	0.018	0.800	0.130	25465	915	95.3
1.20	2	80	0.020	0.960	0.160	21220	850	130.4
1.50	2	80	0.028	1.200	0.200	16975	950	228.2
2.00	2	80	0.036	1.600	0.260	12730	915	381.4
2.50	2	80	0.044	2.000	0.330	10185	895	591.6
3.00	2	80	0.052	2.400	0.390	8490	885	826.3
0.50	2	60	0.008	0.400	0.070	38195	610	17.1
0.60	2	60	0.010	0.480	0.080	31830	635	24.4
0.80	2	60	0.012	0.640	0.100	23875	575	36.7
1.00	2	60	0.016	0.800	0.130	19100	610	63.6
1.20	2	60	0.018	0.960	0.160	15915	575	88.0
1.50	2	60	0.024	1.200	0.200	12730	610	146.7
2.00	2	60	0.030	1.600	0.260	9550	575	238.4
2.50	2	60	0.040	2.000	0.330	7640	610	403.4
3.00	2	60	0.046	2.400	0.390	6365	585	548.2
0.50	2	66	0.010	0.060	0.500	42015	840	25.2
0.60	2	79	0.010	0.070	0.600	41910	840	35.2
0.80	2	106	0.014	0.090	0.800	42175	1180	85.0
1.00	2	132	0.018	0.110	1.000	42015	1515	166.4
1.20	2	158	0.022	0.130	1.200	41910	1845	287.7
1.50	2	160	0.028	0.170	1.500	33955	1900	484.8
2.00	2	160	0.036	0.220	2.000	25465	1835	806.7
2.50	2	160	0.046	0.280	2.500	20370	1875	1311.9
3.00	2	160	0.054	0.330	3.000	16975	1835	1815.1
0.50	2	66	0.010	0.060	0.500	42015	840	25.2
0.60	2	79	0.010	0.070	0.600	41910	840	35.2
0.80	2	106	0.014	0.090	0.800	42175	1180	85.0
1.00	2	132	0.018	0.110	1.000	42015	1515	166.4
1.20	2	140	0.020	0.130	1.200	37135	1485	231.7
1.50	2	140	0.026	0.170	1.500	29710	1545	393.9
2.00	2	140	0.034	0.220	2.000	22280	1515	666.7
2.50	2	140	0.044	0.280	2.500	17825	1570	1098.0
3.00	2	140	0.052	0.330	3.000	14855	1545	1529.4
0.50	2	66	0.008	0.060	0.500	42015	670	20.2
0.60	2	70	0.008	0.070	0.600	37135	595	25.0
0.80	2	70	0.012	0.090	0.800	27850	670	48.1
1.00	2	70	0.016	0.110	1.000	22280	715	78.4
1.20	2	70	0.020	0.130	1.200	18570	745	115.9
1.50	2	70	0.024	0.170	1.500	14855	715	181.8
2.00	2	70	0.032	0.220	2.000	11140	715	313.7
2.50	2	70	0.040	0.280	2.500	8915	715	499.1
3.00	2	70	0.048	0.330	3.000	7425	715	705.9
0.50	2	50	0.008	0.060	0.500	31830	510	15.3
0.60	2	50	0.008	0.070	0.600	26525	425	17.8
0.80	2	50	0.012	0.090	0.800	19895	475	34.4
1.00	2	50	0.014	0.110	1.000	15915	445	49.0
1.20	2	50	0.018	0.130	1.200	13265	475	74.5
1.50	2	50	0.022	0.170	1.500	10610	465	119.0
2.00	2	50	0.028	0.220	2.000	7960	445	196.1
2.50	2	50	0.036	0.280	2.500	6365	460	320.9
3.00	2	50	0.044	0.330	3.000	5305	465	462.2


Cylindrical end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 5xd



HM
MG10


λ 25°
 γ 6°

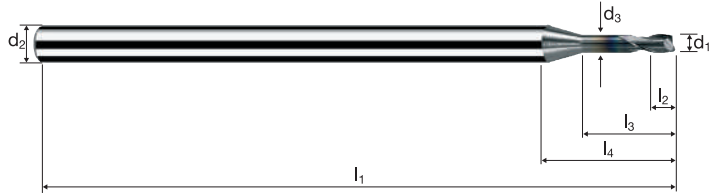

Rm < 850 Rm 850-1100 Rm 1100-1300 Rm 1300-1500 Inox Stainless Ti Titanium Cobalt-Chrome Gold / Platinum Copper

Example: Order-N°.											MICRO	
											M5714	
\varnothing Code	d_1 ± 0.01	d_2 h6	d_3	l_1	l_2	l_3	l_4	45°	α	z		
050	0.50	3.00	0.45	40	0.60	2.50	7.65	-	10.0°	2	●	
060	0.60	3.00	0.55	40	0.72	3.00	7.97	-	9.5°	2	●	
070	0.70	3.00	0.65	40	0.84	3.50	8.28	-	8.5°	2	●	
080	0.80	3.00	0.75	40	0.96	4.00	8.59	-	8.0°	2	●	
090	0.90	3.00	0.85	40	1.08	4.50	8.91	-	7.5°	2	●	
100	1.00	3.00	0.95	50	1.20	5.00	9.22	0.07	7.0°	2	●	
108	1.20	3.00	1.10	50	1.44	6.00	9.94	0.07	5.5°	2	●	
120	1.50	3.00	1.40	50	1.80	7.50	10.88	0.07	4.5°	2	●	
132	1.80	3.00	1.70	50	2.16	9.00	11.82	0.07	3.5°	2	●	
140	2.00	3.00	1.90	50	2.40	10.00	12.45	0.10	2.5°	2	●	
152	2.30	3.00	2.10	50	2.76	11.50	13.57	0.10	2.0°	2	●	
160	2.50	3.00	2.30	50	3.00	12.50	14.20	0.10	1.5°	2	●	
172	2.80	3.00	2.60	50	3.36	14.00	15.14	0.10	0.5°	2	●	
180	3.00	3.00	2.80	50	3.60	14.56	15.00	0.10	0.0°	2	●	

Application




Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

Gold

Steel850 - 1300 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

Gold

Steel850 - 1300 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
0.50	3	66	0.010	0.400	0.070	42015	1260	35.3
0.60	3	79	0.010	0.480	0.080	41910	1255	48.3
0.80	3	80	0.014	0.640	0.100	31830	1335	85.6
1.00	3	80	0.018	0.800	0.130	25465	1375	143.0
1.20	3	80	0.022	0.960	0.160	21220	1400	215.1
1.50	3	80	0.028	1.200	0.200	16975	1425	342.2
2.00	3	80	0.036	1.600	0.260	12730	1375	572.0
2.50	3	80	0.046	2.000	0.330	10185	1405	927.7
3.00	3	80	0.054	2.400	0.390	8490	1375	1287.1
0.50	3	50	0.008	0.400	0.070	31830	765	21.4
0.60	3	50	0.008	0.480	0.080	26525	635	24.4
0.80	3	50	0.012	0.640	0.100	19895	715	45.8
1.00	3	50	0.014	0.800	0.130	15915	670	69.5
1.20	3	50	0.018	0.960	0.160	13265	715	110.0
1.50	3	50	0.022	1.200	0.200	10610	700	168.1
2.00	3	50	0.028	1.600	0.260	7960	670	278.1
2.50	3	50	0.036	2.000	0.330	6365	690	453.8
3.00	3	50	0.044	2.400	0.390	5305	700	655.5
0.50	3	180	0.012	0.400	0.070	114590	4125	115.5
0.60	3	180	0.012	0.480	0.080	95495	3440	132.0
0.80	3	180	0.016	0.640	0.100	71620	3440	220.0
1.00	3	180	0.022	0.800	0.130	57295	3780	393.3
1.20	3	180	0.026	0.960	0.160	47745	3725	572.0
1.50	3	180	0.034	1.200	0.200	38195	3895	935.1
2.00	3	180	0.044	1.600	0.260	28650	3780	1573.1
2.50	3	180	0.056	2.000	0.330	22920	3850	2541.2
3.00	3	180	0.064	2.400	0.390	19100	3665	3432.2
0.50	3	66	0.010	0.400	0.070	42015	1260	35.3
0.60	3	79	0.010	0.480	0.080	41910	1255	48.3
0.80	3	106	0.014	0.640	0.100	42175	1770	113.4
1.00	3	120	0.018	0.800	0.130	38195	2065	214.5
1.20	3	120	0.022	0.960	0.160	31830	2100	322.7
1.50	3	120	0.028	1.200	0.200	25465	2140	513.4
2.00	3	120	0.036	1.600	0.260	19100	2065	858.1
2.50	3	120	0.046	2.000	0.330	15280	2110	1391.6
3.00	3	120	0.054	2.400	0.390	12730	2065	1930.6
0.50	3	60	0.006	0.050	0.500	38195	690	17.2
0.60	3	60	0.008	0.060	0.600	31830	765	27.5
0.80	3	60	0.010	0.080	0.800	23875	715	45.8
1.00	3	60	0.014	0.100	1.000	19100	800	80.2
1.20	3	60	0.016	0.120	1.200	15915	765	110.0
1.50	3	60	0.020	0.150	1.500	12730	765	171.9
2.00	3	60	0.026	0.200	2.000	9550	745	297.9
2.50	3	60	0.034	0.250	2.500	7640	780	487.0
3.00	3	60	0.040	0.300	3.000	6365	765	687.5
0.50	3	40	0.004	0.050	0.500	25465	305	7.6
0.60	3	40	0.006	0.060	0.600	21220	380	13.8
0.80	3	40	0.008	0.080	0.800	15915	380	24.4
1.00	3	40	0.012	0.100	1.000	12730	460	45.8
1.20	3	40	0.012	0.120	1.200	10610	380	55.0
1.50	3	40	0.016	0.150	1.500	8490	405	91.7
2.00	3	40	0.020	0.200	2.000	6365	380	152.8
2.50	3	40	0.028	0.250	2.500	5095	430	267.4
3.00	3	40	0.032	0.300	3.000	4245	405	366.7
0.50	3	160	0.008	0.050	0.500	101860	2445	61.1
0.60	3	160	0.010	0.060	0.600	84885	2545	91.7
0.80	3	160	0.012	0.080	0.800	63660	2290	146.7
1.00	3	160	0.016	0.100	1.000	50930	2445	244.5
1.20	3	160	0.020	0.120	1.200	42440	2545	366.7
1.50	3	160	0.024	0.150	1.500	33955	2445	550.0
2.00	3	160	0.032	0.200	2.000	25465	2445	977.8
2.50	3	160	0.040	0.250	2.500	20370	2445	1527.9
3.00	3	160	0.048	0.300	3.000	16975	2445	2200.2
0.50	3	66	0.006	0.050	0.500	42015	755	18.9
0.60	3	79	0.008	0.060	0.600	41910	1005	36.2
0.80	3	100	0.010	0.080	0.800	39790	1195	76.4
1.00	3	100	0.014	0.100	1.000	31830	1335	133.7
1.20	3	100	0.016	0.120	1.200	26525	1275	183.3
1.50	3	100	0.020	0.150	1.500	21220	1275	286.5
2.00	3	100	0.026	0.200	2.000	15915	1240	496.6
2.50	3	100	0.034	0.250	2.500	12730	1300	811.7
3.00	3	100	0.040	0.300	3.000	10610	1275	1145.9

Cylindrical end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 5xd




HM XA	λ 25° γ -10°
----------	--------------------------------

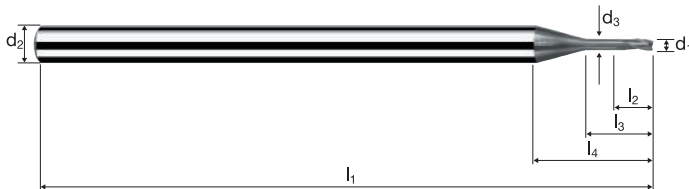

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	--

Example: Order-N°.										MICRO
	Coating		Article-N°.		ø-Code					M15754
	M		15754		050					
Ø Code	d ₁ ±0.01	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	α	z	
050	0.50	3.00	0.45	40	0.60	2.50	7.65	10.0°	3	●
060	0.60	3.00	0.55	40	0.72	3.00	7.97	9.5°	3	●
080	0.80	3.00	0.75	40	0.96	4.00	8.59	8.0°	3	●
100	1.00	3.00	0.95	50	1.20	5.00	9.22	7.0°	3	●
108	1.20	3.00	1.10	50	1.44	6.00	9.94	5.5°	3	●
120	1.50	3.00	1.40	60	1.80	7.50	10.88	4.5°	3	●
140	2.00	3.00	1.90	60	2.40	10.00	12.45	2.5°	3	●
160	2.50	3.00	2.30	60	3.00	12.50	14.20	1.5°	3	●
180	3.00	3.00	2.80	60	3.60	14.56	15.00	0.0°	3	●

Application




Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
0.50	2	66	0.012	0.300	0.060	42015	1010	18.2
0.60	2	79	0.014	0.360	0.070	41910	1175	29.6
0.80	2	106	0.018	0.480	0.090	42175	1520	65.6
1.00	2	132	0.022	0.600	0.110	42015	1850	122.0
1.20	2	158	0.026	0.720	0.130	41910	2180	204.0
1.50	2	180	0.034	0.900	0.170	38195	2595	397.4
2.00	2	180	0.044	1.200	0.220	28650	2520	665.5
2.50	2	180	0.056	1.500	0.280	22920	2565	1078.1
3.00	2	180	0.066	1.800	0.330	19100	2520	1497.5
0.50	2	66	0.010	0.300	0.060	42015	840	15.1
0.60	2	79	0.012	0.360	0.070	41910	1005	25.3
0.80	2	106	0.016	0.480	0.090	42175	1350	58.3
1.00	2	132	0.020	0.600	0.110	42015	1680	110.9
1.20	2	158	0.024	0.720	0.130	41910	2010	188.3
1.50	2	160	0.030	0.900	0.170	33955	2035	311.7
2.00	2	160	0.040	1.200	0.220	25465	2035	537.8
2.50	2	160	0.050	1.500	0.280	20370	2035	855.6
3.00	2	160	0.060	1.800	0.330	16975	2035	1210.1
0.50	2	66	0.010	0.300	0.060	42015	840	15.1
0.60	2	79	0.012	0.360	0.070	41910	1005	25.3
0.80	2	80	0.014	0.480	0.090	31830	890	38.5
1.00	2	80	0.018	0.600	0.110	25465	915	60.5
1.20	2	80	0.020	0.720	0.130	21220	850	79.5
1.50	2	80	0.028	0.900	0.170	16975	950	145.5
2.00	2	80	0.036	1.200	0.220	12730	915	242.0
2.50	2	80	0.044	1.500	0.280	10185	895	376.5
3.00	2	80	0.052	1.800	0.330	8490	885	524.4
0.50	2	60	0.008	0.300	0.060	38195	610	11.0
0.60	2	60	0.010	0.360	0.070	31830	635	16.0
0.80	2	60	0.012	0.480	0.090	23875	575	24.8
1.00	2	60	0.016	0.600	0.110	19100	610	40.3
1.20	2	60	0.018	0.720	0.130	15915	575	53.6
1.50	2	60	0.024	0.900	0.170	12730	610	93.5
2.00	2	60	0.030	1.200	0.220	9550	575	151.3
2.50	2	60	0.040	1.500	0.280	7640	610	256.7
3.00	2	60	0.046	1.800	0.330	6365	585	347.9
0.50	2	66	0.010	0.050	0.500	42015	840	21.0
0.60	2	79	0.010	0.060	0.600	41910	840	30.2
0.80	2	106	0.014	0.080	0.800	42175	1180	75.6
1.00	2	132	0.018	0.100	1.000	42015	1515	151.3
1.20	2	158	0.022	0.120	1.200	41910	1845	265.5
1.50	2	160	0.028	0.150	1.500	33955	1900	427.8
2.00	2	160	0.036	0.200	2.000	25465	1835	733.4
2.50	2	160	0.046	0.250	2.500	20370	1875	1171.4
3.00	2	160	0.054	0.300	3.000	16975	1835	1650.1
0.50	2	66	0.010	0.050	0.500	42015	840	21.0
0.60	2	79	0.010	0.060	0.600	41910	840	30.2
0.80	2	106	0.014	0.080	0.800	42175	1180	75.6
1.00	2	132	0.018	0.100	1.000	42015	1515	151.3
1.20	2	140	0.020	0.120	1.200	37135	1485	213.9
1.50	2	140	0.026	0.150	1.500	29710	1545	347.6
2.00	2	140	0.034	0.200	2.000	22280	1515	606.1
2.50	2	140	0.044	0.250	2.500	17825	1570	980.4
3.00	2	140	0.052	0.300	3.000	14855	1545	1390.4
0.50	2	66	0.008	0.050	0.500	42015	670	16.8
0.60	2	70	0.008	0.060	0.600	37135	595	21.4
0.80	2	70	0.012	0.080	0.800	27850	670	42.8
1.00	2	70	0.016	0.100	1.000	22280	715	71.3
1.20	2	70	0.020	0.120	1.200	18570	745	107.0
1.50	2	70	0.024	0.150	1.500	14855	715	160.4
2.00	2	70	0.032	0.200	2.000	11140	715	285.2
2.50	2	70	0.040	0.250	2.500	8915	715	445.6
3.00	2	70	0.048	0.300	3.000	7425	715	641.7
0.50	2	50	0.008	0.050	0.500	31830	510	12.7
0.60	2	50	0.008	0.060	0.600	26525	425	15.3
0.80	2	50	0.012	0.080	0.800	19895	475	30.6
1.00	2	50	0.014	0.100	1.000	15915	445	44.6
1.20	2	50	0.018	0.120	1.200	13265	475	68.8
1.50	2	50	0.022	0.150	1.500	10610	465	105.0
2.00	2	50	0.028	0.200	2.000	7960	445	178.3
2.50	2	50	0.036	0.250	2.500	6365	460	286.5
3.00	2	50	0.044	0.300	3.000	5305	465	420.2

Cylindrical end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 8xd




HM
MG10 λ 25°
 γ 6°

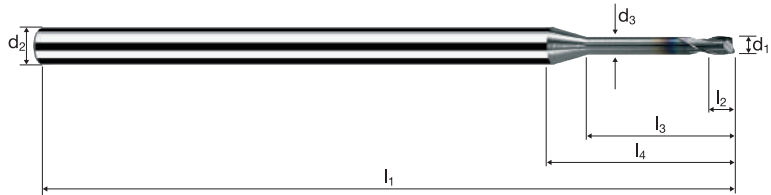

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	--

Example: Order-N°.											MICRO	
Coating: M Article-N°: 5716 ø-Code: 050												
Order-N°: M5716												
Ø Code	d ₁ ±0.01	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z		
050	0.50	3.00	0.45	40	0.60	4.00	9.15	-	8.5°	2	●	
060	0.60	3.00	0.55	40	0.72	4.80	9.77	-	7.5°	2	●	
080	0.80	3.00	0.75	40	0.96	6.40	10.99	-	6.0°	2	●	
100	1.00	3.00	0.95	50	1.20	8.00	12.22	0.07	5.0°	2	●	
108	1.20	3.00	1.10	50	1.44	9.60	13.54	0.07	4.0°	2	●	
120	1.50	3.00	1.40	60	1.80	12.00	15.38	0.07	3.0°	2	●	
140	2.00	3.00	1.90	60	2.40	16.00	18.45	0.10	2.0°	2	●	
160	2.50	3.00	2.30	60	3.00	20.00	21.70	0.10	1.0°	2	●	
180	3.00	3.00	2.80	60	3.60	23.56	24.00	0.10	0.0°	2	●	

Application




Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
0.50	2	66	0.012	0.250	0.060	42015	1010	15.1
0.60	2	79	0.014	0.300	0.070	41910	1175	24.6
0.80	2	106	0.018	0.400	0.090	42175	1520	54.7
1.00	2	132	0.022	0.500	0.110	42015	1850	101.7
1.20	2	158	0.026	0.600	0.130	41910	2180	170.0
1.50	2	180	0.034	0.750	0.170	38195	2595	331.2
2.00	2	180	0.044	1.000	0.220	28650	2520	554.6
2.50	2	180	0.056	1.250	0.280	22920	2565	898.4
3.00	2	180	0.066	1.500	0.330	19100	2520	1247.9
0.50	2	66	0.010	0.250	0.060	42015	840	12.6
0.60	2	79	0.012	0.300	0.070	41910	1005	21.1
0.80	2	106	0.016	0.400	0.090	42175	1350	48.6
1.00	2	132	0.020	0.500	0.110	42015	1680	92.4
1.20	2	158	0.024	0.600	0.130	41910	2010	156.9
1.50	2	160	0.030	0.750	0.170	33955	2035	259.7
2.00	2	160	0.040	1.000	0.220	25465	2035	448.2
2.50	2	160	0.050	1.250	0.280	20370	2035	713.0
3.00	2	160	0.060	1.500	0.330	16975	2035	1008.4
0.50	2	66	0.010	0.250	0.060	42015	840	12.6
0.60	2	79	0.012	0.300	0.070	41910	1005	21.1
0.80	2	80	0.014	0.400	0.090	31830	890	32.1
1.00	2	80	0.018	0.500	0.110	25465	915	50.4
1.20	2	80	0.020	0.600	0.130	21220	850	66.2
1.50	2	80	0.028	0.750	0.170	16975	950	121.2
2.00	2	80	0.036	1.000	0.220	12730	915	201.7
2.50	2	80	0.044	1.250	0.280	10185	895	313.7
3.00	2	80	0.052	1.500	0.330	8490	885	437.0
0.50	2	60	0.008	0.250	0.060	38195	610	9.2
0.60	2	60	0.010	0.300	0.070	31830	635	13.4
0.80	2	60	0.012	0.400	0.090	23875	575	20.6
1.00	2	60	0.016	0.500	0.110	19100	610	33.6
1.20	2	60	0.018	0.600	0.130	15915	575	44.7
1.50	2	60	0.024	0.750	0.170	12730	610	77.9
2.00	2	60	0.030	1.000	0.220	9550	575	126.1
2.50	2	60	0.040	1.250	0.280	7640	610	213.9
3.00	2	60	0.046	1.500	0.330	6365	585	289.9
0.50	2	66	0.010	0.040	0.500	42015	840	16.8
0.60	2	79	0.010	0.050	0.600	41910	840	25.1
0.80	2	106	0.014	0.060	0.800	42175	1180	56.7
1.00	2	132	0.018	0.080	1.000	42015	1515	121.0
1.20	2	158	0.022	0.100	1.200	41910	1845	221.3
1.50	2	160	0.028	0.120	1.500	33955	1900	342.2
2.00	2	160	0.036	0.160	2.000	25465	1835	586.7
2.50	2	160	0.046	0.200	2.500	20370	1875	937.1
3.00	2	160	0.054	0.240	3.000	16975	1835	1320.1
0.50	2	66	0.010	0.040	0.500	42015	840	16.8
0.60	2	79	0.010	0.050	0.600	41910	840	25.1
0.80	2	106	0.014	0.060	0.800	42175	1180	56.7
1.00	2	132	0.018	0.080	1.000	42015	1515	121.0
1.20	2	140	0.020	0.100	1.200	37135	1485	178.3
1.50	2	140	0.026	0.120	1.500	29710	1545	278.1
2.00	2	140	0.034	0.160	2.000	22280	1515	484.8
2.50	2	140	0.044	0.200	2.500	17825	1570	784.3
3.00	2	140	0.052	0.240	3.000	14855	1545	1112.3
0.50	2	66	0.008	0.040	0.500	42015	670	13.4
0.60	2	70	0.008	0.050	0.600	37135	595	17.8
0.80	2	70	0.012	0.060	0.800	27850	670	32.1
1.00	2	70	0.016	0.080	1.000	22280	715	57.0
1.20	2	70	0.020	0.100	1.200	18570	745	89.1
1.50	2	70	0.024	0.120	1.500	14855	715	128.3
2.00	2	70	0.032	0.160	2.000	11140	715	228.2
2.50	2	70	0.040	0.200	2.500	8915	715	356.5
3.00	2	70	0.048	0.240	3.000	7425	715	513.4
0.50	2	50	0.008	0.040	0.500	31830	510	10.2
0.60	2	50	0.008	0.050	0.600	26525	425	12.7
0.80	2	50	0.012	0.060	0.800	19895	475	22.9
1.00	2	50	0.014	0.080	1.000	15915	445	35.7
1.20	2	50	0.018	0.100	1.200	13265	475	57.3
1.50	2	50	0.022	0.120	1.500	10610	465	84.0
2.00	2	50	0.028	0.160	2.000	7960	445	142.6
2.50	2	50	0.036	0.200	2.500	6365	460	229.2
3.00	2	50	0.044	0.240	3.000	5305	465	336.1

Cylindrical end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 10xd

Base-X
B

HM
MG10 λ 25°
 γ 6°

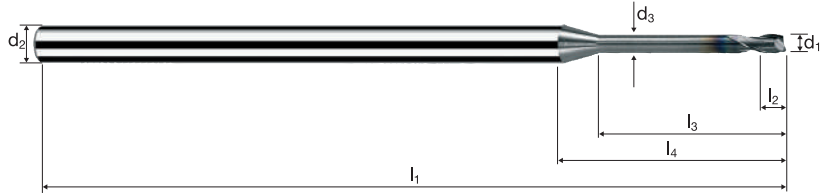


ToolSchool X6809
X6508

Rm < 850 Rm 850-1100 Rm 1100-1300 Rm 1300-1500 **Inox** Stainless **Ti** Titanium **Gold / Platinum Copper**

Ø Code	d ₁ ±0.01	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	MICRO
											M5717
050	0.50	3.00	0.45	40	0.60	5.00	10.15	-	7.5°	2	●
060	0.60	3.00	0.55	40	0.72	6.00	10.97	-	7.0°	2	●
080	0.80	3.00	0.75	40	0.96	8.00	12.59	-	5.5°	2	●
100	1.00	3.00	0.95	50	1.20	10.00	14.22	0.07	4.5°	2	●
108	1.20	3.00	1.10	50	1.44	12.00	15.94	0.07	3.5°	2	●
120	1.50	3.00	1.40	60	1.80	15.00	18.38	0.07	2.5°	2	●
140	2.00	3.00	1.90	60	2.40	20.00	22.45	0.10	1.5°	2	●
160	2.50	3.00	2.30	60	3.00	25.00	26.70	0.10	1.0°	2	●
180	3.00	3.00	2.80	60	3.60	29.56	30.00	0.10	0.0°	2	●

Application



Material

Steel
850 - 1100 N/mm²




Steel
1100 - 1300 N/mm²




Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]




d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
1.00	2	132	0.022	0.400	0.090	42015	1850	66.6
1.20	2	158	0.026	0.480	0.110	41910	2180	115.1
1.50	2	180	0.034	0.600	0.140	38195	2595	218.2
2.00	2	180	0.044	0.800	0.180	28650	2520	363.0
2.50	2	180	0.056	1.000	0.230	22920	2565	590.4
3.00	2	180	0.066	1.200	0.270	19100	2520	816.8
1.00	2	132	0.020	0.400	0.090	42015	1680	60.5
1.20	2	158	0.024	0.480	0.110	41910	2010	106.2
1.50	2	160	0.030	0.600	0.140	33955	2035	171.1
2.00	2	160	0.040	0.800	0.180	25465	2035	293.4
2.50	2	160	0.050	1.000	0.230	20370	2035	468.6
3.00	2	160	0.060	1.200	0.270	16975	2035	660.0
1.00	2	80	0.018	0.400	0.090	25465	915	33.0
1.20	2	80	0.020	0.480	0.110	21220	850	44.8
1.50	2	80	0.028	0.600	0.140	16975	950	79.9
2.00	2	80	0.036	0.800	0.180	12730	915	132.0
2.50	2	80	0.044	1.000	0.230	10185	895	206.2
3.00	2	80	0.052	1.200	0.270	8490	885	286.0
1.00	2	60	0.016	0.400	0.090	19100	610	22.0
1.20	2	60	0.018	0.480	0.110	15915	575	30.3
1.50	2	60	0.024	0.600	0.140	12730	610	51.3
2.00	2	60	0.030	0.800	0.180	9550	575	82.5
2.50	2	60	0.040	1.000	0.230	7640	610	140.6
3.00	2	60	0.046	1.200	0.270	6365	585	189.8
1.00	2	132	0.018	0.060	1.000	42015	1515	90.8
1.20	2	158	0.022	0.070	1.200	41910	1845	154.9
1.50	2	160	0.028	0.090	1.500	33955	1900	256.7
2.00	2	160	0.036	0.120	2.000	25465	1835	440.0
2.50	2	160	0.046	0.150	2.500	20370	1875	702.8
3.00	2	160	0.054	0.180	3.000	16975	1835	990.1
1.00	2	132	0.018	0.060	1.000	42015	1515	90.8
1.20	2	140	0.020	0.070	1.200	37135	1485	124.8
1.50	2	140	0.026	0.090	1.500	29710	1545	208.6
2.00	2	140	0.034	0.120	2.000	22280	1515	363.6
2.50	2	140	0.044	0.150	2.500	17825	1570	588.2
3.00	2	140	0.052	0.180	3.000	14855	1545	834.2
1.00	2	70	0.016	0.060	1.000	22280	715	42.8
1.20	2	70	0.020	0.070	1.200	18570	745	62.4
1.50	2	70	0.024	0.090	1.500	14855	715	96.3
2.00	2	70	0.032	0.120	2.000	11140	715	171.1
2.50	2	70	0.040	0.150	2.500	8915	715	267.4
3.00	2	70	0.048	0.180	3.000	7425	715	385.0
1.00	2	50	0.014	0.060	1.000	15915	445	26.7
1.20	2	50	0.018	0.070	1.200	13265	475	40.1
1.50	2	50	0.022	0.090	1.500	10610	465	63.0
2.00	2	50	0.028	0.120	2.000	7960	445	107.0
2.50	2	50	0.036	0.150	2.500	6365	460	171.9
3.00	2	50	0.044	0.180	3.000	5305	465	252.1

Cylindrical end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 12xd



HM λ 25°
MG10 γ 6°

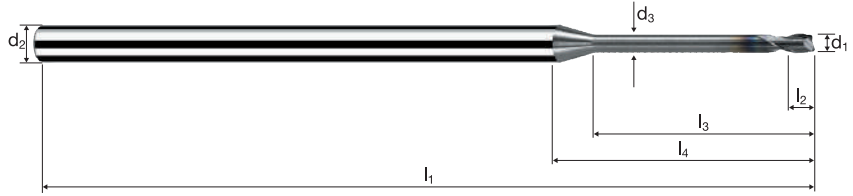


ToolSchool X6810

Rm < 850 **Rm** 850-1100 **Rm** 1100-1300 **Rm** 1300-1500 **Inox** Stainless **Ti** Titanium **Gold / Platinum** Copper

Example: Order-N°. M 5721 100											MICRO
\varnothing Code	d_1 ±0.01	d_2 h6	d_3	l_1	l_2	l_3	l_4	45°	α	z	M5721
100	1.00	3.00	0.95	50	1.20	12.00	16.22	0.07	4.0°	2	●
108	1.20	3.00	1.10	60	1.44	14.40	18.34	0.07	3.0°	2	●
120	1.50	3.00	1.40	60	1.80	18.00	21.38	0.07	2.5°	2	●
140	2.00	3.00	1.90	60	2.40	24.00	26.45	0.10	1.5°	2	●
160	2.50	3.00	2.30	70	3.00	30.00	31.70	0.10	0.5°	2	●
180	3.00	3.00	2.80	70	3.60	35.56	36.00	0.10	0.0°	2	●

Application



Material

Steel
850 - 1100 N/mm²




Steel
1100 - 1300 N/mm²




Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
1.00	2	132	0.018	0.300	0.090	42015	1515	40.8
1.20	2	158	0.022	0.360	0.110	41910	1845	73.0
1.50	2	180	0.028	0.450	0.140	38195	2140	134.8
2.00	2	180	0.036	0.600	0.180	28650	2065	222.8
2.50	2	180	0.046	0.750	0.230	22920	2110	363.7
3.00	2	180	0.054	0.900	0.270	19100	2065	501.2

1.00	2	132	0.016	0.300	0.090	42015	1345	36.3
1.20	2	158	0.020	0.360	0.110	41910	1675	66.4
1.50	2	160	0.026	0.450	0.140	33955	1765	111.2
2.00	2	160	0.032	0.600	0.180	25465	1630	176.0
2.50	2	160	0.042	0.750	0.230	20370	1710	295.2
3.00	2	160	0.048	0.900	0.270	16975	1630	396.0

1.00	2	80	0.014	0.300	0.090	25465	715	19.3
1.20	2	80	0.018	0.360	0.110	21220	765	30.3
1.50	2	80	0.022	0.450	0.140	16975	745	47.1
2.00	2	80	0.028	0.600	0.180	12730	715	77.0
2.50	2	80	0.036	0.750	0.230	10185	735	126.5
3.00	2	80	0.044	0.900	0.270	8490	745	181.5

1.00	2	60	0.012	0.300	0.090	19100	460	12.4
1.20	2	60	0.016	0.360	0.110	15915	510	20.2
1.50	2	60	0.020	0.450	0.140	12730	510	32.1
2.00	2	60	0.026	0.600	0.180	9550	495	53.6
2.50	2	60	0.032	0.750	0.230	7640	490	84.3
3.00	2	60	0.038	0.900	0.270	6365	485	117.6

1.00	2	132	0.016	0.040	1.000	42015	1345	53.8
1.20	2	158	0.018	0.050	1.200	41910	1510	90.5
1.50	2	160	0.024	0.060	1.500	33955	1630	146.7
2.00	2	160	0.030	0.080	2.000	25465	1530	244.5
2.50	2	160	0.038	0.100	2.500	20370	1550	387.1
3.00	2	160	0.046	0.120	3.000	16975	1560	562.3

1.00	2	132	0.016	0.040	1.000	42015	1345	53.8
1.20	2	140	0.018	0.050	1.200	37135	1335	80.2
1.50	2	140	0.022	0.060	1.500	29710	1305	117.6
2.00	2	140	0.028	0.080	2.000	22280	1250	199.6
2.50	2	140	0.036	0.100	2.500	17825	1285	320.9
3.00	2	140	0.044	0.120	3.000	14855	1305	470.6

1.00	2	70	0.014	0.040	1.000	22280	625	25.0
1.20	2	70	0.016	0.050	1.200	18570	595	35.7
1.50	2	70	0.022	0.060	1.500	14855	655	58.8
2.00	2	70	0.026	0.080	2.000	11140	580	92.7
2.50	2	70	0.034	0.100	2.500	8915	605	151.5
3.00	2	70	0.040	0.120	3.000	7425	595	213.9


1.00	2	50	0.012	0.040	1.000	15915	380	15.3
1.20	2	50	0.014	0.050	1.200	13265	370	22.3
1.50	2	50	0.020	0.060	1.500	10610	425	38.2
2.00	2	50	0.024	0.080	2.000	7960	380	61.1
2.50	2	50	0.030	0.100	2.500	6365	380	95.5
3.00	2	50	0.036	0.120	3.000	5305	380	137.5

Cylindrical end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 15xd



HM λ 25°
MG10 γ 6°

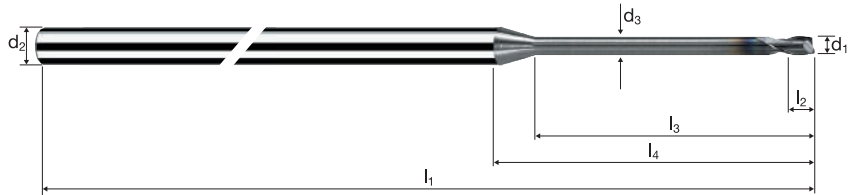


ToolSchool X6811

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500			Inox Stainless	Ti Titanium	Gold / Platinum Copper
----------	-------------	--------------	--------------	--	--	----------------	-------------	------------------------

Ø Code	d ₁ ±0.01	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	MICRO	
Example: Order-N°.	Coating M		Article-N° 5723	Ø-Code 100								M5723
100	1.00	3.00	0.95	60	1.20	15.00	19.22	0.07	3.5°	2	●	
108	1.20	3.00	1.10	60	1.44	18.00	21.94	0.07	2.5°	2	●	
120	1.50	3.00	1.40	70	1.80	22.50	25.88	0.07	2.0°	2	●	
140	2.00	3.00	1.90	70	2.40	30.00	32.45	0.10	1.0°	2	●	
160	2.50	3.00	2.30	70	3.00	37.50	39.20	0.10	0.5°	2	●	
180	3.00	3.00	2.80	80	3.60	44.56	45.00	0.10	0.0°	2	●	

Application



Material

Steel
850 - 1100 N/mm²




Steel
1100 - 1300 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
1.00	2	132	0.018	0.200	0.070	42015	1515	21.2
1.20	2	158	0.022	0.240	0.080	41910	1845	35.4
1.50	2	180	0.028	0.300	0.110	38195	2140	70.6
2.00	2	180	0.036	0.400	0.140	28650	2065	115.5
2.50	2	180	0.046	0.500	0.180	22920	2110	189.8
3.00	2	180	0.054	0.600	0.210	19100	2065	259.9
1.00	2	132	0.016	0.200	0.070	42015	1345	18.8
1.20	2	158	0.020	0.240	0.080	41910	1675	32.2
1.50	2	160	0.026	0.300	0.110	33955	1765	58.3
2.00	2	160	0.032	0.400	0.140	25465	1630	91.3
2.50	2	160	0.042	0.500	0.180	20370	1710	154.0
3.00	2	160	0.048	0.600	0.210	16975	1630	205.3
1.00	2	80	0.014	0.200	0.070	25465	715	10.0
1.20	2	80	0.018	0.240	0.080	21220	765	14.7
1.50	2	80	0.022	0.300	0.110	16975	745	24.6
2.00	2	80	0.028	0.400	0.140	12730	715	39.9
2.50	2	80	0.036	0.500	0.180	10185	735	66.0
3.00	2	80	0.044	0.600	0.210	8490	745	94.1
1.00	2	60	0.012	0.200	0.070	19100	460	6.4
1.20	2	60	0.016	0.240	0.080	15915	510	9.8
1.50	2	60	0.020	0.300	0.110	12730	510	16.8
2.00	2	60	0.026	0.400	0.140	9550	495	27.8
2.50	2	60	0.032	0.500	0.180	7640	490	44.0
3.00	2	60	0.038	0.600	0.210	6365	485	61.0
1.00	2	132	0.016	0.030	1.000	42015	1345	40.3
1.20	2	158	0.018	0.040	1.200	41910	1510	72.4
1.50	2	160	0.024	0.050	1.500	33955	1630	122.2
2.00	2	160	0.030	0.060	2.000	25465	1530	183.3
2.50	2	160	0.038	0.080	2.500	20370	1550	309.7
3.00	2	160	0.046	0.090	3.000	16975	1560	421.7
1.00	2	132	0.016	0.030	1.000	42015	1345	40.3
1.20	2	140	0.018	0.040	1.200	37135	1335	64.2
1.50	2	140	0.022	0.050	1.500	29710	1305	98.0
2.00	2	140	0.028	0.060	2.000	22280	1250	149.7
2.50	2	140	0.036	0.080	2.500	17825	1285	256.7
3.00	2	140	0.044	0.090	3.000	14855	1305	352.9
1.00	2	70	0.014	0.030	1.000	22280	625	18.7
1.20	2	70	0.016	0.040	1.200	18570	595	28.5
1.50	2	70	0.022	0.050	1.500	14855	655	49.0
2.00	2	70	0.026	0.060	2.000	11140	580	69.5
2.50	2	70	0.034	0.080	2.500	8915	605	121.2
3.00	2	70	0.040	0.090	3.000	7425	595	160.4
1.00	2	50	0.012	0.030	1.000	15915	380	11.5
1.20	2	50	0.014	0.040	1.200	13265	370	17.8
1.50	2	50	0.020	0.050	1.500	10610	425	31.8
2.00	2	50	0.024	0.060	2.000	7960	380	45.8
2.50	2	50	0.030	0.080	2.500	6365	380	76.4
3.00	2	50	0.036	0.090	3.000	5305	380	103.1

Cylindrical end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 20xd




HM λ 25°
MG10 γ 6°

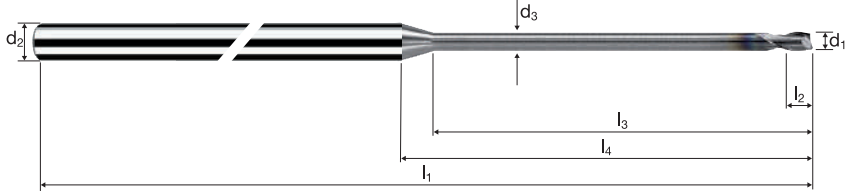

Rm < 850	Rm 850-1100	Rm 1100-1300									Gold / Platinum Copper
----------	-------------	--------------	--	--	--	--	--	--	--	--	---------------------------

Example: Order-N°.											MICRO
	Coating		Article-N°.		ø-Code						
	M		15725		100						M15725
Ø Code	d ₁ ±0.01	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	α	z	
100	1.00	3.00	0.95	60	1.20	20.00	24.22	0.07	2.5°	2	●
108	1.20	3.00	1.10	60	1.44	24.00	27.94	0.07	2.0°	2	●
120	1.50	3.00	1.40	70	1.80	30.00	33.38	0.07	1.5°	2	●
140	2.00	3.00	1.90	80	2.40	40.00	42.45	0.10	1.0°	2	●
160	2.50	3.00	2.30	80	3.00	50.00	51.70	0.10	0.5°	2	●
180	3.00	3.00	2.80	90	3.60	59.56	60.00	0.10	0.0°	2	●

Application




Material

Steel
< 850 N/mm²

Short-chipping brass
[CuZn]

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
> 300 HB
[Ti6Al4V]



Steel
< 850 N/mm²

Short-chipping brass
[CuZn]

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
> 300 HB
[Ti6Al4V]

d1 [mm]	z	v _r [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
0.20	2	26	0.002	0.200	0.040	41380	165	1.3
0.40	2	53	0.004	0.400	0.080	42175	335	10.8
0.50	2	66	0.006	0.500	0.100	42015	505	25.2
0.60	2	79	0.008	0.600	0.120	41910	670	48.3
0.80	2	106	0.010	0.800	0.160	42175	845	108.0
1.00	2	132	0.012	1.000	0.200	42015	1010	201.7
1.20	2	158	0.014	1.200	0.240	41910	1175	338.0
1.50	2	180	0.018	1.500	0.300	38195	1375	618.8
1.80	2	180	0.022	1.800	0.360	31830	1400	907.6

0.20	2	26	0.002	0.200	0.040	41380	165	1.3
0.40	2	53	0.004	0.400	0.080	42175	335	10.8
0.50	2	66	0.006	0.500	0.100	42015	505	25.2
0.60	2	79	0.008	0.600	0.120	41910	670	48.3
0.80	2	106	0.012	0.800	0.160	42175	1010	129.6
1.00	2	132	0.014	1.000	0.200	42015	1175	235.3
1.20	2	158	0.016	1.200	0.240	41910	1340	386.2
1.50	2	190	0.020	1.500	0.300	40320	1615	725.7
1.80	2	190	0.024	1.800	0.360	33600	1615	1045.1

0.20	2	26	0.002	0.200	0.040	41380	165	1.3
0.40	2	53	0.004	0.400	0.080	42175	335	10.8
0.50	2	66	0.004	0.500	0.100	42015	335	16.8
0.60	2	70	0.006	0.600	0.120	37135	445	32.1
0.80	2	70	0.008	0.800	0.160	27850	445	57.0
1.00	2	70	0.010	1.000	0.200	22280	445	89.1
1.20	2	70	0.012	1.200	0.240	18570	445	128.3
1.50	2	70	0.014	1.500	0.300	14855	415	187.2
1.80	2	70	0.018	1.800	0.360	12380	445	288.8

0.20	2	26	0.002	0.200	0.040	41380	165	1.3
0.40	2	50	0.002	0.400	0.080	39790	160	5.1
0.50	2	50	0.004	0.500	0.100	31830	255	12.7
0.60	2	50	0.006	0.600	0.120	26525	320	22.9
0.80	2	50	0.008	0.800	0.160	19895	320	40.7
1.00	2	50	0.008	1.000	0.200	15915	255	50.9
1.20	2	50	0.010	1.200	0.240	13265	265	76.4
1.50	2	50	0.012	1.500	0.300	10610	255	114.6
1.80	2	50	0.016	1.800	0.360	8840	285	183.3

0.20	2	26	0.002	0.040	0.200	41380	165	1.3
0.40	2	53	0.004	0.080	0.400	42175	335	10.8
0.50	2	66	0.006	0.100	0.500	42015	505	25.2
0.60	2	79	0.006	0.120	0.600	41910	505	36.2
0.80	2	106	0.008	0.160	0.800	42175	675	86.4
1.00	2	132	0.012	0.200	1.000	42015	1010	201.7
1.20	2	158	0.014	0.240	1.200	41910	1175	338.0
1.50	2	160	0.016	0.300	1.500	33955	1085	488.9
1.80	2	160	0.020	0.360	1.800	28295	1130	733.4

0.20	2	26	0.002	0.040	0.200	41380	165	1.3
0.40	2	53	0.004	0.080	0.400	42175	335	10.8
0.50	2	66	0.006	0.100	0.500	42015	505	25.2
0.60	2	79	0.006	0.120	0.600	41910	505	36.2
0.80	2	106	0.008	0.160	0.800	42175	675	86.4
1.00	2	132	0.012	0.200	1.000	42015	1010	201.7
1.20	2	158	0.014	0.240	1.200	41910	1175	338.0
1.50	2	170	0.016	0.300	1.500	36075	1155	519.5
1.80	2	170	0.022	0.360	1.800	30065	1325	857.1

0.20	2	26	0.002	0.040	0.200	41380	165	1.3
0.40	2	53	0.004	0.080	0.400	42175	335	10.8
0.50	2	60	0.006	0.100	0.500	38195	460	22.9
0.60	2	60	0.006	0.120	0.600	31830	380	27.5
0.80	2	60	0.008	0.160	0.800	23875	380	48.9
1.00	2	60	0.010	0.200	1.000	19100	380	76.4
1.20	2	60	0.012	0.240	1.200	15915	380	110.0
1.50	2	60	0.014	0.300	1.500	12730	355	160.4
1.80	2	60	0.018	0.360	1.800	10610	380	247.5



0.20	2	26	0.002	0.040	0.200	41380	165	1.3
0.40	2	40	0.004	0.080	0.400	31830	255	8.1
0.50	2	40	0.004	0.100	0.500	25465	205	10.2
0.60	2	40	0.004	0.120	0.600	21220	170	12.2
0.80	2	40	0.006	0.160	0.800	15915	190	24.4
1.00	2	40	0.010	0.200	1.000	12730	255	50.9
1.20	2	40	0.012	0.240	1.200	10610	255	73.3
1.50	2	40	0.012	0.300	1.500	8490	205	91.7
1.80	2	40	0.016	0.360	1.800	7075	225	146.7

Cylindrical end mills

Shank \varnothing 3mm, 1.5xd




HM	λ 30°
MG10	γ 8°

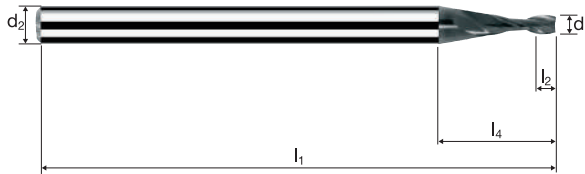

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	CuZn Brass Gold / Platinum Copper
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	---

Example: Order-N°.									MICRO
Coating Article-N° ø-Code									
M 45709 010									M45709
\varnothing Code	d_1 ± 0.01	d_2 h6	l_1	l_2	l_4	α	z		
010	0.10	3.00	40	0.15	6.01	14.5°	2	●	
015	0.15	3.00	40	0.23	5.99	14.5°	2	●	
020	0.20	3.00	40	0.30	5.97	14.5°	2	●	
025	0.25	3.00	40	0.38	5.96	14.0°	2	●	
030	0.30	3.00	40	0.45	5.93	14.0°	2	●	
040	0.40	3.00	40	0.60	5.90	13.5°	2	●	
050	0.50	3.00	40	0.75	5.86	13.0°	2	●	
060	0.60	3.00	40	0.90	5.82	12.5°	2	●	
070	0.70	3.00	40	1.05	5.79	12.5°	2	●	
080	0.80	3.00	40	1.20	5.75	12.0°	2	●	
090	0.90	3.00	40	1.35	5.71	11.5°	2	●	
100	1.00	3.00	40	1.50	5.68	11.0°	2	●	
104	1.10	3.00	40	1.65	5.69	10.5°	2	●	
108	1.20	3.00	40	1.80	5.65	10.0°	2	●	
112	1.30	3.00	40	1.95	5.62	9.5°	2	●	
116	1.40	3.00	40	2.10	5.58	9.0°	2	●	
120	1.50	3.00	40	2.25	5.54	8.5°	2	●	
123	1.60	3.00	40	2.40	5.51	8.0°	2	●	
126	1.70	3.00	40	2.55	5.47	7.5°	2	●	
130	1.80	3.00	40	2.70	5.43	7.0°	2	●	
135	1.90	3.00	40	2.85	5.40	6.5°	2	●	

Application



Material

Steel
< 850 N/mm²




Short-chipping brass
[CuZn]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Titanium alloys
> 300 HB
[Ti6Al4V]



Steel
< 850 N/mm²



Short-chipping brass
[CuZn]



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Titanium alloys
> 300 HB
[Ti6Al4V]





d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
2.00	2	180	0.024	2.000	0.400	28650	1375	1.1
2.10	2	180	0.024	2.100	0.420	27285	1310	1.2
2.20	2	180	0.026	2.200	0.440	26045	1355	1.3
2.30	2	180	0.028	2.300	0.460	24910	1395	1.5
2.40	2	180	0.028	2.400	0.480	23875	1335	1.5
2.50	2	180	0.030	2.500	0.500	22920	1375	1.7
2.60	2	180	0.030	2.600	0.520	22035	1320	1.8
2.70	2	180	0.032	2.700	0.540	21220	1360	2.0
2.80	2	180	0.032	2.800	0.560	20465	1310	2.1
2.00	2	190	0.026	2.000	0.400	30240	1570	1.3
2.10	2	190	0.026	2.100	0.420	28800	1500	1.3
2.20	2	190	0.028	2.200	0.440	27490	1540	1.5
2.30	2	190	0.030	2.300	0.460	26295	1580	1.7
2.40	2	190	0.030	2.400	0.480	25200	1510	1.7
2.50	2	190	0.034	2.500	0.500	24190	1645	2.1
2.60	2	190	0.034	2.600	0.520	23260	1580	2.1
2.70	2	190	0.036	2.700	0.540	22400	1615	2.4
2.80	2	190	0.036	2.800	0.560	21600	1555	2.4
2.00	2	70	0.020	2.000	0.400	11140	445	0.4
2.10	2	70	0.020	2.100	0.420	10610	425	0.4
2.20	2	70	0.020	2.200	0.440	10130	405	0.4
2.30	2	70	0.022	2.300	0.460	9690	425	0.5
2.40	2	70	0.022	2.400	0.480	9285	410	0.5
2.50	2	70	0.024	2.500	0.500	8915	430	0.5
2.60	2	70	0.024	2.600	0.520	8570	410	0.6
2.70	2	70	0.026	2.700	0.540	8250	430	0.6
2.80	2	70	0.026	2.800	0.560	7960	415	0.6
2.00	2	50	0.016	2.000	0.400	7960	255	0.2
2.10	2	50	0.016	2.100	0.420	7580	245	0.2
2.20	2	50	0.018	2.200	0.440	7235	260	0.3
2.30	2	50	0.020	2.300	0.460	6920	275	0.3
2.40	2	50	0.020	2.400	0.480	6630	265	0.3
2.50	2	50	0.022	2.500	0.500	6365	280	0.4
2.60	2	50	0.022	2.600	0.520	6120	270	0.4
2.70	2	50	0.022	2.700	0.540	5895	260	0.4
2.80	2	50	0.022	2.800	0.560	5685	250	0.4
2.00	2	160	0.022	0.400	2.000	25465	1120	0.9
2.10	2	160	0.024	0.420	2.100	24250	1165	1.0
2.20	2	160	0.024	0.440	2.200	23150	1110	1.1
2.30	2	160	0.026	0.460	2.300	22145	1150	1.2
2.40	2	160	0.026	0.480	2.400	21220	1105	1.3
2.50	2	160	0.028	0.500	2.500	20370	1140	1.4
2.60	2	160	0.028	0.520	2.600	19590	1095	1.5
2.70	2	160	0.030	0.540	2.700	18865	1130	1.7
2.80	2	160	0.032	0.560	2.800	18190	1165	1.8
2.00	2	170	0.024	0.400	2.000	27055	1300	1.0
2.10	2	170	0.026	0.420	2.100	25770	1340	1.2
2.20	2	170	0.026	0.440	2.200	24595	1280	1.2
2.30	2	170	0.028	0.460	2.300	23525	1320	1.4
2.40	2	170	0.028	0.480	2.400	22545	1265	1.5
2.50	2	170	0.030	0.500	2.500	21645	1300	1.6
2.60	2	170	0.030	0.520	2.600	20815	1250	1.7
2.70	2	170	0.032	0.540	2.700	20040	1285	1.9
2.80	2	170	0.034	0.560	2.800	19325	1315	2.1
2.00	2	60	0.020	0.400	2.000	9550	380	0.3
2.10	2	60	0.022	0.420	2.100	9095	400	0.4
2.20	2	60	0.022	0.440	2.200	8680	380	0.4
2.30	2	60	0.022	0.460	2.300	8305	365	0.4
2.40	2	60	0.022	0.480	2.400	7960	350	0.4
2.50	2	60	0.024	0.500	2.500	7640	365	0.5
2.60	2	60	0.024	0.520	2.600	7345	355	0.5
2.70	2	60	0.026	0.540	2.700	7075	370	0.5
2.80	2	60	0.028	0.560	2.800	6820	380	0.6
2.00	2	40	0.018	0.400	2.000	6365	230	0.2
2.10	2	40	0.020	0.420	2.100	6065	245	0.2
2.20	2	40	0.020	0.440	2.200	5785	230	0.2
2.30	2	40	0.020	0.460	2.300	5535	220	0.2
2.40	2	40	0.020	0.480	2.400	5305	210	0.2
2.50	2	40	0.022	0.500	2.500	5095	225	0.3
2.60	2	40	0.022	0.520	2.600	4895	215	0.3
2.70	2	40	0.024	0.540	2.700	4715	225	0.3
2.80	2	40	0.026	0.560	2.800	4545	235	0.4

Cylindrical end mills

Shank \varnothing 3mm, 1.5xd




HM	λ 30°
MG10	γ 8°

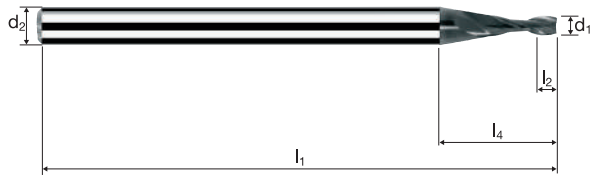

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	CuZn Brass Gold / Platinum Copper
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	---

Example: Order-N°.									MICRO
									M45709
\varnothing Code	d ₁ ± 0.01	d ₂ h6	l ₁	l ₂	l ₄	α	z		
140	2.00	3.00	40	3.00	5.36	6.0°	2		●
143	2.10	3.00	40	3.15	5.32	5.5°	2		●
146	2.20	3.00	40	3.30	5.29	5.0°	2		●
150	2.30	3.00	40	3.45	5.25	4.5°	2		●
155	2.40	3.00	40	3.60	5.21	4.0°	2		●
160	2.50	3.00	40	3.75	5.18	3.0°	2		●
165	2.60	3.00	45	3.90	5.14	2.5°	2		●
170	2.70	3.00	45	4.05	5.10	2.0°	2		●
172	2.80	3.00	45	4.20	5.07	1.5°	2		●
176	2.90	3.00	45	4.35	5.03	1.0°	2		●

Application




Material

Steel
< 850 N/mm²



d1 [mm]	z	v _r [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
0.30	2	40	0.006	0.240	0.050	42440	510	6.1
0.50	2	66	0.010	0.400	0.080	42015	840	26.9
0.60	2	79	0.010	0.480	0.090	41910	840	36.2
0.80	2	106	0.014	0.640	0.120	42175	1180	90.7
1.00	2	132	0.018	0.800	0.150	42015	1515	181.5
1.20	2	158	0.022	0.960	0.180	41910	1845	318.7
1.50	2	180	0.028	1.200	0.230	38195	2140	590.4
1.80	2	180	0.032	1.440	0.270	31830	2035	792.1
2.00	2	180	0.036	1.600	0.300	28650	2065	990.1

Steel
850 - 1100 N/mm²



0.30	2	40	0.006	0.240	0.050	42440	510	6.1
0.50	2	66	0.010	0.400	0.080	42015	840	26.9
0.60	2	79	0.010	0.480	0.090	41910	840	36.2
0.80	2	106	0.012	0.640	0.120	42175	1010	77.7
1.00	2	132	0.016	0.800	0.150	42015	1345	161.3
1.20	2	158	0.020	0.960	0.180	41910	1675	289.7
1.50	2	160	0.026	1.200	0.230	33955	1765	487.3
1.80	2	160	0.028	1.440	0.270	28295	1585	616.0
2.00	2	160	0.032	1.600	0.300	25465	1630	782.3

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




0.30	2	40	0.004	0.240	0.050	42440	340	4.1
0.50	2	66	0.008	0.400	0.080	42015	670	21.5
0.60	2	70	0.008	0.480	0.090	37135	595	25.7
0.80	2	70	0.012	0.640	0.120	27850	670	51.3
1.00	2	70	0.014	0.800	0.150	22280	625	74.9
1.20	2	70	0.018	0.960	0.180	18570	670	115.5
1.50	2	70	0.022	1.200	0.230	14855	655	180.4
1.80	2	70	0.026	1.440	0.270	12380	645	250.3
2.00	2	70	0.028	1.600	0.300	11140	625	299.5

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



0.30	2	40	0.004	0.240	0.050	42440	340	4.1
0.50	2	60	0.008	0.400	0.080	38195	610	19.6
0.60	2	60	0.008	0.480	0.090	31830	510	22.0
0.80	2	60	0.010	0.640	0.120	23875	475	36.7
1.00	2	60	0.012	0.800	0.150	19100	460	55.0
1.20	2	60	0.016	0.960	0.180	15915	510	88.0
1.50	2	60	0.020	1.200	0.230	12730	510	140.6
1.80	2	60	0.022	1.440	0.270	10610	465	181.5
2.00	2	60	0.026	1.600	0.300	9550	495	238.4




Steel
< 850 N/mm²



0.30	2	40	0.006	0.040	0.300	42440	510	6.1
0.50	2	66	0.008	0.060	0.500	42015	670	20.2
0.60	2	79	0.010	0.070	0.600	41910	840	35.2
0.80	2	106	0.014	0.100	0.800	42175	1180	94.5
1.00	2	132	0.016	0.120	1.000	42015	1345	161.3
1.20	2	158	0.020	0.140	1.200	41910	1675	281.6
1.50	2	160	0.026	0.180	1.500	33955	1765	476.7
1.80	2	160	0.030	0.220	1.800	28295	1700	672.3
2.00	2	160	0.034	0.240	2.000	25465	1730	831.2

Steel
850 - 1100 N/mm²



0.30	2	40	0.006	0.040	0.300	42440	510	6.1
0.50	2	66	0.008	0.060	0.500	42015	670	20.2
0.60	2	79	0.010	0.070	0.600	41910	840	35.2
0.80	2	106	0.014	0.100	0.800	42175	1180	94.5
1.00	2	132	0.016	0.120	1.000	42015	1345	161.3
1.20	2	140	0.020	0.140	1.200	37135	1485	249.6
1.50	2	140	0.024	0.180	1.500	29710	1425	385.0
1.80	2	140	0.028	0.220	1.800	24755	1385	549.0
2.00	2	140	0.032	0.240	2.000	22280	1425	684.5

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



0.30	2	40	0.006	0.040	0.300	42440	510	6.1
0.50	2	60	0.008	0.060	0.500	38195	610	18.3
0.60	2	60	0.008	0.070	0.600	31830	510	21.4
0.80	2	60	0.012	0.100	0.800	23875	575	45.8
1.00	2	60	0.014	0.120	1.000	19100	535	64.2
1.20	2	60	0.018	0.140	1.200	15915	575	96.3
1.50	2	60	0.022	0.180	1.500	12730	560	151.3
1.80	2	60	0.026	0.220	1.800	10610	550	218.5
2.00	2	60	0.030	0.240	2.000	9550	575	275.0

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]





0.30	2	40	0.004	0.040	0.300	42440	340	4.1
0.50	2	50	0.006	0.060	0.500	31830	380	11.5
0.60	2	50	0.008	0.070	0.600	26525	425	17.8
0.80	2	50	0.012	0.100	0.800	19895	475	38.2
1.00	2	50	0.012	0.120	1.000	15915	380	45.8
1.20	2	50	0.016	0.140	1.200	13265	425	71.3
1.50	2	50	0.020	0.180	1.500	10610	425	114.6
1.80	2	50	0.024	0.220	1.800	8840	425	168.1
2.00	2	50	0.028	0.240	2.000	7960	445	213.9

Cylindrical end mills

Shank \varnothing 3mm, 3xd




HM λ 30°
MG10 γ 12°

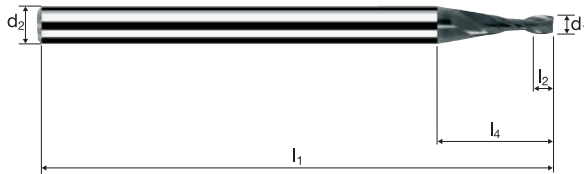

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	Copper Aluminium
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	---------------------

Example: Order-N°.									MICRO	
									5710	M45710
\varnothing Code	d_1 ± 0.01	d_2 h6	l_1	l_2	l_4	α	z			
030	0.30	3.00	40	1.00	8.97	9.0°	2	●	●	
040	0.40	3.00	40	1.00	8.69	9.0°	2	●	●	
050	0.50	3.00	40	1.50	8.90	8.5°	2	●	●	
060	0.60	3.00	40	1.50	8.62	8.5°	2	●	●	
070	0.70	3.00	40	2.00	8.83	8.0°	2	●	●	
080	0.80	3.00	40	2.00	8.55	8.0°	2	●	●	
090	0.90	3.00	40	2.50	8.77	7.5°	2	●	●	
100	1.00	3.00	40	3.00	8.98	7.0°	2	●	●	
104	1.10	3.00	40	3.00	8.75	6.5°	2	●	●	
108	1.20	3.00	40	4.00	9.47	6.0°	2	●	●	
112	1.30	3.00	40	4.00	9.18	5.5°	2	●	●	
116	1.40	3.00	40	4.00	8.90	5.5°	2	●	●	
120	1.50	3.00	40	4.00	8.62	5.5°	2	●	●	
123	1.60	3.00	40	5.00	9.33	4.5°	2	●	●	
126	1.70	3.00	40	5.00	7.41	5.5°	2	●	●	
130	1.80	3.00	40	5.00	7.28	5.5°	2	●	●	
135	1.90	3.00	40	5.00	7.14	5.0°	2	●	●	
140	2.00	3.00	40	5.00	7.00	4.5°	2	●	●	

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
2.10	2	180	0.038	1.680	0.320	27285	2075	1.1
2.20	2	180	0.040	1.760	0.330	26045	2085	1.2
2.30	2	180	0.042	1.840	0.350	24910	2095	1.3
2.40	2	180	0.044	1.920	0.360	23875	2100	1.5
2.50	2	180	0.046	2.000	0.380	22920	2110	1.6
3.00	2	180	0.054	2.400	0.450	19100	2065	2.2

Steel
850 - 1100 N/mm²



2.10	2	160	0.034	1.680	0.320	24250	1650	0.9
2.20	2	160	0.036	1.760	0.330	23150	1665	1.0
2.30	2	160	0.038	1.840	0.350	22145	1685	1.1
2.40	2	160	0.040	1.920	0.360	21220	1700	1.2
2.50	2	160	0.042	2.000	0.380	20370	1710	1.3
3.00	2	160	0.048	2.400	0.450	16975	1630	1.8

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




2.10	2	70	0.030	1.680	0.320	10610	635	0.3
2.20	2	70	0.032	1.760	0.330	10130	650	0.4
2.30	2	70	0.034	1.840	0.350	9690	660	0.4
2.40	2	70	0.036	1.920	0.360	9285	670	0.5
2.50	2	70	0.036	2.000	0.380	8915	640	0.5
3.00	2	70	0.044	2.400	0.450	7425	655	0.7

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



2.10	2	60	0.026	1.680	0.320	9095	475	0.3
2.20	2	60	0.028	1.760	0.330	8680	485	0.3
2.30	2	60	0.030	1.840	0.350	8305	500	0.3
2.40	2	60	0.030	1.920	0.360	7960	475	0.3
2.50	2	60	0.032	2.000	0.380	7640	490	0.4
3.00	2	60	0.038	2.400	0.450	6365	485	0.5



Steel
< 850 N/mm²



2.10	2	160	0.036	0.250	2.100	24250	1745	0.9
2.20	2	160	0.036	0.260	2.200	23150	1665	1.0
2.30	2	160	0.038	0.280	2.300	22145	1685	1.1
2.40	2	160	0.040	0.290	2.400	21220	1700	1.2
2.50	2	160	0.042	0.300	2.500	20370	1710	1.3
3.00	2	160	0.050	0.360	3.000	16975	1700	1.8

Steel
850 - 1100 N/mm²



2.10	2	140	0.034	0.250	2.100	21220	1445	0.8
2.20	2	140	0.034	0.260	2.200	20255	1375	0.8
2.30	2	140	0.036	0.280	2.300	19375	1395	0.9
2.40	2	140	0.038	0.290	2.400	18570	1410	1.0
2.50	2	140	0.040	0.300	2.500	17825	1425	1.1
3.00	2	140	0.048	0.360	3.000	14855	1425	1.5

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



2.10	2	60	0.032	0.250	2.100	9095	580	0.3
2.20	2	60	0.032	0.260	2.200	8680	555	0.3
2.30	2	60	0.034	0.280	2.300	8305	565	0.4
2.40	2	60	0.036	0.290	2.400	7960	575	0.4
2.50	2	60	0.036	0.300	2.500	7640	550	0.4
3.00	2	60	0.044	0.360	3.000	6365	560	0.6

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]





2.10	2	50	0.028	0.250	2.100	7580	425	0.2
2.20	2	50	0.028	0.260	2.200	7235	405	0.2
2.30	2	50	0.030	0.280	2.300	6920	415	0.3
2.40	2	50	0.032	0.290	2.400	6630	425	0.3
2.50	2	50	0.034	0.300	2.500	6365	435	0.3
3.00	2	50	0.040	0.360	3.000	5305	425	0.5

Cylindrical end mills

Shank \varnothing 3mm, 3xd




HM	λ 30°
MG10	γ 12°

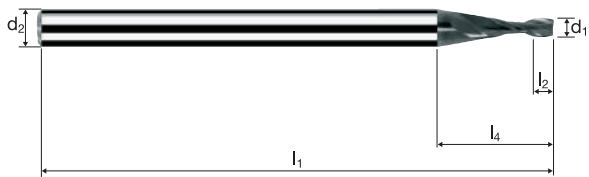

Rm < 850	Rm 850-1100	Rm 1100-1300				Inox Stainless	Ti Titanium	Copper Aluminium
----------	-------------	--------------	--	--	--	-------------------	----------------	---------------------

Example: Order-N°.									MICRO	
Coating		Article-N°.		ø-Code					5710	M45710
M		45710		143					●	●
Ø Code	d ₁ ±0.01	d ₂ h6	l ₁	l ₂	l ₄	α	z			
143	2.10	3.00	40	6.00	7.87	4.0°	2	●	●	
146	2.20	3.00	40	6.00	7.73	3.5°	2	●	●	
150	2.30	3.00	40	6.00	7.59	3.0°	2	●	●	
155	2.40	3.00	40	6.00	7.45	2.5°	2	●	●	
160	2.50	3.00	40	7.00	8.32	2.0°	2	●	●	
180	3.00	4.00	44	10.00	12.36	2.5°	2	●	●	

Application




Material

Steel
< 850 N/mm²

Short-chipping brass
[CuZn]

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
> 300 HB
[Ti6Al4V]



Steel
< 850 N/mm²

Short-chipping brass
[CuZn]

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
> 300 HB
[Ti6Al4V]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
0.40	3	53	0.004	0.480	0.040	42175	505	9.7
0.60	3	79	0.008	0.720	0.060	41910	1005	43.5
0.80	3	106	0.010	0.960	0.080	42175	1265	97.2
1.00	3	132	0.012	1.200	0.100	42015	1515	181.5
1.20	3	158	0.014	1.440	0.120	41910	1760	304.2
1.40	3	180	0.016	1.680	0.140	40925	1965	462.0
1.60	3	180	0.018	1.920	0.160	35810	1935	594.0
1.80	3	180	0.022	2.160	0.180	31830	2100	816.8
2.00	3	180	0.024	2.400	0.200	28650	2065	990.1

0.40	3	53	0.004	0.480	0.040	42175	505	9.7
0.60	3	79	0.008	0.720	0.060	41910	1005	43.5
0.80	3	106	0.012	0.960	0.080	42175	1520	116.6
1.00	3	132	0.014	1.200	0.100	42015	1765	211.8
1.20	3	158	0.016	1.440	0.120	41910	2010	347.6
1.40	3	185	0.018	1.680	0.140	42060	2270	534.2
1.60	3	190	0.020	1.920	0.160	37800	2270	696.7
1.80	3	190	0.024	2.160	0.180	33600	2420	940.6
2.00	3	190	0.026	2.400	0.200	30240	2360	1132.2

0.40	3	53	0.004	0.480	0.040	42175	505	9.7
0.60	3	70	0.006	0.720	0.060	37135	670	28.9
0.80	3	70	0.008	0.960	0.080	27850	670	51.3
1.00	3	70	0.010	1.200	0.100	22280	670	80.2
1.20	3	70	0.012	1.440	0.120	18570	670	115.5
1.40	3	70	0.012	1.680	0.140	15915	575	134.8
1.60	3	70	0.014	1.920	0.160	13925	585	179.7
1.80	3	70	0.018	2.160	0.180	12380	670	259.9
2.00	3	70	0.020	2.400	0.200	11140	670	320.9

0.40	3	50	0.002	0.480	0.040	39790	240	4.6
0.60	3	50	0.006	0.720	0.060	26525	475	20.6
0.80	3	50	0.008	0.960	0.080	19895	475	36.7
1.00	3	50	0.008	1.200	0.100	15915	380	45.8
1.20	3	50	0.010	1.440	0.120	13265	400	68.8
1.40	3	50	0.012	1.680	0.140	11370	410	96.3
1.60	3	50	0.012	1.920	0.160	9945	360	110.0
1.80	3	50	0.016	2.160	0.180	8840	425	165.0
2.00	3	50	0.016	2.400	0.200	7960	380	183.3

0.40	3	53	0.004	0.050	0.400	42175	505	10.1
0.60	3	79	0.006	0.070	0.600	41910	755	31.7
0.80	3	106	0.008	0.100	0.800	42175	1010	81.0
1.00	3	132	0.012	0.120	1.000	42015	1515	181.5
1.20	3	158	0.014	0.140	1.200	41910	1760	295.7
1.40	3	160	0.016	0.170	1.400	36380	1745	415.6
1.60	3	160	0.018	0.190	1.600	31830	1720	522.5
1.80	3	160	0.020	0.220	1.800	28295	1700	672.3
2.00	3	160	0.022	0.240	2.000	25465	1680	806.7

0.40	3	53	0.004	0.050	0.400	42175	505	10.1
0.60	3	79	0.006	0.070	0.600	41910	755	31.7
0.80	3	106	0.008	0.100	0.800	42175	1010	81.0
1.00	3	132	0.012	0.120	1.000	42015	1515	181.5
1.20	3	158	0.014	0.140	1.200	41910	1760	295.7
1.40	3	170	0.016	0.170	1.400	38650	1855	441.6
1.60	3	170	0.018	0.190	1.600	33820	1825	555.2
1.80	3	170	0.022	0.220	1.800	30065	1985	785.7
2.00	3	170	0.024	0.240	2.000	27055	1950	935.1

0.40	3	53	0.004	0.050	0.400	42175	505	10.1
0.60	3	60	0.006	0.070	0.600	31830	575	24.1
0.80	3	60	0.008	0.100	0.800	23875	575	45.8
1.00	3	60	0.010	0.120	1.000	19100	575	68.8
1.20	3	60	0.012	0.140	1.200	15915	575	96.3
1.40	3	60	0.014	0.170	1.400	13640	575	136.4
1.60	3	60	0.016	0.190	1.600	11935	575	174.2
1.80	3	60	0.018	0.220	1.800	10610	575	226.9
2.00	3	60	0.020	0.240	2.000	9550	575	275.0

0.40	3	40	0.004	0.050	0.400	31830	380	7.6
0.60	3	40	0.004	0.070	0.600	21220	255	10.7
0.80	3	40	0.006	0.100	0.800	15915	285	22.9
1.00	3	40	0.010	0.120	1.000	12730	380	45.8
1.20	3	40	0.012	0.140	1.200	10610	380	64.2
1.40	3	40	0.012	0.170	1.400	9095	325	77.9
1.60	3	40	0.014	0.190	1.600	7960	335	101.6
1.80	3	40	0.016	0.220	1.800	7075	340	134.5
2.00	3	40	0.018	0.240	2.000	6365	345	165.0


Cylindrical end mills

Shank \varnothing 3mm, 3xd








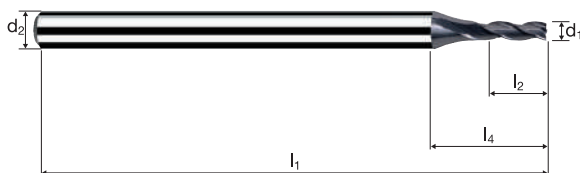
















HM
MG10

λ 30°
 γ 8°



Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	CuZn Brass Gold / Platinum Copper
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	---

Example: Order-N°.									MICRO
		Coating	Article-N°.	ø-Code					
		M	45713	040					M45713
Ø Code	d ₁ ±0.01	d ₂ h6	l ₁	l ₂	l ₄	α	z		
040	0.40	3.00	40	1.20	6.50	12.5°	3	●	
050	0.50	3.00	40	1.50	6.61	11.5°	3	●	
060	0.60	3.00	40	1.80	6.72	11.0°	3	●	
070	0.70	3.00	40	2.10	6.84	10.5°	3	●	
080	0.80	3.00	40	2.40	6.95	10.0°	3	●	
090	0.90	3.00	40	2.70	7.06	9.0°	3	●	
100	1.00	3.00	40	3.00	7.18	8.5°	3	●	
104	1.10	3.00	40	3.30	7.34	8.0°	3	●	
108	1.20	3.00	40	3.60	7.45	7.5°	3	●	
112	1.30	3.00	40	3.90	7.57	7.0°	3	●	
116	1.40	3.00	40	4.20	7.68	6.5°	3	●	
120	1.50	3.00	40	4.50	7.79	6.0°	3	●	
123	1.60	3.00	40	4.80	7.91	5.5°	3	●	
126	1.70	3.00	40	5.10	8.02	5.0°	3	●	
130	1.80	3.00	40	5.40	8.13	4.5°	3	●	
135	1.90	3.00	40	5.70	8.25	4.5°	3	●	
140	2.00	3.00	40	6.00	8.36	4.0°	3	●	



Application	Material	d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
	Steel < 850 N/mm ²  	2.10	3	180	0.024	2.520	0.210	27285	1965	1.0
		2.20	3	180	0.026	2.640	0.220	26045	2030	1.2
		2.30	3	180	0.028	2.760	0.230	24910	2095	1.3
		2.40	3	180	0.028	2.880	0.240	23875	2005	1.4
		2.50	3	180	0.030	3.000	0.250	22920	2065	1.5
		2.60	3	180	0.030	3.120	0.260	22035	1985	1.6
		2.70	3	180	0.032	3.240	0.270	21220	2035	1.8
		2.80	3	180	0.032	3.360	0.280	20465	1965	1.8
		2.90	3	180	0.034	3.480	0.290	19755	2015	2.0
		Short-chipping brass [CuZn]    	2.10	3	190	0.026	2.520	0.210	28800	2245
2.20	3		190	0.028	2.640	0.220	27490	2310	1.3	
2.30	3		190	0.030	2.760	0.230	26295	2365	1.5	
2.40	3		190	0.030	2.880	0.240	25200	2270	1.6	
2.50	3		190	0.034	3.000	0.250	24190	2470	1.9	
2.60	3		190	0.034	3.120	0.260	23260	2375	1.9	
2.70	3		190	0.036	3.240	0.270	22400	2420	2.1	
2.80	3		190	0.036	3.360	0.280	21600	2335	2.2	
2.90	3		190	0.038	3.480	0.290	20855	2375	2.4	
Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]  	2.10		3	70	0.020	2.520	0.210	10610	635	0.3
	2.20	3	70	0.020	2.640	0.220	10130	610	0.4	
	2.30	3	70	0.022	2.760	0.230	9690	640	0.4	
	2.40	3	70	0.022	2.880	0.240	9285	615	0.4	
	2.50	3	70	0.024	3.000	0.250	8915	640	0.5	
	2.60	3	70	0.024	3.120	0.260	8570	615	0.5	
	2.70	3	70	0.026	3.240	0.270	8250	645	0.6	
	2.80	3	70	0.026	3.360	0.280	7960	620	0.6	
	2.90	3	70	0.028	3.480	0.290	7685	645	0.7	
	Titanium alloys > 300 HB [Ti6Al4V]  	2.10	3	50	0.016	2.520	0.210	7580	365	0.2
2.20		3	50	0.018	2.640	0.220	7235	390	0.2	
2.30		3	50	0.020	2.760	0.230	6920	415	0.3	
2.40		3	50	0.020	2.880	0.240	6630	400	0.3	
2.50		3	50	0.022	3.000	0.250	6365	420	0.3	
2.60		3	50	0.022	3.120	0.260	6120	405	0.3	
2.70		3	50	0.022	3.240	0.270	5895	390	0.3	
2.80		3	50	0.022	3.360	0.280	5685	375	0.4	
2.90		3	50	0.024	3.480	0.290	5490	395	0.4	
		Steel < 850 N/mm ²  	2.10	3	160	0.024	0.250	2.100	24250	1745
	2.20		3	160	0.024	0.260	2.200	23150	1665	1.0
	2.30		3	160	0.026	0.280	2.300	22145	1725	1.1
	2.40		3	160	0.026	0.290	2.400	21220	1655	1.2
	2.50		3	160	0.028	0.300	2.500	20370	1710	1.3
	2.60		3	160	0.028	0.310	2.600	19590	1645	1.3
	2.70		3	160	0.030	0.320	2.700	18865	1700	1.5
	2.80		3	160	0.032	0.340	2.800	18190	1745	1.7
	2.90		3	160	0.032	0.350	2.900	17560	1685	1.7
	Short-chipping brass [CuZn]    		2.10	3	170	0.026	0.250	2.100	25770	2010
2.20		3	170	0.026	0.260	2.200	24595	1920	1.1	
2.30		3	170	0.028	0.280	2.300	23525	1975	1.3	
2.40		3	170	0.028	0.290	2.400	22545	1895	1.3	
2.50		3	170	0.030	0.300	2.500	21645	1950	1.5	
2.60		3	170	0.030	0.310	2.600	20815	1875	1.5	
2.70		3	170	0.032	0.320	2.700	20040	1925	1.7	
2.80		3	170	0.034	0.340	2.800	19325	1970	1.9	
2.90		3	170	0.034	0.350	2.900	18660	1905	1.9	
Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]  		2.10	3	60	0.022	0.250	2.100	9095	600	0.3
	2.20	3	60	0.022	0.260	2.200	8680	575	0.3	
	2.30	3	60	0.022	0.280	2.300	8305	550	0.4	
	2.40	3	60	0.022	0.290	2.400	7960	525	0.4	
	2.50	3	60	0.024	0.300	2.500	7640	550	0.4	
	2.60	3	60	0.024	0.310	2.600	7345	530	0.4	
	2.70	3	60	0.026	0.320	2.700	7075	550	0.5	
	2.80	3	60	0.028	0.340	2.800	6820	575	0.5	
	2.90	3	60	0.028	0.350	2.900	6585	555	0.6	
	Titanium alloys > 300 HB [Ti6Al4V]  	2.10	3	40	0.020	0.250	2.100	6065	365	0.2
2.20		3	40	0.020	0.260	2.200	5785	345	0.2	
2.30		3	40	0.020	0.280	2.300	5535	330	0.2	
2.40		3	40	0.020	0.290	2.400	5305	320	0.2	
2.50		3	40	0.022	0.300	2.500	5095	335	0.3	
2.60		3	40	0.022	0.310	2.600	4895	325	0.3	
2.70		3	40	0.024	0.320	2.700	4715	340	0.3	
2.80		3	40	0.026	0.340	2.800	4545	355	0.3	
2.90		3	40	0.026	0.350	2.900	4390	340	0.3	

Cylindrical end mills

Shank \varnothing 3mm, 3xd




HM
MG10 λ 30°
 γ 8°

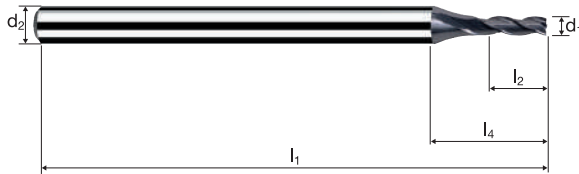

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	CuZn Brass Gold / Platinum Copper
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	---

Example: Order-N°.									MICRO
		Coating	Article-N°.		ø-Code				
		M	45713		143				M45713
Ø Code	d ₁ ±0.01	d ₂ h6	l ₁	l ₂	l ₄	α	z		
143	2.10	3.00	40	6.30	8.47	3.5°	3	●	
146	2.20	3.00	40	6.60	8.59	3.0°	3	●	
150	2.30	3.00	40	6.90	8.70	2.5°	3	●	
155	2.40	3.00	40	7.20	8.81	2.5°	3	●	
160	2.50	3.00	40	7.50	8.93	2.0°	3	●	
165	2.60	3.00	45	7.80	9.04	1.5°	3	●	
170	2.70	3.00	45	8.10	9.15	1.0°	3	●	
172	2.80	3.00	45	8.40	9.27	1.0°	3	●	
176	2.90	3.00	45	8.70	9.38	0.5°	3	●	

Application



Material

Steel
< 850 N/mm²

Steel
850 - 1100 N/mm²

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _f [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
2.00	3	120	0.005	2.000	0.300	19100	285
3.00	3	120	0.010	3.000	0.500	12730	380
4.00	3	120	0.015	4.000	0.600	9550	430
5.00	3	120	0.015	5.000	0.800	7640	345
6.00	3	120	0.020	6.000	0.900	6365	380
8.00	3	120	0.025	8.000	1.200	4775	360
10.00	3	120	0.035	10.000	1.500	3820	400

2.00	3	75	0.005	2.000	0.300	11935	180
3.00	3	75	0.010	3.000	0.500	7960	240
4.00	3	75	0.015	4.000	0.600	5970	270
5.00	3	75	0.015	5.000	0.800	4775	215
6.00	3	75	0.020	6.000	0.900	3980	240
8.00	3	75	0.025	8.000	1.200	2985	225
10.00	3	75	0.035	10.000	1.500	2385	250

2.00	3	60	0.005	2.000	0.300	9550	145
3.00	3	60	0.010	3.000	0.500	6365	190
4.00	3	60	0.015	4.000	0.600	4775	215
5.00	3	60	0.015	5.000	0.800	3820	170
6.00	3	60	0.020	6.000	0.900	3185	190
8.00	3	60	0.025	8.000	1.200	2385	180
10.00	3	60	0.035	10.000	1.500	1910	200

2.00	3	80	0.005	2.000	0.300	12730	190
3.00	3	80	0.010	3.000	0.500	8490	255
4.00	3	80	0.015	4.000	0.600	6365	285
5.00	3	80	0.015	5.000	0.800	5095	230
6.00	3	80	0.020	6.000	0.900	4245	255
8.00	3	80	0.025	8.000	1.200	3185	240
10.00	3	80	0.035	10.000	1.500	2545	265

Application



Material

Steel
< 850 N/mm²

Steel
850 - 1100 N/mm²

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _f [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
2.00	3	95	0.005	1.600	2.000	15120	225	0.7
3.00	3	95	0.010	2.400	3.000	10080	300	2.2
4.00	3	95	0.010	3.200	4.000	7560	225	2.9
5.00	3	95	0.015	4.000	5.000	6050	270	5.4
6.00	3	95	0.015	4.800	6.000	5040	225	6.5
8.00	3	95	0.020	6.400	8.000	3780	225	11.6
10.00	3	95	0.030	8.000	10.000	3025	270	21.8

2.00	3	60	0.005	1.600	2.000	9550	145	0.5
3.00	3	60	0.010	2.400	3.000	6365	190	1.4
4.00	3	60	0.010	3.200	4.000	4775	145	1.8
5.00	3	60	0.015	4.000	5.000	3820	170	3.4
6.00	3	60	0.015	4.800	6.000	3185	145	4.1
8.00	3	60	0.020	6.400	8.000	2385	145	7.3
10.00	3	60	0.025	8.000	10.000	1910	145	11.5

2.00	3	45	0.005	1.600	2.000	7160	105	0.3
3.00	3	45	0.010	2.400	3.000	4775	145	1.0
4.00	3	45	0.010	3.200	4.000	3580	105	1.4
5.00	3	45	0.015	4.000	5.000	2865	130	2.6
6.00	3	45	0.015	4.800	6.000	2385	105	3.1
8.00	3	45	0.020	6.400	8.000	1790	105	5.5
10.00	3	45	0.025	8.000	10.000	1430	105	8.6



2.00	3	55	0.005	1.600	2.000	8755	130	0.4
3.00	3	55	0.010	2.400	3.000	5835	175	1.3
4.00	3	55	0.010	3.200	4.000	4375	130	1.7
5.00	3	55	0.015	4.000	5.000	3500	160	3.2
6.00	3	55	0.015	4.800	6.000	2920	130	3.8
8.00	3	55	0.020	6.400	8.000	2190	130	6.7
10.00	3	55	0.025	8.000	10.000	1750	130	10.5

Cylindrical end mills

Smooth-edged, short-shank version




HM	λ 30°
MG10	γ 12°

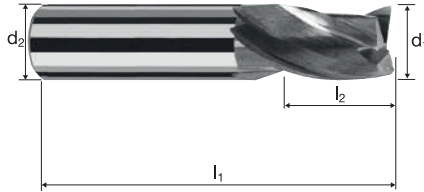

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	Nickel-Alloys Copper Platinum
--------------------	-----------------------	------------------------	--	--	--	--	--------------------------	-----------------------	--


Example: Order-N°.									POLYCHROM
Coating: P Article-N°: 15232 ø-Code: 120									
\emptyset Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	α	z		P15232
120	1.50	6.00	38	3.00	11.92	11.5°	3		●
140	2.00	6.00	38	3.00	11.15	11.0°	3		●
160	2.50	6.00	38	3.00	10.88	10.0°	3		●
180	3.00	6.00	38	4.00	11.96	8.0°	3		●
200	3.50	6.00	38	4.00	11.02	7.0°	3		●
220	4.00	6.00	38	5.00	11.59	5.5°	3		●
240	4.50	6.00	38	5.00	10.66	4.5°	3		●
260	5.00	6.00	38	6.00	10.72	3.0°	3		●
300	6.00	6.00	38	7.00	-	0.0°	3		●
391	8.00	8.00	41	9.00	-	0.0°	3		●
450	10.00	10.00	48	11.00	-	0.0°	3		●

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _f [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
2.00	3	60	0.005	2.000	0.200	9550	145
3.00	3	60	0.010	3.000	0.300	6365	190
4.00	3	60	0.015	4.000	0.400	4775	215
5.00	3	60	0.015	5.000	0.500	3820	170
6.00	3	60	0.020	6.000	0.600	3185	190
8.00	3	60	0.025	8.000	0.800	2385	180
10.00	3	60	0.035	10.000	1.000	1910	200

Short-chipping brass
[CuZn]




2.00	3	140	0.005	2.000	0.200	22280	335
3.00	3	140	0.010	3.000	0.300	14855	445
4.00	3	140	0.010	4.000	0.400	11140	335
5.00	3	140	0.020	5.000	0.500	8915	535
6.00	3	140	0.025	6.000	0.600	7425	555
8.00	3	140	0.030	8.000	0.800	5570	500
10.00	3	140	0.040	10.000	1.000	4455	535

Gold




2.00	3	160	0.005	2.000	0.200	25465	380
3.00	3	160	0.010	3.000	0.300	16975	510
4.00	3	160	0.010	4.000	0.400	12730	380
5.00	3	160	0.020	5.000	0.500	10185	610
6.00	3	160	0.025	6.000	0.600	8490	635
8.00	3	160	0.030	8.000	0.800	6365	575
10.00	3	160	0.040	10.000	1.000	5095	610

Wrought aluminium
Construction aluminium




2.00	3	250	0.005	2.000	0.200	39790	595
3.00	3	250	0.010	3.000	0.300	26525	795
4.00	3	250	0.015	4.000	0.400	19895	895
5.00	3	250	0.020	5.000	0.500	15915	955
6.00	3	250	0.025	6.000	0.600	13265	995
8.00	3	250	0.030	8.000	0.800	9945	895
10.00	3	250	0.040	10.000	1.000	7960	955

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _f [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
2.00	3	45	0.005	1.000	2.000	7160	105	0.2
3.00	3	45	0.010	1.500	3.000	4775	145	0.6
4.00	3	45	0.010	2.000	4.000	3580	105	0.9
5.00	3	45	0.015	2.500	5.000	2865	130	1.6
6.00	3	45	0.015	3.000	6.000	2385	105	1.9
8.00	3	45	0.020	4.000	8.000	1790	105	3.4
10.00	3	45	0.030	5.000	10.000	1430	130	6.4

Short-chipping brass
[CuZn]




2.00	3	120	0.005	1.000	2.000	19100	285	0.6
3.00	3	120	0.005	1.500	3.000	12730	190	0.9
4.00	3	120	0.010	2.000	4.000	9550	285	2.3
5.00	3	120	0.015	2.500	5.000	7640	345	4.3
6.00	3	120	0.015	3.000	6.000	6365	285	5.2
8.00	3	120	0.025	4.000	8.000	4775	360	11.5
10.00	3	120	0.035	5.000	10.000	3820	400	20.1

Gold




2.00	3	140	0.005	1.000	2.000	22280	335	0.7
3.00	3	140	0.005	1.500	3.000	14855	225	1.0
4.00	3	140	0.010	2.000	4.000	11140	335	2.7
5.00	3	140	0.015	2.500	5.000	8915	400	5.0
6.00	3	140	0.015	3.000	6.000	7425	335	6.0
8.00	3	140	0.025	4.000	8.000	5570	420	13.4
10.00	3	140	0.035	5.000	10.000	4455	470	23.4

Wrought aluminium
Construction aluminium



2.00	3	200	0.005	1.000	2.000	31830	475	1.0
3.00	3	200	0.005	1.500	3.000	21220	320	1.4
4.00	3	200	0.010	2.000	4.000	15915	475	3.8
5.00	3	200	0.015	2.500	5.000	12730	575	7.2
6.00	3	200	0.015	3.000	6.000	10610	475	8.6
8.00	3	200	0.025	4.000	8.000	7960	595	19.1
10.00	3	200	0.035	5.000	10.000	6365	670	33.4



Cylindrical end mills

Smooth-edged, short-shank version



HM
MG10

λ 30°
 γ 12°

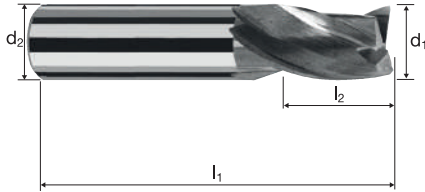

Roughing

Finishing



Rm
< 850

Rm
850-1100

Aluminium
Copper / CuZn Brass
Gold

Example:
Order-N°.

Coating Article-N° ø-Code
15232 120



15232

Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	α	z		
120	1.50	6.00	38	3.00	11.92	11.5°	3	●	
140	2.00	6.00	38	3.00	11.15	11.0°	3	●	
160	2.50	6.00	38	3.00	10.88	10.0°	3	●	
180	3.00	6.00	38	4.00	11.96	8.0°	3	●	
200	3.50	6.00	38	4.00	11.02	7.0°	3	●	
220	4.00	6.00	38	5.00	11.59	5.5°	3	●	
240	4.50	6.00	38	5.00	10.66	4.5°	3	●	
260	5.00	6.00	38	6.00	10.72	3.0°	3	●	
300	6.00	6.00	38	7.00	-	0.0°	3	●	
391	8.00	8.00	41	9.00	-	0.0°	3	●	
450	10.00	10.00	48	11.00	-	0.0°	3	●	

Application	Material	d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	
	Steel < 850 N/mm ² 	2.00	3	115	0.005	2.000	0.200	18305	275	
		3.00	3	115	0.010	3.000	0.300	12200	365	
		4.00	3	115	0.015	4.000	0.400	9150	410	
		5.00	3	115	0.015	5.000	0.500	7320	330	
		6.00	3	115	0.020	6.000	0.600	6100	365	
		8.00	3	115	0.025	8.000	0.800	4575	345	
		10.00	3	115	0.035	10.000	1.000	3660	385	
	Steel 850 - 1100 N/mm ² 	2.00	3	75	0.005	2.000	0.200	11935	180	
		3.00	3	75	0.010	3.000	0.300	7960	240	
		4.00	3	75	0.015	4.000	0.400	5970	270	
		5.00	3	75	0.015	5.000	0.500	4775	215	
		6.00	3	75	0.020	6.000	0.600	3980	240	
		8.00	3	75	0.025	8.000	0.800	2985	225	
		10.00	3	75	0.035	10.000	1.000	2385	250	
	Titanium alloys up to 300 HB [Ti5Al2.5Sn] 	2.00	3	40	0.005	2.000	0.200	6365	95	
		3.00	3	40	0.010	3.000	0.300	4245	125	
		4.00	3	40	0.015	4.000	0.400	3185	145	
		5.00	3	40	0.015	5.000	0.500	2545	115	
		6.00	3	40	0.020	6.000	0.600	2120	125	
		8.00	3	40	0.025	8.000	0.800	1590	120	
		10.00	3	40	0.035	10.000	1.000	1275	135	
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	2.00	3	80	0.005	2.000	0.200	12730	190	
		3.00	3	80	0.010	3.000	0.300	8490	255	
		4.00	3	80	0.015	4.000	0.400	6365	285	
		5.00	3	80	0.015	5.000	0.500	5095	230	
		6.00	3	80	0.020	6.000	0.600	4245	255	
		8.00	3	80	0.025	8.000	0.800	3185	240	
		10.00	3	80	0.035	10.000	1.000	2545	265	

Application	Material	d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	
	Steel < 850 N/mm ² 	2.00	3	85	0.005	1.000	2.000	13530	205	0.4	
		3.00	3	85	0.010	1.500	3.000	9020	270	1.2	
		4.00	3	85	0.010	2.000	4.000	6765	205	1.6	
		5.00	3	85	0.015	2.500	5.000	5410	245	3.0	
		6.00	3	85	0.015	3.000	6.000	4510	205	3.7	
		8.00	3	85	0.020	4.000	8.000	3380	205	6.5	
		10.00	3	85	0.030	5.000	10.000	2705	245	12.2	
	Steel 850 - 1100 N/mm ² 	2.00	3	60	0.005	1.000	2.000	9550	145	0.3	
		3.00	3	60	0.010	1.500	3.000	6365	190	0.9	
		4.00	3	60	0.010	2.000	4.000	4775	145	1.1	
		5.00	3	60	0.015	2.500	5.000	3820	170	2.1	
		6.00	3	60	0.015	3.000	6.000	3185	145	2.6	
		8.00	3	60	0.020	4.000	8.000	2385	145	4.6	
		10.00	3	60	0.025	5.000	10.000	1910	145	7.2	
	Titanium alloys up to 300 HB [Ti5Al2.5Sn] 	2.00	3	30	0.005	1.000	2.000	4775	70	0.1	
		3.00	3	30	0.010	1.500	3.000	3185	95	0.4	
		4.00	3	30	0.010	2.000	4.000	2385	70	0.6	
		5.00	3	30	0.015	2.500	5.000	1910	85	1.1	
		6.00	3	30	0.015	3.000	6.000	1590	70	1.3	
		8.00	3	30	0.020	4.000	8.000	1195	70	2.3	
		10.00	3	30	0.025	5.000	10.000	955	70	3.6	
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	2.00	3	55	0.005	1.000	2.000	8755	130	0.3	
		3.00	3	55	0.010	1.500	3.000	5835	175	0.8	
		4.00	3	55	0.010	2.000	4.000	4375	130	1.1	
		5.00	3	55	0.015	2.500	5.000	3500	160	2.0	
		6.00	3	55	0.015	3.000	6.000	2920	130	2.4	
		8.00	3	55	0.020	4.000	8.000	2190	130	4.2	
		10.00	3	55	0.025	5.000	10.000	1750	130	6.6	

Cylindrical end mills


Smooth-edged, short-shank version



HM
MG10

λ 30°
 γ 12°

90°

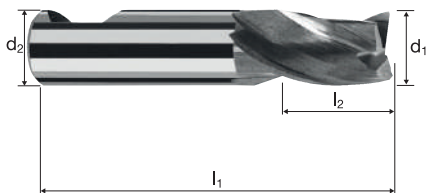

Roughing


Finishing



Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Nickel-Alloys
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	------------------------

Example: Order-N°.									POLYCHROM	
Coating Article-N° ø-Code										
P 5336 120										
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	α	z			
120	1.50	6.00	38	3.00	11.92	11.5°	3		●	
140	2.00	6.00	38	3.00	11.15	11.0°	3		●	
160	2.50	6.00	38	3.00	10.88	10.0°	3		●	
180	3.00	6.00	38	4.00	11.96	8.0°	3		●	
200	3.50	6.00	38	4.00	11.02	7.0°	3		●	
220	4.00	6.00	38	5.00	11.59	5.5°	3		●	
240	4.50	6.00	38	5.00	10.66	4.5°	3		●	
260	5.00	6.00	38	6.00	10.72	3.0°	3		●	
300	6.00	6.00	38	7.00	-	0.0°	3		●	
331	7.00	8.00	41	8.00	12.72	2.5°	3		●	
391	8.00	8.00	41	9.00	-	0.0°	3		●	
420	9.00	10.00	48	10.00	14.72	2.5°	3		●	
450	10.00	10.00	48	11.00	-	0.0°	3		●	

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _f [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
2.00	3	115	0.005	2.000	0.200	18305	275
3.00	3	115	0.010	3.000	0.300	12200	365
4.00	3	115	0.015	4.000	0.400	9150	410
5.00	3	115	0.015	5.000	0.500	7320	330
6.00	3	115	0.020	6.000	0.600	6100	365
8.00	3	115	0.025	8.000	0.800	4575	345
10.00	3	115	0.035	10.000	1.000	3660	385

Steel
850 - 1100 N/mm²



2.00	3	75	0.005	2.000	0.200	11935	180
3.00	3	75	0.010	3.000	0.300	7960	240
4.00	3	75	0.015	4.000	0.400	5970	270
5.00	3	75	0.015	5.000	0.500	4775	215
6.00	3	75	0.020	6.000	0.600	3980	240
8.00	3	75	0.025	8.000	0.800	2985	225
10.00	3	75	0.035	10.000	1.000	2385	250

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



2.00	3	40	0.005	2.000	0.200	6365	95
3.00	3	40	0.010	3.000	0.300	4245	125
4.00	3	40	0.015	4.000	0.400	3185	145
5.00	3	40	0.015	5.000	0.500	2545	115
6.00	3	40	0.020	6.000	0.600	2120	125
8.00	3	40	0.025	8.000	0.800	1590	120
10.00	3	40	0.035	10.000	1.000	1275	135

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



2.00	3	80	0.005	2.000	0.200	12730	190
3.00	3	80	0.010	3.000	0.300	8490	255
4.00	3	80	0.015	4.000	0.400	6365	285
5.00	3	80	0.015	5.000	0.500	5095	230
6.00	3	80	0.020	6.000	0.600	4245	255
8.00	3	80	0.025	8.000	0.800	3185	240
10.00	3	80	0.035	10.000	1.000	2545	265

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _f [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
2.00	3	85	0.005	1.000	2.000	13530	205	0.4
3.00	3	85	0.010	1.500	3.000	9020	270	1.2
4.00	3	85	0.010	2.000	4.000	6765	205	1.6
5.00	3	85	0.015	2.500	5.000	5410	245	3.0
6.00	3	85	0.015	3.000	6.000	4510	205	3.7
8.00	3	85	0.020	4.000	8.000	3380	205	6.5
10.00	3	85	0.030	5.000	10.000	2705	245	12.2

Steel
850 - 1100 N/mm²



2.00	3	60	0.005	1.000	2.000	9550	145	0.3
3.00	3	60	0.010	1.500	3.000	6365	190	0.9
4.00	3	60	0.010	2.000	4.000	4775	145	1.1
5.00	3	60	0.015	2.500	5.000	3820	170	2.1
6.00	3	60	0.015	3.000	6.000	3185	145	2.6
8.00	3	60	0.020	4.000	8.000	2385	145	4.6
10.00	3	60	0.025	5.000	10.000	1910	145	7.2

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



2.00	3	30	0.005	1.000	2.000	4775	70	0.1
3.00	3	30	0.010	1.500	3.000	3185	95	0.4
4.00	3	30	0.010	2.000	4.000	2385	70	0.6
5.00	3	30	0.015	2.500	5.000	1910	85	1.1
6.00	3	30	0.015	3.000	6.000	1590	70	1.3
8.00	3	30	0.020	4.000	8.000	1195	70	2.3
10.00	3	30	0.025	5.000	10.000	955	70	3.6

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




2.00	3	55	0.005	1.000	2.000	8755	130	0.3
3.00	3	55	0.010	1.500	3.000	5835	175	0.8
4.00	3	55	0.010	2.000	4.000	4375	130	1.1
5.00	3	55	0.015	2.500	5.000	3500	160	2.0
6.00	3	55	0.015	3.000	6.000	2920	130	2.4
8.00	3	55	0.020	4.000	8.000	2190	130	4.2
10.00	3	55	0.025	5.000	10.000	1750	130	6.6

Cylindrical end mills

Smooth-edged, short-shank version




HM	λ 30°
MG10	γ 12°

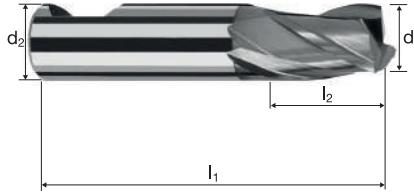

Rm < 850	Rm 850-1100	Rm 1100-1300				Inox Stainless	Ti Titanium	GG(G) Nickel-Alloys
--------------------	-----------------------	------------------------	--	--	--	--------------------------	-----------------------	-------------------------------

Example: Order-N°.										POLYCHROM	
										P5335	
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	45°	α	z			
140	2.00	6.00	38	3.00	11.15	0.10	11.0°	3		●	
180	3.00	6.00	38	4.00	11.96	0.10	8.0°	3		●	
220	4.00	6.00	38	5.00	11.59	0.10	5.5°	3		●	
260	5.00	6.00	38	6.00	10.72	0.15	3.0°	3		●	
300	6.00	6.00	38	7.00	-	0.15	0.0°	3		●	
391	8.00	8.00	41	9.00	-	0.15	0.0°	3		●	
450	10.00	10.00	48	11.00	-	0.20	0.0°	3		●	



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
3.00	4	160	0.010	3.000	0.150	16975	680
4.00	4	160	0.010	4.000	0.200	12730	510
5.00	4	160	0.015	5.000	0.250	10185	610
6.00	6	160	0.015	6.000	0.300	8490	765
8.00	6	160	0.025	8.000	0.400	6365	955
10.00	6	160	0.030	10.000	0.500	5095	915

Steel
850 - 1100 N/mm²

3.00	4	100	0.010	3.000	0.150	10610	425
4.00	4	100	0.010	4.000	0.200	7960	320
5.00	4	100	0.015	5.000	0.250	6365	380
6.00	6	100	0.015	6.000	0.300	5305	475
8.00	6	100	0.025	8.000	0.400	3980	595
10.00	6	100	0.030	10.000	0.500	3185	575

Steel
1100 - 1300 N/mm²

3.00	4	75	0.010	3.000	0.150	7960	320
4.00	4	75	0.010	4.000	0.200	5970	240
5.00	4	75	0.015	5.000	0.250	4775	285
6.00	6	75	0.015	6.000	0.300	3980	360
8.00	6	75	0.025	8.000	0.400	2985	450
10.00	6	75	0.030	10.000	0.500	2385	430

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

3.00	4	90	0.010	3.000	0.150	9550	380
4.00	4	90	0.010	4.000	0.200	7160	285
5.00	4	90	0.015	5.000	0.250	5730	345
6.00	6	90	0.015	6.000	0.300	4775	430
8.00	6	90	0.025	8.000	0.400	3580	535
10.00	6	90	0.030	10.000	0.500	2865	515

Cast iron
(lamellar / spheroidal)

3.00	4	120	0.010	3.000	0.150	12730	510
4.00	4	120	0.010	4.000	0.200	9550	380
5.00	4	120	0.015	5.000	0.250	7640	460
6.00	6	120	0.015	6.000	0.300	6365	575
8.00	6	120	0.025	8.000	0.400	4775	715
10.00	6	120	0.030	10.000	0.500	3820	690

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]

3.00	4	65	0.010	3.000	0.150	6895	275
4.00	4	65	0.010	4.000	0.200	5175	205
5.00	4	65	0.015	5.000	0.250	4140	250
6.00	6	65	0.015	6.000	0.300	3450	310
8.00	6	65	0.025	8.000	0.400	2585	390
10.00	6	65	0.030	10.000	0.500	2070	370

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

3.00	4	95	0.010	3.000	0.150	10080	405
4.00	4	95	0.010	4.000	0.200	7560	300
5.00	4	95	0.015	5.000	0.250	6050	365
6.00	6	95	0.015	6.000	0.300	5040	455
8.00	6	95	0.025	8.000	0.400	3780	565
10.00	6	95	0.030	10.000	0.500	3025	545

Inox difficult
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]

3.00	4	50	0.010	3.000	0.150	5305	210
4.00	4	50	0.010	4.000	0.200	3980	160
5.00	4	50	0.015	5.000	0.250	3185	190
6.00	6	50	0.015	6.000	0.300	2655	240
8.00	6	50	0.025	8.000	0.400	1990	300
10.00	6	50	0.030	10.000	0.500	1590	285


Cylindrical end mills

Finishing, short-shank version



HM
MG10

λ 45°
 γ 10°

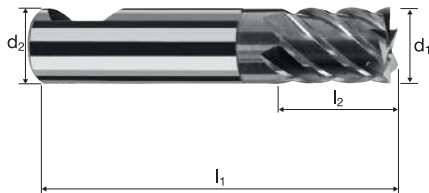

Roughing


Finishing



Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Tool Steel
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	---------------------

Ø Code	d_1 e8	d_2 h6	l_1	l_2	l_4	α	z	POLYCHROM	
Example: Order-N°: P 5337 180									P5337
									P5237
180	3.00	6.00	38	4.00	11.96	8.0°	4		●
220	4.00	6.00	38	5.00	11.59	5.5°	4		●
260	5.00	6.00	38	6.00	10.72	3.0°	4		●
300	6.00	6.00	38	7.00	-	0.0°	6		●
391	8.00	8.00	41	9.00	-	0.0°	6		●
450	10.00	10.00	48	11.00	-	0.0°	6		●

Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _f [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
1.00	3	60	0.005	1.000	0.100	19100	285
2.00	3	60	0.010	2.000	0.200	9550	285
2.50	3	60	0.010	2.500	0.250	7640	230
3.00	3	60	0.010	3.000	0.300	6365	190
3.50	3	60	0.015	3.500	0.350	5455	245
4.00	3	60	0.015	4.000	0.400	4775	215
5.00	3	60	0.020	5.000	0.500	3820	230
5.50	3	60	0.020	5.500	0.550	3470	210
6.00	3	60	0.025	6.000	0.600	3185	240

Steel
850 - 1100 N/mm²

1.00	3	48	0.005	1.000	0.100	15280	230
2.00	3	48	0.010	2.000	0.200	7640	230
2.50	3	48	0.010	2.500	0.250	6110	185
3.00	3	48	0.010	3.000	0.300	5095	155
3.50	3	48	0.015	3.500	0.350	4365	195
4.00	3	48	0.015	4.000	0.400	3820	170
5.00	3	48	0.020	5.000	0.500	3055	185
5.50	3	48	0.020	5.500	0.550	2780	165
6.00	3	48	0.025	6.000	0.600	2545	190


Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

1.00	3	25	0.005	1.000	0.100	7960	120
2.00	3	25	0.010	2.000	0.200	3980	120
2.50	3	25	0.010	2.500	0.250	3185	95
3.00	3	25	0.010	3.000	0.300	2655	80
3.50	3	25	0.015	3.500	0.350	2275	100
4.00	3	25	0.015	4.000	0.400	1990	90
5.00	3	25	0.020	5.000	0.500	1590	95
5.50	3	25	0.020	5.500	0.550	1445	85
6.00	3	25	0.025	6.000	0.600	1325	100

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]

1.00	3	22	0.005	1.000	0.100	7005	105
2.00	3	22	0.010	2.000	0.200	3500	105
2.50	3	22	0.010	2.500	0.250	2800	85
3.00	3	22	0.010	3.000	0.300	2335	70
3.50	3	22	0.015	3.500	0.350	2000	90
4.00	3	22	0.015	4.000	0.400	1750	80
5.00	3	22	0.020	5.000	0.500	1400	85
5.50	3	22	0.020	5.500	0.550	1275	75
6.00	3	22	0.025	6.000	0.600	1165	90

Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _f [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
1.00	3	55	0.005	0.500	1.000	17505	265	131.3
2.00	3	55	0.010	1.000	2.000	8755	265	525.2
2.50	3	55	0.010	1.250	2.500	7005	210	656.5
3.00	3	55	0.010	1.500	3.000	5835	175	787.8
3.50	3	55	0.015	1.750	3.500	5000	225	1378.7
4.00	3	55	0.015	2.000	4.000	4375	195	1575.6
5.00	3	55	0.020	2.500	5.000	3500	210	2626.1
5.50	3	55	0.020	2.750	5.500	3185	190	2888.7
6.00	3	55	0.025	3.000	6.000	2920	220	3939.1

Steel
850 - 1100 N/mm²

1.00	3	45	0.005	0.500	1.000	14325	215	107.4
2.00	3	45	0.010	1.000	2.000	7160	215	429.7
2.50	3	45	0.010	1.250	2.500	5730	170	537.1
3.00	3	45	0.010	1.500	3.000	4775	145	644.6
3.50	3	45	0.015	1.750	3.500	4095	185	1128.0
4.00	3	45	0.015	2.000	4.000	3580	160	1289.2
5.00	3	45	0.020	2.500	5.000	2865	170	2148.6
5.50	3	45	0.020	2.750	5.500	2605	155	2363.5
6.00	3	45	0.025	3.000	6.000	2385	180	3222.9

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

1.00	3	22	0.005	0.500	1.000	7005	105	52.5
2.00	3	22	0.010	1.000	2.000	3500	105	210.1
2.50	3	22	0.010	1.250	2.500	2800	85	262.6
3.00	3	22	0.010	1.500	3.000	2335	70	315.1
3.50	3	22	0.015	1.750	3.500	2000	90	551.5
4.00	3	22	0.015	2.000	4.000	1750	80	630.3
5.00	3	22	0.020	2.500	5.000	1400	85	1050.4
5.50	3	22	0.020	2.750	5.500	1275	75	1155.5
6.00	3	22	0.025	3.000	6.000	1165	90	1575.6

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]

1.00	3	20	0.005	0.500	1.000	6365	95	47.7
2.00	3	20	0.010	1.000	2.000	3185	95	191.0
2.50	3	20	0.010	1.250	2.500	2545	75	238.7
3.00	3	20	0.010	1.500	3.000	2120	65	286.5
3.50	3	20	0.015	1.750	3.500	1820	80	501.3
4.00	3	20	0.015	2.000	4.000	1590	70	573.0
5.00	3	20	0.020	2.500	5.000	1275	75	954.9
5.50	3	20	0.020	2.750	5.500	1155	70	1050.4
6.00	3	20	0.025	3.000	6.000	1060	80	1432.4

Cylindrical end mills


Smooth-edged, short-shank version

HSS

HSS-E
Co8

λ 30°
 γ 15°

90°

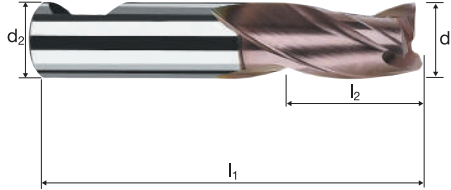

Roughing

Finishing



Rm
< 850


Rm
850-1100

Inox
Stainless

Copper

Example: Order-N°.		Coating U	Article-N° 0400	ø-Code 100					UNICUT-4X
Ø Code	d ₁ f8	d ₂ h6	l ₁	l ₂	l ₄	α	z		
100	1.00	6.00	34	3.00	10.48	14.0°	3	●	
120	1.50	6.00	34	3.00	9.99	13.0°	3	●	
130	1.80	6.00	35	4.00	10.78	11.5°	3	●	
140	2.00	6.00	35	4.00	10.61	11.0°	3	●	
150	2.30	6.00	36	5.00	12.00	9.0°	3	●	
160	2.50	6.00	36	5.00	12.00	8.5°	3	●	
170	2.80	6.00	36	5.00	12.00	8.0°	3	●	
180	3.00	6.00	36	5.00	12.00	7.5°	3	●	
190	3.30	6.00	37	6.00	13.00	6.0°	3	●	
200	3.50	6.00	37	6.00	13.00	5.5°	3	●	
210	3.80	6.00	38	7.00	14.00	4.5°	3	●	
220	4.00	6.00	38	7.00	14.00	4.5°	3	●	
230	4.30	6.00	38	7.00	14.00	3.5°	3	●	
240	4.50	6.00	38	7.00	14.00	3.5°	3	●	
250	4.80	6.00	39	8.00	15.00	2.5°	3	●	
260	5.00	6.00	39	8.00	15.00	2.0°	3	●	
270	5.30	6.00	39	8.00	15.00	1.5°	3	●	
280	5.50	6.00	39	8.00	15.00	1.0°	3	●	
290	5.75	6.00	39	8.00	15.00	0.0°	3	●	
300	6.00	6.00	39	8.00	-	0.0°	3	●	

Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
6.50	3	60	0.025	6.500	0.650	2940	220
7.00	3	60	0.030	7.000	0.700	2730	245
7.50	3	60	0.030	7.500	0.750	2545	230
8.00	3	60	0.030	8.000	0.800	2385	215
8.50	3	60	0.035	8.500	0.850	2245	235
9.00	3	60	0.035	9.000	0.900	2120	225
9.50	3	60	0.040	9.500	0.950	2010	240
10.00	3	60	0.040	10.000	1.000	1910	230

Steel
850 - 1100 N/mm²

6.50	3	48	0.025	6.500	0.650	2350	175
7.00	3	48	0.030	7.000	0.700	2185	195
7.50	3	48	0.030	7.500	0.750	2035	185
8.00	3	48	0.030	8.000	0.800	1910	170
8.50	3	48	0.035	8.500	0.850	1800	190
9.00	3	48	0.035	9.000	0.900	1700	180
9.50	3	48	0.040	9.500	0.950	1610	195
10.00	3	48	0.040	10.000	1.000	1530	185

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

6.50	3	25	0.025	6.500	0.650	1225	90
7.00	3	25	0.030	7.000	0.700	1135	100
7.50	3	25	0.030	7.500	0.750	1060	95
8.00	3	25	0.030	8.000	0.800	995	90
8.50	3	25	0.035	8.500	0.850	935	100
9.00	3	25	0.035	9.000	0.900	885	95
9.50	3	25	0.040	9.500	0.950	840	100
10.00	3	25	0.040	10.000	1.000	795	95

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]

6.50	3	22	0.025	6.500	0.650	1075	80
7.00	3	22	0.030	7.000	0.700	1000	90
7.50	3	22	0.030	7.500	0.750	935	85
8.00	3	22	0.030	8.000	0.800	875	80
8.50	3	22	0.035	8.500	0.850	825	85
9.00	3	22	0.035	9.000	0.900	780	80
9.50	3	22	0.040	9.500	0.950	735	90
10.00	3	22	0.040	10.000	1.000	700	85

Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.50	3	55	0.025	3.250	6.500	2695	200	4.3
7.00	3	55	0.030	3.500	7.000	2500	225	5.5
7.50	3	55	0.030	3.750	7.500	2335	210	5.9
8.00	3	55	0.030	4.000	8.000	2190	195	6.3
8.50	3	55	0.035	4.250	8.500	2060	215	7.8
9.00	3	55	0.035	4.500	9.000	1945	205	8.3
9.50	3	55	0.040	4.750	9.500	1845	220	10.0
10.00	3	55	0.040	5.000	10.000	1750	210	10.5

Steel
850 - 1100 N/mm²

6.50	3	45	0.025	3.250	6.500	2205	165	3.5
7.00	3	45	0.030	3.500	7.000	2045	185	4.5
7.50	3	45	0.030	3.750	7.500	1910	170	4.8
8.00	3	45	0.030	4.000	8.000	1790	160	5.2
8.50	3	45	0.035	4.250	8.500	1685	175	6.4
9.00	3	45	0.035	4.500	9.000	1590	165	6.8
9.50	3	45	0.040	4.750	9.500	1510	180	8.2
10.00	3	45	0.040	5.000	10.000	1430	170	8.6

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

6.50	3	22	0.025	3.250	6.500	1075	80	1.7
7.00	3	22	0.030	3.500	7.000	1000	90	2.2
7.50	3	22	0.030	3.750	7.500	935	85	2.4
8.00	3	22	0.030	4.000	8.000	875	80	2.5
8.50	3	22	0.035	4.250	8.500	825	85	3.1
9.00	3	22	0.035	4.500	9.000	780	80	3.3
9.50	3	22	0.040	4.750	9.500	735	90	4.0
10.00	3	22	0.040	5.000	10.000	700	85	4.2

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



6.50	3	20	0.025	3.250	6.500	980	75	1.6
7.00	3	20	0.030	3.500	7.000	910	80	2.0
7.50	3	20	0.030	3.750	7.500	850	75	2.1
8.00	3	20	0.030	4.000	8.000	795	70	2.3
8.50	3	20	0.035	4.250	8.500	750	80	2.8
9.00	3	20	0.035	4.500	9.000	705	75	3.0
9.50	3	20	0.040	4.750	9.500	670	80	3.6
10.00	3	20	0.040	5.000	10.000	635	75	3.8

Cylindrical end mills

Smooth-edged, short-shank version

HSS

HSS-E λ 30°
Co8 γ 15°

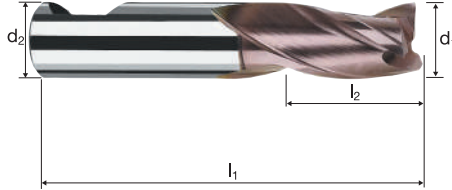

Roughing

Finishing



Rm
< 850


Rm
850-1100

Inox
Stainless

Copper

Example: Order-N°.									UNICUT-4X
Coating: U Article-N°: 0400 ø-Code: 311									U0400
Ø Code	d ₁ f8	d ₂ h6	l ₁	l ₂	l ₄	α	z		
311	6.50	8.00	42	10.00	17.50	2.5°	3		●
331	7.00	8.00	42	10.00	17.50	2.0°	3		●
351	7.50	8.00	42	10.00	17.50	1.0°	3		●
391	8.00	8.00	43	11.00	-	0.0°	3		●
410	8.50	10.00	48	11.00	20.50	2.5°	3		●
420	9.00	10.00	48	11.00	20.50	1.5°	3		●
430	9.50	10.00	48	11.00	20.50	1.0°	3		●
450	10.00	10.00	50	13.00	-	0.0°	3		●

Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
2.00	3	60	0.005	3.000	0.200	9550	145
3.00	3	60	0.010	4.500	0.300	6365	190
4.00	3	60	0.015	6.000	0.400	4775	215
5.00	3	60	0.015	7.500	0.500	3820	170
6.00	3	60	0.020	9.000	0.600	3185	190
7.00	3	60	0.025	10.500	0.700	2730	205
8.00	3	60	0.025	12.000	0.800	2385	180
9.00	3	60	0.030	13.500	0.900	2120	190
10.00	3	60	0.035	15.000	1.000	1910	200

Steel
850 - 1100 N/mm²

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
2.00	3	48	0.005	3.000	0.200	7640	115
3.00	3	48	0.010	4.500	0.300	5095	155
4.00	3	48	0.015	6.000	0.400	3820	170
5.00	3	48	0.015	7.500	0.500	3055	140
6.00	3	48	0.020	9.000	0.600	2545	155
7.00	3	48	0.025	10.500	0.700	2185	165
8.00	3	48	0.025	12.000	0.800	1910	145
9.00	3	48	0.030	13.500	0.900	1700	155
10.00	3	48	0.035	15.000	1.000	1530	160

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
2.00	3	25	0.005	3.000	0.200	3980	60
3.00	3	25	0.010	4.500	0.300	2655	80
4.00	3	25	0.015	6.000	0.400	1990	90
5.00	3	25	0.015	7.500	0.500	1590	70
6.00	3	25	0.020	9.000	0.600	1325	80
7.00	3	25	0.025	10.500	0.700	1135	85
8.00	3	25	0.025	12.000	0.800	995	75
9.00	3	25	0.030	13.500	0.900	885	80
10.00	3	25	0.035	15.000	1.000	795	85

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
2.00	3	22	0.005	3.000	0.200	3500	55
3.00	3	22	0.010	4.500	0.300	2335	70
4.00	3	22	0.015	6.000	0.400	1750	80
5.00	3	22	0.015	7.500	0.500	1400	65
6.00	3	22	0.020	9.000	0.600	1165	70
7.00	3	22	0.025	10.500	0.700	1000	75
8.00	3	22	0.025	12.000	0.800	875	65
9.00	3	22	0.030	13.500	0.900	780	70
10.00	3	22	0.035	15.000	1.000	700	75

Application



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
2.00	3	55	0.005	1.000	2.000	8755	130	0.3
3.00	3	55	0.010	1.500	3.000	5835	175	0.8
4.00	3	55	0.010	2.000	4.000	4375	130	1.1
5.00	3	55	0.015	2.500	5.000	3500	160	2.0
6.00	3	55	0.015	3.000	6.000	2920	130	2.4
7.00	3	55	0.020	3.500	7.000	2500	150	3.7
8.00	3	55	0.025	4.000	8.000	2190	165	5.3
9.00	3	55	0.025	4.500	9.000	1945	145	5.9
10.00	3	55	0.030	5.000	10.000	1750	160	7.9

Steel
850 - 1100 N/mm²

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
2.00	3	45	0.005	1.000	2.000	7160	105	0.2
3.00	3	45	0.010	1.500	3.000	4775	145	0.6
4.00	3	45	0.010	2.000	4.000	3580	105	0.9
5.00	3	45	0.015	2.500	5.000	2865	130	1.6
6.00	3	45	0.015	3.000	6.000	2385	105	1.9
7.00	3	45	0.020	3.500	7.000	2045	125	3.0
8.00	3	45	0.025	4.000	8.000	1790	135	4.3
9.00	3	45	0.025	4.500	9.000	1590	120	4.8
10.00	3	45	0.030	5.000	10.000	1430	130	6.4

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
2.00	3	22	0.005	1.000	2.000	3500	55	0.1
3.00	3	22	0.010	1.500	3.000	2335	70	0.3
4.00	3	22	0.010	2.000	4.000	1750	55	0.4
5.00	3	22	0.015	2.500	5.000	1400	65	0.8
6.00	3	22	0.015	3.000	6.000	1165	55	0.9
7.00	3	22	0.020	3.500	7.000	1000	60	1.5
8.00	3	22	0.025	4.000	8.000	875	65	2.1
9.00	3	22	0.025	4.500	9.000	780	60	2.4
10.00	3	22	0.030	5.000	10.000	700	65	3.2

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
2.00	3	20	0.005	1.000	2.000	3185	50	0.1
3.00	3	20	0.010	1.500	3.000	2120	65	0.3
4.00	3	20	0.010	2.000	4.000	1590	50	0.4
5.00	3	20	0.015	2.500	5.000	1275	55	0.7
6.00	3	20	0.015	3.000	6.000	1060	50	0.9
7.00	3	20	0.020	3.500	7.000	910	55	1.3
8.00	3	20	0.025	4.000	8.000	795	60	1.9
9.00	3	20	0.025	4.500	9.000	705	55	2.1
10.00	3	20	0.030	5.000	10.000	635	55	2.9

Cylindrical end mills


Smooth-edged, short-shank version

HSS

HSS-E
Co8

λ 30°
 γ 15°

90°

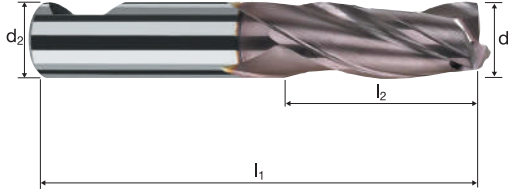

Roughing

Finishing



Rm
< 850

Rm
850-1100

Inox
Stainless

Copper

Example: Order-N°.								UNICUT-4X	
Coating		Article-N°.		ø-Code				U0410	
U		0410		140					
Ø Code	d ₁ f8	d ₂ h6	l ₁	l ₂	l ₄	α	z		
140	2.00	6.00	38	7.00	13.61	8.5°	3	●	
160	2.50	6.00	39	8.00	15.00	7.0°	3	●	
180	3.00	6.00	39	8.00	15.00	6.0°	3	●	
200	3.50	6.00	41	10.00	17.00	4.5°	3	●	
220	4.00	6.00	42	11.00	18.00	3.5°	3	●	
240	4.50	6.00	42	11.00	18.00	2.5°	3	●	
260	5.00	6.00	44	13.00	20.00	1.5°	3	●	
280	5.50	6.00	44	13.00	20.00	1.0°	3	●	
300	6.00	6.00	44	13.00	-	0.0°	3	●	
311	6.50	8.00	48	16.00	23.50	2.0°	3	●	
331	7.00	8.00	48	16.00	23.50	1.5°	3	●	
351	7.50	8.00	48	16.00	23.50	1.0°	3	●	
391	8.00	8.00	51	19.00	-	0.0°	3	●	
410	8.50	10.00	56	19.00	28.50	2.0°	3	●	
420	9.00	10.00	56	19.00	28.50	1.5°	3	●	
430	9.50	10.00	56	19.00	28.50	1.0°	3	●	
450	10.00	10.00	59	22.00	-	0.0°	3	●	



End milling tools for 3D machining

Ball nose

Tolerance $r \pm 0.003$

N° 7500



SpheroX

X-Generation
X

3xd

d, 1 – 12

F SF

Rm
1100-1500

HRC
48- >60

Ti
Titanium

345

Tolerance $r \pm 0.005$

N° 7470



SpheroX

X-Generation
X

3xd

d, 1 – 16

R F

Rm
1300-1500

HRC
48- >60

HSS
Ti

347

N° 7490



SpheroX

X-Generation
X

3xd

d, 1 – 16

HDC R/F

Rm
1300-1500

HRC
48- >60

HSS
Ti

349

N° 7400



SpheroX

X-Generation
X

3xd

d, 1 – 12

R F

Rm
1100-1500

HRC
48- >60

Ti
Titanium

351

N° 7460



SpheroX

X-Generation
X

3xd

d, 6 – 12

F SF

Rm
1100-1500

HRC
48- >60

Ti
Titanium

353

N° 7540



Sphericut

Base-X
B

3xd

d, 1 – 16

PF F

Rm
<850-1500

Inox
Stainless

355

N° 7550



Sphericut

Base-X
B

3xd

d, 2 – 20

HDC R/F

Al
Aluminium Alloy

Cu
Copper

Plastic
Thermoplast

357

N° 7472



SpheroX

X-Generation
X

4.5xd

d, 1 – 16

R F

Rm
1300-1500

HRC
48- >60

HSS
Ti

359

N° 7492



SpheroX

X-Generation
X

4.5xd

d, 1 – 16

HDC R/F

Rm
1300-1500

HRC
48- >60

HSS
Ti

361

N° 7402



SpheroX

X-Generation
X

4.5xd

d, 1 – 12

R F

Rm
1100-1500









HRC
48- >60

Ti
Titanium

363

End milling tools for 3D machining

Ball nose

Tolerance $r \pm 0.005$									
N° 7474		SpheroX	X-Generation X	6xd R F	$d_1 1-16$	Rm 1300-1500	HRC 48->60	HSS Ti	365
N° 7494		SpheroX	X-Generation X	6xd HDC R/F	$d_1 1-16$	Rm 1300-1500	HRC 48->60	HSS Ti	367
N° 7404		SpheroX	X-Generation X	6xd R F	$d_1 1-12$	Rm 1100-1500	HRC 48->60	Ti Titanium	369
N° 7464	 <small>ToolSchool</small>	SpheroX	X-Generation X	6xd F SF	$d_1 6-12$	Rm 1100-1500	HRC 48->60	Ti Titanium	371
N° 7544		Sphericut	Base-X B	6xd PF F	$d_1 1-16$	Rm <850-1500	Inox Stainless		373
N° 7554		Sphericut	Base-X B	6xd HDC R/F	$d_1 3-16$	Al Aluminium Alloy	Cu Copper	Plastic Thermoplast	375
N° 7478		SpheroX	X-Generation X	9xd F SF	$d_1 1-16$	Rm 1300-1500	HRC 48->60	HSS Ti	377
N° 7408		SpheroX	X-Generation X	9xd F SF	$d_1 1-12$	Rm 1100-1500	HRC 48->60	Ti Titanium	379

End milling tools for 3D machining

Ball nose

Tolerance r f8 (-/-)

N° 5286



Sphericut

Base-X B	3xd		d, 1 – 16	Rm	HRC	381
	PF	F		1100-1500	48-56	
Favora® F	3xd		d, 3 – 12	Rm		383
	PF	F		850-1300		

N° 45298








II



End milling tools for 3D machining







Circular arc milling cutter

Spherical										
N° 8530		ArCutX	X-Generation X	PF	F	r_1 2, 3, 4 r_2 750, 1000	HRC <48-56	Inox Ti	Al Aluminium Alloy	385
Spherical, micro										
N° 8535		ArCutX	X-Generation X	PF	F	r_1 0.5, 1, 2 r_2 250, 350	HRC <48-56	Inox Ti	Al Aluminium Alloy	387
Toric										
N° 8540		ArCutX	X-Generation X	PF	F	r_1 1.25, 2, 3.5 r_2 30, 40, 50	HRC <48-56	Inox Ti	Al Aluminium Alloy	389
Toric, integral										
N° 8545		ArCutX	X-Generation X	PF	F	r_1 0.8, 1 r_2 200, 350	HRC <48-56	Inox Ti	Al Aluminium Alloy	391
Flat surfaces										
N° 8550		ArCutX	X-Generation X	PF	F	r_1 1 r_2 250	HRC <48-56	Inox Ti	Al Aluminium Alloy	393





End milling tools for 3D machining





Corner radius

Tolerance r 0/+0.015

N° 7210		XSpeed-H	X-Generation X	3xd HDC R/F	r 0,2, 0,5	HRC 56- >60	HSS		395
N° 7200		XSpeed	X-Generation X	3xd PF F	r 0,5, 1,0	Rm 1100-1500	HRC 48-60		397
N° 7100		ToroX	X-Generation X	3xd R PF	r 0,2, 0,5, 1,0, 2,0	Rm 1100-1500	HRC 48-60		401
N° 7212		XSpeed-H new!	X-Generation X	4.5xd HDC R/F	r 0,2, 0,5	HRC 56- >60	HSS		405
N° 7204		XSpeed	X-Generation X	6xd PF F	r 0,5, 1,0	Rm 1100-1500	HRC 48-60		407
N° 7104		ToroX	X-Generation X	6xd R PF	r 0,2, 0,5, 1,0, 2,0	Rm 1100-1500	HRC 48-60		411









Tolerance r 0/+0.03

N° 5250		Multispeed	X-Generation X	3xd PF F	r 0,5, 0,8, 1,0, 1,5	Rm <850-1300	Inox Stainless		415
N° 7340		Torocut	Base-X B	3xd R PF	r 0,2, 0,5, 1,0, 1,5, 2,0	Rm <850-1500	Inox Stainless		417
N° 5252		Multispeed	X-Generation X	5xd PF F	r 0,8, 1,0, 1,5	Rm <850-1300	Inox Stainless		421
N° 7344		Torocut	Base-X B	6xd R PF	r 0,2, 0,5, 1,0	Rm <850-1500	Inox Stainless		423

N° 8507 / 8607		HX	X-Generation X	Roughing HPC Roughing HDC Finishing	r 0,2, 0,5, 1,0, 1,5, 2,0, 2,5, 3,0	HRC 48- >60	HSS		157
N° 8107 / 8207		MFC	Base-X B	Roughing HPC Roughing HDC Finishing	r 0,2, 0,5, 1,0, 1,5, 2,0, 2,5	Rm <850-1500	HRC 48-56	Inox Ti	171
N° 8517 / 8617		HX	X-Generation X	Roughing HPC Roughing HDC Finishing	r 0,2, 0,5, 1,0, 1,5, 2,0, 2,5, 3,0	HRC 48- >60	HSS		185
N° 8117 / 8217		MFC	Base-X B	Roughing HPC Roughing HDC Finishing	r 0,2, 0,5, 1,0, 1,5, 2,0, 2,5	Rm <850-1500	HRC 48-56	Inox Ti	189

End milling tools for 3D machining

HFC

Cylindrical neck								
N° 7610		XFeed-H	X-Generation	3xd	d, 1-16	HRC 56- >60	HSS	427
				R				
N° 7600		XFeed	X-Generation	3xd	d, 1-16	Rm 850-1500	HRC 48- >60	429
				R				
N° 7620		XFeed	X-Generation	3xd	d, 6-16	Rm 1100-1500	HRC 48-56	431
				R				
N° 7612		XFeed-H	X-Generation	4.5xd	d, 1-16	HRC 56- >60	HSS	433
				R				
N° 7614		XFeed-H	X-Generation	6xd	d, 3-16	HRC 56- >60	HSS	435
				R				
N° 7604		XFeed	X-Generation	6xd	d, 3-16	Rm 850-1500	HRC 48- >60	437
				R				
N° 7624		XFeed	X-Generation	6xd	d, 6-16	Rm 1100-1500	HRC 48-56	439
				R				
N° 7608		XFeed	X-Generation	9xd	d, 3-16	Rm 850-1500	HRC 48- >60	441
				R				

End milling tools for 3D machining

Milling of carbides

Ball nose

N° 5580



X-Generation

X

3xd

d, 1 – 12

F

SF

HM

< 1200 HV

HM

< 1600 HV

443

End milling tools for 3D machining

CBN

Ball nose

N° 31700



X-Generation

X

3xd

d, 4-12

SF

HRC
56- >60

445

Corner radius

N° 31420



X-Generation

X

3xd

r 0.5

SF

HRC
56- >60

447

N° 31410



X-Generation

X

3xd

r 1.0, 1.25,
1.5, 2.0,
2.5, 3.0









SF

HRC
56- >60

449














End milling tools for 3D machining

Micro with ball nose

Shank \varnothing 6mm									
N° 6460		MicroHX	X-Generation X	1xd	d_1 0.4 – 2.0	Rm 1300-1500	HRC 48- >60	HSS	451
N° 6461		MicroHX	X-Generation X	2xd	d_1 0.4 – 2.0	Rm 1300-1500	HRC 48- >60	HSS	453
N° 6481		MicroHX	X-Generation X	2.5xd	d_1 0.4 – 1.0	Rm 1300-1500	HRC 48- >60	HSS	455
N° 6462		MicroHX	X-Generation X	3xd	d_1 0.4 – 3.0	Rm 1300-1500	HRC 48- >60	HSS	457
N° 6482		MicroHX	X-Generation X	3.5xd	d_1 0.4 – 1.0	Rm 1300-1500	HRC 48- >60	HSS	459
N° 6463		MicroHX	X-Generation X	4xd	d_1 0.4 – 2.0	Rm 1300-1500	HRC 48- >60	HSS	461
N° 6483		MicroHX	X-Generation X	4.5xd	d_1 0.4 – 1.0	Rm 1300-1500	HRC 48- >60	HSS	463
N° 6464		MicroHX	X-Generation X	5xd	d_1 0.4 – 3.0	Rm 1300-1500	HRC 48- >60	HSS	465







End milling tools for 3D machining

Micro with ball nose

Shank ø 6mm								
N° 6560		MicroX X-Generation	X	1xd d, 0,1 – 2,0	Rm 850-1500	HRC 48-60	Inox Ti	467
N° 6561		MicroX X-Generation	X	2xd d, 0,1 – 2,0	Rm 850-1500	HRC 48-60	Inox Ti	469
N° 6581		MicroX X-Generation	X	2.5xd d, 0,1 – 1,0	Rm 850-1500	HRC 48-60	Inox Ti	471
N° 6562		MicroX X-Generation	X	3xd d, 0,1 – 3,0	Rm 850-1500	HRC 48-60	Inox Ti	473
N° 6582		MicroX X-Generation	X	3.5xd d, 0,1 – 1,0	Rm 850-1500	HRC 48-60	Inox Ti	475
N° 6563		MicroX X-Generation	X	4xd d, 0,1 – 2,0	Rm 850-1500	HRC 48-60	Inox Ti	477
N° 6583		MicroX X-Generation	X	4.5xd d, 0,1 – 1,0	Rm 850-1500	HRC 48-60	Inox Ti	479
N° 6564		MicroX X-Generation	X	5xd d, 0,1 – 3,0	Rm 850-1500	HRC 48-60	Inox Ti	481
N° 6565		MicroX X-Generation	X	6xd d, 0,2 – 2,0	Rm 850-1500	HRC 48-60	Inox Ti	483
N° 6579		MicroX X-Generation	X	7xd d, 0,2 – 2,0	Rm 850-1500	HRC 48-60	Inox Ti	485
N° 6566		MicroX X-Generation	X	8xd d, 0,2 – 3,0	Rm 850-1500	HRC 48-60	Inox Ti	487
N° 6567		MicroX X-Generation	X	9xd d, 0,2 – 2,0	Rm 850-1500	HRC 48-60	Inox Ti	489
N° 6568		MicroX X-Generation	X	10xd d, 0,2 – 3,0	Rm 850-1500	HRC 48-60	Inox Ti	491









End milling tools for 3D machining

Micro with ball nose

Shank \varnothing 6mm, conical neck 0.9°									
N° 6765		MicroX	X-Generation X	6xd	d_1 0.5 – 2.0	Rm 850-1500	HRC 48-60	Inox Ti	493
N° 6766		MicroX	X-Generation X	8xd	d_1 0.5 – 3.0	Rm 850-1500	HRC 48-60	Inox Ti	495
N° 6768		MicroX	X-Generation X	10xd	d_1 0.5 – 3.0	Rm 850-1500	HRC 48-60	Inox Ti	497
N° 6770		MicroX	X-Generation X	12xd	d_1 0.5 – 3.0	Rm 850-1500	HRC 48-60	Inox Ti	499
N° 6772		MicroX	X-Generation X	15xd	d_1 0.5 – 3.0	Rm 850-1500	HRC 48-60	Inox Ti	501
N° 6774		MicroX	X-Generation X	20xd	d_1 0.5 – 3.0	Rm 850-1500	HRC 48-60	Inox Ti	503









End milling tools for 3D machining

Micro with ball nose

Shank \varnothing 4mm									
N° 6832		Microcut new!	B	1xd	d, 0,2 – 2,0	Rm <850-1500	HRC 48-56	Inox Ti	505
N° 6836		Microcut new!	B	3xd	d, 0,2 – 3,0	Rm <850-1500	HRC 48-56	Inox Ti	507
N° 6840		Microcut new!	B	5xd	d, 0,2 – 3,0	Rm <850-1500	HRC 48-56	Inox Ti	509
N° 6844		Microcut new!	B	8xd	d, 0,5 – 3,0	Rm <850-1500	HRC 48-56	Inox Ti	511
N° 6846		Microcut new!	B	10xd	d, 0,5 – 3,0	Rm <850-1500	HRC 48-56	Inox Ti	513
N° 6847		Microcut new!	B	12xd	d, 1,0 – 3,0	Rm <850-1500	HRC 48-56	Inox Ti	515
N° 6848		Microcut new!	B	15xd	d, 1,0 – 3,0	Rm <850-1500	HRC 48-56	Inox Ti	517
N° 6849		Microcut new!	B	20xd	d, 1,0 – 3,0	Rm <850-1500	HRC 48-56	Inox Ti	519








End milling tools for 3D machining







Micro with ball nose

Shank \varnothing 3mm									
N° 5782		Microcut	Base-X B	3xd	d_1 0.2 – 3.0	Rm <850-1300	Inox Stainless	Ti Titanium	521
N° 5784		Microcut	Base-X B	5xd	d_1 0.5 – 3.0	Rm <850-1300	Inox Stainless	Ti Titanium	523
N° 5786		Microcut	Base-X B	8xd	d_1 0.5 – 3.0	Rm <850-1300	Inox Stainless	Ti Titanium	525
N° 5787		Microcut	Base-X B	10xd	d_1 0.5 – 3.0	Rm <850-1300			527
N° 5791		Microcut	Base-X B	12xd	d_1 1.0 – 3.0	Rm <850-1300			529
N° 5793		Microcut	Base-X B	15xd	d_1 1.0 – 3.0	Rm <850-1300			531
N° 15795		Microcut	Base-X B	20xd	d_1 1.0 – 3.0	Rm <850-1100			533
N° 45785			Favorita F	3xd	d_1 0.3 – 3.0	Rm <850-1100			535

End milling tools for 3D machining

Micro with corner radius

Shank ø 6mm									
N° 6531		MicroX X-Generation	X	2xd	r 0.05, 0.1, 0.2, 0.3, 0.5	Rm 850-1500	HRC 48-60	Inox Ti	537
N° 6532		MicroX X-Generation	X	3xd	r 0.05, 0.1, 0.2, 0.3, 0.5	Rm 850-1500	HRC 48-60	Inox Ti	539
N° 6533		MicroX X-Generation	X	4xd	r 0.05, 0.1, 0.2, 0.3, 0.5	Rm 850-1500	HRC 48-60	Inox Ti	543
N° 6534		MicroX X-Generation	X	5xd	r 0.05, 0.1, 0.2, 0.3, 0.5	Rm 850-1500	HRC 48-60	Inox Ti	545
N° 6535		MicroX X-Generation	X	6xd	r 0.05, 0.1, 0.2, 0.3, 0.5	Rm 850-1500	HRC 48-60	Inox Ti	549
N° 6536		MicroX X-Generation	X	8xd	r 0.05, 0.1, 0.2, 0.3, 0.5	Rm 850-1500	HRC 48-60	Inox Ti	551
N° 6538		MicroX X-Generation	X	10xd	r 0.05, 0.1, 0.2, 0.3, 0.5	Rm 850-1500	HRC 48-60	Inox Ti	555



Shank ø 6mm, conical neck 0.9°									
N° 6735		MicroX X-Generation	X	6xd	r 0.1, 0.2, 0.5	Rm 850-1500	HRC 48-60	Inox Ti	559
N° 6736		MicroX X-Generation	X	8xd	r 0.1, 0.2, 0.5	Rm 850-1500	HRC 48-60	Inox Ti	561
N° 6738		MicroX X-Generation	X	10xd	r 0.1, 0.2, 0.5	Rm 850-1500	HRC 48-60	Inox Ti	563
N° 6740		MicroX X-Generation	X	12xd	r 0.1, 0.2, 0.5	Rm 850-1500	HRC 48-60	Inox Ti	565
N° 6742		MicroX X-Generation	X	15xd	r 0.1, 0.2, 0.5	Rm 850-1500	HRC 48-60	Inox Ti	567
N° 6744		MicroX X-Generation	X	20xd	r 0.1, 0.2, 0.5	Rm 850-1500	HRC 48-60	Inox Ti	569







End milling tools for 3D machining

Micro with corner radius




Shank ø 6mm, Z4

N° 6632		MicroX	X-Generation X	3xd	r 0.1, 0.2, 0.5	Rm 1100-1500	HRC 48-60		571
N° 6634		MicroX	X-Generation X	5xd	r 0.1, 0.2, 0.5	Rm 1100-1500	HRC 48-60		573

Shank ø 4mm


N° 6816		Microcut new!	Base-X B	1xd	r 0.1, 0.2	Rm <850-1500	HRC 48-56	Inox Ti	575
N° 6818		Microcut new!	Base-X B	3xd	r 0.1, 0.2	Rm <850-1500	HRC 48-56	Inox Ti	577
N° 6820		Microcut new!	Base-X B	5xd	r 0.1, 0.2	Rm <850-1500	HRC 48-56	Inox Ti	579
N° 6823		Microcut new!	Base-X B	8xd	r 0.1, 0.2	Rm <850-1500	HRC 48-56	Inox Ti	581

Shank ø 3mm

N° 5752		Microcut	Base-X B	3xd	r 0.2	Rm <850-1300	Inox Stainless	Ti Titanium	583
N° 5754		Microcut	Base-X B	5xd	r 0.2	Rm <850-1300	Inox Stainless	Ti Titanium	585
N° 5756		Microcut	Base-X B	8xd	r 0.2	Rm <850-1300	Inox Stainless	Ti Titanium	587

Application

Material



Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC




d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
1.00	2	120	0.026	0.030	0.090	0.91	41975	2185	45°
2.00	2	226	0.038	0.030	0.120	1.72	41825	3180	45°
3.00	2	300	0.058	0.050	0.150	2.59	36870	4275	45°
4.00	2	300	0.074	0.050	0.180	3.39	28170	4170	45°
5.00	2	300	0.084	0.050	0.210	4.17	22900	3845	45°
6.00	2	300	0.090	0.050	0.230	4.94	19330	3480	45°
8.00	2	300	0.098	0.080	0.280	6.67	14315	2805	45°
10.00	2	300	0.106	0.080	0.310	8.22	11615	2465	45°
12.00	2	300	0.116	0.100	0.340	9.89	9655	2240	45°
1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
2.00	2	200	0.028	0.030	0.120	1.72	37015	2075	45°
3.00	2	250	0.042	0.050	0.150	2.59	30725	2580	45°
4.00	2	250	0.052	0.050	0.180	3.39	23475	2440	45°
5.00	2	250	0.058	0.050	0.210	4.17	19085	2215	45°
6.00	2	250	0.064	0.050	0.230	4.94	16110	2060	45°
8.00	2	250	0.068	0.080	0.280	6.67	11930	1625	45°
10.00	2	250	0.074	0.080	0.310	8.22	9680	1435	45°
12.00	2	250	0.082	0.100	0.340	9.89	8045	1320	45°
1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
2.00	2	160	0.028	0.030	0.120	1.72	29610	1660	45°
3.00	2	200	0.042	0.050	0.150	2.59	24580	2065	45°
4.00	2	200	0.052	0.050	0.180	3.39	18780	1955	45°
5.00	2	200	0.058	0.050	0.210	4.17	15265	1770	45°
6.00	2	200	0.064	0.050	0.230	4.94	12885	1650	45°
8.00	2	200	0.068	0.080	0.280	6.67	9545	1300	45°
10.00	2	200	0.074	0.080	0.310	8.22	7745	1145	45°
12.00	2	200	0.082	0.100	0.340	9.89	6435	1055	45°
1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
2.00	2	120	0.028	0.030	0.120	1.72	22210	1245	45°
3.00	2	150	0.042	0.050	0.150	2.59	18435	1550	45°
4.00	2	150	0.052	0.050	0.180	3.39	14085	1465	45°
5.00	2	150	0.058	0.050	0.210	4.17	11450	1330	45°
6.00	2	150	0.064	0.050	0.230	4.94	9665	1235	45°
8.00	2	150	0.068	0.080	0.280	6.67	7160	975	45°
10.00	2	150	0.074	0.080	0.310	8.22	5810	860	45°
12.00	2	150	0.082	0.100	0.340	9.89	4830	790	45°
1.00	2	116	0.030	0.020	0.040	0.88	41960	2520	45°
2.00	2	220	0.040	0.020	0.050	1.67	41935	3355	45°
3.00	2	329	0.045	0.030	0.060	2.50	41890	3770	45°
4.00	2	360	0.050	0.030	0.060	3.27	35045	3505	45°
5.00	2	360	0.050	0.030	0.070	4.04	28365	2835	45°
6.00	2	360	0.055	0.030	0.070	4.80	23875	2625	45°
8.00	2	360	0.060	0.050	0.080	6.48	17685	2120	45°
10.00	2	360	0.060	0.050	0.080	8.00	14325	1720	45°
12.00	2	360	0.065	0.050	0.080	9.51	12050	1565	45°
1.00	2	116	0.020	0.020	0.040	0.88	41960	1680	45°
2.00	2	220	0.025	0.020	0.050	1.67	41935	2095	45°
3.00	2	300	0.030	0.030	0.060	2.50	38195	2290	45°
4.00	2	300	0.030	0.030	0.060	3.27	29205	1750	45°
5.00	2	300	0.035	0.030	0.070	4.04	23635	1655	45°
6.00	2	300	0.035	0.030	0.070	4.80	19895	1395	45°
8.00	2	300	0.040	0.050	0.080	6.48	14735	1180	45°
10.00	2	300	0.040	0.050	0.080	8.00	11935	955	45°
12.00	2	300	0.040	0.050	0.080	9.51	10040	805	45°
1.00	2	116	0.020	0.020	0.040	0.88	41960	1680	45°
2.00	2	190	0.025	0.020	0.050	1.67	36215	1810	45°
3.00	2	240	0.030	0.030	0.060	2.50	30560	1835	45°
4.00	2	240	0.030	0.030	0.060	3.27	23360	1400	45°
5.00	2	240	0.035	0.030	0.070	4.04	18910	1325	45°
6.00	2	240	0.035	0.030	0.070	4.80	15915	1115	45°
8.00	2	240	0.040	0.050	0.080	6.48	11790	945	45°
10.00	2	240	0.040	0.050	0.080	8.00	9550	765	45°
12.00	2	240	0.040	0.050	0.080	9.51	8035	645	45°
1.00	2	116	0.020	0.020	0.040	0.88	41960	1680	45°
2.00	2	140	0.025	0.020	0.050	1.67	26685	1335	45°
3.00	2	180	0.030	0.030	0.060	2.50	22920	1375	45°
4.00	2	180	0.030	0.030	0.060	3.27	17520	1050	45°
5.00	2	180	0.035	0.030	0.070	4.04	14180	995	45°
6.00	2	180	0.035	0.030	0.070	4.80	11935	835	45°
8.00	2	180	0.040	0.050	0.080	6.48	8840	705	45°
10.00	2	180	0.040	0.050	0.080	8.00	7160	575	45°
12.00	2	180	0.040	0.050	0.080	9.51	6025	480	45°

Ball nose end mills SpheroX

Tolerance $r \pm 0.003$, 3xd




HM
XA λ 30°
 γ -10°

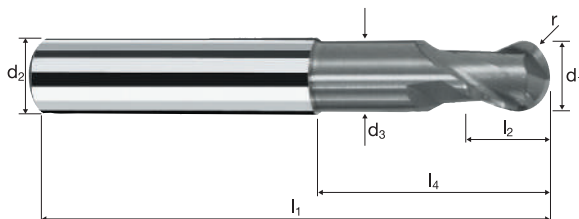

Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	HSS ToolSteel
----------------	-----------------	-----------------	--------------	--------------	-------------	----------------	------------------

Ø Code	Coating		Article-N°		ø-Code							X-AL
	X		7500		100							X7500
	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.003	α	z		
100	1.00	6.00	0.95	57	1.50	3.00	13.08	0.500	11.8°	2		●
140	2.00	6.00	1.90	57	3.00	6.00	14.31	1.000	9.0°	2		●
180	3.00	6.00	2.80	57	4.00	9.00	15.63	1.500	6.4°	2		●
220	4.00	6.00	3.70	57	5.00	12.00	16.95	2.000	4.0°	2		●
260	5.00	6.00	4.60	57	6.00	15.00	18.27	2.500	2.0°	2		●
300	6.00	6.00	5.50	57	7.00	19.34	20.00	3.000	0.0°	2		●
391	8.00	8.00	7.40	63	9.00	25.29	26.00	4.000	0.0°	2		●
450	10.00	10.00	9.20	72	11.00	30.20	31.00	5.000	0.0°	2		●
501	12.00	12.00	11.00	83	13.00	36.13	37.00	6.000	0.0°	2		●

Application



Material

Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



High speed steel,
hardened
64 - 70 HRC




d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_t [mm/min]	β [°]
1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
2.00	2	160	0.028	0.030	0.120	1.72	29610	1660	45°
3.00	2	200	0.042	0.050	0.150	2.59	24580	2065	45°
4.00	2	200	0.052	0.050	0.180	3.39	18780	1955	45°
5.00	2	200	0.058	0.050	0.210	4.17	15265	1770	45°
6.00	2	200	0.064	0.050	0.230	4.94	12885	1650	45°
8.00	2	200	0.068	0.080	0.280	6.67	9545	1300	45°
10.00	2	200	0.074	0.080	0.310	8.22	7745	1145	45°
12.00	2	200	0.082	0.100	0.340	9.89	6435	1055	45°

1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
2.00	2	120	0.028	0.030	0.120	1.72	22210	1245	45°
3.00	2	150	0.042	0.050	0.150	2.59	18435	1550	45°
4.00	2	150	0.052	0.050	0.180	3.39	14085	1465	45°
5.00	2	150	0.058	0.050	0.210	4.17	11450	1330	45°
6.00	2	150	0.064	0.050	0.230	4.94	9665	1235	45°
8.00	2	150	0.068	0.080	0.280	6.67	7160	975	45°
10.00	2	150	0.074	0.080	0.310	8.22	5810	860	45°
12.00	2	150	0.082	0.100	0.340	9.89	4830	790	45°

1.00	2	80	0.018	0.030	0.090	0.91	27985	1005	45°
2.00	2	80	0.028	0.030	0.120	1.72	14805	830	45°
3.00	2	100	0.042	0.050	0.150	2.59	12290	1030	45°
4.00	2	100	0.052	0.050	0.180	3.39	9390	975	45°
5.00	2	100	0.058	0.050	0.210	4.17	7635	885	45°
6.00	2	100	0.064	0.050	0.230	4.94	6445	825	45°
8.00	2	100	0.068	0.080	0.280	6.67	4770	650	45°
10.00	2	100	0.074	0.080	0.310	8.22	3870	575	45°
12.00	2	100	0.082	0.100	0.340	9.89	3220	530	45°

1.00	2	50	0.018	0.030	0.090	0.91	17490	630	45°
2.00	2	50	0.028	0.030	0.120	1.72	9255	520	45°
3.00	2	60	0.042	0.050	0.150	2.59	7375	620	45°
4.00	2	60	0.052	0.050	0.180	3.39	5635	585	45°
5.00	2	60	0.058	0.050	0.210	4.17	4580	530	45°
6.00	2	60	0.064	0.050	0.230	4.94	3865	495	45°
8.00	2	60	0.068	0.080	0.280	6.67	2865	390	45°
10.00	2	60	0.074	0.080	0.310	8.22	2325	345	45°
12.00	2	60	0.082	0.100	0.340	9.89	1930	315	45°

Application



Material

Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



High speed steel,
hardened
64 - 70 HRC



d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_t [mm/min]	Q [mm ³ /min]
1.00	2	100	0.028	0.180	0.200	0.77	41340	2315	83.3
2.00	2	111	0.048	0.280	0.400	1.39	25420	2440	273.3
3.00	2	111	0.060	0.360	0.600	1.95	18120	2175	469.6
4.00	2	111	0.072	0.480	0.800	2.60	13590	1955	751.4
5.00	2	111	0.080	0.600	1.000	3.25	10870	1740	1043.7
6.00	2	111	0.086	0.720	1.200	3.90	9060	1560	1346.3
8.00	2	111	0.106	0.960	1.600	5.20	6795	1440	2212.6
10.00	2	111	0.120	1.200	2.000	6.50	5435	1305	3131.0
12.00	2	111	0.125	1.440	2.400	7.80	4530	1130	3913.7

1.00	2	68	0.017	0.160	0.200	0.74	29250	995	31.8
2.00	2	68	0.029	0.250	0.400	1.33	16275	945	94.4
3.00	2	68	0.036	0.320	0.600	1.86	11635	840	160.9
4.00	2	68	0.043	0.430	0.800	2.48	8730	750	258.2
5.00	2	68	0.048	0.540	1.000	3.10	6980	670	362.0
6.00	2	68	0.052	0.650	1.200	3.72	5820	605	472.0
8.00	2	68	0.063	0.860	1.600	4.97	4355	550	755.1
10.00	2	68	0.072	1.080	2.000	6.21	3485	500	1084.1
12.00	2	68	0.075	1.300	2.400	7.45	2905	435	1359.7

1.00	2	51	0.014	0.130	0.200	0.66	24595	690	17.9
2.00	2	51	0.023	0.200	0.400	1.19	13640	630	50.2
3.00	2	51	0.029	0.250	0.600	1.66	9780	565	85.1
4.00	2	51	0.035	0.340	0.800	2.22	7315	510	139.2
5.00	2	51	0.038	0.420	1.000	2.77	5860	445	187.1
6.00	2	51	0.041	0.500	1.200	3.33	4875	400	239.9
8.00	2	51	0.051	0.670	1.600	4.44	3655	375	399.8
10.00	2	51	0.058	0.840	2.000	5.55	2925	340	570.0
12.00	2	51	0.060	1.010	2.400	6.66	2440	295	709.0


1.00	2	34	0.011	0.130	0.200	0.66	16400	360	9.4
2.00	2	34	0.018	0.200	0.400	1.19	9095	325	26.2
3.00	2	34	0.023	0.250	0.600	1.66	6520	300	45.0
4.00	2	34	0.028	0.340	0.800	2.22	4875	275	74.3
5.00	2	34	0.031	0.420	1.000	2.77	3905	240	101.7
6.00	2	34	0.033	0.500	1.200	3.33	3250	215	128.7
8.00	2	34	0.041	0.670	1.600	4.44	2440	200	214.3
10.00	2	34	0.046	0.840	2.000	5.55	1950	180	301.4
12.00	2	34	0.048	1.010	2.400	6.66	1625	155	378.1

Ball nose end mills SpheroX

Tolerance $r \pm 0.005, 3xd$




HM XA	λ 30° γ -10°

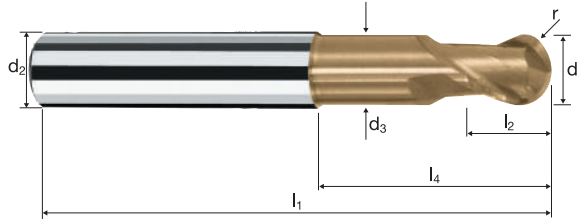

		Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60		Ti Titanium	HSS ToolSteel
--	--	-----------------	-----------------	--------------	--------------	-------------	--	----------------	------------------

Ø Code	Coating			Article-N°		ø-Code		r ±0.005	α	z	DURO-V
	Example: Order-N°.	V	7470	100			V7470				
	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄				
100	1.00	6.00	0.95	57	1.50	3.00	13.08	0.500	11.8°	2	●
140	2.00	6.00	1.90	57	3.00	6.00	14.31	1.000	9.0°	2	●
180	3.00	6.00	2.80	57	4.00	9.00	15.63	1.500	6.4°	2	●
220	4.00	6.00	3.70	57	5.00	12.00	16.95	2.000	4.0°	2	●
260	5.00	6.00	4.60	57	6.00	15.00	18.27	2.500	2.0°	2	●
300	6.00	6.00	5.50	57	7.00	19.34	20.00	3.000	0.0°	2	●
391	8.00	8.00	7.40	63	9.00	25.29	26.00	4.000	0.0°	2	●
450	10.00	10.00	9.20	72	11.00	30.20	31.00	5.000	0.0°	2	●
501	12.00	12.00	11.00	83	13.00	36.13	37.00	6.000	0.0°	2	●
610	16.00	16.00	15.00	92	17.00	42.13	43.00	8.000	0.0°	2	●

Application



Material

Hardened tool steel
52 - 56 HRC




Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



High speed steel,
hardened
64 - 70 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



High speed steel,
hardened
64 - 70 HRC




d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _r [mm/min]	β [°]
1.00	4	120	0.014	0.030	0.090	0.91	41975	2350	45°
2.00	4	160	0.022	0.030	0.120	1.72	29610	2605	45°
3.00	4	200	0.034	0.050	0.150	2.59	24580	3345	45°
4.00	4	200	0.042	0.050	0.180	3.39	18780	3155	45°
5.00	4	200	0.048	0.050	0.210	4.17	15265	2930	45°
6.00	4	200	0.052	0.050	0.230	4.94	12885	2680	45°
8.00	4	200	0.056	0.080	0.280	6.67	9545	2140	45°
10.00	4	200	0.060	0.080	0.310	8.22	7745	1860	45°
12.00	4	200	0.066	0.100	0.340	9.89	6435	1700	45°
1.00	4	120	0.014	0.030	0.090	0.91	41975	2350	45°
2.00	4	120	0.022	0.030	0.120	1.72	22210	1955	45°
3.00	4	150	0.034	0.050	0.150	2.59	18435	2505	45°
4.00	4	150	0.042	0.050	0.180	3.39	14085	2365	45°
5.00	4	150	0.048	0.050	0.210	4.17	11450	2200	45°
6.00	4	150	0.052	0.050	0.230	4.94	9665	2010	45°
8.00	4	150	0.056	0.080	0.280	6.67	7160	1605	45°
10.00	4	150	0.060	0.080	0.310	8.22	5810	1395	45°
12.00	4	150	0.066	0.100	0.340	9.89	4830	1275	45°
1.00	4	80	0.014	0.030	0.090	0.91	27985	1565	45°
2.00	4	80	0.022	0.030	0.120	1.72	14805	1305	45°
3.00	4	100	0.034	0.050	0.150	2.59	12290	1670	45°
4.00	4	100	0.042	0.050	0.180	3.39	9390	1575	45°
5.00	4	100	0.048	0.050	0.210	4.17	7635	1465	45°
6.00	4	100	0.052	0.050	0.230	4.94	6445	1340	45°
8.00	4	100	0.056	0.080	0.280	6.67	4770	1070	45°
10.00	4	100	0.060	0.080	0.310	8.22	3870	930	45°
12.00	4	100	0.066	0.100	0.340	9.89	3220	850	45°
1.00	4	50	0.014	0.030	0.090	0.91	17490	980	45°
2.00	4	50	0.022	0.030	0.120	1.72	9255	815	45°
3.00	4	60	0.034	0.050	0.150	2.59	7375	1005	45°
4.00	4	60	0.042	0.050	0.180	3.39	5635	945	45°
5.00	4	60	0.048	0.050	0.210	4.17	4580	880	45°
6.00	4	60	0.052	0.050	0.230	4.94	3865	805	45°
8.00	4	60	0.056	0.080	0.280	6.67	2865	640	45°
10.00	4	60	0.060	0.080	0.310	8.22	2325	560	45°
12.00	4	60	0.066	0.100	0.340	9.89	1930	510	45°
1.00	4	130	0.023	0.180	0.180	0.99	41800	3845	30°
2.00	4	130	0.039	0.280	0.280	1.92	21550	3360	30°
3.00	4	130	0.049	0.360	0.360	2.83	14620	2865	30°
4.00	4	130	0.058	0.480	0.480	3.77	10975	2545	30°
5.00	4	130	0.065	0.600	0.600	4.71	8785	2285	30°
6.00	4	130	0.070	0.720	0.720	5.66	7310	2045	30°
8.00	4	130	0.086	0.960	0.960	7.54	5490	1890	30°
10.00	4	130	0.098	1.200	1.200	9.43	4390	1720	30°
12.00	4	130	0.101	1.440	1.440	11.31	3660	1480	30°
1.00	4	80	0.014	0.160	0.160	0.97	26250	1470	30°
2.00	4	80	0.023	0.250	0.250	1.90	13405	1235	30°
3.00	4	80	0.029	0.320	0.320	2.78	9160	1065	30°
4.00	4	80	0.035	0.430	0.430	3.72	6845	960	30°
5.00	4	80	0.039	0.540	0.540	4.65	5475	855	30°
6.00	4	80	0.042	0.650	0.650	5.58	4565	765	30°
8.00	4	80	0.051	0.860	0.860	7.43	3425	700	30°
10.00	4	80	0.058	1.080	1.080	9.30	2740	635	30°
12.00	4	80	0.061	1.300	1.300	11.16	2280	555	30°
1.00	4	60	0.011	0.130	0.130	0.95	20105	885	30°
2.00	4	60	0.019	0.200	0.200	1.84	10380	790	30°
3.00	4	60	0.023	0.250	0.250	2.69	7100	655	30°
4.00	4	60	0.028	0.340	0.340	3.59	5320	595	30°
5.00	4	60	0.031	0.420	0.420	4.48	4265	530	30°
6.00	4	60	0.034	0.500	0.500	5.37	3555	485	30°
8.00	4	60	0.041	0.670	0.670	7.17	2665	435	30°
10.00	4	60	0.047	0.840	0.840	8.96	2130	400	30°
12.00	4	60	0.049	1.010	1.010	10.76	1775	350	30°
1.00	4	40	0.009	0.130	0.130	0.95	13405	480	30°
2.00	4	40	0.015	0.200	0.200	1.84	6920	415	30°
3.00	4	40	0.019	0.250	0.250	2.69	4735	360	30°
4.00	4	40	0.023	0.340	0.340	3.59	3545	325	30°
5.00	4	40	0.025	0.420	0.420	4.48	2840	285	30°
6.00	4	40	0.027	0.500	0.500	5.37	2370	255	30°
8.00	4	40	0.033	0.670	0.670	7.17	1775	235	30°
10.00	4	40	0.037	0.840	0.840	8.96	1420	210	30°
12.00	4	40	0.039	1.010	1.010	10.76	1185	185	30°

Ball nose end mills SpheroX

Tolerance $r \pm 0.005, 3xd$




HM XA	λ 40° γ 0°
Vario 	

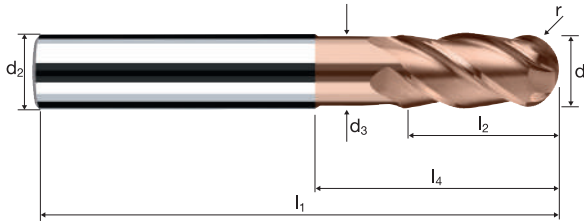

		Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60		Ti Titanium	HSS
--	--	-----------------	-----------------	--------------	--------------	-------------	--	----------------	-----

Example: Order-N°.											DURO-Si	
											H7490	
Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z		
100	1.00	6.00	0.95	57	2.00	3.10	13.18	0.500	11.8°	4	●	
140	2.00	6.00	1.90	57	4.00	6.00	14.31	1.000	9.0°	4	●	
180	3.00	6.00	2.80	57	6.00	9.00	15.63	1.500	6.4°	4	●	
220	4.00	6.00	3.70	57	8.00	12.00	16.95	2.000	4.0°	4	●	
260	5.00	6.00	4.60	57	10.00	15.00	18.27	2.500	2.0°	4	●	
300	6.00	6.00	5.50	57	12.00	19.34	20.00	3.000	0.0°	4	●	
391	8.00	8.00	7.40	63	16.00	25.29	26.00	4.000	0.0°	4	●	
450	10.00	10.00	9.20	72	20.00	30.20	31.00	5.000	0.0°	4	●	
501	12.00	12.00	11.00	83	24.00	36.13	37.00	6.000	0.0°	4	●	
610	16.00	16.00	15.00	92	32.00	42.13	43.00	8.000	0.0°	4	●	

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Titanium alloys
> 300 HB
[Ti6Al4V]


d1 [mm]	z	v_c [m/min]	f_z [mm]	a_s [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
1.00	2	120	0.026	0.030	0.090	0.91	41975	2185	45°
2.00	2	226	0.038	0.030	0.120	1.72	41825	3180	45°
3.00	2	300	0.058	0.050	0.150	2.59	36870	4275	45°
4.00	2	300	0.074	0.050	0.180	3.39	28170	4170	45°
5.00	2	300	0.084	0.050	0.210	4.17	22900	3845	45°
6.00	2	300	0.090	0.050	0.230	4.94	19330	3480	45°
8.00	2	300	0.098	0.080	0.280	6.67	14315	2805	45°
10.00	2	300	0.106	0.080	0.310	8.22	11615	2465	45°
12.00	2	300	0.116	0.100	0.340	9.89	9655	2240	45°

1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
2.00	2	200	0.028	0.030	0.120	1.72	37015	2075	45°
3.00	2	250	0.042	0.050	0.150	2.59	30725	2580	45°
4.00	2	250	0.052	0.050	0.180	3.39	23475	2440	45°
5.00	2	250	0.058	0.050	0.210	4.17	19085	2215	45°
6.00	2	250	0.064	0.050	0.230	4.94	16110	2060	45°
8.00	2	250	0.068	0.080	0.280	6.67	11930	1625	45°
10.00	2	250	0.074	0.080	0.310	8.22	9680	1435	45°
12.00	2	250	0.082	0.100	0.340	9.89	8045	1320	45°

1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
2.00	2	160	0.028	0.030	0.120	1.72	29610	1660	45°
3.00	2	200	0.042	0.050	0.150	2.59	24580	2065	45°
4.00	2	200	0.052	0.050	0.180	3.39	18780	1955	45°
5.00	2	200	0.058	0.050	0.210	4.17	15265	1770	45°
6.00	2	200	0.064	0.050	0.230	4.94	12885	1650	45°
8.00	2	200	0.068	0.080	0.280	6.67	9545	1300	45°
10.00	2	200	0.074	0.080	0.310	8.22	7745	1145	45°
12.00	2	200	0.082	0.100	0.340	9.89	6435	1055	45°

1.00	2	120	0.026	0.030	0.090	0.91	41975	2185	45°
2.00	2	120	0.038	0.030	0.120	1.72	22210	1690	45°
3.00	2	150	0.058	0.050	0.150	2.59	18435	2140	45°
4.00	2	150	0.074	0.050	0.180	3.39	14085	2085	45°
5.00	2	150	0.084	0.050	0.210	4.17	11450	1925	45°
6.00	2	150	0.090	0.050	0.230	4.94	9665	1740	45°
8.00	2	150	0.098	0.080	0.280	6.67	7160	1405	45°
10.00	2	150	0.106	0.080	0.310	8.22	5810	1230	45°
12.00	2	150	0.116	0.100	0.340	9.89	4830	1120	45°

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Titanium alloys
> 300 HB
[Ti6Al4V]

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_s [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
1.00	2	100	0.034	0.180	0.200	0.77	41340	2810	101.2
2.00	2	170	0.058	0.280	0.400	1.39	38930	4515	505.8
3.00	2	170	0.073	0.360	0.600	1.95	27750	4050	875.1
4.00	2	170	0.087	0.480	0.800	2.60	20815	3620	1390.6
5.00	2	170	0.097	0.600	1.000	3.25	16650	3230	1938.1
6.00	2	170	0.105	0.720	1.200	3.90	13875	2915	2517.5
8.00	2	170	0.128	0.960	1.600	5.20	10405	2665	4091.9
10.00	2	170	0.145	1.200	2.000	6.50	8325	2415	5794.2
12.00	2	170	0.151	1.440	2.400	7.80	6940	2095	7240.8

1.00	2	100	0.031	0.180	0.200	0.77	41340	2565	92.3
2.00	2	136	0.053	0.280	0.400	1.39	31145	3300	369.7
3.00	2	136	0.066	0.360	0.600	1.95	22200	2930	633.0
4.00	2	136	0.079	0.480	0.800	2.60	16650	2630	1010.2
5.00	2	136	0.088	0.600	1.000	3.25	13320	2345	1406.6
6.00	2	136	0.095	0.720	1.200	3.90	11100	2110	1822.2
8.00	2	136	0.116	0.960	1.600	5.20	8325	1930	2966.6
10.00	2	136	0.132	1.200	2.000	6.50	6660	1760	4219.8
12.00	2	136	0.137	1.440	2.400	7.80	5550	1520	5255.6

1.00	2	100	0.028	0.180	0.200	0.77	41340	2315	83.3
2.00	2	111	0.048	0.280	0.400	1.39	25420	2440	273.3
3.00	2	111	0.060	0.360	0.600	1.95	18120	2175	469.6
4.00	2	111	0.072	0.480	0.800	2.60	13590	1955	751.4
5.00	2	111	0.080	0.600	1.000	3.25	10870	1740	1043.7
6.00	2	111	0.086	0.720	1.200	3.90	9060	1560	1346.3
8.00	2	111	0.106	0.960	1.600	5.20	6795	1440	2212.6
10.00	2	111	0.120	1.200	2.000	6.50	5435	1305	3131.0
12.00	2	111	0.125	1.440	2.400	7.80	4530	1130	3913.7


1.00	2	85	0.031	0.180	0.200	0.77	35140	2180	78.4
2.00	2	85	0.053	0.280	0.400	1.39	19465	2065	231.1
3.00	2	85	0.066	0.360	0.600	1.95	13875	1830	395.6
4.00	2	85	0.079	0.480	0.800	2.60	10405	1645	631.4
5.00	2	85	0.088	0.600	1.000	3.25	8325	1465	879.1
6.00	2	85	0.095	0.720	1.200	3.90	6940	1320	1138.9
8.00	2	85	0.116	0.960	1.600	5.20	5205	1205	1854.2
10.00	2	85	0.132	1.200	2.000	6.50	4165	1100	2637.4
12.00	2	85	0.137	1.440	2.400	7.80	3470	950	3284.7

Ball nose end mills SpheroX

Tolerance $r \pm 0.005, 3xd$






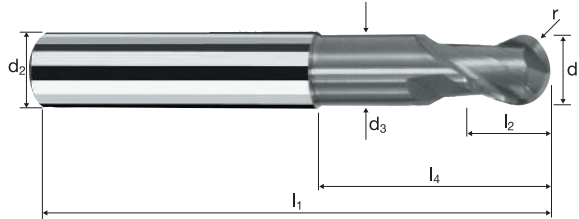






HM XA	λ 30° γ -10°



Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	HSS ToolSteel
----------------	-----------------	-----------------	--------------	--------------	-------------	----------------	------------------

Ø Code	Coating			Article-N°		ø-Code		r ±0.005	α	z	X-AL
	Example: Order-N°	X	7400	100							
	d1	d2 h4	d3	l1	l2	l3	l4				X7400
100	1.00	6.00	0.95	57	1.50	3.00	13.08	0.500	11.8°	2	●
140	2.00	6.00	1.90	57	3.00	6.00	14.31	1.000	9.0°	2	●
180	3.00	6.00	2.80	57	4.00	9.00	15.63	1.500	6.4°	2	●
220	4.00	6.00	3.70	57	5.00	12.00	16.95	2.000	4.0°	2	●
260	5.00	6.00	4.60	57	6.00	15.00	18.27	2.500	2.0°	2	●
300	6.00	6.00	5.50	57	7.00	19.34	20.00	3.000	0.0°	2	●
391	8.00	8.00	7.40	63	9.00	25.29	26.00	4.000	0.0°	2	●
450	10.00	10.00	9.20	72	11.00	30.20	31.00	5.000	0.0°	2	●
501	12.00	12.00	11.00	83	13.00	36.13	37.00	6.000	0.0°	2	●



Application	Material	d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
	Hardened tool steel 42 - 48 HRC    	6.00	8	300	0.055	0.120	0.120	5.26	18155	7990	45°
		8.00	10	300	0.060	0.140	0.140	6.94	13760	8255	45°
		10.00	12	300	0.065	0.160	0.160	8.62	11080	8640	45°
		12.00	16	300	0.070	0.180	0.180	10.29	9280	10395	45°
		6.00	8	250	0.050	0.120	0.120	5.26	15130	6050	45°
		8.00	10	250	0.055	0.140	0.140	6.94	11465	6305	45°
		10.00	12	250	0.060	0.160	0.160	8.62	9230	6645	45°
		12.00	16	250	0.065	0.180	0.180	10.29	7735	8045	45°
		6.00	8	200	0.050	0.120	0.120	5.26	12105	4840	45°
		8.00	10	200	0.055	0.140	0.140	6.94	9175	5045	45°
		10.00	12	200	0.060	0.160	0.160	8.62	7385	5315	45°
		12.00	16	200	0.065	0.180	0.180	10.29	6185	6435	45°
		6.00	8	150	0.045	0.120	0.120	5.26	9075	3270	45°
		8.00	10	150	0.050	0.140	0.140	6.94	6880	3440	45°
		10.00	12	150	0.055	0.160	0.160	8.62	5540	3655	45°
		12.00	16	150	0.060	0.180	0.180	10.29	4640	4455	45°
	Hardened tool steel 42 - 48 HRC    	6.00	8	400	0.030	0.030	0.030	4.80	26525	6365	45°
		8.00	10	400	0.035	0.030	0.030	6.31	20180	7060	45°
		10.00	12	400	0.035	0.040	0.040	7.91	16095	6760	45°
		12.00	16	400	0.040	0.040	0.040	9.41	13530	8660	45°
		6.00	8	350	0.030	0.030	0.030	4.80	23210	5570	45°
		8.00	10	350	0.035	0.030	0.030	6.31	17655	6180	45°
		10.00	12	350	0.035	0.040	0.040	7.91	14085	5915	45°
		12.00	16	350	0.040	0.040	0.040	9.41	11840	7575	45°
		6.00	8	280	0.025	0.030	0.030	4.80	18570	3715	45°
		8.00	10	280	0.030	0.030	0.030	6.31	14125	4235	45°
		10.00	12	280	0.030	0.040	0.040	7.91	11270	4055	45°
		12.00	16	280	0.035	0.040	0.040	9.41	9470	5305	45°
		6.00	8	180	0.025	0.030	0.030	4.80	11935	2385	45°
		8.00	10	180	0.030	0.030	0.030	6.31	9080	2725	45°
		10.00	12	180	0.030	0.040	0.040	7.91	7245	2610	45°
		12.00	16	180	0.035	0.040	0.040	9.41	6090	3410	45°

Ball nose end mills SpheroX

Tolerance $r \pm 0.005$, 3xd



HM λ 30°
XA γ -10°

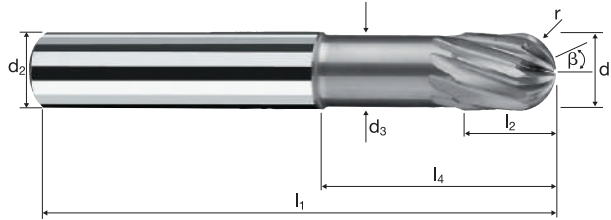


Rm	Rm	Rm	HRC	HRC	HRC	Ti	HSS
850-1100	1100-1300	1300-1500	48-56	56-60	> 60	Titanium	ToolSteel

Ø Code	Example: Order-N°.										X-AL
	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	β	z	X7460
300	6.00	6.00	5.50	57	7.00	19.34	20.00	3.000	25°	8	●
391	8.00	8.00	7.40	63	9.00	25.29	26.00	4.000	25°	10	●
450	10.00	10.00	9.20	72	11.00	30.20	31.00	5.000	25°	12	●
501	12.00	12.00	11.00	83	13.00	36.13	37.00	6.000	25°	16	●

Application

Material



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _r [mm/min]	β [°]
1.00	2	100	0.030	0.110	0.110	0.99	32155	1930	45°
2.00	2	100	0.055	0.220	0.220	1.99	15995	1760	45°
3.00	2	100	0.060	0.330	0.330	2.98	10680	1280	45°
4.00	2	100	0.070	0.440	0.440	3.98	8000	1120	45°
5.00	2	100	0.080	0.550	0.550	4.97	6405	1025	45°
6.00	2	100	0.085	0.660	0.660	5.96	5340	910	45°
8.00	2	100	0.100	0.880	0.880	7.95	4005	800	45°
10.00	2	100	0.115	1.100	1.100	9.94	3200	735	45°
12.00	2	100	0.120	1.320	1.320	11.93	2670	640	45°

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



1.00	2	90	0.028	0.110	0.110	0.99	28935	1620	45°
2.00	2	90	0.050	0.220	0.220	1.99	14395	1440	45°
3.00	2	90	0.054	0.330	0.330	2.98	9615	1040	45°
4.00	2	90	0.064	0.440	0.440	3.98	7200	920	45°
5.00	2	90	0.072	0.550	0.550	4.97	5765	830	45°
6.00	2	90	0.076	0.660	0.660	5.96	4805	730	45°
8.00	2	90	0.090	0.880	0.880	7.95	3605	650	45°
10.00	2	90	0.104	1.100	1.100	9.94	2880	600	45°
12.00	2	90	0.108	1.320	1.320	11.93	2400	520	45°

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]




1.00	2	60	0.025	0.110	0.110	0.99	19290	965	45°
2.00	2	60	0.045	0.220	0.220	1.99	9595	865	45°
3.00	2	60	0.050	0.330	0.330	2.98	6410	640	45°
4.00	2	60	0.060	0.440	0.440	3.98	4800	575	45°
5.00	2	60	0.070	0.550	0.550	4.97	3845	540	45°
6.00	2	60	0.070	0.660	0.660	5.96	3205	450	45°
8.00	2	60	0.085	0.880	0.880	7.95	2400	410	45°
10.00	2	60	0.100	1.100	1.100	9.94	1920	385	45°
12.00	2	60	0.100	1.320	1.320	11.93	1600	320	45°

Steel
< 850 N/mm²



1.00	2	132	0.040	0.120	0.120	1.00	42015	3360	45°
2.00	2	240	0.070	0.240	0.240	1.99	38390	5375	45°
3.00	2	240	0.075	0.360	0.360	2.99	25550	3830	45°
4.00	2	240	0.090	0.480	0.480	3.99	19145	3445	45°
5.00	2	240	0.100	0.600	0.600	4.98	15340	3070	45°
6.00	2	240	0.105	0.720	0.720	5.98	12775	2685	45°
8.00	2	240	0.125	0.960	0.960	7.98	9575	2395	45°
10.00	2	240	0.145	1.200	1.200	9.97	7660	2220	45°
12.00	2	240	0.150	1.440	1.440	11.96	6385	1915	45°



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



1.00	2	124	0.025	0.050	0.050	0.94	41990	2100	45°
2.00	2	140	0.030	0.070	0.070	1.84	24220	1455	45°
3.00	2	140	0.035	0.090	0.090	2.72	16385	1145	45°
4.00	2	140	0.055	0.110	0.110	3.60	12380	1360	45°
5.00	2	140	0.060	0.130	0.130	4.48	9945	1195	45°
6.00	2	140	0.065	0.150	0.150	5.36	8315	1080	45°
8.00	2	140	0.075	0.170	0.170	7.05	6320	950	45°
10.00	2	140	0.080	0.200	0.200	8.77	5080	815	45°
12.00	2	140	0.085	0.250	0.250	10.56	4220	715	45°

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



1.00	2	124	0.022	0.050	0.050	0.94	41990	1850	45°
2.00	2	125	0.028	0.070	0.070	1.84	21625	1210	45°
3.00	2	125	0.032	0.090	0.090	2.72	14630	935	45°
4.00	2	125	0.050	0.110	0.110	3.60	11050	1105	45°
5.00	2	125	0.054	0.130	0.130	4.48	8880	960	45°
6.00	2	125	0.058	0.150	0.150	5.36	7425	860	45°
8.00	2	125	0.068	0.170	0.170	7.05	5645	770	45°
10.00	2	125	0.072	0.200	0.200	8.77	4535	655	45°
12.00	2	125	0.076	0.250	0.250	10.56	3770	575	45°

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]



1.00	2	70	0.025	0.050	0.050	0.94	23705	1185	45°
2.00	2	70	0.025	0.070	0.070	1.84	12110	605	45°
3.00	2	70	0.030	0.090	0.090	2.72	8190	490	45°
4.00	2	70	0.050	0.110	0.110	3.60	6190	620	45°
5.00	2	70	0.055	0.130	0.130	4.48	4975	545	45°
6.00	2	70	0.060	0.150	0.150	5.36	4155	500	45°
8.00	2	70	0.070	0.170	0.170	7.05	3160	440	45°
10.00	2	70	0.070	0.200	0.200	8.77	2540	355	45°
12.00	2	70	0.075	0.250	0.250	10.56	2110	315	45°



Steel
< 850 N/mm²



1.00	2	124	0.030	0.050	0.050	0.94	41990	2520	45°
2.00	2	243	0.035	0.070	0.070	1.84	42040	2945	45°
3.00	2	359	0.040	0.090	0.090	2.72	42010	3360	45°
4.00	2	360	0.065	0.110	0.110	3.60	31830	4140	45°
5.00	2	360	0.070	0.130	0.130	4.48	25580	3580	45°
6.00	2	360	0.080	0.150	0.150	5.36	21380	3420	45°
8.00	2	360	0.090	0.170	0.170	7.05	16255	2925	45°
10.00	2	360	0.095	0.200	0.200	8.77	13065	2485	45°
12.00	2	360	0.100	0.250	0.250	10.56	10850	2170	45°

Ball nose end mills Sphericut


Tolerance $r \pm 0.005$, $3 \times d$

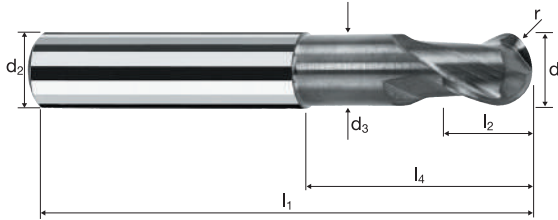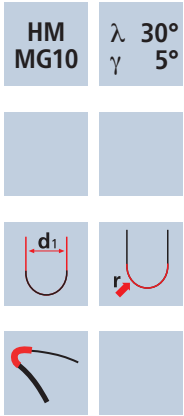

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
----------	-------------	--------------	--------------	-----------	----------------	-------------	--------------------------------

Ø Code	Example: Order-N°.											POLYCHROM	
	d ₁	d ₂ h ₆	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	P7540		
100	1.00	6.00	0.95	57	1.50	3.00	13.08	0.500	11.8°	2	●		
140	2.00	6.00	1.90	57	3.00	6.00	14.31	1.000	9.0°	2	●		
180	3.00	6.00	2.80	57	4.00	9.00	15.63	1.500	6.4°	2	●		
220	4.00	6.00	3.70	57	5.00	12.00	16.95	2.000	4.0°	2	●		
260	5.00	6.00	4.60	57	6.00	15.00	18.27	2.500	2.0°	2	●		
300	6.00	6.00	5.50	57	7.00	19.34	20.00	3.000	0.0°	2	●		
391	8.00	8.00	7.40	63	9.00	25.29	26.00	4.000	0.0°	2	●		
450	10.00	10.00	9.20	72	11.00	30.20	31.00	5.000	0.0°	2	●		
501	12.00	12.00	11.00	83	13.00	36.13	37.00	6.000	0.0°	2	●		
610	16.00	16.00	15.00	92	17.00	42.13	43.00	8.000	0.0°	2	●		

Application



Material

Wrought aluminium
Construction aluminium

Unalloyed copper

Thermoplastics

Cast aluminium


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
2.00	2	250	0.055	0.120	0.050	1.92	41445	4560	45°
3.00	2	370	0.060	0.150	0.050	2.83	41615	4995	45°
4.00	2	490	0.070	0.180	0.050	3.75	41590	5825	45°
5.00	2	610	0.075	0.200	0.050	4.64	41845	6275	45°
6.00	2	730	0.085	0.230	0.075	5.55	41870	7120	45°
8.00	2	810	0.090	0.250	0.075	7.27	35465	6385	45°
10.00	2	810	0.100	0.300	0.100	9.06	28460	5690	45°
12.00	2	810	0.105	0.350	0.100	10.85	23765	4990	45°
16.00	2	810	0.115	0.400	0.120	14.28	18055	4155	45°

2.00	2	250	0.055	0.120	0.050	1.92	41445	4560	45°
3.00	2	370	0.060	0.150	0.050	2.83	41615	4995	45°
4.00	2	490	0.070	0.180	0.050	3.75	41590	5825	45°
5.00	2	540	0.075	0.200	0.050	4.64	37045	5555	45°
6.00	2	540	0.085	0.230	0.075	5.55	30970	5265	45°
8.00	2	540	0.090	0.250	0.075	7.27	23645	4255	45°
10.00	2	540	0.100	0.300	0.100	9.06	18970	3795	45°
12.00	2	540	0.105	0.350	0.100	10.85	15840	3325	45°
16.00	2	540	0.115	0.400	0.120	14.28	12035	2770	45°

2.00	2	250	0.055	0.120	0.050	1.92	41445	4560	45°
3.00	2	370	0.060	0.150	0.050	2.83	41615	4995	45°
4.00	2	490	0.070	0.180	0.050	3.75	41590	5825	45°
5.00	2	610	0.075	0.200	0.050	4.64	41845	6275	45°
6.00	2	730	0.085	0.230	0.075	5.55	41870	7120	45°
8.00	2	955	0.090	0.250	0.075	7.27	41815	7525	45°
10.00	2	1195	0.100	0.300	0.100	9.06	41985	8395	45°
12.00	2	1430	0.105	0.350	0.100	10.85	41950	8810	45°
16.00	2	1800	0.115	0.400	0.120	14.28	40125	9230	45°

2.00	2	250	0.055	0.120	0.050	1.92	41445	4560	45°
3.00	2	370	0.060	0.150	0.050	2.83	41615	4995	45°
4.00	2	490	0.070	0.180	0.050	3.75	41590	5825	45°
5.00	2	610	0.075	0.200	0.050	4.64	41845	6275	45°
6.00	2	648	0.085	0.230	0.075	5.55	37165	6320	45°
8.00	2	648	0.090	0.250	0.075	7.27	28370	5105	45°
10.00	2	648	0.100	0.300	0.100	9.06	22765	4555	45°
12.00	2	648	0.105	0.350	0.100	10.85	19010	3990	45°
16.00	2	648	0.115	0.400	0.120	14.28	14445	3320	45°

Application



Material

Wrought aluminium
Construction aluminium

Unalloyed copper

Thermoplastics

Cast aluminium

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [cm ³ /min]
2.00	2	210	0.065	0.400	0.800	1.60	41780	5430	1.7
3.00	2	315	0.082	0.600	1.200	2.40	41780	6850	4.9
4.00	2	405	0.090	0.800	1.600	3.20	40285	7250	9.3
5.00	2	405	0.100	1.000	2.000	4.00	32230	6445	12.9
6.00	2	405	0.120	1.200	2.400	4.80	26855	6445	18.6
8.00	2	405	0.140	1.600	3.200	6.40	20145	5640	28.9
10.00	2	405	0.150	2.000	4.000	8.00	16115	4835	38.7
12.00	2	405	0.180	2.400	4.800	9.60	13430	4835	55.7
16.00	2	405	0.200	3.200	6.400	12.80	10070	4030	82.5

2.00	2	210	0.062	0.400	0.800	1.60	41780	5180	1.7
3.00	2	270	0.078	0.600	1.200	2.40	35810	5585	4.0
4.00	2	270	0.084	0.800	1.600	3.20	26855	4510	5.8
5.00	2	270	0.092	1.000	2.000	4.00	21485	3955	7.9
6.00	2	270	0.111	1.200	2.400	4.80	17905	3975	11.4
8.00	2	270	0.128	1.600	3.200	6.40	13430	3440	17.6
10.00	2	270	0.135	2.000	4.000	8.00	10745	2900	23.2
12.00	2	270	0.162	2.400	4.800	9.60	8950	2900	33.4
16.00	2	270	0.176	3.200	6.400	12.80	6715	2365	48.4

2.00	2	210	0.065	0.400	0.800	1.60	41780	5430	1.7
3.00	2	315	0.082	0.600	1.200	2.40	41780	6850	4.9
4.00	2	420	0.090	0.800	1.600	3.20	41780	7520	9.6
5.00	2	520	0.100	1.000	2.000	4.00	41380	8275	16.6
6.00	2	630	0.120	1.200	2.400	4.80	41780	10025	28.9
8.00	2	830	0.140	1.600	3.200	6.40	41280	11560	59.2
10.00	2	900	0.150	2.000	4.000	8.00	35810	10745	85.9
12.00	2	900	0.180	2.400	4.800	9.60	29840	10745	123.8
16.00	2	900	0.200	3.200	6.400	12.80	22380	8950	183.3




2.00	2	210	0.065	0.400	0.800	1.60	41780	5430	1.7
3.00	2	315	0.082	0.600	1.200	2.40	41780	6850	4.9
4.00	2	324	0.090	0.800	1.600	3.20	32230	5800	7.4
5.00	2	324	0.100	1.000	2.000	4.00	25785	5155	10.3
6.00	2	324	0.120	1.200	2.400	4.80	21485	5155	14.9
8.00	2	324	0.140	1.600	3.200	6.40	16115	4510	23.1
10.00	2	324	0.150	2.000	4.000	8.00	12890	3865	30.9
12.00	2	324	0.180	2.400	4.800	9.60	10745	3865	44.6
16.00	2	324	0.200	3.200	6.400	12.80	8055	3225	66.0

Ball nose end mills Sphericut

Tolerance $r \pm 0.005$, 3xd




HM
MG10 λ 40°
 γ 20°

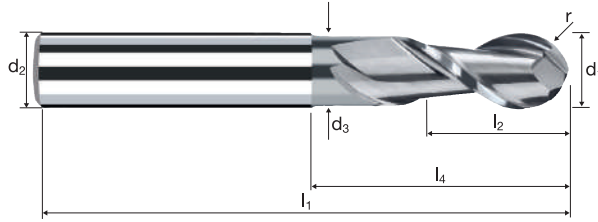

		Al Aluminium > 99%	Al Aluminium Alloy	Al Aluminium Cast		Cu Copper	Plastic Thermoplast	
--	--	--------------------------	--------------------------	-------------------------	--	--------------	------------------------	--

Ø Code	Example: Order-N°.											7550
	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z		
140	2.00	6.00	1.90	57	4.00	6.00	14.31	1.000	8.2°	2	●	
180	3.00	6.00	2.80	57	6.00	9.00	15.63	1.500	5.7°	2	●	
220	4.00	6.00	3.70	57	8.00	12.00	16.95	2.000	3.6°	2	●	
260	5.00	6.00	4.60	57	10.00	15.00	18.27	2.500	1.8°	2	●	
300	6.00	6.00	5.50	57	12.00	19.34	20.00	3.000	0.0°	2	●	
391	8.00	8.00	7.40	63	16.00	25.29	26.00	4.000	0.0°	2	●	
450	10.00	10.00	9.20	72	20.00	30.20	31.00	5.000	0.0°	2	●	
501	12.00	12.00	11.00	83	24.00	36.13	37.00	6.000	0.0°	2	●	
610	16.00	16.00	15.00	92	32.00	42.13	43.00	8.000	0.0°	2	●	
682	20.00	20.00	19.00	104	40.00	52.13	53.00	10.000	0.0°	2	●	

Application



Material

Hardened tool steel
52 - 56 HRC

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
2.00	2	140	0.028	0.030	0.120	1.72	25910	1450	45°
3.00	2	180	0.042	0.050	0.150	2.59	22120	1860	45°
4.00	2	180	0.052	0.050	0.180	3.39	16900	1760	45°
5.00	2	180	0.058	0.050	0.210	4.17	13740	1595	45°
6.00	2	180	0.064	0.050	0.230	4.94	11600	1485	45°
8.00	2	180	0.068	0.080	0.280	6.67	8590	1170	45°
10.00	2	180	0.074	0.080	0.310	8.22	6970	1030	45°
12.00	2	180	0.082	0.100	0.340	9.89	5795	950	45°

Hardened tool steel
56 - 60 HRC

1.00	2	110	0.018	0.030	0.090	0.91	38475	1385	45°
2.00	2	110	0.028	0.030	0.120	1.72	20355	1140	45°
3.00	2	140	0.042	0.050	0.150	2.59	17205	1445	45°
4.00	2	140	0.052	0.050	0.180	3.39	13145	1365	45°
5.00	2	140	0.058	0.050	0.210	4.17	10685	1240	45°
6.00	2	140	0.064	0.050	0.230	4.94	9020	1155	45°
8.00	2	140	0.068	0.080	0.280	6.67	6680	910	45°
10.00	2	140	0.074	0.080	0.310	8.22	5420	800	45°
12.00	2	140	0.082	0.100	0.340	9.89	4505	740	45°


Hardened tool steel
> 60 HRC

1.00	2	70	0.018	0.030	0.090	0.91	24485	880	45°
2.00	2	70	0.028	0.030	0.120	1.72	12955	725	45°
3.00	2	90	0.042	0.050	0.150	2.59	11060	930	45°
4.00	2	90	0.052	0.050	0.180	3.39	8450	880	45°
5.00	2	90	0.058	0.050	0.210	4.17	6870	795	45°
6.00	2	90	0.064	0.050	0.230	4.94	5800	740	45°
8.00	2	90	0.068	0.080	0.280	6.67	4295	585	45°
10.00	2	90	0.074	0.080	0.310	8.22	3485	515	45°
12.00	2	90	0.082	0.100	0.340	9.89	2895	475	45°

High speed steel,
hardened
64 - 70 HRC

1.00	2	40	0.018	0.030	0.090	0.91	13990	505	45°
2.00	2	40	0.028	0.030	0.120	1.72	7405	415	45°
3.00	2	50	0.042	0.050	0.150	2.59	6145	515	45°
4.00	2	50	0.052	0.050	0.180	3.39	4695	490	45°
5.00	2	50	0.058	0.050	0.210	4.17	3815	445	45°
6.00	2	50	0.064	0.050	0.230	4.94	3220	410	45°
8.00	2	50	0.068	0.080	0.280	6.67	2385	325	45°
10.00	2	50	0.074	0.080	0.310	8.22	1935	285	45°
12.00	2	50	0.082	0.100	0.340	9.89	1610	265	45°

Application



Material

Hardened tool steel
52 - 56 HRC

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
1.00	2	100	0.028	0.180	0.200	0.77	41340	2315	83.3
2.00	2	100	0.048	0.280	0.400	1.39	22900	2200	246.2
3.00	2	100	0.060	0.360	0.600	1.95	16325	1960	423.1
4.00	2	100	0.072	0.480	0.800	2.60	12245	1765	677.0
5.00	2	100	0.080	0.600	1.000	3.25	9795	1565	940.2
6.00	2	100	0.086	0.720	1.200	3.90	8160	1405	1212.9
8.00	2	100	0.106	0.960	1.600	5.20	6120	1300	1993.3
10.00	2	100	0.120	1.200	2.000	6.50	4895	1175	2820.7
12.00	2	100	0.125	1.440	2.400	7.80	4080	1020	3525.9

Hardened tool steel
56 - 60 HRC

1.00	2	61	0.017	0.160	0.200	0.74	26240	890	28.5
2.00	2	61	0.029	0.250	0.400	1.33	14600	845	84.7
3.00	2	61	0.036	0.320	0.600	1.86	10440	750	144.3
4.00	2	61	0.043	0.430	0.800	2.48	7830	675	231.6
5.00	2	61	0.048	0.540	1.000	3.10	6265	600	324.7
6.00	2	61	0.052	0.650	1.200	3.72	5220	545	423.4
8.00	2	61	0.063	0.860	1.600	4.97	3905	490	677.3
10.00	2	61	0.072	1.080	2.000	6.21	3125	450	972.5
12.00	2	61	0.075	1.300	2.400	7.45	2605	390	1219.7

Hardened tool steel
> 60 HRC



1.00	2	46	0.014	0.130	0.200	0.66	22185	620	16.2
2.00	2	46	0.023	0.200	0.400	1.19	12305	565	45.3
3.00	2	46	0.029	0.250	0.600	1.66	8820	510	76.7
4.00	2	46	0.035	0.340	0.800	2.22	6595	460	125.6
5.00	2	46	0.038	0.420	1.000	2.77	5285	400	168.7
6.00	2	46	0.041	0.500	1.200	3.33	4395	360	216.3
8.00	2	46	0.051	0.670	1.600	4.44	3300	335	360.6
10.00	2	46	0.058	0.840	2.000	5.55	2640	305	514.1
12.00	2	46	0.060	1.010	2.400	6.66	2200	265	639.5

High speed steel,
hardened
64 - 70 HRC

1.00	2	31	0.011	0.130	0.200	0.66	14950	330	8.6
2.00	2	31	0.018	0.200	0.400	1.19	8290	300	23.9
3.00	2	31	0.023	0.250	0.600	1.66	5945	275	41.0
4.00	2	31	0.028	0.340	0.800	2.22	4445	250	67.7
5.00	2	31	0.031	0.420	1.000	2.77	3560	220	92.8
6.00	2	31	0.033	0.500	1.200	3.33	2965	195	117.3
8.00	2	31	0.041	0.670	1.600	4.44	2220	180	195.4
10.00	2	31	0.046	0.840	2.000	5.55	1780	165	274.8
12.00	2	31	0.048	1.010	2.400	6.66	1480	140	344.8

Ball nose end mills SpheroX

Tolerance $r \pm 0.005$, 4.5xd

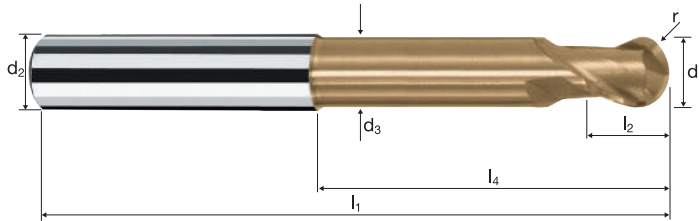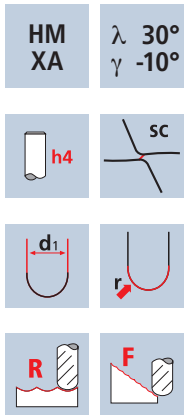


		Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60		Ti Titanium	HSS ToolSteel
--	--	-----------------	-----------------	--------------	--------------	-------------	--	----------------	------------------

Ø Code	Coating			Article-N°		ø-Code		r ±0.005	α	z	DURO-V
	Example: Order-N°	V	7472	100			V7472				
	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄				
100	1.00	6.00	0.95	61	1.50	4.50	14.58	0.500	10.0°	2	●
140	2.00	6.00	1.90	61	3.00	9.00	17.31	1.000	6.8°	2	●
180	3.00	6.00	2.80	61	4.00	13.50	20.13	1.500	4.5°	2	●
220	4.00	6.00	3.70	66	5.00	18.00	22.95	2.000	2.7°	2	●
260	5.00	6.00	4.60	66	6.00	22.50	25.77	2.500	1.4°	2	●
300	6.00	6.00	5.50	69	7.00	30.34	31.00	3.000	0.0°	2	●
391	8.00	8.00	7.40	80	9.00	39.29	40.00	4.000	0.0°	2	●
450	10.00	10.00	9.20	90	11.00	47.20	48.00	5.000	0.0°	2	●
501	12.00	12.00	11.00	105	13.00	54.13	55.00	6.000	0.0°	2	●
610	16.00	16.00	15.00	125	17.00	74.13	75.00	8.000	0.0°	2	●

Application

Material



Hardened tool steel
52 - 56 HRC




Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



High speed steel,
hardened
64 - 70 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



High speed steel,
hardened
64 - 70 HRC




d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _r [mm/min]	β [°]
1.00	4	120	0.014	0.030	0.090	0.91	41975	2350	45°
2.00	4	140	0.022	0.030	0.120	1.72	25910	2280	45°
3.00	4	180	0.034	0.050	0.150	2.59	22120	3010	45°
4.00	4	180	0.042	0.050	0.180	3.39	16900	2840	45°
5.00	4	180	0.048	0.050	0.210	4.17	13740	2640	45°
6.00	4	180	0.052	0.050	0.230	4.94	11600	2410	45°
8.00	4	180	0.056	0.080	0.280	6.67	8590	1925	45°
10.00	4	180	0.060	0.080	0.310	8.22	6970	1675	45°
12.00	4	180	0.066	0.100	0.340	9.89	5795	1530	45°
1.00	4	110	0.014	0.030	0.090	0.91	38475	2155	45°
2.00	4	110	0.022	0.030	0.120	1.72	20355	1790	45°
3.00	4	140	0.034	0.050	0.150	2.59	17205	2340	45°
4.00	4	140	0.042	0.050	0.180	3.39	13145	2210	45°
5.00	4	140	0.048	0.050	0.210	4.17	10685	2050	45°
6.00	4	140	0.052	0.050	0.230	4.94	9020	1875	45°
8.00	4	140	0.056	0.080	0.280	6.67	6680	1495	45°
10.00	4	140	0.060	0.080	0.310	8.22	5420	1300	45°
12.00	4	140	0.066	0.100	0.340	9.89	4505	1190	45°
1.00	4	70	0.014	0.030	0.090	0.91	24485	1370	45°
2.00	4	70	0.022	0.030	0.120	1.72	12955	1140	45°
3.00	4	90	0.034	0.050	0.150	2.59	11060	1505	45°
4.00	4	90	0.042	0.050	0.180	3.39	8450	1420	45°
5.00	4	90	0.048	0.050	0.210	4.17	6870	1320	45°
6.00	4	90	0.052	0.050	0.230	4.94	5800	1205	45°
8.00	4	90	0.056	0.080	0.280	6.67	4295	960	45°
10.00	4	90	0.060	0.080	0.310	8.22	3485	835	45°
12.00	4	90	0.066	0.100	0.340	9.89	2895	765	45°
1.00	4	40	0.014	0.030	0.090	0.91	13990	785	45°
2.00	4	40	0.022	0.030	0.120	1.72	7405	650	45°
3.00	4	50	0.034	0.050	0.150	2.59	6145	835	45°
4.00	4	50	0.042	0.050	0.180	3.39	4695	790	45°
5.00	4	50	0.048	0.050	0.210	4.17	3815	735	45°
6.00	4	50	0.052	0.050	0.230	4.94	3220	670	45°
8.00	4	50	0.056	0.080	0.280	6.67	2385	535	45°
10.00	4	50	0.060	0.080	0.310	8.22	1935	465	45°
12.00	4	50	0.066	0.100	0.340	9.89	1610	425	45°
1.00	4	104	0.023	0.180	0.180	0.99	33440	3075	30°
2.00	4	104	0.039	0.280	0.280	1.92	17240	2690	30°
3.00	4	104	0.049	0.360	0.360	2.83	11700	2295	30°
4.00	4	104	0.058	0.480	0.480	3.77	8780	2035	30°
5.00	4	104	0.065	0.600	0.600	4.71	7030	1825	30°
6.00	4	104	0.070	0.720	0.720	5.66	5850	1640	30°
8.00	4	104	0.086	0.960	0.960	7.54	4390	1510	30°
10.00	4	104	0.098	1.200	1.200	9.43	3510	1375	30°
12.00	4	104	0.101	1.440	1.440	11.31	2925	1185	30°
1.00	4	64	0.014	0.160	0.160	0.97	21000	1175	30°
2.00	4	64	0.023	0.250	0.250	1.90	10720	985	30°
3.00	4	64	0.029	0.320	0.320	2.78	7330	850	30°
4.00	4	64	0.035	0.430	0.430	3.72	5475	765	30°
5.00	4	64	0.039	0.540	0.540	4.65	4380	685	30°
6.00	4	64	0.042	0.650	0.650	5.58	3650	615	30°
8.00	4	64	0.051	0.860	0.860	7.43	2740	560	30°
10.00	4	64	0.058	1.080	1.080	9.30	2190	510	30°
12.00	4	64	0.061	1.300	1.300	11.16	1825	445	30°
1.00	4	48	0.011	0.130	0.130	0.95	16085	710	30°
2.00	4	48	0.019	0.200	0.200	1.84	8305	630	30°
3.00	4	48	0.023	0.250	0.250	2.69	5680	525	30°
4.00	4	48	0.028	0.340	0.340	3.59	4255	475	30°
5.00	4	48	0.031	0.420	0.420	4.48	3410	425	30°
6.00	4	48	0.034	0.500	0.500	5.37	2845	385	30°
8.00	4	48	0.041	0.670	0.670	7.17	2130	350	30°
10.00	4	48	0.047	0.840	0.840	8.96	1705	320	30°
12.00	4	48	0.049	1.010	1.010	10.76	1420	280	30°
1.00	4	24	0.007	0.130	0.130	0.95	8040	225	30°
2.00	4	24	0.012	0.200	0.200	1.84	4150	200	30°
3.00	4	24	0.015	0.250	0.250	2.69	2840	170	30°
4.00	4	24	0.018	0.340	0.340	3.59	2130	155	30°
5.00	4	24	0.020	0.420	0.420	4.48	1705	135	30°
6.00	4	24	0.022	0.500	0.500	5.37	1425	125	30°
8.00	4	24	0.026	0.670	0.670	7.17	1065	110	30°
10.00	4	24	0.030	0.840	0.840	8.96	855	100	30°
12.00	4	24	0.031	1.010	1.010	10.76	710	90	30°

Ball nose end mills SpheroX

Tolerance $r \pm 0.005$, 4.5xd




HM XA	λ 40° γ 0°
Vario 	

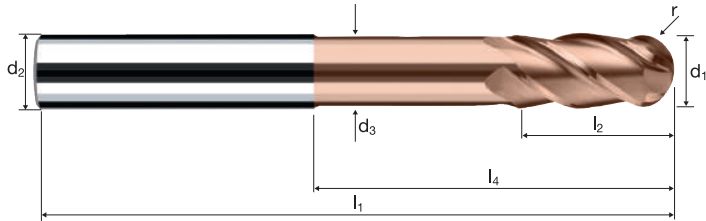

	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	HSS
--	-----------------	-----------------	--------------	--------------	-------------	----------------	-----

Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	DURO-Si	
Example: Order-N°: H 7492 100												
											H7492	
100	1.00	6.00	0.95	61	2.00	4.50	14.58	0.500	10.0°	4		●
140	2.00	6.00	1.90	61	4.00	9.00	17.31	1.000	6.8°	4		●
180	3.00	6.00	2.80	61	6.00	13.50	20.13	1.500	4.5°	4		●
220	4.00	6.00	3.70	66	8.00	18.00	22.95	2.000	2.7°	4		●
260	5.00	6.00	4.60	66	10.00	22.50	25.77	2.500	1.4°	4		●
300	6.00	6.00	5.50	69	12.00	30.34	31.00	3.000	0.0°	4		●
391	8.00	8.00	7.40	80	16.00	39.29	40.00	4.000	0.0°	4		●
450	10.00	10.00	9.20	90	20.00	47.20	48.00	5.000	0.0°	4		●
501	12.00	12.00	11.00	105	24.00	54.13	55.00	6.000	0.0°	4		●
610	16.00	16.00	15.00	125	32.00	74.13	75.00	8.000	0.0°	4		●

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Titanium alloys
> 300 HB
[Ti6Al4V]


d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
1.00	2	120	0.026	0.030	0.090	0.91	41975	2185	45°
2.00	2	220	0.038	0.030	0.120	1.72	40715	3095	45°
3.00	2	270	0.058	0.050	0.150	2.59	33185	3850	45°
4.00	2	270	0.074	0.050	0.180	3.39	25350	3750	45°
5.00	2	270	0.084	0.050	0.210	4.17	20610	3460	45°
6.00	2	270	0.090	0.050	0.230	4.94	17400	3130	45°
8.00	2	270	0.098	0.080	0.280	6.67	12885	2525	45°
10.00	2	270	0.106	0.080	0.310	8.22	10455	2215	45°
12.00	2	270	0.116	0.100	0.340	9.89	8690	2015	45°

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
2.00	2	180	0.028	0.030	0.120	1.72	33310	1865	45°
3.00	2	230	0.042	0.050	0.150	2.59	28265	2375	45°
4.00	2	230	0.052	0.050	0.180	3.39	21595	2245	45°
5.00	2	230	0.058	0.050	0.210	4.17	17555	2035	45°
6.00	2	230	0.064	0.050	0.230	4.94	14820	1895	45°
8.00	2	230	0.068	0.080	0.280	6.67	10975	1495	45°
10.00	2	230	0.074	0.080	0.310	8.22	8905	1320	45°
12.00	2	230	0.082	0.100	0.340	9.89	7405	1215	45°

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
2.00	2	140	0.028	0.030	0.120	1.72	25910	1450	45°
3.00	2	180	0.042	0.050	0.150	2.59	22120	1860	45°
4.00	2	180	0.052	0.050	0.180	3.39	16900	1760	45°
5.00	2	180	0.058	0.050	0.210	4.17	13740	1595	45°
6.00	2	180	0.064	0.050	0.230	4.94	11600	1485	45°
8.00	2	180	0.068	0.080	0.280	6.67	8590	1170	45°
10.00	2	180	0.074	0.080	0.310	8.22	6970	1030	45°
12.00	2	180	0.082	0.100	0.340	9.89	5795	950	45°

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
1.00	2	110	0.026	0.030	0.090	0.91	38475	2000	45°
2.00	2	110	0.038	0.030	0.120	1.72	20355	1545	45°
3.00	2	140	0.058	0.050	0.150	2.59	17205	1995	45°
4.00	2	140	0.074	0.050	0.180	3.39	13145	1945	45°
5.00	2	140	0.084	0.050	0.210	4.17	10685	1795	45°
6.00	2	140	0.090	0.050	0.230	4.94	9020	1625	45°
8.00	2	140	0.098	0.080	0.280	6.67	6680	1310	45°
10.00	2	140	0.106	0.080	0.310	8.22	5420	1150	45°
12.00	2	140	0.116	0.100	0.340	9.89	4505	1045	45°

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Titanium alloys
> 300 HB
[Ti6Al4V]

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ³ /min]
1.00	2	100	0.034	0.180	0.200	0.77	41340	2810	101.2
2.00	2	153	0.058	0.280	0.400	1.39	35035	4065	455.2
3.00	2	153	0.073	0.360	0.600	1.95	24975	3645	787.6
4.00	2	153	0.087	0.480	0.800	2.60	18730	3260	1251.6
5.00	2	153	0.097	0.600	1.000	3.25	14985	2905	1744.3
6.00	2	153	0.105	0.720	1.200	3.90	12490	2620	2265.7
8.00	2	153	0.128	0.960	1.600	5.20	9365	2400	3682.7
10.00	2	153	0.145	1.200	2.000	6.50	7495	2175	5214.8
12.00	2	153	0.151	1.440	2.400	7.80	6245	1885	6516.7

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ³ /min]
1.00	2	100	0.031	0.180	0.200	0.77	41340	2565	92.3
2.00	2	122	0.053	0.280	0.400	1.39	27940	2960	331.7
3.00	2	122	0.066	0.360	0.600	1.95	19915	2630	567.8
4.00	2	122	0.079	0.480	0.800	2.60	14935	2360	906.2
5.00	2	122	0.088	0.600	1.000	3.25	11950	2105	1261.8
6.00	2	122	0.095	0.720	1.200	3.90	9955	1890	1634.6
8.00	2	122	0.116	0.960	1.600	5.20	7470	1735	2661.3
10.00	2	122	0.132	1.200	2.000	6.50	5975	1575	3785.4
12.00	2	122	0.137	1.440	2.400	7.80	4980	1365	4714.5

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ³ /min]
1.00	2	100	0.028	0.180	0.200	0.77	41340	2315	83.3
2.00	2	100	0.048	0.280	0.400	1.39	22900	2200	246.2
3.00	2	100	0.060	0.360	0.600	1.95	16325	1960	423.1
4.00	2	100	0.072	0.480	0.800	2.60	12245	1765	677.0
5.00	2	100	0.080	0.600	1.000	3.25	9795	1565	940.2
6.00	2	100	0.086	0.720	1.200	3.90	8160	1405	1212.9
8.00	2	100	0.106	0.960	1.600	5.20	6120	1300	1993.3
10.00	2	100	0.120	1.200	2.000	6.50	4895	1175	2820.7
12.00	2	100	0.125	1.440	2.400	7.80	4080	1020	3525.9


d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ³ /min]
1.00	2	77	0.031	0.180	0.200	0.77	31830	1975	71.0
2.00	2	77	0.053	0.280	0.400	1.39	17635	1870	209.3
3.00	2	77	0.066	0.360	0.600	1.95	12570	1660	358.4
4.00	2	77	0.079	0.480	0.800	2.60	9425	1490	571.9
5.00	2	77	0.088	0.600	1.000	3.25	7540	1325	796.4
6.00	2	77	0.095	0.720	1.200	3.90	6285	1195	1031.7
8.00	2	77	0.116	0.960	1.600	5.20	4715	1095	1679.6
10.00	2	77	0.132	1.200	2.000	6.50	3770	995	2389.1
12.00	2	77	0.137	1.440	2.400	7.80	3140	860	2975.6

Ball nose end mills SpheroX

Tolerance $r \pm 0.005$, 4.5xd



HM XA	λ 30° γ -10°

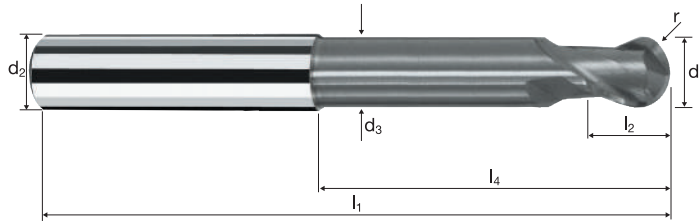

Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	HSS ToolSteel
----------------	-----------------	-----------------	--------------	--------------	-------------	----------------	------------------

Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	X-AL
											X7402
100	1.00	6.00	0.95	61	1.50	4.50	14.58	0.500	10.0°	2	●
140	2.00	6.00	1.90	61	3.00	9.00	17.31	1.000	6.8°	2	●
180	3.00	6.00	2.80	61	4.00	13.50	20.13	1.500	4.5°	2	●
220	4.00	6.00	3.70	66	5.00	18.00	22.95	2.000	2.7°	2	●
260	5.00	6.00	4.60	66	6.00	22.50	25.77	2.500	1.4°	2	●
300	6.00	6.00	5.50	69	7.00	30.34	31.00	3.000	0.0°	2	●
391	8.00	8.00	7.40	80	9.00	39.29	40.00	4.000	0.0°	2	●
450	10.00	10.00	9.20	90	11.00	47.20	48.00	5.000	0.0°	2	●
501	12.00	12.00	11.00	105	13.00	54.13	55.00	6.000	0.0°	2	●

Application	Material	d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
	Hardened tool steel 52 - 56 HRC 	1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
		2.00	2	130	0.028	0.030	0.120	1.72	24060	1345	45°
		3.00	2	160	0.042	0.050	0.150	2.59	19665	1650	45°
		4.00	2	160	0.052	0.050	0.180	3.39	15025	1560	45°
		5.00	2	160	0.058	0.050	0.210	4.17	12215	1415	45°
		6.00	2	160	0.064	0.050	0.230	4.94	10310	1320	45°
		8.00	2	160	0.068	0.080	0.280	6.67	7635	1040	45°
		10.00	2	160	0.074	0.080	0.310	8.22	6195	915	45°
		12.00	2	160	0.082	0.100	0.340	9.89	5150	845	45°
		1.00	2	100	0.018	0.030	0.090	0.91	34980	1260	45°
		2.00	2	100	0.028	0.030	0.120	1.72	18505	1035	45°
		3.00	2	130	0.042	0.050	0.150	2.59	15975	1340	45°
4.00	2	130	0.052	0.050	0.180	3.39	12205	1270	45°		
5.00	2	130	0.058	0.050	0.210	4.17	9925	1150	45°		
6.00	2	130	0.064	0.050	0.230	4.94	8375	1070	45°		
8.00	2	130	0.068	0.080	0.280	6.67	6205	845	45°		
10.00	2	130	0.074	0.080	0.310	8.22	5035	745	45°		
12.00	2	130	0.082	0.100	0.340	9.89	4185	685	45°		
1.00	2	60	0.018	0.030	0.090	0.91	20985	755	45°		
2.00	2	60	0.028	0.030	0.120	1.72	11105	620	45°		
3.00	2	80	0.042	0.050	0.150	2.59	9830	825	45°		
4.00	2	80	0.052	0.050	0.180	3.39	7510	780	45°		
5.00	2	80	0.058	0.050	0.210	4.17	6105	710	45°		
6.00	2	80	0.064	0.050	0.230	4.94	5155	660	45°		
8.00	2	80	0.068	0.080	0.280	6.67	3820	520	45°		
10.00	2	80	0.074	0.080	0.310	8.22	3100	460	45°		
12.00	2	80	0.082	0.100	0.340	9.89	2575	420	45°		
1.00	2	40	0.018	0.030	0.090	0.91	13990	505	45°		
2.00	2	40	0.028	0.030	0.120	1.72	7405	415	45°		
3.00	2	50	0.042	0.050	0.150	2.59	6145	515	45°		
4.00	2	50	0.052	0.050	0.180	3.39	4695	490	45°		
5.00	2	50	0.058	0.050	0.210	4.17	3815	445	45°		
6.00	2	50	0.064	0.050	0.230	4.94	3220	410	45°		
8.00	2	50	0.068	0.080	0.280	6.67	2385	325	45°		
10.00	2	50	0.074	0.080	0.310	8.22	1935	285	45°		
12.00	2	50	0.082	0.100	0.340	9.89	1610	265	45°		


Application	Material	d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
	Hardened tool steel 52 - 56 HRC 	1.00	2	78	0.028	0.180	0.200	0.77	32245	1805	65.0
		2.00	2	78	0.048	0.280	0.400	1.39	17860	1715	192.1
		3.00	2	78	0.060	0.360	0.600	1.95	12730	1530	330.0
		4.00	2	78	0.072	0.480	0.800	2.60	9550	1375	528.0
		5.00	2	78	0.080	0.600	1.000	3.25	7640	1220	733.4
		6.00	2	78	0.086	0.720	1.200	3.90	6365	1095	946.1
		8.00	2	78	0.106	0.960	1.600	5.20	4775	1010	1554.8
		10.00	2	78	0.120	1.200	2.000	6.50	3820	915	2200.2
		12.00	2	78	0.125	1.440	2.400	7.80	3185	795	2750.2
		1.00	2	34	0.017	0.160	0.200	0.74	14625	495	15.9
		2.00	2	34	0.029	0.250	0.400	1.33	8135	470	47.2
		3.00	2	34	0.036	0.320	0.600	1.86	5820	420	80.4
4.00	2	34	0.043	0.430	0.800	2.48	4365	375	129.1		
5.00	2	34	0.048	0.540	1.000	3.10	3490	335	181.0		
6.00	2	34	0.052	0.650	1.200	3.72	2910	305	236.0		
8.00	2	34	0.063	0.860	1.600	4.97	2180	275	377.5		
10.00	2	34	0.072	1.080	2.000	6.21	1745	250	542.1		
12.00	2	34	0.075	1.300	2.400	7.45	1455	220	679.9		
1.00	2	26	0.014	0.130	0.200	0.66	12540	350	9.1		
2.00	2	26	0.023	0.200	0.400	1.19	6955	320	25.6		
3.00	2	26	0.029	0.250	0.600	1.66	4985	290	43.4		
4.00	2	26	0.035	0.340	0.800	2.22	3730	260	71.0		
5.00	2	26	0.038	0.420	1.000	2.77	2990	225	95.4		
6.00	2	26	0.041	0.500	1.200	3.33	2485	205	122.3		
8.00	2	26	0.051	0.670	1.600	4.44	1865	190	203.8		
10.00	2	26	0.058	0.840	2.000	5.55	1490	175	290.6		
12.00	2	26	0.060	1.010	2.400	6.66	1245	150	361.5		
1.00	2	17	0.011	0.130	0.200	0.66	8200	180	4.7		
2.00	2	17	0.018	0.200	0.400	1.19	4545	165	13.1		
3.00	2	17	0.023	0.250	0.600	1.66	3260	150	22.5		
4.00	2	17	0.028	0.340	0.800	2.22	2440	135	37.1		
5.00	2	17	0.031	0.420	1.000	2.77	1955	120	50.9		
6.00	2	17	0.033	0.500	1.200	3.33	1625	105	64.4		
8.00	2	17	0.041	0.670	1.600	4.44	1220	100	107.1		
10.00	2	17	0.046	0.840	2.000	5.55	975	90	150.7		
12.00	2	17	0.048	1.010	2.400	6.66	815	80	189.1		

Ball nose end mills SpheroX

Tolerance $r \pm 0.005$, 6xd




HM XA	λ 30° γ -10°

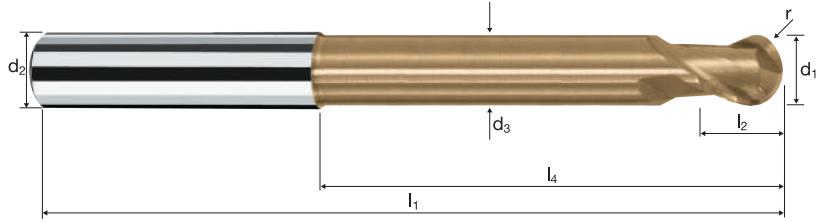

		Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60		Ti Titanium	HSS ToolSteel
--	--	-----------------	-----------------	--------------	--------------	-------------	--	----------------	------------------

Ø Code	Coating			Article-N°		ø-Code						DURO-V
	d1	d2 h4	d3	l1	l2	l3	l4	r ±0.005	α	z		
Example: Order-N°.	V			7474		100						V7474
100	1.00	6.00	0.95	66	1.50	6.00	16.08	0.500	9.5°	2	●	
140	2.00	6.00	1.90	66	3.00	12.00	20.31	1.000	6.1°	2	●	
180	3.00	6.00	2.80	66	4.00	18.00	24.63	1.500	3.9°	2	●	
220	4.00	6.00	3.70	69	5.00	24.00	28.95	2.000	2.2°	2	●	
260	5.00	6.00	4.60	75	6.00	30.00	33.27	2.500	1.0°	2	●	
300	6.00	6.00	5.50	80	7.00	42.34	43.00	3.000	0.0°	2	●	
391	8.00	8.00	7.40	90	9.00	52.29	53.00	4.000	0.0°	2	●	
450	10.00	10.00	9.20	105	11.00	63.20	64.00	5.000	0.0°	2	●	
501	12.00	12.00	11.00	120	13.00	73.13	74.00	6.000	0.0°	2	●	
610	16.00	16.00	15.00	135	17.00	85.13	86.00	8.000	0.0°	2	●	

Application



Material

Hardened tool steel
52 - 56 HRC




Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



High speed steel,
hardened
64 - 70 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



High speed steel,
hardened
64 - 70 HRC




d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_t [mm/min]	β [°]
1.00	4	120	0.014	0.030	0.090	0.91	41975	2350	45°
2.00	4	130	0.022	0.030	0.120	1.72	24060	2115	45°
3.00	4	160	0.034	0.050	0.150	2.59	19665	2675	45°
4.00	4	160	0.042	0.050	0.180	3.39	15025	2525	45°
5.00	4	160	0.048	0.050	0.210	4.17	12215	2345	45°
6.00	4	160	0.052	0.050	0.230	4.94	10310	2145	45°
8.00	4	160	0.056	0.080	0.280	6.67	7635	1710	45°
10.00	4	160	0.060	0.080	0.310	8.22	6195	1485	45°
12.00	4	160	0.066	0.100	0.340	9.89	5150	1360	45°
1.00	4	100	0.014	0.030	0.090	0.91	34980	1960	45°
2.00	4	100	0.022	0.030	0.120	1.72	18505	1630	45°
3.00	4	130	0.034	0.050	0.150	2.59	15975	2175	45°
4.00	4	130	0.042	0.050	0.180	3.39	12205	2050	45°
5.00	4	130	0.048	0.050	0.210	4.17	9925	1905	45°
6.00	4	130	0.052	0.050	0.230	4.94	8375	1740	45°
8.00	4	130	0.056	0.080	0.280	6.67	6205	1390	45°
10.00	4	130	0.060	0.080	0.310	8.22	5035	1210	45°
12.00	4	130	0.066	0.100	0.340	9.89	4185	1105	45°
1.00	4	60	0.014	0.030	0.090	0.91	20985	1175	45°
2.00	4	60	0.022	0.030	0.120	1.72	11105	975	45°
3.00	4	80	0.034	0.050	0.150	2.59	9830	1335	45°
4.00	4	80	0.042	0.050	0.180	3.39	7510	1260	45°
5.00	4	80	0.048	0.050	0.210	4.17	6105	1170	45°
6.00	4	80	0.052	0.050	0.230	4.94	5155	1070	45°
8.00	4	80	0.056	0.080	0.280	6.67	3820	855	45°
10.00	4	80	0.060	0.080	0.310	8.22	3100	745	45°
12.00	4	80	0.066	0.100	0.340	9.89	2575	680	45°
1.00	4	40	0.014	0.030	0.090	0.91	13990	785	45°
2.00	4	40	0.022	0.030	0.120	1.72	7405	650	45°
3.00	4	50	0.034	0.050	0.150	2.59	6145	835	45°
4.00	4	50	0.042	0.050	0.180	3.39	4695	790	45°
5.00	4	50	0.048	0.050	0.210	4.17	3815	735	45°
6.00	4	50	0.052	0.050	0.230	4.94	3220	670	45°
8.00	4	50	0.056	0.080	0.280	6.67	2385	535	45°
10.00	4	50	0.060	0.080	0.310	8.22	1935	465	45°
12.00	4	50	0.066	0.100	0.340	9.89	1610	425	45°
1.00	4	52	0.023	0.130	0.130	0.95	17425	1605	30°
2.00	4	52	0.039	0.200	0.200	1.84	8995	1405	30°
3.00	4	52	0.049	0.250	0.250	2.69	6155	1205	30°
4.00	4	52	0.058	0.340	0.340	3.59	4610	1070	30°
5.00	4	52	0.065	0.420	0.420	4.48	3695	960	30°
6.00	4	52	0.070	0.500	0.500	5.37	3080	865	30°
8.00	4	52	0.086	0.670	0.670	7.17	2310	795	30°
10.00	4	52	0.098	0.840	0.840	8.96	1845	725	30°
12.00	4	52	0.101	1.010	1.010	10.76	1540	620	30°
1.00	4	24	0.014	0.130	0.130	0.95	8040	450	30°
2.00	4	24	0.023	0.200	0.200	1.84	4150	380	30°
3.00	4	24	0.029	0.250	0.250	2.69	2840	330	30°
4.00	4	24	0.035	0.340	0.340	3.59	2130	300	30°
5.00	4	24	0.039	0.420	0.420	4.48	1705	265	30°
6.00	4	24	0.042	0.500	0.500	5.37	1425	240	30°
8.00	4	24	0.051	0.670	0.670	7.17	1065	215	30°
10.00	4	24	0.058	0.840	0.840	8.96	855	200	30°
12.00	4	24	0.061	1.010	1.010	10.76	710	175	30°
1.00	4	18	0.011	0.130	0.130	0.95	6030	265	30°
2.00	4	18	0.019	0.200	0.200	1.84	3115	235	30°
3.00	4	18	0.023	0.250	0.250	2.69	2130	195	30°
4.00	4	18	0.028	0.340	0.340	3.59	1595	180	30°
5.00	4	18	0.031	0.420	0.420	4.48	1280	160	30°
6.00	4	18	0.034	0.500	0.500	5.37	1065	145	30°
8.00	4	18	0.041	0.670	0.670	7.17	800	130	30°
10.00	4	18	0.047	0.840	0.840	8.96	640	120	30°
12.00	4	18	0.049	1.010	1.010	10.76	530	105	30°
1.00	4	12	0.007	0.130	0.130	0.95	4020	115	30°
2.00	4	12	0.012	0.200	0.200	1.84	2075	100	30°
3.00	4	12	0.015	0.250	0.250	2.69	1420	85	30°
4.00	4	12	0.018	0.340	0.340	3.59	1065	75	30°
5.00	4	12	0.020	0.420	0.420	4.48	855	70	30°
6.00	4	12	0.022	0.500	0.500	5.37	710	65	30°
8.00	4	12	0.026	0.670	0.670	7.17	535	55	30°
10.00	4	12	0.030	0.840	0.840	8.96	425	50	30°
12.00	4	12	0.031	1.010	1.010	10.76	355	45	30°

Ball nose end mills SpheroX

Tolerance $r \pm 0.005$, 6xd




HM XA	λ 40° γ 0°
Vario 	

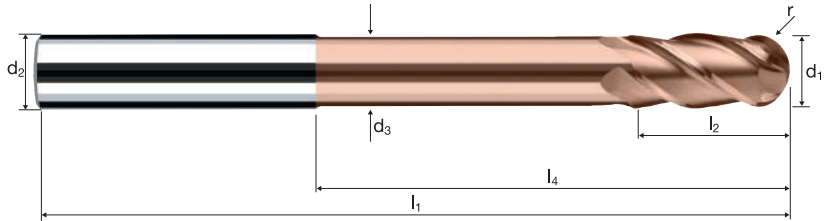

		Rm	Rm	HRC	HRC	HRC		Ti	HSS
		1100-1300	1300-1500	48-56	56-60	> 60		Titanium	

Ø Code	Example: Order-N°.											DURO-Si
	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	H7494	
100	1.00	6.00	0.95	66	2.00	6.00	16.08	0.500	9.5°	4	•	
140	2.00	6.00	1.90	66	4.00	12.00	20.31	1.000	6.1°	4	•	
180	3.00	6.00	2.80	66	6.00	18.00	24.63	1.500	3.9°	4	•	
220	4.00	6.00	3.70	69	8.00	24.00	28.95	2.000	2.2°	4	•	
260	5.00	6.00	4.60	75	10.00	30.00	33.27	2.500	1.0°	4	•	
300	6.00	6.00	5.50	80	12.00	42.34	43.00	3.000	0.0°	4	•	
391	8.00	8.00	7.40	90	16.00	52.29	53.00	4.000	0.0°	4	•	
450	10.00	10.00	9.20	105	20.00	63.20	64.00	5.000	0.0°	4	•	
501	12.00	12.00	11.00	120	24.00	73.13	74.00	6.000	0.0°	4	•	
610	16.00	16.00	15.00	135	32.00	85.13	86.00	8.000	0.0°	4	•	

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Titanium alloys
> 300 HB
[Ti6Al4V]


d1 [mm]	z	vc [m/min]	fz [mm]	as [mm]	ae [mm]	d_eff [mm]	n [min ⁻¹]	vt [mm/min]	β [°]
1.00	2	120	0.026	0.030	0.090	0.91	41975	2185	45°
2.00	2	190	0.038	0.030	0.120	1.72	35160	2670	45°
3.00	2	240	0.058	0.050	0.150	2.59	29495	3420	45°
4.00	2	240	0.074	0.050	0.180	3.39	22535	3335	45°
5.00	2	240	0.084	0.050	0.210	4.17	18320	3080	45°
6.00	2	240	0.090	0.050	0.230	4.94	15465	2785	45°
8.00	2	240	0.098	0.080	0.280	6.67	11455	2245	45°
10.00	2	240	0.106	0.080	0.310	8.22	9295	1970	45°
12.00	2	240	0.116	0.100	0.340	9.89	7725	1790	45°

1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
2.00	2	170	0.028	0.030	0.120	1.72	31460	1760	45°
3.00	2	210	0.042	0.050	0.150	2.59	25810	2170	45°
4.00	2	210	0.052	0.050	0.180	3.39	19720	2050	45°
5.00	2	210	0.058	0.050	0.210	4.17	16030	1860	45°
6.00	2	210	0.064	0.050	0.230	4.94	13530	1730	45°
8.00	2	210	0.068	0.080	0.280	6.67	10020	1365	45°
10.00	2	210	0.074	0.080	0.310	8.22	8130	1205	45°
12.00	2	210	0.082	0.100	0.340	9.89	6760	1110	45°

1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
2.00	2	130	0.028	0.030	0.120	1.72	24060	1345	45°
3.00	2	160	0.042	0.050	0.150	2.59	19665	1650	45°
4.00	2	160	0.052	0.050	0.180	3.39	15025	1560	45°
5.00	2	160	0.058	0.050	0.210	4.17	12215	1415	45°
6.00	2	160	0.064	0.050	0.230	4.94	10310	1320	45°
8.00	2	160	0.068	0.080	0.280	6.67	7635	1040	45°
10.00	2	160	0.074	0.080	0.310	8.22	6195	915	45°
12.00	2	160	0.082	0.100	0.340	9.89	5150	845	45°

1.00	2	100	0.026	0.030	0.090	0.91	34980	1820	45°
2.00	2	100	0.038	0.030	0.120	1.72	18505	1405	45°
3.00	2	130	0.058	0.050	0.150	2.59	15975	1855	45°
4.00	2	130	0.074	0.050	0.180	3.39	12205	1805	45°
5.00	2	130	0.084	0.050	0.210	4.17	9925	1665	45°
6.00	2	130	0.090	0.050	0.230	4.94	8375	1510	45°
8.00	2	130	0.098	0.080	0.280	6.67	6205	1215	45°
10.00	2	130	0.106	0.080	0.310	8.22	5035	1065	45°
12.00	2	130	0.116	0.100	0.340	9.89	4185	970	45°

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Titanium alloys
> 300 HB
[Ti6Al4V]

d1 [mm]	z	vc [m/min]	fz [mm]	as [mm]	ae [mm]	d_eff [mm]	n [min ⁻¹]	vt [mm/min]	Q [mm ³ /min]
1.00	2	100	0.034	0.180	0.200	0.77	41340	2810	101.2
2.00	2	119	0.058	0.280	0.400	1.39	27250	3160	354.0
3.00	2	119	0.073	0.360	0.600	1.95	19425	2835	612.6
4.00	2	119	0.087	0.480	0.800	2.60	14570	2535	973.4
5.00	2	119	0.097	0.600	1.000	3.25	11655	2260	1356.6
6.00	2	119	0.105	0.720	1.200	3.90	9715	2040	1762.2
8.00	2	119	0.128	0.960	1.600	5.20	7285	1865	2864.3
10.00	2	119	0.145	1.200	2.000	6.50	5830	1690	4056.0
12.00	2	119	0.151	1.440	2.400	7.80	4855	1465	5068.5

1.00	2	95	0.031	0.180	0.200	0.77	39270	2435	87.7
2.00	2	95	0.053	0.280	0.400	1.39	21755	2305	258.3
3.00	2	95	0.066	0.360	0.600	1.95	15505	2045	442.1
4.00	2	95	0.079	0.480	0.800	2.60	11630	1840	705.6
5.00	2	95	0.088	0.600	1.000	3.25	9305	1640	982.5
6.00	2	95	0.095	0.720	1.200	3.90	7755	1475	1272.8
8.00	2	95	0.116	0.960	1.600	5.20	5815	1350	2072.3
10.00	2	95	0.132	1.200	2.000	6.50	4650	1230	2947.6
12.00	2	95	0.137	1.440	2.400	7.80	3875	1060	3671.2

1.00	2	78	0.028	0.180	0.200	0.77	32245	1805	65.0
2.00	2	78	0.048	0.280	0.400	1.39	17860	1715	192.1
3.00	2	78	0.060	0.360	0.600	1.95	12730	1530	330.0
4.00	2	78	0.072	0.480	0.800	2.60	9550	1375	528.0
5.00	2	78	0.080	0.600	1.000	3.25	7640	1220	733.4
6.00	2	78	0.086	0.720	1.200	3.90	6365	1095	946.1
8.00	2	78	0.106	0.960	1.600	5.20	4775	1010	1554.8
10.00	2	78	0.120	1.200	2.000	6.50	3820	915	2200.2
12.00	2	78	0.125	1.440	2.400	7.80	3185	795	2750.2



1.00	2	60	0.031	0.180	0.200	0.77	24805	1540	55.4
2.00	2	60	0.053	0.280	0.400	1.39	13740	1455	163.1
3.00	2	60	0.066	0.360	0.600	1.95	9795	1295	279.3
4.00	2	60	0.079	0.480	0.800	2.60	7345	1160	445.7
5.00	2	60	0.088	0.600	1.000	3.25	5875	1035	620.6
6.00	2	60	0.095	0.720	1.200	3.90	4895	930	803.9
8.00	2	60	0.116	0.960	1.600	5.20	3675	850	1308.8
10.00	2	60	0.132	1.200	2.000	6.50	2940	775	1861.7
12.00	2	60	0.137	1.440	2.400	7.80	2450	670	2318.6

Ball nose end mills SpheroX

Tolerance $r \pm 0.005, 6xd$









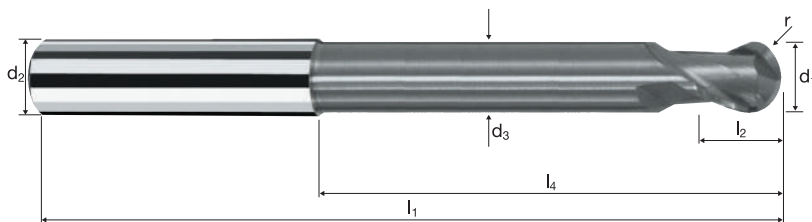



HM
XA λ 30°
 γ -10°



Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	HSS ToolSteel
----------------	-----------------	-----------------	--------------	--------------	-------------	----------------	------------------

											X-AL
											X7404
Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	
100	1.00	6.00	0.95	66	1.50	6.00	16.08	0.500	9.5°	2	●
140	2.00	6.00	1.90	66	3.00	12.00	20.31	1.000	6.1°	2	●
180	3.00	6.00	2.80	66	4.00	18.00	24.63	1.500	3.9°	2	●
220	4.00	6.00	3.70	69	5.00	24.00	28.95	2.000	2.2°	2	●
260	5.00	6.00	4.60	75	6.00	30.00	33.27	2.500	1.0°	2	●
300	6.00	6.00	5.50	80	7.00	42.34	43.00	3.000	0.0°	2	●
391	8.00	8.00	7.40	90	9.00	52.29	53.00	4.000	0.0°	2	●
450	10.00	10.00	9.20	105	11.00	63.20	64.00	5.000	0.0°	2	●
501	12.00	12.00	11.00	120	13.00	73.13	74.00	6.000	0.0°	2	●

Application	Material	d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
	Hardened tool steel 42 - 48 HRC    	6.00	8	300	0.055	0.120	0.120	5.26	18155	7990	45°
		8.00	10	300	0.060	0.140	0.140	6.94	13760	8255	45°
		10.00	12	300	0.065	0.160	0.160	8.62	11080	8640	45°
		12.00	16	300	0.070	0.180	0.180	10.29	9280	10395	45°
		6.00	8	250	0.050	0.120	0.120	5.26	15130	6050	45°
		8.00	10	250	0.055	0.140	0.140	6.94	11465	6305	45°
		10.00	12	250	0.060	0.160	0.160	8.62	9230	6645	45°
		12.00	16	250	0.065	0.180	0.180	10.29	7735	8045	45°
		6.00	8	200	0.050	0.120	0.120	5.26	12105	4840	45°
		8.00	10	200	0.055	0.140	0.140	6.94	9175	5045	45°
		10.00	12	200	0.060	0.160	0.160	8.62	7385	5315	45°
		12.00	16	200	0.065	0.180	0.180	10.29	6185	6435	45°
		6.00	8	150	0.045	0.120	0.120	5.26	9075	3270	45°
		8.00	10	150	0.050	0.140	0.140	6.94	6880	3440	45°
		10.00	12	150	0.055	0.160	0.160	8.62	5540	3655	45°
		12.00	16	150	0.060	0.180	0.180	10.29	4640	4455	45°
	Hardened tool steel 42 - 48 HRC    	6.00	8	400	0.030	0.030	0.030	4.80	26525	6365	45°
		8.00	10	400	0.035	0.030	0.030	6.31	20180	7060	45°
		10.00	12	400	0.035	0.040	0.040	7.91	16095	6760	45°
		12.00	16	400	0.040	0.040	0.040	9.41	13530	8660	45°
		6.00	8	350	0.030	0.030	0.030	4.80	23210	5570	45°
		8.00	10	350	0.035	0.030	0.030	6.31	17655	6180	45°
		10.00	12	350	0.035	0.040	0.040	7.91	14085	5915	45°
		12.00	16	350	0.040	0.040	0.040	9.41	11840	7575	45°
		6.00	8	280	0.025	0.030	0.030	4.80	18570	3715	45°
		8.00	10	280	0.030	0.030	0.030	6.31	14125	4235	45°
		10.00	12	280	0.030	0.040	0.040	7.91	11270	4055	45°
		12.00	16	280	0.035	0.040	0.040	9.41	9470	5305	45°
		6.00	8	180	0.025	0.030	0.030	4.80	11935	2385	45°
		8.00	10	180	0.030	0.030	0.030	6.31	9080	2725	45°
		10.00	12	180	0.030	0.040	0.040	7.91	7245	2610	45°
		12.00	16	180	0.035	0.040	0.040	9.41	6090	3410	45°

Ball nose end mills SpheroX

Tolerance $r \pm 0.005$, 6xd



HM
XA


λ 30°
 γ -10°

h4

d₁

r

F

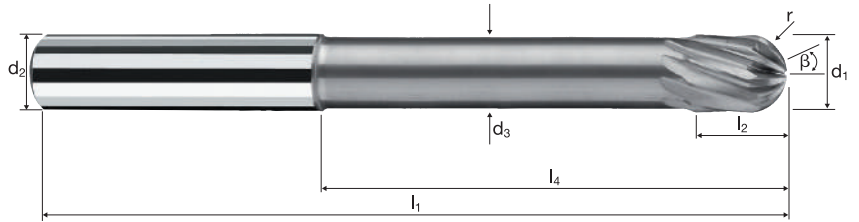


ToolSchool

H7494

Rm	Rm	Rm	HRC	HRC	HRC	Ti	HSS
850-1100	1100-1300	1300-1500	48-56	56-60	> 60	Titanium	ToolSteel

Ø Code	Coating			Article-N°			ø-Code			X-AL
	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	r ±0.005	β	z	X7464
300	6.00	6.00	5.50	80	7.00	42.34	3.000	25°	8	●
391	8.00	8.00	7.40	90	9.00	52.29	4.000	25°	10	●
450	10.00	10.00	9.20	105	11.00	63.20	5.000	25°	12	●
501	12.00	12.00	11.00	120	13.00	73.13	6.000	25°	16	●

Application




Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]

Steel
< 850 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]

Steel
< 850 N/mm²


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
1.00	2	100	0.030	0.080	0.080	0.98	32480	1950	45°
2.00	2	100	0.045	0.160	0.160	1.96	16240	1460	45°
3.00	2	100	0.055	0.240	0.240	2.93	10865	1195	45°
4.00	2	100	0.060	0.320	0.320	3.91	8140	975	45°
5.00	2	100	0.070	0.400	0.400	4.89	6510	910	45°
6.00	2	100	0.075	0.480	0.480	5.87	5425	815	45°
8.00	2	100	0.085	0.640	0.640	7.82	4070	690	45°
10.00	2	100	0.100	0.800	0.800	9.78	3255	650	45°
12.00	2	100	0.105	0.960	0.960	11.73	2715	570	45°
1.00	2	90	0.028	0.080	0.080	0.98	29235	1635	45°
2.00	2	90	0.040	0.160	0.160	1.96	14615	1170	45°
3.00	2	90	0.050	0.240	0.240	2.93	9775	980	45°
4.00	2	90	0.054	0.320	0.320	3.91	7325	790	45°
5.00	2	90	0.064	0.400	0.400	4.89	5860	750	45°
6.00	2	90	0.068	0.480	0.480	5.87	4880	665	45°
8.00	2	90	0.076	0.640	0.640	7.82	3665	555	45°
10.00	2	90	0.090	0.800	0.800	9.78	2930	525	45°
12.00	2	90	0.094	0.960	0.960	11.73	2440	460	45°
1.00	2	60	0.025	0.080	0.080	0.98	19490	975	45°
2.00	2	60	0.040	0.160	0.160	1.96	9745	780	45°
3.00	2	60	0.045	0.240	0.240	2.93	6520	585	45°
4.00	2	60	0.050	0.320	0.320	3.91	4885	490	45°
5.00	2	60	0.060	0.400	0.400	4.89	3905	470	45°
6.00	2	60	0.065	0.480	0.480	5.87	3255	425	45°
8.00	2	60	0.070	0.640	0.640	7.82	2440	340	45°
10.00	2	60	0.085	0.800	0.800	9.78	1955	330	45°
12.00	2	60	0.090	0.960	0.960	11.73	1630	295	45°
1.00	2	129	0.040	0.090	0.090	0.98	41900	3350	45°
2.00	2	240	0.055	0.170	0.170	1.96	38975	4285	45°
3.00	2	240	0.070	0.260	0.260	2.95	25895	3625	45°
4.00	2	240	0.075	0.350	0.350	3.93	19440	2915	45°
5.00	2	240	0.090	0.440	0.440	4.92	15525	2795	45°
6.00	2	240	0.095	0.520	0.520	5.89	12970	2465	45°
8.00	2	240	0.105	0.700	0.700	7.86	9720	2040	45°
10.00	2	240	0.125	0.870	0.870	9.83	7770	1945	45°
12.00	2	240	0.130	1.050	1.050	11.80	6475	1685	45°
1.00	2	124	0.025	0.050	0.050	0.94	41990	2100	45°
2.00	2	140	0.030	0.070	0.070	1.84	24220	1455	45°
3.00	2	140	0.030	0.090	0.090	2.72	16385	985	45°
4.00	2	140	0.050	0.110	0.110	3.60	12380	1240	45°
5.00	2	140	0.055	0.130	0.130	4.48	9945	1095	45°
6.00	2	140	0.060	0.150	0.150	5.36	8315	1000	45°
8.00	2	140	0.065	0.170	0.170	7.05	6320	820	45°
10.00	2	140	0.070	0.200	0.200	8.77	5080	710	45°
12.00	2	140	0.075	0.250	0.250	10.56	4220	635	45°
1.00	2	124	0.022	0.050	0.050	0.94	41990	1850	45°
2.00	2	125	0.028	0.070	0.070	1.84	21625	1210	45°
3.00	2	125	0.028	0.090	0.090	2.72	14630	820	45°
4.00	2	125	0.046	0.110	0.110	3.60	11050	1015	45°
5.00	2	125	0.050	0.130	0.130	4.48	8880	890	45°
6.00	2	125	0.054	0.150	0.150	5.36	7425	800	45°
8.00	2	125	0.058	0.170	0.170	7.05	5645	655	45°
10.00	2	125	0.064	0.200	0.200	8.77	4535	580	45°
12.00	2	125	0.068	0.250	0.250	10.56	3770	510	45°
1.00	2	70	0.025	0.050	0.050	0.94	23705	1185	45°
2.00	2	70	0.025	0.070	0.070	1.84	12110	605	45°
3.00	2	70	0.025	0.090	0.090	2.72	8190	410	45°
4.00	2	70	0.045	0.110	0.110	3.60	6190	555	45°
5.00	2	70	0.050	0.130	0.130	4.48	4975	495	45°
6.00	2	70	0.055	0.150	0.150	5.36	4155	455	45°
8.00	2	70	0.060	0.170	0.170	7.05	3160	380	45°
10.00	2	70	0.065	0.200	0.200	8.77	2540	330	45°
12.00	2	70	0.070	0.250	0.250	10.56	2110	295	45°
1.00	2	124	0.030	0.050	0.050	0.94	41990	2520	45°
2.00	2	243	0.035	0.070	0.070	1.84	42040	2945	45°
3.00	2	359	0.035	0.090	0.090	2.72	42010	2940	45°
4.00	2	360	0.060	0.110	0.110	3.60	31830	3820	45°
5.00	2	360	0.065	0.130	0.130	4.48	25580	3325	45°
6.00	2	360	0.070	0.150	0.150	5.36	21380	2995	45°
8.00	2	360	0.080	0.170	0.170	7.05	16255	2600	45°
10.00	2	360	0.085	0.200	0.200	8.77	13065	2220	45°
12.00	2	360	0.090	0.250	0.250	10.56	10850	1955	45°

Ball nose end mills Sphericut

Tolerance $r \pm 0.005$, 6xd




HM	λ 30°
MG10	γ 5°

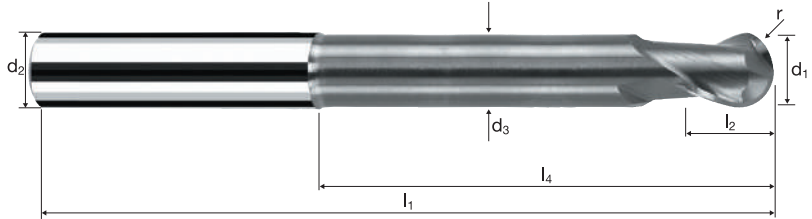

Rm	Rm	Rm	Rm	HRC	Inox	Ti	GG(G)
< 850	850-1100	1100-1300	1300-1500	48-56	Stainless	Titanium	Tool Steel Nickel-Alloys


											POLYCHROM	
Example: Order-N°.											P7544	
											P7544	
	d_1	d_2 h6	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z		
100	1.00	6.00	0.95	66	1.50	6.00	16.08	0.500	9.5°	2	●	
140	2.00	6.00	1.90	66	3.00	12.00	20.31	1.000	6.1°	2	●	
180	3.00	6.00	2.80	66	4.00	18.00	24.63	1.500	3.9°	2	●	
220	4.00	6.00	3.70	69	5.00	24.00	28.95	2.000	2.2°	2	●	
260	5.00	6.00	4.60	75	6.00	30.00	33.27	2.500	1.0°	2	●	
300	6.00	6.00	5.50	80	7.00	42.34	43.00	3.000	0.0°	2	●	
391	8.00	8.00	7.40	90	9.00	52.29	53.00	4.000	0.0°	2	●	
450	10.00	10.00	9.20	105	11.00	63.20	64.00	5.000	0.0°	2	●	
501	12.00	12.00	11.00	120	13.00	73.13	74.00	6.000	0.0°	2	●	
610	16.00	16.00	15.00	135	17.00	85.13	86.00	8.000	0.0°	2	●	

Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
3.00	2	370	0.060	0.150	0.050	2.83	41615	4995	45°
4.00	2	486	0.070	0.180	0.050	3.75	41255	5775	45°
5.00	2	486	0.075	0.200	0.050	4.64	33340	5000	45°
6.00	2	486	0.085	0.230	0.075	5.55	27875	4740	45°
8.00	2	486	0.090	0.250	0.075	7.27	21280	3830	45°
10.00	2	486	0.100	0.300	0.100	9.06	17075	3415	45°
12.00	2	486	0.105	0.350	0.100	10.85	14260	2995	45°
16.00	2	486	0.115	0.400	0.120	14.28	10835	2490	45°

Unalloyed copper




3.00	2	324	0.060	0.150	0.050	2.83	36445	4375	45°
4.00	2	324	0.070	0.180	0.050	3.75	27500	3850	45°
5.00	2	324	0.075	0.200	0.050	4.64	22225	3335	45°
6.00	2	324	0.085	0.230	0.075	5.55	18580	3160	45°
8.00	2	324	0.090	0.250	0.075	7.27	14185	2555	45°
10.00	2	324	0.100	0.300	0.100	9.06	11385	2275	45°
12.00	2	324	0.105	0.350	0.100	10.85	9505	1995	45°
16.00	2	324	0.115	0.400	0.120	14.28	7220	1660	45°

Thermoplastics




3.00	2	370	0.060	0.150	0.050	2.83	41615	4995	45°
4.00	2	490	0.070	0.180	0.050	3.75	41590	5825	45°
5.00	2	610	0.075	0.200	0.050	4.64	41845	6275	45°
6.00	2	730	0.085	0.230	0.075	5.55	41870	7120	45°
8.00	2	955	0.090	0.250	0.075	7.27	41815	7525	45°
10.00	2	1080	0.100	0.300	0.100	9.06	37945	7590	45°
12.00	2	1080	0.105	0.350	0.100	10.85	31685	6655	45°
16.00	2	1080	0.115	0.400	0.120	14.28	24075	5535	45°

Cast aluminium



3.00	2	370	0.060	0.150	0.050	2.83	41615	4995	45°
4.00	2	389	0.070	0.180	0.050	3.75	33020	4625	45°
5.00	2	389	0.075	0.200	0.050	4.64	26685	4005	45°
6.00	2	389	0.085	0.230	0.075	5.55	22310	3795	45°
8.00	2	389	0.090	0.250	0.075	7.27	17030	3065	45°
10.00	2	389	0.100	0.300	0.100	9.06	13665	2735	45°
12.00	2	389	0.105	0.350	0.100	10.85	11410	2395	45°
16.00	2	389	0.115	0.400	0.120	14.28	8670	1995	45°

Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [cm ³ /min]
3.00	2	227	0.082	0.450	0.900	2.14	33765	5535	2.2
4.00	2	227	0.090	0.600	1.200	2.86	25265	4550	3.3
5.00	2	227	0.100	0.750	1.500	3.57	20240	4050	4.6
6.00	2	227	0.120	0.900	1.800	4.28	16880	4050	6.6
8.00	2	227	0.140	1.200	2.400	5.71	12655	3545	10.2
10.00	2	227	0.150	1.500	3.000	7.14	10120	3035	13.7
12.00	2	227	0.180	1.800	3.600	8.57	8430	3035	19.7
16.00	2	227	0.200	2.400	4.800	11.43	6320	2530	29.1

Unalloyed copper



3.00	2	151	0.078	0.450	0.900	2.14	22460	3505	1.4
4.00	2	151	0.084	0.600	1.200	2.86	16805	2825	2.0
5.00	2	151	0.092	0.750	1.500	3.57	13465	2475	2.8
6.00	2	151	0.111	0.900	1.800	4.28	11230	2495	4.0
8.00	2	151	0.128	1.200	2.400	5.71	8420	2155	6.2
10.00	2	151	0.135	1.500	3.000	7.14	6730	1820	8.2
12.00	2	151	0.162	1.800	3.600	8.57	5610	1815	11.8
16.00	2	151	0.176	2.400	4.800	11.43	4205	1480	17.1

Thermoplastics



3.00	2	273	0.082	0.450	0.900	2.14	40605	6660	2.7
4.00	2	361	0.090	0.600	1.200	2.86	40180	7230	5.2
5.00	2	455	0.100	0.750	1.500	3.57	40570	8115	9.1
6.00	2	504	0.120	0.900	1.800	4.28	37485	8995	14.6
8.00	2	504	0.140	1.200	2.400	5.71	28095	7865	22.7
10.00	2	504	0.150	1.500	3.000	7.14	22470	6740	30.3
12.00	2	504	0.180	1.800	3.600	8.57	18720	6740	43.7
16.00	2	504	0.200	2.400	4.800	11.43	14035	5615	64.7

Cast aluminium






3.00	2	181	0.082	0.450	0.900	2.14	26920	4415	1.8
4.00	2	181	0.090	0.600	1.200	2.86	20145	3625	2.6
5.00	2	181	0.100	0.750	1.500	3.57	16140	3230	3.6
6.00	2	181	0.120	0.900	1.800	4.28	13460	3230	5.2
8.00	2	181	0.140	1.200	2.400	5.71	10090	2825	8.1
10.00	2	181	0.150	1.500	3.000	7.14	8070	2420	10.9
12.00	2	181	0.180	1.800	3.600	8.57	6725	2420	15.7
16.00	2	181	0.200	2.400	4.800	11.43	5040	2015	23.2

Ball nose end mills Sphericut

Tolerance $r \pm 0.005, 6xd$




HM
MG10 λ 40°
 γ 20°

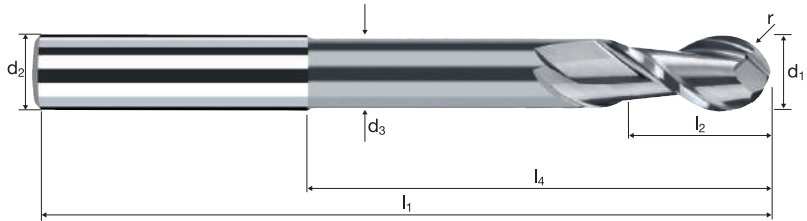

		Al Aluminium > 99%	Al Aluminium Alloy	Al Aluminium Cast		Cu Copper	Plastic Thermoplast	
--	--	--------------------------	--------------------------	-------------------------	--	--------------	------------------------	--

Ø Code	Example: Order-N°.											7554
	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z		
180	3.00	6.00	2.80	66	6.00	18.00	24.63	1.500	3.7°	2	●	
220	4.00	6.00	3.70	69	8.00	24.00	28.95	2.000	2.2°	2	●	
260	5.00	6.00	4.60	75	10.00	30.00	33.27	2.500	1.1°	2	●	
300	6.00	6.00	5.50	80	12.00	42.34	43.00	3.000	0.0°	2	●	
391	8.00	8.00	7.40	90	16.00	52.29	53.00	4.000	0.0°	2	●	
450	10.00	10.00	9.20	105	20.00	63.20	64.00	5.000	0.0°	2	●	
501	12.00	12.00	11.00	120	24.00	73.13	74.00	6.000	0.0°	2	●	
610	16.00	16.00	15.00	135	32.00	85.13	86.00	8.000	0.0°	2	●	

Application



Material

Hardened tool steel
52 - 56 HRC




Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



High speed steel,
hardened
64 - 70 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



High speed steel,
hardened
64 - 70 HRC




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
1.00	2	110	0.018	0.030	0.090	0.91	38475	1385	45°
2.00	2	110	0.028	0.030	0.120	1.72	20355	1140	45°
3.00	2	140	0.042	0.050	0.150	2.59	17205	1445	45°
4.00	2	140	0.052	0.050	0.180	3.39	13145	1365	45°
5.00	2	140	0.058	0.050	0.210	4.17	10685	1240	45°
6.00	2	140	0.064	0.050	0.230	4.94	9020	1155	45°
8.00	2	140	0.068	0.080	0.280	6.67	6680	910	45°
10.00	2	140	0.074	0.080	0.310	8.22	5420	800	45°
12.00	2	140	0.082	0.100	0.340	9.89	4505	740	45°
1.00	2	100	0.018	0.030	0.090	0.91	34980	1260	45°
2.00	2	100	0.028	0.030	0.120	1.72	18505	1035	45°
3.00	2	120	0.042	0.050	0.150	2.59	14750	1240	45°
4.00	2	120	0.052	0.050	0.180	3.39	11270	1170	45°
5.00	2	120	0.058	0.050	0.210	4.17	9160	1065	45°
6.00	2	120	0.064	0.050	0.230	4.94	7730	990	45°
8.00	2	120	0.068	0.080	0.280	6.67	5725	780	45°
10.00	2	120	0.074	0.080	0.310	8.22	4645	690	45°
12.00	2	120	0.082	0.100	0.340	9.89	3860	635	45°
1.00	2	60	0.018	0.030	0.090	0.91	20985	755	45°
2.00	2	60	0.028	0.030	0.120	1.72	11105	620	45°
3.00	2	70	0.042	0.050	0.150	2.59	8605	725	45°
4.00	2	70	0.052	0.050	0.180	3.39	6575	685	45°
5.00	2	70	0.058	0.050	0.210	4.17	5345	620	45°
6.00	2	70	0.064	0.050	0.230	4.94	4510	575	45°
8.00	2	70	0.068	0.080	0.280	6.67	3340	455	45°
10.00	2	70	0.074	0.080	0.310	8.22	2710	400	45°
12.00	2	70	0.082	0.100	0.340	9.89	2255	370	45°
1.00	2	40	0.018	0.030	0.090	0.91	13990	505	45°
2.00	2	40	0.028	0.030	0.120	1.72	7405	415	45°
3.00	2	50	0.042	0.050	0.150	2.59	6145	515	45°
4.00	2	50	0.052	0.050	0.180	3.39	4695	490	45°
5.00	2	50	0.058	0.050	0.210	4.17	3815	445	45°
6.00	2	50	0.064	0.050	0.230	4.94	3220	410	45°
8.00	2	50	0.068	0.080	0.280	6.67	2385	325	45°
10.00	2	50	0.074	0.080	0.310	8.22	1935	285	45°
12.00	2	50	0.082	0.100	0.340	9.89	1610	265	45°
1.00	2	116	0.020	0.020	0.040	0.88	41960	1680	45°
2.00	2	140	0.025	0.020	0.050	1.67	26685	1335	45°
3.00	2	170	0.030	0.030	0.060	2.50	21645	1300	45°
4.00	2	170	0.030	0.030	0.060	3.27	16550	995	45°
5.00	2	170	0.035	0.030	0.070	4.04	13395	940	45°
6.00	2	170	0.035	0.030	0.070	4.80	11275	790	45°
8.00	2	170	0.040	0.050	0.080	6.48	8350	670	45°
10.00	2	170	0.040	0.050	0.080	8.00	6765	540	45°
12.00	2	170	0.040	0.050	0.080	9.51	5690	455	45°
1.00	2	110	0.020	0.020	0.040	0.88	39790	1590	45°
2.00	2	110	0.025	0.020	0.050	1.67	20965	1050	45°
3.00	2	140	0.030	0.030	0.060	2.50	17825	1070	45°
4.00	2	140	0.030	0.030	0.060	3.27	13630	820	45°
5.00	2	140	0.035	0.030	0.070	4.04	11030	770	45°
6.00	2	140	0.035	0.030	0.070	4.80	9285	650	45°
8.00	2	140	0.040	0.050	0.080	6.48	6875	550	45°
10.00	2	140	0.040	0.050	0.080	8.00	5570	445	45°
12.00	2	140	0.040	0.050	0.080	9.51	4685	375	45°
1.00	2	60	0.020	0.020	0.040	0.88	21705	870	45°
2.00	2	60	0.025	0.020	0.050	1.67	11435	570	45°
3.00	2	80	0.030	0.030	0.060	2.50	10185	610	45°
4.00	2	80	0.030	0.030	0.060	3.27	7785	465	45°
5.00	2	80	0.035	0.030	0.070	4.04	6305	440	45°
6.00	2	80	0.035	0.030	0.070	4.80	5305	370	45°
8.00	2	80	0.040	0.050	0.080	6.48	3930	315	45°
10.00	2	80	0.040	0.050	0.080	8.00	3185	255	45°
12.00	2	80	0.040	0.050	0.080	9.51	2680	215	45°
1.00	2	50	0.020	0.020	0.040	0.88	18085	725	45°
2.00	2	50	0.025	0.020	0.050	1.67	9530	475	45°
3.00	2	60	0.030	0.030	0.060	2.50	7640	460	45°
4.00	2	60	0.030	0.030	0.060	3.27	5840	350	45°
5.00	2	60	0.035	0.030	0.070	4.04	4725	330	45°
6.00	2	60	0.035	0.030	0.070	4.80	3980	280	45°
8.00	2	60	0.040	0.050	0.080	6.48	2945	235	45°
10.00	2	60	0.040	0.050	0.080	8.00	2385	190	45°
12.00	2	60	0.040	0.050	0.080	9.51	2010	160	45°

Ball nose end mills SpheroX

Tolerance r ±0.005, 9xd




HM XA	λ 30° γ -10°

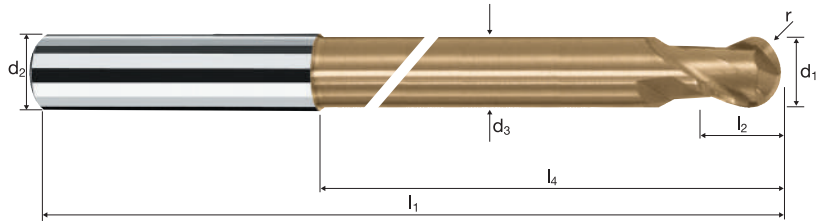

	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	HSS ToolSteel
--	-----------------	-----------------	--------------	--------------	-------------	----------------	------------------

Example: Order-N°.		Coating V		Article-N°. 7478		ø-Code 100						DURO-V
Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z		V7478
100	1.00	6.00	0.95	69	1.50	9.00	19.08	0.500	8.0°	2		●
140	2.00	6.00	1.90	69	3.00	18.00	26.31	1.000	4.7°	2		●
180	3.00	6.00	2.80	75	4.00	27.00	33.63	1.500	2.8°	2		●
220	4.00	6.00	3.70	80	5.00	36.00	40.95	2.000	1.5°	2		●
260	5.00	6.00	4.60	87	6.00	45.00	48.27	2.500	0.7°	2		●
300	6.00	6.00	5.50	100	7.00	62.34	63.00	3.000	0.0°	2		●
391	8.00	8.00	7.40	120	9.00	82.29	83.00	4.000	0.0°	2		●
450	10.00	10.00	9.20	135	11.00	93.20	94.00	5.000	0.0°	2		●
501	12.00	12.00	11.00	160	13.00	113.13	114.00	6.000	0.0°	2		●
610	16.00	16.00	15.00	180	17.00	130.13	131.00	8.000	0.0°	2		●

Application



Material

Hardened tool steel
42 - 48 HRC




Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Titanium alloys
> 300 HB
[Ti6Al4V]



Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Titanium alloys
> 300 HB
[Ti6Al4V]






d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_t [mm/min]	β [°]
1.00	2	120	0.026	0.030	0.090	0.91	41975	2185	45°
2.00	2	180	0.038	0.030	0.120	1.72	33310	2530	45°
3.00	2	220	0.058	0.050	0.150	2.59	27040	3135	45°
4.00	2	220	0.074	0.050	0.180	3.39	20655	3055	45°
5.00	2	220	0.084	0.050	0.210	4.17	16795	2820	45°
6.00	2	220	0.090	0.050	0.230	4.94	14175	2550	45°
8.00	2	220	0.098	0.080	0.280	6.67	10500	2060	45°
10.00	2	220	0.106	0.080	0.310	8.22	8520	1805	45°
12.00	2	220	0.116	0.100	0.340	9.89	7080	1645	45°
1.00	2	120	0.018	0.030	0.090	0.91	41975	1510	45°
2.00	2	150	0.028	0.030	0.120	1.72	27760	1555	45°
3.00	2	190	0.042	0.050	0.150	2.59	23350	1960	45°
4.00	2	190	0.052	0.050	0.180	3.39	17840	1855	45°
5.00	2	190	0.058	0.050	0.210	4.17	14505	1680	45°
6.00	2	190	0.064	0.050	0.230	4.94	12245	1565	45°
8.00	2	190	0.068	0.080	0.280	6.67	9065	1235	45°
10.00	2	190	0.074	0.080	0.310	8.22	7360	1090	45°
12.00	2	190	0.082	0.100	0.340	9.89	6115	1005	45°
1.00	2	110	0.018	0.030	0.090	0.91	38475	1385	45°
2.00	2	110	0.028	0.030	0.120	1.72	20355	1140	45°
3.00	2	140	0.042	0.050	0.150	2.59	17205	1445	45°
4.00	2	140	0.052	0.050	0.180	3.39	13145	1365	45°
5.00	2	140	0.058	0.050	0.210	4.17	10685	1240	45°
6.00	2	140	0.064	0.050	0.230	4.94	9020	1155	45°
8.00	2	140	0.068	0.080	0.280	6.67	6680	910	45°
10.00	2	140	0.074	0.080	0.310	8.22	5420	800	45°
12.00	2	140	0.082	0.100	0.340	9.89	4505	740	45°
1.00	2	100	0.026	0.030	0.090	0.91	34980	1820	45°
2.00	2	100	0.038	0.030	0.120	1.72	18505	1405	45°
3.00	2	120	0.058	0.050	0.150	2.59	14750	1710	45°
4.00	2	120	0.074	0.050	0.180	3.39	11270	1670	45°
5.00	2	120	0.084	0.050	0.210	4.17	9160	1540	45°
6.00	2	120	0.090	0.050	0.230	4.94	7730	1390	45°
8.00	2	120	0.098	0.080	0.280	6.67	5725	1120	45°
10.00	2	120	0.106	0.080	0.310	8.22	4645	985	45°
12.00	2	120	0.116	0.100	0.340	9.89	3860	895	45°
1.00	2	116	0.030	0.020	0.040	0.88	41960	2520	45°
2.00	2	210	0.040	0.020	0.050	1.67	40025	3200	45°
3.00	2	260	0.045	0.030	0.060	2.50	33105	2980	45°
4.00	2	260	0.050	0.030	0.060	3.27	25310	2530	45°
5.00	2	260	0.050	0.030	0.070	4.04	20485	2050	45°
6.00	2	260	0.055	0.030	0.070	4.80	17240	1895	45°
8.00	2	260	0.060	0.050	0.080	6.48	12770	1535	45°
10.00	2	260	0.060	0.050	0.080	8.00	10345	1240	45°
12.00	2	260	0.065	0.050	0.080	9.51	8700	1130	45°
1.00	2	116	0.020	0.020	0.040	0.88	41960	1680	45°
2.00	2	180	0.025	0.020	0.050	1.67	34310	1715	45°
3.00	2	230	0.030	0.030	0.060	2.50	29285	1755	45°
4.00	2	230	0.030	0.030	0.060	3.27	22390	1345	45°
5.00	2	230	0.035	0.030	0.070	4.04	18120	1270	45°
6.00	2	230	0.035	0.030	0.070	4.80	15250	1070	45°
8.00	2	230	0.040	0.050	0.080	6.48	11300	905	45°
10.00	2	230	0.040	0.050	0.080	8.00	9150	730	45°
12.00	2	230	0.040	0.050	0.080	9.51	7700	615	45°
1.00	2	116	0.020	0.020	0.040	0.88	41960	1680	45°
2.00	2	140	0.025	0.020	0.050	1.67	26685	1335	45°
3.00	2	170	0.030	0.030	0.060	2.50	21645	1300	45°
4.00	2	170	0.030	0.030	0.060	3.27	16550	995	45°
5.00	2	170	0.035	0.030	0.070	4.04	13395	940	45°
6.00	2	170	0.035	0.030	0.070	4.80	11275	790	45°
8.00	2	170	0.040	0.050	0.080	6.48	8350	670	45°
10.00	2	170	0.040	0.050	0.080	8.00	6765	540	45°
12.00	2	170	0.040	0.050	0.080	9.51	5690	455	45°
1.00	2	110	0.030	0.020	0.040	0.88	39790	2385	45°
2.00	2	110	0.040	0.020	0.050	1.67	20965	1675	45°
3.00	2	140	0.045	0.030	0.060	2.50	17825	1605	45°
4.00	2	140	0.050	0.030	0.060	3.27	13630	1365	45°
5.00	2	140	0.050	0.030	0.070	4.04	11030	1105	45°
6.00	2	140	0.055	0.030	0.070	4.80	9285	1020	45°
8.00	2	140	0.060	0.050	0.080	6.48	6875	825	45°
10.00	2	140	0.060	0.050	0.080	8.00	5570	670	45°
12.00	2	140	0.065	0.050	0.080	9.51	4685	610	45°

Ball nose end mills SpheroX

Tolerance $r \pm 0.005$, 9xd




HM
XA λ 30°
 γ -10°

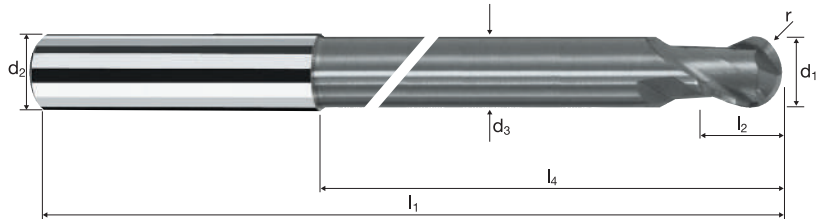

Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	HSS ToolSteel
----------------	-----------------	-----------------	--------------	--------------	-------------	----------------	------------------

											X-AL
Example: Order-N°.											X7408
Coating											X
Article-N°.											7408
ø-Code											100
Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	
100	1.00	6.00	0.95	69	1.50	9.00	19.08	0.500	8.0°	2	●
140	2.00	6.00	1.90	69	3.00	18.00	26.31	1.000	4.7°	2	●
180	3.00	6.00	2.80	75	4.00	27.00	33.63	1.500	2.8°	2	●
220	4.00	6.00	3.70	80	5.00	36.00	40.95	2.000	1.5°	2	●
260	5.00	6.00	4.60	87	6.00	45.00	48.27	2.500	0.7°	2	●
300	6.00	6.00	5.50	100	7.00	62.34	63.00	3.000	0.0°	2	●
391	8.00	8.00	7.40	120	9.00	82.29	83.00	4.000	0.0°	2	●
450	10.00	10.00	9.20	135	11.00	93.20	94.00	5.000	0.0°	2	●
501	12.00	12.00	11.00	160	13.00	113.13	114.00	6.000	0.0°	2	●

Application



Material

Steel
1100 - 1300 N/mm²




Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Steel
1100 - 1300 N/mm²



Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC




d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _r [mm/min]	β [°]
1.00	2	131	0.040	0.100	0.100	0.99	42120	3370	45°
2.00	2	180	0.065	0.200	0.200	1.98	28935	3760	45°
3.00	2	180	0.075	0.300	0.300	2.97	19290	2895	45°
4.00	2	180	0.090	0.400	0.400	3.96	14470	2605	45°
6.00	2	180	0.110	0.600	0.600	5.94	9645	2120	45°
8.00	2	180	0.125	0.800	0.800	7.92	7235	1810	45°
10.00	2	180	0.145	1.000	1.000	9.90	5785	1680	45°
12.00	2	180	0.150	1.200	1.200	11.88	4825	1445	45°
16.00	2	180	0.180	1.600	1.600	15.84	3615	1300	45°
1.00	2	131	0.035	0.100	0.100	0.99	42120	2950	45°
2.00	2	160	0.060	0.200	0.200	1.98	25720	3085	45°
3.00	2	160	0.070	0.300	0.300	2.97	17150	2400	45°
4.00	2	160	0.085	0.400	0.400	3.96	12860	2185	45°
6.00	2	160	0.100	0.600	0.600	5.94	8575	1715	45°
8.00	2	160	0.115	0.800	0.800	7.92	6430	1480	45°
10.00	2	160	0.135	1.000	1.000	9.90	5145	1390	45°
12.00	2	160	0.140	1.200	1.200	11.88	4285	1200	45°
16.00	2	160	0.165	1.600	1.600	15.84	3215	1060	45°
1.00	2	132	0.035	0.120	0.120	1.00	42015	2940	45°
2.00	2	140	0.055	0.150	0.150	1.95	22855	2515	45°
3.00	2	140	0.065	0.180	0.180	2.87	15525	2020	45°
4.00	2	140	0.075	0.200	0.200	3.78	11790	1770	45°
6.00	2	140	0.095	0.300	0.300	5.67	7860	1495	45°
8.00	2	140	0.105	0.400	0.400	7.56	5895	1240	45°
10.00	2	140	0.125	0.500	0.500	9.45	4715	1180	45°
12.00	2	140	0.130	0.600	0.600	11.34	3930	1020	45°
16.00	2	140	0.155	0.800	0.800	15.11	2950	915	45°
1.00	2	100	0.030	0.120	0.120	1.00	31830	1910	45°
2.00	2	100	0.050	0.150	0.150	1.95	16325	1630	45°
3.00	2	100	0.060	0.180	0.180	2.87	11090	1330	45°
4.00	2	100	0.070	0.200	0.200	3.78	8420	1180	45°
6.00	2	100	0.090	0.300	0.300	5.67	5615	1010	45°
8.00	2	100	0.100	0.400	0.400	7.56	4210	840	45°
10.00	2	100	0.115	0.500	0.500	9.45	3370	775	45°
12.00	2	100	0.120	0.600	0.600	11.34	2805	675	45°
16.00	2	100	0.145	0.800	0.800	15.11	2105	610	45°
1.00	2	124	0.025	0.050	0.050	0.94	41990	2100	45°
2.00	2	243	0.030	0.070	0.070	1.84	42040	2520	45°
3.00	2	280	0.035	0.100	0.100	2.74	32530	2275	45°
4.00	2	280	0.055	0.120	0.120	3.62	24620	2710	45°
6.00	2	280	0.065	0.150	0.150	5.36	16630	2160	45°
8.00	2	280	0.075	0.170	0.170	7.05	12640	1895	45°
10.00	2	280	0.080	0.200	0.200	8.77	10165	1625	45°
12.00	2	280	0.085	0.250	0.250	10.56	8440	1435	45°
16.00	2	280	0.100	0.280	0.280	13.88	6420	1285	45°
1.00	2	124	0.025	0.050	0.050	0.94	41990	2100	45°
2.00	2	243	0.030	0.070	0.070	1.84	42040	2520	45°
3.00	2	250	0.035	0.100	0.100	2.74	29045	2035	45°
4.00	2	250	0.050	0.120	0.120	3.62	21985	2200	45°
6.00	2	250	0.060	0.150	0.150	5.36	14845	1780	45°
8.00	2	250	0.070	0.170	0.170	7.05	11290	1580	45°
10.00	2	250	0.075	0.200	0.200	8.77	9075	1360	45°
12.00	2	250	0.080	0.250	0.250	10.56	7535	1205	45°
16.00	2	250	0.095	0.280	0.280	13.88	5735	1090	45°
1.00	2	124	0.025	0.050	0.050	0.94	41990	2100	45°
2.00	2	200	0.025	0.070	0.070	1.84	34600	1730	45°
3.00	2	200	0.030	0.100	0.100	2.74	23235	1395	45°
4.00	2	200	0.050	0.120	0.120	3.62	17585	1760	45°
6.00	2	200	0.060	0.150	0.150	5.36	11875	1425	45°
8.00	2	200	0.070	0.170	0.170	7.05	9030	1265	45°
10.00	2	200	0.070	0.200	0.200	8.77	7260	1015	45°
12.00	2	200	0.075	0.250	0.250	10.56	6030	905	45°
16.00	2	200	0.090	0.280	0.280	13.88	4585	825	45°
1.00	2	124	0.020	0.050	0.050	0.94	41990	1680	45°
2.00	2	150	0.025	0.070	0.070	1.84	25950	1295	45°
3.00	2	150	0.030	0.100	0.100	2.74	17425	1045	45°
4.00	2	150	0.045	0.120	0.120	3.62	13190	1185	45°
6.00	2	150	0.055	0.150	0.150	5.36	8910	980	45°
8.00	2	150	0.065	0.170	0.170	7.05	6775	880	45°
10.00	2	150	0.070	0.200	0.200	8.77	5445	760	45°
12.00	2	150	0.070	0.250	0.250	10.56	4520	635	45°
16.00	2	150	0.085	0.280	0.280	13.88	3440	585	45°

Ball nose end mills Sphericut

Tolerance r f8 (-/-), 3xd




HM Plus	λ 30° γ -10°

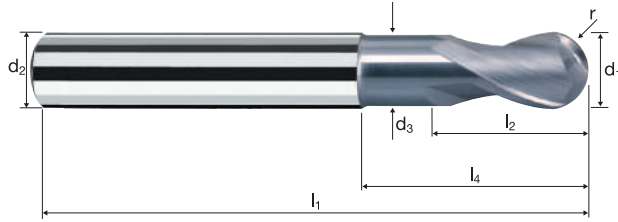

		Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60					GG(G)
--	--	-----------------	-----------------	--------------	--------------	--	--	--	--	-------

Example: Order-N°.											POLYCHROM	
											P5286	
Ø Code	d ₁ ±	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r f8	α	z		
100	1.00	3.00	-	40	1.00	-	5.93	0.500	13.2°	2		●
120	1.50	3.00	-	40	2.00	-	5.99	0.750	10.4°	2		●
138	2.00	3.00	-	40	2.50	-	5.96	1.000	8.3°	2		●
140	2.00	6.00	1.90	57	3.00	6.00	14.31	1.000	9.0°	2		●
178	3.00	3.00	-	40	4.00	-	-	1.500	0.0°	2		●
180	3.00	6.00	2.80	57	4.00	9.00	15.63	1.500	6.4°	2		●
220	4.00	6.00	3.70	57	5.00	12.00	16.95	2.000	4.0°	2		●
260	5.00	6.00	4.60	57	6.00	15.00	18.27	2.500	2.0°	2		●
300	6.00	6.00	5.50	57	7.00	19.34	20.00	3.000	0.0°	2		●
391	8.00	8.00	7.40	63	9.00	25.29	26.00	4.000	0.0°	2		●
450	10.00	10.00	9.20	72	11.00	30.20	31.00	5.000	0.0°	2		●
501	12.00	12.00	11.00	83	13.00	36.13	37.00	6.000	0.0°	2		●
610	16.00	16.00	15.00	92	17.00	42.13	43.00	8.000	0.0°	2		●

Application



Material

Steel
850 - 1100 N/mm²




Steel
1100 - 1300 N/mm²



Steel
1300 - 1500 N/mm²



Steel
1500 - 1800 N/mm²



Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Steel
1300 - 1500 N/mm²



Steel
1500 - 1800 N/mm²



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _c [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
3.00	2	200	0.070	0.240	0.240	2.93	21730	3040	45°
4.00	2	200	0.080	0.320	0.320	3.91	16280	2605	45°
5.00	2	200	0.090	0.400	0.400	4.89	13020	2345	45°
6.00	2	200	0.100	0.480	0.480	5.87	10845	2170	45°
8.00	2	200	0.110	0.640	0.640	7.82	8140	1790	45°
10.00	2	200	0.130	0.800	0.800	9.78	6510	1690	45°
12.00	2	200	0.135	0.960	0.960	11.73	5425	1465	45°

3.00	2	160	0.065	0.240	0.240	2.93	17380	2260	45°
4.00	2	160	0.075	0.320	0.320	3.91	13025	1955	45°
5.00	2	160	0.085	0.400	0.400	4.89	10415	1770	45°
6.00	2	160	0.090	0.480	0.480	5.87	8675	1560	45°
8.00	2	160	0.100	0.640	0.640	7.82	6515	1305	45°
10.00	2	160	0.120	0.800	0.800	9.78	5210	1250	45°
12.00	2	160	0.125	0.960	0.960	11.73	4340	1085	45°

3.00	2	140	0.060	0.240	0.240	2.93	15210	1825	45°
4.00	2	140	0.070	0.320	0.320	3.91	11395	1595	45°
5.00	2	140	0.075	0.400	0.400	4.89	9115	1365	45°
6.00	2	140	0.085	0.480	0.480	5.87	7590	1290	45°
8.00	2	140	0.095	0.640	0.640	7.82	5700	1085	45°
10.00	2	140	0.110	0.800	0.800	9.78	4555	1000	45°
12.00	2	140	0.115	0.960	0.960	11.73	3800	875	45°

3.00	2	80	0.055	0.190	0.190	2.89	8810	970	45°
4.00	2	80	0.065	0.260	0.260	3.86	6595	860	45°
5.00	2	80	0.070	0.320	0.320	4.81	5295	740	45°
6.00	2	80	0.080	0.380	0.380	5.77	4415	705	45°
8.00	2	80	0.090	0.510	0.510	7.70	3305	595	45°
10.00	2	80	0.105	0.640	0.640	9.63	2645	555	45°
12.00	2	80	0.110	0.770	0.770	11.55	2205	485	45°

3.00	2	300	0.025	0.100	0.100	2.74	34850	1745	45°
4.00	2	300	0.050	0.120	0.120	3.62	26380	2640	45°
5.00	2	300	0.055	0.130	0.130	4.48	21315	2345	45°
6.00	2	300	0.060	0.150	0.150	5.36	17815	2140	45°
8.00	2	300	0.065	0.170	0.170	7.05	13545	1760	45°
10.00	2	300	0.070	0.200	0.200	8.77	10890	1525	45°
12.00	2	300	0.075	0.250	0.250	10.56	9045	1355	45°

3.00	2	260	0.025	0.100	0.100	2.74	30205	1510	45°
4.00	2	260	0.050	0.120	0.120	3.62	22860	2285	45°
5.00	2	260	0.050	0.130	0.130	4.48	18475	1845	45°
6.00	2	260	0.055	0.150	0.150	5.36	15440	1700	45°
8.00	2	260	0.060	0.170	0.170	7.05	11740	1410	45°
10.00	2	260	0.065	0.200	0.200	8.77	9435	1225	45°
12.00	2	260	0.070	0.250	0.250	10.56	7835	1095	45°

3.00	2	200	0.025	0.100	0.100	2.74	23235	1160	45°
4.00	2	200	0.045	0.120	0.120	3.62	17585	1585	45°
5.00	2	200	0.050	0.130	0.130	4.48	14210	1420	45°
6.00	2	200	0.055	0.150	0.150	5.36	11875	1305	45°
8.00	2	200	0.060	0.170	0.170	7.05	9030	1085	45°
10.00	2	200	0.065	0.200	0.200	8.77	7260	945	45°
12.00	2	200	0.070	0.250	0.250	10.56	6030	845	45°


3.00	2	100	0.020	0.080	0.080	2.69	11835	475	45°
4.00	2	100	0.045	0.100	0.100	3.57	8915	800	45°
5.00	2	100	0.045	0.110	0.110	4.42	7200	650	45°
6.00	2	100	0.050	0.130	0.130	5.29	6015	600	45°
8.00	2	100	0.055	0.150	0.150	6.98	4560	500	45°
10.00	2	100	0.060	0.180	0.180	8.70	3660	440	45°
12.00	2	100	0.065	0.220	0.220	10.45	3045	395	45°

Ball nose end mills

Tolerance r f8 (-/-), 3xd



HM MG10	λ 30° γ -10°

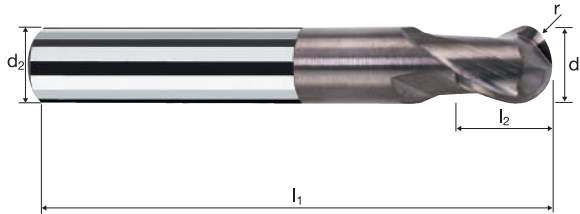

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500							GG(G)
-------------	----------------	-----------------	-----------------	--	--	--	--	--	--	-------

Example: Order-N°.										UNICUT-4X
										U45298
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	r f8	α	z		
180	3.00	6.00	57	4.00	11.76	1.500	10.4°	2		●
220	4.00	6.00	57	5.00	11.39	2.000	8.3°	2		●
260	5.00	6.00	57	6.00	10.52	2.500	5.3°	2		●
300	6.00	6.00	57	7.00	-	3.000	0.0°	2		●
391	8.00	8.00	63	9.00	-	4.000	0.0°	2		●
450	10.00	10.00	72	11.00	-	5.000	0.0°	2		●
501	12.00	12.00	83	13.00	-	6.000	0.0°	2		●

Applications



Cutting data calculator ToolExpert ArCut X

Perfect finishing tool whenever an excellent surface quality is demanded: ToolExpert ArCut X

With the ArCut X tool concept, FRAISA offers a range of conical end mills in various designs which cover a broad spectrum of finishing processes.

In combination with the respective tool characteristics, the technologies facilitate a wide range of applications in a variety of materials.

Optimize your finishing processes with the ToolExpert ArCut X.






This way to the cutting data calculator **ToolExpert ArCut X** or the FRAISA website
www.fraisa.com/en/toolexpert-arcut-x

Circular arc milling cutter ArCutX

Spherical, form tolerance ± 0.010



HM MG10	λ 30° γ 10°
------------	-------------------------------

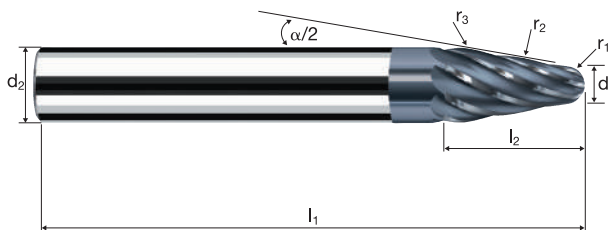

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel Aluminium
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	----------------------------------

Example: Order-N°.											POLYCHROM				
											8530	P8530			
Ø Code	d ₁	$\alpha/2$	d ₂ h5	l ₁	l ₂	r1	r2	r3	z	Coating		Article-N°		ø-Code	
										P	8530	220			
220	4.00	30.0°	16.00	108	14.50	2.00	750	3.00	4	●					
221	4.00	30.0°	16.00	108	14.50	2.00	750	3.00	6	●					
300	6.00	20.0°	16.00	108	18.50	3.00	1000	5.00	4	●					
301	6.00	20.0°	16.00	108	18.50	3.00	1000	5.00	8	●					
388	8.00	10.0°	16.00	108	28.50	4.00	1000	5.00	4	●					
389	8.00	10.0°	16.00	108	28.50	4.00	1000	5.00	8	●					
391	8.00	6.0°	16.00	123	44.00	4.00	1000	5.00	4	●					
393	8.00	6.0°	16.00	123	44.00	4.00	1000	5.00	8	●					

Applications



Cutting data calculator ToolExpert ArCut X

Perfect finishing tool whenever an excellent surface quality is demanded: ToolExpert ArCut X

With the ArCut X tool concept, FRAISA offers a range of conical end mills in various designs which cover a broad spectrum of finishing processes.

In combination with the respective tool characteristics, the technologies facilitate a wide range of applications in a variety of materials.



Optimize your finishing processes with the ToolExpert ArCut X.



This way to the cutting data calculator **ToolExpert ArCut X** or the FRAISA website
www.fraisa.com/en/toolexpert-arcut-x

Circular arc milling cutter ArCutX


Spherical, form tolerance ± 0.005

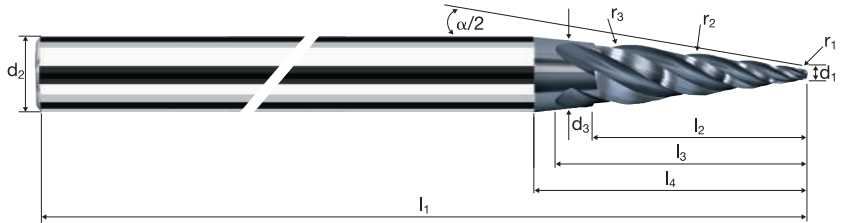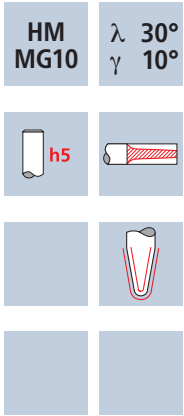

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel Aluminium
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	----------------------------------

													POLYCHROM																													
Example: Order-N°.													8535	P8535																												
													<table border="0"> <tr> <td>Coating</td> <td>Article-N°</td> <td>ø-Code</td> <td colspan="10"></td> </tr> <tr> <td>P</td> <td>8535</td> <td>100</td> <td colspan="10"></td> </tr> </table>		Coating	Article-N°	ø-Code											P	8535	100												
Coating	Article-N°	ø-Code																																								
P	8535	100																																								
Ø Code	d ₁	α/2	d ₂ h ₅	d ₃	l ₁	l ₂	l ₃	l ₄	r1	r2	r3	z																														
100	1.00	8.0°	6.00	5.00	70	16.00	17.50	22.50	0.50	350	1.00	4	●	●																												
140	2.00	15.0°	8.00	7.00	80	11.50	17.50	22.50	1.00	350	1.00	4	●	●																												
145	2.00	30.0°	8.00	-	80	8.00	-	-	1.00	250	1.00	4	●	●																												
220	4.00	14.0°	12.00	9.00	97	13.50	17.50	22.50	2.00	350	1.00	4	●	●																												

Applications

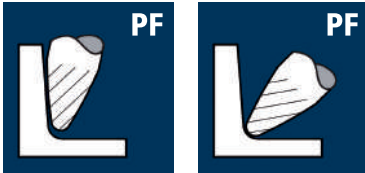

Cutting data calculator ToolExpert ArCut X

Perfect finishing tool whenever an excellent surface quality is demanded: ToolExpert ArCut X

With the ArCut X tool concept, FRAISA offers a range of conical end mills in various designs which cover a broad spectrum of finishing processes.

In combination with the respective tool characteristics, the technologies facilitate a wide range of applications in a variety of materials.



Optimize your finishing processes with the ToolExpert ArCut X.



This way to the cutting data calculator **ToolExpert ArCut X** or the FRAISA website
www.fraisa.com/en/toolexpert-arcut-x

Circular arc milling cutter ArCutX

Toric, form tolerance ± 0.010

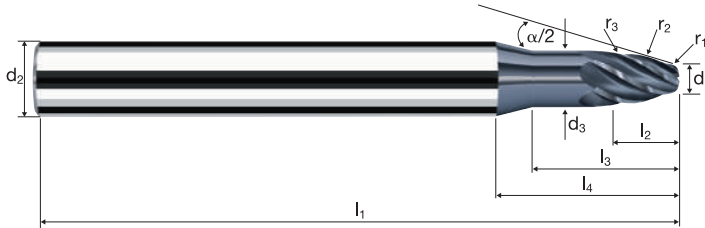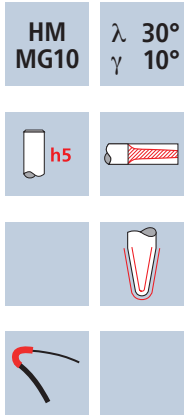

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel Aluminium	
----------	-------------	--------------	--------------	-----------	--	--	----------------	-------------	----------------------------	--

													POLYCHROM		
													8540	P8540	
Ø Code	Example: Order-N°		Coating	Article-N°		ø-Code							z		
	d ₁	α/2	P	8540	220	l ₁	l ₂	l ₃	l ₄	r1	r2	r3			
220	4.00	12.5°				84	11.00	20.00	25.00	1.25	30	1.00	4	●	●
221	4.00	12.5°				84	11.00	20.00	25.00	1.25	30	1.00	6	●	●
300	6.00	15.0°				97	15.00	-	-	2.00	40	2.00	4	●	●
301	6.00	15.0°				97	15.00	-	-	2.00	40	2.00	6	●	●
450	10.00	17.5°				108	15.00	-	-	3.50	50	2.00	4	●	●
453	10.00	17.5°				108	15.00	-	-	3.50	50	2.00	8	●	●

Applications



Cutting data calculator ToolExpert ArCut X

Perfect finishing tool whenever an excellent surface quality is demanded: ToolExpert ArCut X

With the ArCut X tool concept, FRAISA offers a range of conical end mills in various designs which cover a broad spectrum of finishing processes.

In combination with the respective tool characteristics, the technologies facilitate a wide range of applications in a variety of materials.

Optimize your finishing processes with the ToolExpert ArCut X.




This way to the cutting data calculator **ToolExpert ArCut X** or the FRAISA website
www.fraisa.com/en/toolexpert-arcut-x

Circular arc milling cutter ArCutX

Toric, integral, form tolerance ±0.010




HM MG10	λ 30° γ 10°

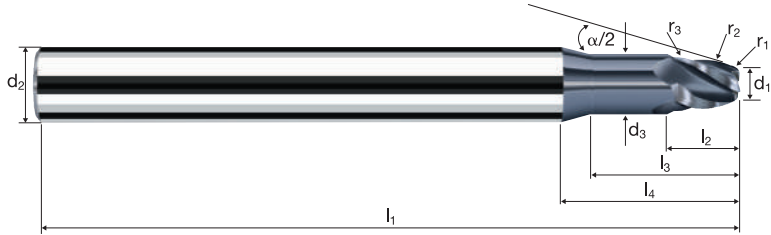

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel Aluminium
--------------------	-----------------------	------------------------	------------------------	---------------------	--	--	--------------------------	-----------------------	---

													POLYCHROM			
Example: Order-N°.													8545		P8545	
													8545		P8545	
Ø Code	d ₁	α/2	d ₂ h ₅	d ₃	l ₁	l ₂	l ₃	l ₄	r1	r2	r3	z				
180	3.00	14.0°	8.00	5.50	80	7.50	10.00	20.00	0.80	200	1.00	4	•	•		
300	6.00	14.0°	12.00	9.50	110	10.00	25.00	30.00	1.00	350	2.00	4	•	•		

Applications

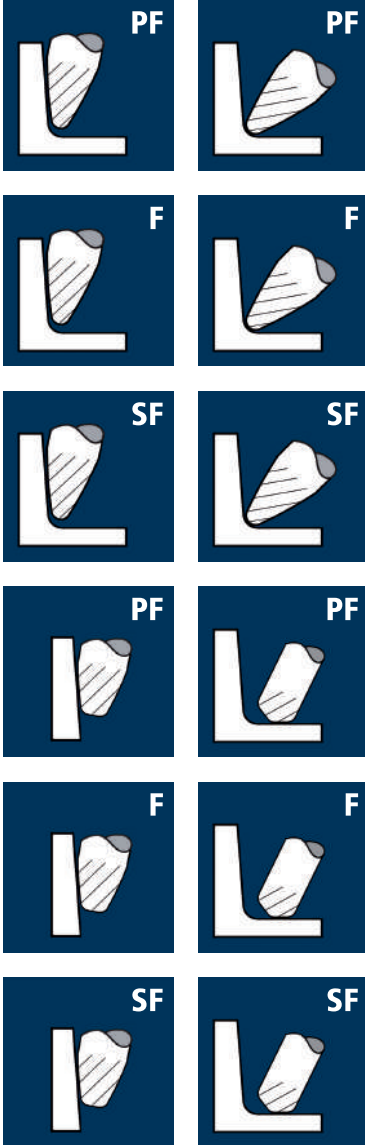

Cutting data calculator ToolExpert ArCut X

Perfect finishing tool whenever an excellent surface quality is demanded: ToolExpert ArCut X

With the ArCut X tool concept, FRAISA offers a range of conical end mills in various designs which cover a broad spectrum of finishing processes.

In combination with the respective tool characteristics, the technologies facilitate a wide range of applications in a variety of materials.



Optimize your finishing processes with the ToolExpert ArCut X.



This way to the cutting data calculator **ToolExpert ArCut X** or the FRAISA website
www.fraisa.com/en/toolexpert-arcut-x

Circular arc milling cutter ArCutX


Flat surfaces, form tolerance ± 0.010

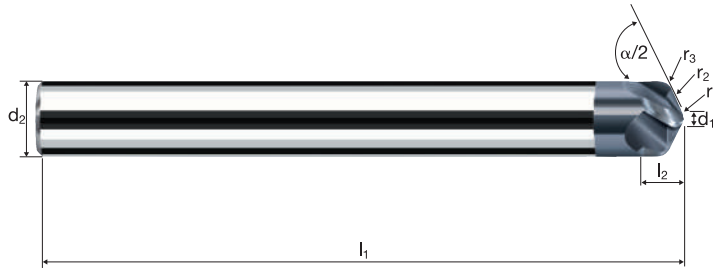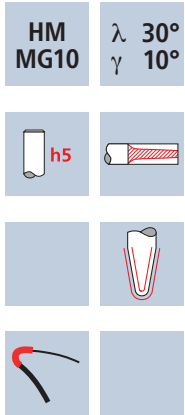

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel	Aluminium
----------	-------------	--------------	--------------	-----------	--	--	----------------	-------------	------------------	-----------

											POLYCHROM	
Example: Order-N°.											8550	P8550
											POLYCHROM	
Ø Code	d ₁	α/2	d ₂ h5	l ₁	l ₂	r1	r2	r3	z			
140	2.00	65.0°	10.00	84	4.00	1.00	250	1.75	4	●	●	
300	6.00	70.0°	20.00	104	5.50	1.00	250	1.00	8	●	●	

Application



Material

Hardened tool steel
56 - 60 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
2.00	6	60	0.014	0.200	1.200	1.80	10610	890	0.50
3.00	6	60	0.021	0.250	1.800	2.87	6655	840	0.50
4.00	6	60	0.028	0.250	2.400	3.87	4935	830	0.50
5.00	6	60	0.035	0.250	3.000	4.87	3920	825	0.50
6.00	8	60	0.042	0.200	3.600	5.80	3295	1105	0.50
8.00	8	60	0.056	0.200	4.800	7.80	2450	1095	0.50
10.00	8	60	0.070	0.200	6.000	9.80	1950	1090	0.50
12.00	8	60	0.084	0.200	7.200	11.80	1620	1090	0.50

Hardened tool steel
> 60 HRC




2.00	6	50	0.007	0.200	1.200	1.80	8840	370	0.50
3.00	6	50	0.011	0.250	1.800	2.87	5545	365	0.50
4.00	6	50	0.014	0.250	2.400	3.87	4115	345	0.50
5.00	6	50	0.018	0.250	3.000	4.87	3270	355	0.50
6.00	8	50	0.021	0.200	3.600	5.80	2745	460	0.50
8.00	8	50	0.028	0.200	4.800	7.80	2040	455	0.50
10.00	8	50	0.035	0.200	6.000	9.80	1625	455	0.50
12.00	8	50	0.042	0.200	7.200	11.80	1350	455	0.50

High speed steel,
hardened
64 - 70 HRC



2.00	6	20	0.004	0.200	1.200	1.80	3535	85	0.50
3.00	6	20	0.006	0.250	1.800	2.87	2220	80	0.50
4.00	6	20	0.008	0.250	2.400	3.87	1645	80	0.50
5.00	6	20	0.010	0.250	3.000	4.87	1305	80	0.50
6.00	8	20	0.012	0.200	3.600	5.80	1100	105	0.50
8.00	8	20	0.016	0.200	4.800	7.80	815	105	0.50
10.00	8	20	0.020	0.200	6.000	9.80	650	105	0.50
12.00	8	20	0.024	0.200	7.200	11.80	540	105	0.50

Application



Material

Hardened tool steel
56 - 60 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
2.00	6	180	0.020	0.090	0.030	1.98	28935	3470	45°
3.00	6	180	0.028	0.090	0.030	2.98	19225	3230	45°
4.00	6	180	0.035	0.090	0.050	3.98	14395	3025	45°
5.00	6	180	0.041	0.090	0.050	4.98	11505	2830	45°
6.00	8	180	0.042	0.090	0.075	5.98	9580	3220	45°
8.00	8	180	0.048	0.090	0.075	7.98	7180	2755	45°
10.00	8	180	0.050	0.090	0.100	9.98	5740	2295	45°
12.00	8	180	0.048	0.090	0.100	11.98	4785	1835	45°

Hardened tool steel
> 60 HRC



2.00	6	120	0.020	0.090	0.030	1.98	19290	2315	45°
3.00	6	120	0.028	0.090	0.030	2.98	12820	2155	45°
4.00	6	120	0.035	0.090	0.050	3.98	9595	2015	45°
5.00	6	120	0.041	0.090	0.050	4.98	7670	1885	45°
6.00	8	120	0.042	0.090	0.075	5.98	6385	2145	45°
8.00	8	120	0.048	0.090	0.075	7.98	4785	1840	45°
10.00	8	120	0.050	0.090	0.100	9.98	3825	1530	45°
12.00	8	120	0.048	0.090	0.100	11.98	3190	1225	45°








High speed steel,
hardened
64 - 70 HRC



2.00	6	80	0.020	0.090	0.030	1.98	12860	1545	45°
3.00	6	80	0.028	0.090	0.030	2.98	8545	1435	45°
4.00	6	80	0.035	0.090	0.050	3.98	6400	1345	45°
5.00	6	80	0.041	0.090	0.050	4.98	5115	1260	45°
6.00	8	80	0.042	0.090	0.075	5.98	4260	1430	45°
8.00	8	80	0.048	0.090	0.075	7.98	3190	1225	45°
10.00	8	80	0.050	0.090	0.100	9.98	2550	1020	45°
12.00	8	80	0.048	0.090	0.100	11.98	2125	815	45°





Precise cutting data for other applications and materials can be found in the cutting data software **ToolExpert 2.0**



Corner radius end mills XSpeed-H


Tolerance r 0/+0.015, 3xd

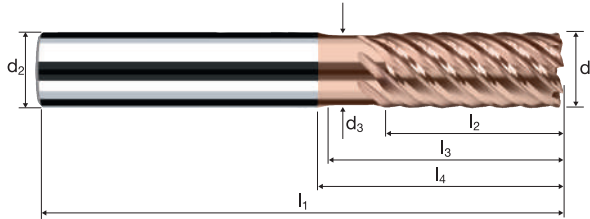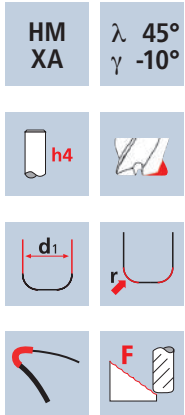

				HRC 48-56	HRC 56-60	HRC > 60			HSS
--	--	--	--	--------------	--------------	-------------	--	--	-----



Example: Order-N°.											DURO-Si	
											H7210	
Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z		
138	2.00	6.00	1.90	57	5.00	6.00	14.31	0.200	8.2°	6	●	
178	3.00	6.00	2.80	57	8.00	9.00	15.63	0.200	5.7°	6	●	
218	4.00	6.00	3.70	57	11.00	12.00	16.95	0.200	3.6°	6	●	
258	5.00	6.00	4.60	57	13.00	15.00	18.27	0.200	1.8°	6	●	
297	6.00	6.00	5.50	57	13.00	19.34	20.00	0.200	0.0°	8	●	
385	8.00	8.00	7.40	63	19.00	25.29	26.00	0.200	0.0°	8	●	
445	10.00	10.00	9.20	72	22.00	30.20	31.00	0.200	0.0°	8	●	
496	12.00	12.00	11.00	83	26.00	36.13	37.00	0.200	0.0°	8	●	
140	2.00	6.00	1.90	57	5.00	6.00	14.31	0.500	8.2°	6	●	
180	3.00	6.00	2.80	57	8.00	9.00	15.63	0.500	5.7°	6	●	
220	4.00	6.00	3.70	57	11.00	12.00	16.95	0.500	3.6°	6	●	
260	5.00	6.00	4.60	57	13.00	15.00	18.27	0.500	1.8°	6	●	
300	6.00	6.00	5.50	57	13.00	19.34	20.00	0.500	0.0°	8	●	
388	8.00	8.00	7.40	63	19.00	25.29	26.00	0.500	0.0°	8	●	
448	10.00	10.00	9.20	72	22.00	30.20	31.00	0.500	0.0°	8	●	
498	12.00	12.00	11.00	83	26.00	36.13	37.00	0.500	0.0°	8	●	

Application





Material

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

Hardened tool steel
> 60 HRC


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
2.00	4	150	0.020	0.050	0.700	1.44	33155	2655	0.50
3.00	4	150	0.025	0.050	1.050	2.44	19570	1955	0.50
4.00	4	150	0.030	0.060	1.400	3.47	13760	1650	0.50
5.00	4	150	0.035	0.060	1.750	4.47	10680	1495	0.50
6.00	6	150	0.040	0.080	2.100	5.54	8620	2070	0.50
8.00	6	150	0.045	0.080	2.800	7.54	6330	1710	0.50
10.00	6	150	0.050	0.100	3.500	9.60	4975	1490	0.50
12.00	6	150	0.055	0.100	4.200	11.60	4115	1360	0.50
16.00	6	150	0.065	0.120	5.600	15.65	3050	1190	0.50

2.00	4	120	0.020	0.050	0.700	1.44	26525	2120	0.50
3.00	4	120	0.025	0.050	1.050	2.44	15655	1565	0.50
4.00	4	120	0.030	0.060	1.400	3.47	11010	1320	0.50
5.00	4	120	0.035	0.060	1.750	4.47	8545	1195	0.50
6.00	6	120	0.040	0.080	2.100	5.54	6895	1655	0.50
8.00	6	120	0.045	0.080	2.800	7.54	5065	1370	0.50
10.00	6	120	0.050	0.100	3.500	9.60	3980	1195	0.50
12.00	6	120	0.055	0.100	4.200	11.60	3295	1085	0.50
16.00	6	120	0.065	0.120	5.600	15.65	2440	950	0.50

2.00	4	80	0.015	0.050	0.700	1.44	17685	1060	0.50
3.00	4	80	0.020	0.050	1.050	2.44	10435	835	0.50
4.00	4	80	0.025	0.060	1.400	3.47	7340	735	0.50
5.00	4	80	0.030	0.060	1.750	4.47	5695	685	0.50
6.00	6	80	0.030	0.080	2.100	5.54	4595	825	0.50
8.00	6	80	0.035	0.080	2.800	7.54	3375	710	0.50
10.00	6	80	0.040	0.100	3.500	9.60	2655	635	0.50
12.00	6	80	0.045	0.100	4.200	11.60	2195	595	0.50
16.00	6	80	0.050	0.120	5.600	15.65	1625	490	0.50



2.00	4	40	0.015	0.050	0.700	1.44	8840	530	0.50
3.00	4	40	0.020	0.050	1.050	2.44	5220	415	0.50
4.00	4	40	0.025	0.060	1.400	3.47	3670	365	0.50
5.00	4	40	0.030	0.060	1.750	4.47	2850	340	0.50
6.00	6	40	0.030	0.080	2.100	5.54	2300	415	0.50
8.00	6	40	0.035	0.080	2.800	7.54	1690	355	0.50
10.00	6	40	0.040	0.100	3.500	9.60	1325	320	0.50
12.00	6	40	0.045	0.100	4.200	11.60	1100	295	0.50
16.00	6	40	0.050	0.120	5.600	15.65	815	245	0.50

Application



Material


Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

Hardened tool steel
> 60 HRC

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
2.00	4	256	0.020	0.050	0.050	1.94	42005	3360	45°
3.00	4	300	0.025	0.050	0.050	2.94	32480	3250	45°
4.00	4	300	0.030	0.060	0.060	3.96	24115	2895	45°
5.00	4	300	0.035	0.060	0.060	4.96	19255	2695	45°
6.00	6	300	0.040	0.080	0.080	5.98	15970	3830	45°
8.00	6	300	0.045	0.080	0.080	7.98	11965	3230	45°
10.00	6	300	0.050	0.100	0.100	9.99	9560	2870	45°
12.00	6	300	0.055	0.100	0.100	11.99	7965	2630	45°
16.00	6	300	0.065	0.120	0.120	16.00	5970	2330	45°

2.00	4	250	0.020	0.050	0.050	1.94	41020	3280	45°
3.00	4	250	0.025	0.050	0.050	2.94	27065	2705	45°
4.00	4	250	0.030	0.060	0.060	3.96	20095	2410	45°
5.00	4	250	0.035	0.060	0.060	4.96	16045	2245	45°
6.00	6	250	0.040	0.080	0.080	5.98	13305	3195	45°
8.00	6	250	0.045	0.080	0.080	7.98	9970	2690	45°
10.00	6	250	0.050	0.100	0.100	9.99	7965	2390	45°
12.00	6	250	0.050	0.100	0.100	11.99	6635	1990	45°
16.00	6	250	0.060	0.120	0.120	16.00	4975	1790	45°

2.00	4	180	0.015	0.050	0.050	1.94	29535	1770	45°
3.00	4	180	0.020	0.050	0.050	2.94	19490	1560	45°
4.00	4	180	0.025	0.060	0.060	3.96	14470	1445	45°
5.00	4	180	0.030	0.060	0.060	4.96	11550	1385	45°
6.00	6	180	0.035	0.080	0.080	5.98	9580	2010	45°
8.00	6	180	0.040	0.080	0.080	7.98	7180	1725	45°
10.00	6	180	0.045	0.100	0.100	9.99	5735	1550	45°
12.00	6	180	0.045	0.100	0.100	11.99	4780	1290	45°
16.00	6	180	0.055	0.120	0.120	16.00	3580	1180	45°


2.00	4	100	0.010	0.050	0.050	1.94	16410	655	45°
3.00	4	100	0.015	0.050	0.050	2.94	10825	650	45°
4.00	4	100	0.015	0.060	0.060	3.96	8040	480	45°
5.00	4	100	0.020	0.060	0.060	4.96	6420	515	45°
6.00	6	100	0.020	0.080	0.080	5.98	5325	640	45°
8.00	6	100	0.025	0.080	0.080	7.98	3990	600	45°
10.00	6	100	0.025	0.100	0.100	9.99	3185	480	45°
12.00	6	100	0.030	0.100	0.100	11.99	2655	480	45°
16.00	6	100	0.035	0.120	0.120	16.00	1990	420	45°

Corner radius end mills XSpeed

Tolerance r 0/+0.015, 3xd




HM λ 55°
XT γ -10°

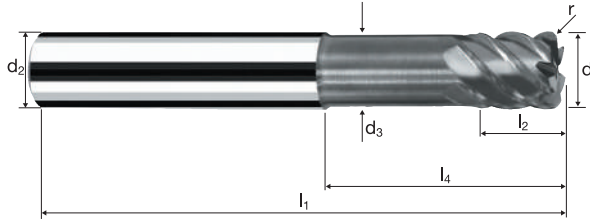

Rm	Rm	Rm	HRC	HRC	HRC	Ti	GG(G) Tool Steel HSS
850-1100	1100-1300	1300-1500	48-56	56-60	> 60	Titanium	

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z	Ordering	
											Coating	Article-N°
Example: Order-N°: X 7200 140												
											X7200	
140	2.00	6.00	1.90	57	3.00	6.00	14.31	0.500	8.7°	4		●
180	3.00	6.00	2.80	57	4.00	9.00	15.63	0.500	6.0°	4		●
220	4.00	6.00	3.70	57	5.00	12.00	16.95	0.500	3.7°	4		●
260	5.00	6.00	4.60	57	6.00	15.00	18.27	0.500	1.7°	4		●
295	6.00	6.00	5.50	57	7.00	19.34	20.00	0.500	0.0°	4		●
300	6.00	6.00	5.50	57	7.00	19.34	20.00	0.500	0.0°	6		●
386	8.00	8.00	7.40	63	9.00	25.29	26.00	0.500	0.0°	4		●
391	8.00	8.00	7.40	63	9.00	25.29	26.00	0.500	0.0°	6		●
440	10.00	10.00	9.20	72	11.00	30.20	31.00	0.500	0.0°	4		●
450	10.00	10.00	9.20	72	11.00	30.20	31.00	0.500	0.0°	6		●
491	12.00	12.00	11.00	83	13.00	36.13	37.00	0.500	0.0°	4		●
501	12.00	12.00	11.00	83	13.00	36.13	37.00	0.500	0.0°	6		●
606	16.00	16.00	15.00	92	17.00	42.13	43.00	0.500	0.0°	6		●

Application



Material

Hardened tool steel
48 - 52 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
4.00	4	150	0.045	0.340	1.400	3.50	13640	2455	1.00
5.00	4	150	0.050	0.380	1.750	4.57	10450	2090	1.00
6.00	6	150	0.055	0.400	2.100	5.60	8525	2815	1.00
8.00	6	150	0.070	0.440	2.800	7.66	6235	2620	1.00
10.00	6	150	0.085	0.480	3.500	9.71	4915	2510	1.00
12.00	6	150	0.105	0.500	4.200	11.73	4070	2565	1.00
16.00	6	150	0.130	0.560	5.600	15.80	3020	2355	1.00

Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
4.00	4	120	0.040	0.340	1.400	3.50	10915	1745	1.00
5.00	4	120	0.045	0.380	1.750	4.57	8360	1505	1.00
6.00	6	120	0.050	0.400	2.100	5.60	6820	2045	1.00
8.00	6	120	0.065	0.440	2.800	7.66	4985	1945	1.00
10.00	6	120	0.075	0.480	3.500	9.71	3935	1770	1.00
12.00	6	120	0.095	0.500	4.200	11.73	3255	1855	1.00
16.00	6	120	0.115	0.560	5.600	15.80	2420	1670	1.00

Hardened tool steel
56 - 60 HRC




d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
4.00	4	80	0.035	0.340	1.400	3.50	7275	1020	1.00
5.00	4	80	0.040	0.380	1.750	4.57	5570	890	1.00
6.00	6	80	0.045	0.400	2.100	5.60	4545	1230	1.00
8.00	6	80	0.055	0.440	2.800	7.66	3325	1095	1.00
10.00	6	80	0.070	0.480	3.500	9.71	2625	1100	1.00
12.00	6	80	0.085	0.500	4.200	11.73	2170	1105	1.00
16.00	6	80	0.105	0.560	5.600	15.80	1610	1015	1.00

Hardened tool steel
> 60 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
4.00	4	40	0.025	0.340	1.400	3.50	3640	365	1.00
5.00	4	40	0.030	0.380	1.750	4.57	2785	335	1.00
6.00	6	40	0.030	0.400	2.100	5.60	2275	410	1.00
8.00	6	40	0.040	0.440	2.800	7.66	1660	400	1.00
10.00	6	40	0.050	0.480	3.500	9.71	1310	395	1.00
12.00	6	40	0.060	0.500	4.200	11.73	1085	390	1.00
16.00	6	40	0.075	0.560	5.600	15.80	805	365	1.00

Application



Material

Hardened tool steel
48 - 52 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
4.00	4	300	0.030	0.080	0.080	3.86	24740	2970	45°
5.00	4	300	0.035	0.080	0.080	4.86	19650	2750	45°
6.00	6	300	0.040	0.110	0.110	5.90	16185	3885	45°
8.00	6	300	0.045	0.110	0.110	7.90	12090	3265	45°
10.00	6	300	0.050	0.140	0.140	9.94	9605	2880	45°
12.00	6	300	0.055	0.140	0.140	11.94	8000	2640	45°
16.00	6	300	0.065	0.160	0.160	15.96	5985	2335	45°

Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
4.00	4	250	0.030	0.080	0.080	3.86	20615	2475	45°
5.00	4	250	0.035	0.080	0.080	4.86	16375	2290	45°
6.00	6	250	0.040	0.110	0.110	5.90	13490	3235	45°
8.00	6	250	0.045	0.110	0.110	7.90	10075	2720	45°
10.00	6	250	0.050	0.140	0.140	9.94	8005	2400	45°
12.00	6	250	0.050	0.140	0.140	11.94	6665	2000	45°
16.00	6	250	0.060	0.160	0.160	15.96	4985	1795	45°

Hardened tool steel
56 - 60 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
4.00	4	180	0.025	0.080	0.080	3.86	14845	1485	45°
5.00	4	180	0.030	0.080	0.080	4.86	11790	1415	45°
6.00	6	180	0.035	0.110	0.110	5.90	9710	2040	45°
8.00	6	180	0.040	0.110	0.110	7.90	7255	1740	45°
10.00	6	180	0.045	0.140	0.140	9.94	5765	1555	45°
12.00	6	180	0.045	0.140	0.140	11.94	4800	1295	45°
16.00	6	180	0.055	0.160	0.160	15.96	3590	1185	45°



Hardened tool steel
> 60 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
4.00	4	100	0.015	0.080	0.080	3.86	8245	495	45°
5.00	4	100	0.020	0.080	0.080	4.86	6550	525	45°
6.00	6	100	0.020	0.110	0.110	5.90	5395	645	45°
8.00	6	100	0.025	0.110	0.110	7.90	4030	605	45°
10.00	6	100	0.025	0.140	0.140	9.94	3200	480	45°
12.00	6	100	0.030	0.140	0.140	11.94	2665	480	45°
16.00	6	100	0.035	0.160	0.160	15.96	1995	420	45°

Corner radius end mills XSpeed


Tolerance r 0/+0.015, 3xd

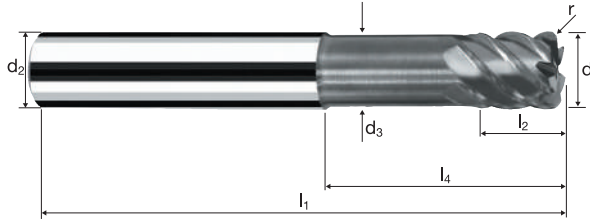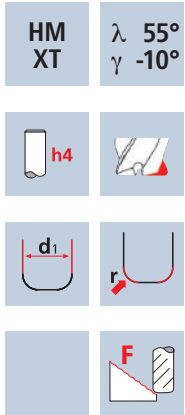

Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	GG(G) Tool Steel HSS
----------------	-----------------	-----------------	--------------	--------------	-------------	----------------	----------------------------

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z	Example: Order-N°.	
											Coating X	Article-N° 7200
											X-AL	
											X7200	
218	4.00	6.00	3.70	57	5.00	12.00	16.95	1.000	3.8°	4	●	
258	5.00	6.00	4.60	57	6.00	15.00	18.27	1.000	1.8°	4	●	
293	6.00	6.00	5.50	57	7.00	19.34	20.00	1.000	0.0°	4	●	
297	6.00	6.00	5.50	57	7.00	19.34	20.00	1.000	0.0°	6	●	
384	8.00	8.00	7.40	63	9.00	25.29	26.00	1.000	0.0°	4	●	
388	8.00	8.00	7.40	63	9.00	25.29	26.00	1.000	0.0°	6	●	
435	10.00	10.00	9.20	72	11.00	30.20	31.00	1.000	0.0°	4	●	
445	10.00	10.00	9.20	72	11.00	30.20	31.00	1.000	0.0°	6	●	
486	12.00	12.00	11.00	83	13.00	36.13	37.00	1.000	0.0°	4	●	
496	12.00	12.00	11.00	83	13.00	36.13	37.00	1.000	0.0°	6	●	
608	16.00	16.00	15.00	92	17.00	42.13	43.00	1.000	0.0°	6	●	

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
2.00	4	180	0.030	0.600	1.200	28650	3440	0.50
3.00	4	180	0.045	0.600	1.800	19100	3440	0.50
4.00	4	180	0.050	0.600	2.400	14325	2865	0.50
5.00	4	180	0.055	0.600	3.000	11460	2520	0.50
6.00	4	180	0.060	0.600	3.600	9550	2290	0.50
8.00	4	180	0.075	0.600	4.800	7160	2150	0.50
10.00	4	180	0.095	0.600	6.000	5730	2175	0.50
12.00	4	180	0.115	0.600	7.200	4775	2195	0.50

Hardened tool steel
48 - 52 HRC



2.00	4	140	0.025	0.600	1.200	22280	2230	0.50
3.00	4	140	0.040	0.600	1.800	14855	2375	0.50
4.00	4	140	0.045	0.600	2.400	11140	2005	0.50
5.00	4	140	0.050	0.600	3.000	8915	1785	0.50
6.00	4	140	0.055	0.600	3.600	7425	1635	0.50
8.00	4	140	0.070	0.600	4.800	5570	1560	0.50
10.00	4	140	0.085	0.600	6.000	4455	1515	0.50
12.00	4	140	0.105	0.600	7.200	3715	1560	0.50

Hardened tool steel
52 - 56 HRC




2.00	4	100	0.025	0.600	1.200	15915	1590	0.50
3.00	4	100	0.035	0.600	1.800	10610	1485	0.50
4.00	4	100	0.040	0.600	2.400	7960	1275	0.50
5.00	4	100	0.045	0.600	3.000	6365	1145	0.50
6.00	4	100	0.050	0.600	3.600	5305	1060	0.50
8.00	4	100	0.060	0.600	4.800	3980	955	0.50
10.00	4	100	0.080	0.600	6.000	3185	1020	0.50
12.00	4	100	0.095	0.600	7.200	2655	1010	0.50

Hardened tool steel
56 - 60 HRC



2.00	4	70	0.015	0.600	0.800	11140	670	0.50
3.00	4	70	0.025	0.600	1.200	7425	745	0.50
4.00	4	70	0.030	0.600	1.600	5570	670	0.50
5.00	4	70	0.030	0.600	2.000	4455	535	0.50
6.00	4	70	0.035	0.600	2.400	3715	520	0.50
8.00	4	70	0.045	0.600	3.200	2785	500	0.50
10.00	4	70	0.055	0.600	4.000	2230	490	0.50
12.00	4	70	0.065	0.600	4.800	1855	485	0.50

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
2.00	4	263	0.045	0.100	0.100	1.99	42070	7570	45°
3.00	4	360	0.065	0.120	0.120	3.00	38195	9930	45°
4.00	4	360	0.085	0.120	0.120	4.00	28650	9740	45°
5.00	4	360	0.100	0.160	0.160	5.00	22920	9165	45°
6.00	4	360	0.135	0.180	0.180	6.00	19100	10315	45°
8.00	4	360	0.150	0.200	0.200	7.99	14340	8605	45°
10.00	4	360	0.200	0.240	0.240	9.97	11495	9195	45°
12.00	4	360	0.170	0.260	0.260	11.96	9580	6515	45°

Hardened tool steel
48 - 52 HRC



2.00	4	250	0.045	0.100	0.100	1.99	39990	7200	45°
3.00	4	250	0.060	0.120	0.120	3.00	26525	6365	45°
4.00	4	250	0.080	0.120	0.120	4.00	19895	6365	45°
5.00	4	250	0.095	0.160	0.160	5.00	15915	6050	45°
6.00	4	250	0.130	0.180	0.180	6.00	13265	6895	45°
8.00	4	250	0.145	0.200	0.200	7.99	9960	5775	45°
10.00	4	250	0.190	0.240	0.240	9.97	7980	6065	45°
12.00	4	250	0.160	0.260	0.260	11.96	6655	4260	45°

Hardened tool steel
52 - 56 HRC



2.00	4	180	0.040	0.100	0.100	1.99	28790	4605	45°
3.00	4	180	0.055	0.120	0.120	3.00	19100	4200	45°
4.00	4	180	0.075	0.120	0.120	4.00	14325	4295	45°
5.00	4	180	0.085	0.160	0.160	5.00	11460	3895	45°
6.00	4	180	0.115	0.180	0.180	6.00	9550	4395	45°
8.00	4	180	0.130	0.200	0.200	7.99	7170	3730	45°
10.00	4	180	0.170	0.240	0.240	9.97	5745	3910	45°
12.00	4	180	0.145	0.260	0.260	11.96	4790	2780	45°



Hardened tool steel
56 - 60 HRC



2.00	4	100	0.025	0.100	0.100	1.99	15995	1600	45°
3.00	4	100	0.035	0.120	0.120	3.00	10610	1485	45°
4.00	4	100	0.045	0.120	0.120	4.00	7960	1430	45°
5.00	4	100	0.050	0.160	0.160	5.00	6365	1275	45°
6.00	4	100	0.070	0.180	0.180	6.00	5305	1485	45°
8.00	4	100	0.075	0.200	0.200	7.99	3985	1195	45°
10.00	4	100	0.100	0.240	0.240	9.97	3195	1275	45°
12.00	4	100	0.085	0.260	0.260	11.96	2660	905	45°

Corner radius end mills ToroX


Tolerance r 0/+0.015, 3xd

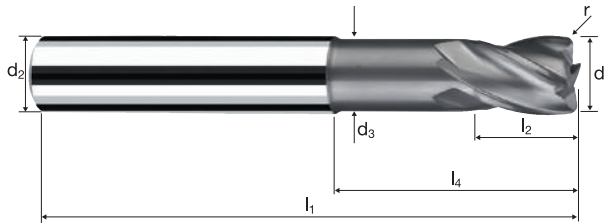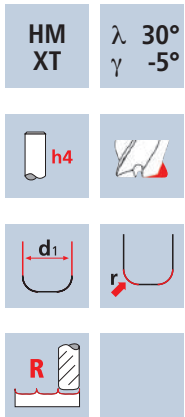

Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	GG(G) Tool Steel HSS
----------------	-----------------	-----------------	--------------	--------------	-------------	----------------	----------------------------

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z	Order-N°	
											Coating X	Article-N° 7100
138	2.00	6.00	1.90	57	3.00	6.00	14.31	0.200	8.5°	4	X-AL	X7100
178	3.00	6.00	2.80	57	4.00	9.00	15.63	0.200	5.8°	4		
218	4.00	6.00	3.70	57	5.00	12.00	16.95	0.200	3.6°	4		
258	5.00	6.00	4.60	57	6.00	15.00	18.27	0.200	1.7°	4		
297	6.00	6.00	5.50	57	7.00	19.34	20.00	0.200	0.0°	4		
385	8.00	8.00	7.40	63	9.00	25.29	26.00	0.200	0.0°	4		
445	10.00	10.00	9.20	72	11.00	30.20	31.00	0.200	0.0°	4		
496	12.00	12.00	11.00	83	13.00	36.13	37.00	0.200	0.0°	4		
140	2.00	6.00	1.90	57	3.00	6.00	14.31	0.500	8.7°	4		
180	3.00	6.00	2.80	57	4.00	9.00	15.63	0.500	6.0°	4		
220	4.00	6.00	3.70	57	5.00	12.00	16.95	0.500	3.7°	4		
260	5.00	6.00	4.60	57	6.00	15.00	18.27	0.500	1.7°	4		
300	6.00	6.00	5.50	57	7.00	19.34	20.00	0.500	0.0°	4		
388	8.00	8.00	7.40	63	9.00	25.29	26.00	0.500	0.0°	4		
448	10.00	10.00	9.20	72	11.00	30.20	31.00	0.500	0.0°	4		
498	12.00	12.00	11.00	83	13.00	36.13	37.00	0.500	0.0°	4		

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
4.00	4	200	0.055	0.600	2.400	3.83	16620	3655	1.00
5.00	4	200	0.060	0.600	3.000	4.83	13180	3165	1.00
6.00	4	200	0.065	0.600	3.600	5.83	10920	2840	1.00
8.00	4	200	0.080	0.600	4.800	7.83	8130	2600	1.00
10.00	4	200	0.105	0.600	6.000	9.83	6475	2720	1.00
12.00	4	200	0.125	0.600	7.200	11.83	5380	2690	1.00

Hardened tool steel
48 - 52 HRC



4.00	4	160	0.050	0.600	2.400	3.83	13300	2660	1.00
5.00	4	160	0.055	0.600	3.000	4.83	10545	2320	1.00
6.00	4	160	0.060	0.600	3.600	5.83	8735	2095	1.00
8.00	4	160	0.070	0.600	4.800	7.83	6505	1820	1.00
10.00	4	160	0.095	0.600	6.000	9.83	5180	1970	1.00
12.00	4	160	0.115	0.600	7.200	11.83	4305	1980	1.00

Hardened tool steel
52 - 56 HRC




4.00	4	150	0.045	0.600	2.400	3.83	12465	2245	1.00
5.00	4	150	0.050	0.600	3.000	4.83	9885	1975	1.00
6.00	4	150	0.055	0.600	3.600	5.83	8190	1800	1.00
8.00	4	150	0.065	0.600	4.800	7.83	6100	1585	1.00
10.00	4	150	0.085	0.600	6.000	9.83	4855	1650	1.00
12.00	4	150	0.105	0.600	7.200	11.83	4035	1695	1.00

Hardened tool steel
56 - 60 HRC



4.00	4	70	0.030	0.600	1.600	3.83	5820	700	1.00
5.00	4	70	0.035	0.600	2.000	4.83	4615	645	1.00
6.00	4	70	0.040	0.600	2.400	5.83	3820	610	1.00
8.00	4	70	0.045	0.600	3.200	7.83	2845	510	1.00
10.00	4	70	0.060	0.600	4.000	9.83	2265	545	1.00
12.00	4	70	0.075	0.600	4.800	11.83	1885	565	1.00

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
4.00	4	300	0.065	0.180	0.180	3.97	24055	6255	45°
5.00	4	300	0.075	0.240	0.240	4.99	19135	5740	45°
6.00	4	300	0.090	0.270	0.270	6.00	15915	5730	45°
8.00	4	300	0.125	0.300	0.300	8.00	11935	5970	45°
10.00	4	300	0.145	0.360	0.360	9.99	9560	5545	45°
12.00	4	300	0.170	0.390	0.390	11.98	7970	5420	45°

Hardened tool steel
48 - 52 HRC



4.00	4	220	0.060	0.180	0.180	3.97	17640	4235	45°
5.00	4	220	0.070	0.240	0.240	4.99	14035	3930	45°
6.00	4	220	0.085	0.270	0.270	6.00	11670	3970	45°
8.00	4	220	0.120	0.300	0.300	8.00	8755	4200	45°
10.00	4	220	0.140	0.360	0.360	9.99	7010	3925	45°
12.00	4	220	0.160	0.390	0.390	11.98	5845	3740	45°

Hardened tool steel
52 - 56 HRC



4.00	4	160	0.055	0.180	0.180	3.97	12830	2820	45°
5.00	4	160	0.065	0.240	0.240	4.99	10205	2655	45°
6.00	4	160	0.075	0.270	0.270	6.00	8490	2545	45°
8.00	4	160	0.110	0.300	0.300	8.00	6365	2800	45°
10.00	4	160	0.125	0.360	0.360	9.99	5100	2550	45°
12.00	4	160	0.145	0.390	0.390	11.98	4250	2465	45°

Hardened tool steel
56 - 60 HRC




4.00	4	80	0.035	0.180	0.180	3.97	6415	900	45°
5.00	4	80	0.040	0.240	0.240	4.99	5105	815	45°
6.00	4	80	0.045	0.270	0.270	6.00	4245	765	45°
8.00	4	80	0.065	0.300	0.300	8.00	3185	830	45°
10.00	4	80	0.075	0.360	0.360	9.99	2550	765	45°
12.00	4	80	0.085	0.390	0.390	11.98	2125	725	45°

Corner radius end mills ToroX

Tolerance r 0/+0.015, 3xd



HM XT	λ 30° γ -5°

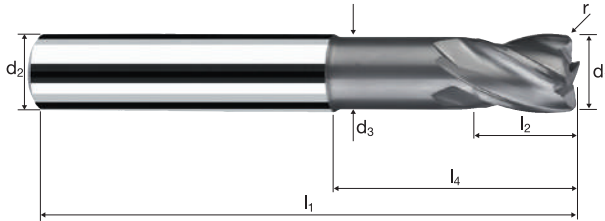


Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	GG(G) Tool Steel HSS
-----------------------	------------------------	------------------------	---------------------	---------------------	--------------------	-----------------------	-------------------------------------

Example: Order-N°.											X-AL	
											X7100	
\emptyset Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	r 0/+0.015	α	z		
	Coating		Article-N°		ø-Code							
	X		7100		222							
222	4.00	6.00	3.70	57	5.00	12.00	16.95	1.000	3.8°	4	●	
262	5.00	6.00	4.60	57	6.00	15.00	18.27	1.000	1.8°	4	●	
302	6.00	6.00	5.50	57	7.00	19.34	20.00	1.000	0.0°	4	●	
391	8.00	8.00	7.40	63	9.00	25.29	26.00	1.000	0.0°	4	●	
450	10.00	10.00	9.20	72	11.00	30.20	31.00	1.000	0.0°	4	●	
501	12.00	12.00	11.00	83	13.00	36.13	37.00	1.000	0.0°	4	●	
395	8.00	8.00	7.40	63	9.00	25.29	26.00	2.000	0.0°	4	●	
455	10.00	10.00	9.20	72	11.00	30.20	31.00	2.000	0.0°	4	●	
505	12.00	12.00	11.00	83	13.00	36.13	37.00	2.000	0.0°	4	●	

Application

Material



Hardened tool steel
56 - 60 HRC

H

d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	r [mm]
2.00	6	54	0.014	0.200	1.200	1.80	9549	802	0.50
3.00	6	54	0.021	0.250	1.800	2.87	5989	755	0.50
4.00	6	54	0.028	0.250	2.400	3.87	4442	746	0.50
5.00	6	54	0.035	0.250	3.000	4.87	3530	741	0.50
6.00	8	54	0.042	0.200	3.600	5.80	2964	996	0.50
8.00	8	54	0.056	0.200	4.800	7.80	2204	987	0.50
10.00	8	54	0.070	0.200	6.000	9.80	1754	982	0.50
12.00	8	54	0.084	0.200	7.200	11.80	1457	979	0.50

Hardened tool steel
> 60 HRC

H

2.00	6	45	0.007	0.200	1.200	1.80	7958	334	0.50
3.00	6	45	0.011	0.250	1.800	2.87	4991	314	0.50
4.00	6	45	0.014	0.250	2.400	3.87	3701	311	0.50
5.00	6	45	0.018	0.250	3.000	4.87	2941	309	0.50
6.00	8	45	0.021	0.200	3.600	5.80	2470	415	0.50
8.00	8	45	0.028	0.200	4.800	7.80	1836	411	0.50
10.00	8	45	0.035	0.200	6.000	9.80	1462	409	0.50
12.00	8	45	0.042	0.200	7.200	11.80	1214	408	0.50


High speed steel,
hardened
64 - 70 HRC

H

2.00	6	16	0.004	0.200	1.200	1.80	2829	68	0.50
3.00	6	16	0.006	0.250	1.800	2.87	1775	64	0.50
4.00	6	16	0.008	0.250	2.400	3.87	1316	63	0.50
5.00	6	16	0.010	0.250	3.000	4.87	1046	63	0.50
6.00	8	16	0.012	0.200	3.600	5.80	878	84	0.50
8.00	8	16	0.016	0.200	4.800	7.80	653	84	0.50
10.00	8	16	0.020	0.200	6.000	9.80	520	83	0.50
12.00	8	16	0.024	0.200	7.200	11.80	432	83	0.50

Application

Material



Hardened tool steel
56 - 60 HRC

H

d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
2.00	6	160	0.020	0.090	0.030	1.98	25722	3087	45°
3.00	6	160	0.028	0.090	0.030	2.98	17090	2871	45°
4.00	6	160	0.035	0.090	0.050	3.98	12796	2687	45°
5.00	6	160	0.041	0.090	0.050	4.98	10227	2516	45°
6.00	8	160	0.042	0.090	0.075	5.98	8517	2862	45°
8.00	8	160	0.048	0.090	0.075	7.98	6382	2451	45°
10.00	8	160	0.050	0.090	0.100	9.98	5103	2041	45°
12.00	8	160	0.048	0.090	0.100	11.98	4251	1632	45°

Hardened tool steel
> 60 HRC

H








2.00	6	110	0.020	0.090	0.030	1.98	17684	2122	45°
3.00	6	110	0.028	0.090	0.030	2.98	11750	1974	45°
4.00	6	110	0.035	0.090	0.050	3.98	8798	1848	45°
5.00	6	110	0.041	0.090	0.050	4.98	7031	1730	45°
6.00	8	110	0.042	0.090	0.075	5.98	5855	1967	45°
8.00	8	110	0.048	0.090	0.075	7.98	4388	1685	45°
10.00	8	110	0.050	0.090	0.100	9.98	3508	1403	45°
12.00	8	110	0.048	0.090	0.100	11.98	2923	1122	45°

High speed steel,
hardened
64 - 70 HRC

H

2.00	6	70	0.020	0.090	0.030	1.98	11253	1350	45°
3.00	6	70	0.028	0.090	0.030	2.98	7477	1256	45°
4.00	6	70	0.035	0.090	0.050	3.98	5598	1176	45°
5.00	6	70	0.041	0.090	0.050	4.98	4474	1101	45°
6.00	8	70	0.042	0.090	0.075	5.98	3726	1252	45°
8.00	8	70	0.048	0.090	0.075	7.98	2792	1072	45°
10.00	8	70	0.050	0.090	0.100	9.98	2233	893	45°
12.00	8	70	0.048	0.090	0.100	11.98	1860	714	45°

Precise cutting data for other applications and materials can be found in the cutting data software **ToolExpert 2.0**




Corner radius end mills XSpeed-H

Tolerance r 0/+0.015, 4.5xd




HM λ **45°**
XA γ **-10°**

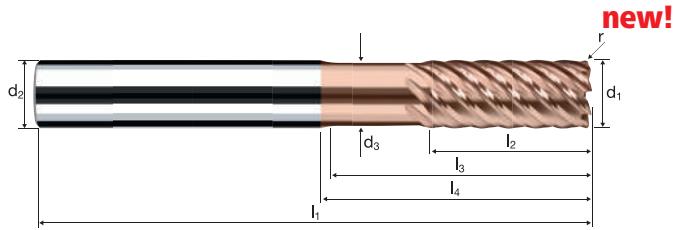

HRC 48-56 HRC 56-60 HRC > 60 HSS

Example: Order-N°												DURO-Si	
												H7212	
												H7212	
Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z			
138	2.00	6.00	1.90	61	5.00	9.00	17.31	0.200	6.8°	6	●		
178	3.00	6.00	2.80	61	8.00	13.50	20.13	0.200	4.5°	6	●		
218	4.00	6.00	3.70	66	11.00	18.00	22.95	0.200	2.7°	6	●		
258	5.00	6.00	4.60	66	13.00	22.50	25.77	0.200	1.3°	6	●		
297	6.00	6.00	5.50	69	13.00	30.34	31.00	0.200	0.0°	8	●		
385	8.00	8.00	7.40	80	19.00	39.29	40.00	0.200	0.0°	8	●		
445	10.00	10.00	9.20	90	22.00	47.20	48.00	0.200	0.0°	8	●		
496	12.00	12.00	11.00	105	26.00	54.13	55.00	0.200	0.0°	8	●		
140	2.00	6.00	1.90	61	5.00	9.00	17.31	0.500	6.8°	6	●		
180	3.00	6.00	2.80	61	8.00	13.50	20.13	0.500	4.5°	6	●		
220	4.00	6.00	3.70	66	11.00	18.00	22.95	0.500	2.7°	6	●		
260	5.00	6.00	4.60	66	13.00	22.50	25.77	0.500	1.3°	6	●		
300	6.00	6.00	5.50	69	13.00	30.34	31.00	0.500	0.0°	8	●		
388	8.00	8.00	7.40	80	19.00	39.29	40.00	0.500	0.0°	8	●		
448	10.00	10.00	9.20	90	22.00	47.20	48.00	0.500	0.0°	8	●		
498	12.00	12.00	11.00	105	26.00	54.13	55.00	0.500	0.0°	8	●		

Application



Material

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

Hardened tool steel
> 60 HRC


d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_eff [mm]	n [min ⁻¹]	v_f [mm/min]	r [mm]
2.00	4	150	0.020	0.050	0.440	1.44	33155	2655	0.50
3.00	4	150	0.025	0.050	0.660	2.44	19570	1955	0.50
4.00	4	150	0.030	0.060	0.880	3.47	13760	1650	0.50
5.00	4	150	0.030	0.060	1.100	4.47	10680	1280	0.50
6.00	6	150	0.035	0.080	1.320	5.54	8620	1810	0.50
8.00	6	150	0.040	0.080	1.760	7.54	6330	1520	0.50
10.00	6	150	0.045	0.100	2.200	9.60	4975	1345	0.50
12.00	6	150	0.050	0.100	2.640	11.60	4115	1235	0.50
16.00	6	150	0.060	0.120	3.520	15.65	3050	1100	0.50

2.00	4	120	0.020	0.050	0.440	1.44	26525	2120	0.50
3.00	4	120	0.025	0.050	0.660	2.44	15655	1565	0.50
4.00	4	120	0.030	0.060	0.880	3.47	11010	1320	0.50
5.00	4	120	0.030	0.060	1.100	4.47	8545	1025	0.50
6.00	6	120	0.035	0.080	1.320	5.54	6895	1450	0.50
8.00	6	120	0.040	0.080	1.760	7.54	5065	1215	0.50
10.00	6	120	0.045	0.100	2.200	9.60	3980	1075	0.50
12.00	6	120	0.050	0.100	2.640	11.60	3295	990	0.50
16.00	6	120	0.060	0.120	3.520	15.65	2440	880	0.50

2.00	4	80	0.015	0.050	0.440	1.44	17685	1060	0.50
3.00	4	80	0.020	0.050	0.660	2.44	10435	835	0.50
4.00	4	80	0.025	0.060	0.880	3.47	7340	735	0.50
5.00	4	80	0.025	0.060	1.100	4.47	5695	570	0.50
6.00	6	80	0.030	0.080	1.320	5.54	4595	825	0.50
8.00	6	80	0.030	0.080	1.760	7.54	3375	610	0.50
10.00	6	80	0.035	0.100	2.200	9.60	2655	555	0.50
12.00	6	80	0.040	0.100	2.640	11.60	2195	525	0.50
16.00	6	80	0.050	0.120	3.520	15.65	1625	490	0.50

2.00	4	40	0.015	0.050	0.440	1.44	8840	530	0.50
3.00	4	40	0.020	0.050	0.660	2.44	5220	415	0.50
4.00	4	40	0.025	0.060	0.880	3.47	3670	365	0.50
5.00	4	40	0.025	0.060	1.100	4.47	2850	285	0.50
6.00	6	40	0.030	0.080	1.320	5.54	2300	415	0.50
8.00	6	40	0.030	0.080	1.760	7.54	1690	305	0.50
10.00	6	40	0.035	0.100	2.200	9.60	1325	280	0.50
12.00	6	40	0.040	0.100	2.640	11.60	1100	265	0.50
16.00	6	40	0.050	0.120	3.520	15.65	815	245	0.50

Application



Material

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

Hardened tool steel
> 60 HRC

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_eff [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
2.00	4	256	0.020	0.050	0.050	1.94	42005	3360	45°
3.00	4	300	0.025	0.050	0.050	2.94	32480	3250	45°
4.00	4	300	0.030	0.060	0.060	3.96	24115	2895	45°
5.00	4	300	0.035	0.060	0.060	4.96	19255	2695	45°
6.00	6	300	0.040	0.080	0.080	5.98	15970	3830	45°
8.00	6	300	0.045	0.080	0.080	7.98	11965	3230	45°
10.00	6	300	0.050	0.100	0.100	9.99	9560	2870	45°
12.00	6	300	0.055	0.100	0.100	11.99	7965	2630	45°
16.00	6	300	0.065	0.120	0.120	16.00	5970	2330	45°



2.00	4	250	0.020	0.050	0.050	1.94	41020	3280	45°
3.00	4	250	0.025	0.050	0.050	2.94	27065	2705	45°
4.00	4	250	0.030	0.060	0.060	3.96	20095	2410	45°
5.00	4	250	0.035	0.060	0.060	4.96	16045	2245	45°
6.00	6	250	0.040	0.080	0.080	5.98	13305	3195	45°
8.00	6	250	0.045	0.080	0.080	7.98	9970	2690	45°
10.00	6	250	0.050	0.100	0.100	9.99	7965	2390	45°
12.00	6	250	0.050	0.100	0.100	11.99	6635	1990	45°
16.00	6	250	0.060	0.120	0.120	16.00	4975	1790	45°

2.00	4	180	0.015	0.050	0.050	1.94	29535	1770	45°
3.00	4	180	0.020	0.050	0.050	2.94	19490	1560	45°
4.00	4	180	0.025	0.060	0.060	3.96	14470	1445	45°
5.00	4	180	0.030	0.060	0.060	4.96	11550	1385	45°
6.00	6	180	0.035	0.080	0.080	5.98	9580	2010	45°
8.00	6	180	0.040	0.080	0.080	7.98	7180	1725	45°
10.00	6	180	0.045	0.100	0.100	9.99	5735	1550	45°
12.00	6	180	0.045	0.100	0.100	11.99	4780	1290	45°
16.00	6	180	0.055	0.120	0.120	16.00	3580	1180	45°

2.00	4	100	0.010	0.050	0.050	1.94	16410	655	45°
3.00	4	100	0.015	0.050	0.050	2.94	10825	650	45°
4.00	4	100	0.015	0.060	0.060	3.96	8040	480	45°
5.00	4	100	0.020	0.060	0.060	4.96	6420	515	45°
6.00	6	100	0.020	0.080	0.080	5.98	5325	640	45°
8.00	6	100	0.025	0.080	0.080	7.98	3990	600	45°
10.00	6	100	0.025	0.100	0.100	9.99	3185	480	45°
12.00	6	100	0.030	0.100	0.100	11.99	2655	480	45°
16.00	6	100	0.035	0.120	0.120	16.00	1990	420	45°

Corner radius end mills XSpeed


Tolerance r 0/+0.015, 6xd

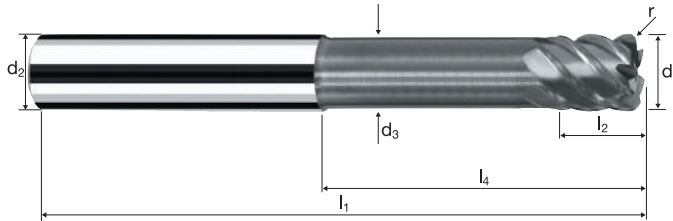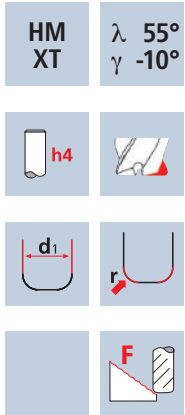

Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	GG(G) Tool Steel HSS
----------------	-----------------	-----------------	--------------	--------------	-------------	----------------	----------------------------

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z	Ordering Information	
											Coating X	Article-N° 7204
140	2.00	6.00	1.90	66	3.00	12.00	20.31	0.500	6.0°	4		X7204
180	3.00	6.00	2.80	66	4.00	18.00	24.63	0.500	3.7°	4		
220	4.00	6.00	3.70	69	5.00	24.00	28.95	0.500	2.1°	4		
260	5.00	6.00	4.60	75	6.00	30.00	33.27	0.500	0.9°	4		
295	6.00	6.00	5.50	80	7.00	42.34	43.00	0.500	0.0°	4		
300	6.00	6.00	5.50	80	7.00	42.34	43.00	0.500	0.0°	6		
386	8.00	8.00	7.40	90	9.00	52.29	53.00	0.500	0.0°	4		
391	8.00	8.00	7.40	90	9.00	52.29	53.00	0.500	0.0°	6		
440	10.00	10.00	9.20	105	11.00	63.20	64.00	0.500	0.0°	4		
450	10.00	10.00	9.20	105	11.00	63.20	64.00	0.500	0.0°	6		
491	12.00	12.00	11.00	120	13.00	73.13	74.00	0.500	0.0°	4		
501	12.00	12.00	11.00	120	13.00	73.13	74.00	0.500	0.0°	6		
606	16.00	16.00	15.00	135	17.00	85.13	86.00	0.500	0.0°	6		

Application



Material

Hardened tool steel
48 - 52 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
4.00	4	150	0.040	0.180	0.880	3.14	15205	2435	1.00
5.00	4	150	0.045	0.220	1.100	4.25	11235	2020	1.00
6.00	6	150	0.050	0.260	1.320	5.35	8925	2675	1.00
8.00	6	150	0.060	0.320	1.760	7.47	6390	2300	1.00
10.00	6	150	0.080	0.380	2.200	9.57	4990	2395	1.00
12.00	6	150	0.095	0.450	2.640	11.67	4090	2330	1.00
16.00	6	150	0.105	0.500	3.520	15.73	3035	1910	1.00

Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
4.00	4	120	0.035	0.180	0.880	3.14	12165	1705	1.00
5.00	4	120	0.040	0.220	1.100	4.25	8990	1440	1.00
6.00	6	120	0.045	0.260	1.320	5.35	7140	1930	1.00
8.00	6	120	0.055	0.320	1.760	7.47	5115	1685	1.00
10.00	6	120	0.070	0.380	2.200	9.57	3990	1675	1.00
12.00	6	120	0.085	0.450	2.640	11.67	3275	1670	1.00
16.00	6	120	0.095	0.500	3.520	15.73	2430	1385	1.00

Hardened tool steel
56 - 60 HRC




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
4.00	4	80	0.035	0.180	0.880	3.14	8110	1135	1.00
5.00	4	80	0.035	0.220	1.100	4.25	5990	840	1.00
6.00	6	80	0.040	0.260	1.320	5.35	4760	1140	1.00
8.00	6	80	0.050	0.320	1.760	7.47	3410	1025	1.00
10.00	6	80	0.065	0.380	2.200	9.57	2660	1040	1.00
12.00	6	80	0.080	0.450	2.640	11.67	2180	1045	1.00
16.00	6	80	0.085	0.500	3.520	15.73	1620	825	1.00

Hardened tool steel
> 60 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
4.00	4	40	0.025	0.180	0.880	3.14	4055	405	1.00
5.00	4	40	0.025	0.220	1.100	4.25	2995	300	1.00
6.00	6	40	0.030	0.260	1.320	5.35	2380	430	1.00
8.00	6	40	0.035	0.320	1.760	7.47	1705	360	1.00
10.00	6	40	0.045	0.380	2.200	9.57	1330	360	1.00
12.00	6	40	0.055	0.450	2.640	11.67	1090	360	1.00
16.00	6	40	0.060	0.500	3.520	15.73	810	290	1.00

Application



Material

Hardened tool steel
48 - 52 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
4.00	4	300	0.030	0.080	0.080	3.86	24740	2970	45°
5.00	4	300	0.035	0.080	0.080	4.86	19650	2750	45°
6.00	6	300	0.040	0.110	0.110	5.90	16185	3885	45°
8.00	6	300	0.045	0.110	0.110	7.90	12090	3265	45°
10.00	6	300	0.050	0.140	0.140	9.94	9605	2880	45°
12.00	6	300	0.055	0.140	0.140	11.94	8000	2640	45°
16.00	6	300	0.065	0.160	0.160	15.96	5985	2335	45°

Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
4.00	4	250	0.030	0.080	0.080	3.86	20615	2475	45°
5.00	4	250	0.035	0.080	0.080	4.86	16375	2290	45°
6.00	6	250	0.040	0.110	0.110	5.90	13490	3235	45°
8.00	6	250	0.045	0.110	0.110	7.90	10075	2720	45°
10.00	6	250	0.050	0.140	0.140	9.94	8005	2400	45°
12.00	6	250	0.050	0.140	0.140	11.94	6665	2000	45°
16.00	6	250	0.060	0.160	0.160	15.96	4985	1795	45°

Hardened tool steel
56 - 60 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
4.00	4	180	0.025	0.080	0.080	3.86	14845	1485	45°
5.00	4	180	0.030	0.080	0.080	4.86	11790	1415	45°
6.00	6	180	0.035	0.110	0.110	5.90	9710	2040	45°
8.00	6	180	0.040	0.110	0.110	7.90	7255	1740	45°
10.00	6	180	0.045	0.140	0.140	9.94	5765	1555	45°
12.00	6	180	0.045	0.140	0.140	11.94	4800	1295	45°
16.00	6	180	0.055	0.160	0.160	15.96	3590	1185	45°

Hardened tool steel
> 60 HRC






d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
4.00	4	100	0.015	0.080	0.080	3.86	8245	495	45°
5.00	4	100	0.020	0.080	0.080	4.86	6550	525	45°
6.00	6	100	0.020	0.110	0.110	5.90	5395	645	45°
8.00	6	100	0.025	0.110	0.110	7.90	4030	605	45°
10.00	6	100	0.025	0.140	0.140	9.94	3200	480	45°
12.00	6	100	0.030	0.140	0.140	11.94	2665	480	45°
16.00	6	100	0.035	0.160	0.160	15.96	1995	420	45°

Corner radius end mills XSpeed

Tolerance r 0/+0.015, 6xd




HM
XT λ 55°
 γ -10°

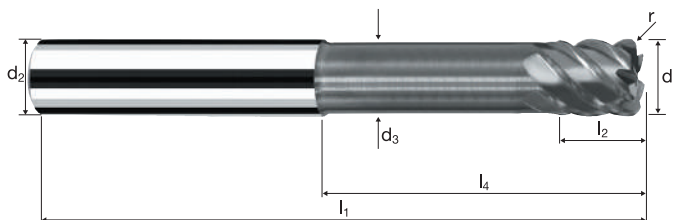

Rm	Rm	Rm	HRC	HRC	HRC	Ti	GG(G) Tool Steel HSS
850-1100	1100-1300	1300-1500	48-56	56-60	> 60	Titanium	

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z	X-AL	
											X7204	
Example: Order-N°.	Coating X		Article-N° 7204		ø-Code 218							
218	4.00	6.00	3.70	69	5.00	24.00	28.95	1.000	2.1°	4	●	
258	5.00	6.00	4.60	75	6.00	30.00	33.27	1.000	1.0°	4	●	
293	6.00	6.00	5.50	80	7.00	42.34	43.00	1.000	0.0°	4	●	
297	6.00	6.00	5.50	80	7.00	42.34	43.00	1.000	0.0°	6	●	
384	8.00	8.00	7.40	90	9.00	52.29	53.00	1.000	0.0°	4	●	
388	8.00	8.00	7.40	90	9.00	52.29	53.00	1.000	0.0°	6	●	
435	10.00	10.00	9.20	105	11.00	63.20	64.00	1.000	0.0°	4	●	
445	10.00	10.00	9.20	105	11.00	63.20	64.00	1.000	0.0°	6	●	
486	12.00	12.00	11.00	120	13.00	73.13	74.00	1.000	0.0°	4	●	
496	12.00	12.00	11.00	120	13.00	73.13	74.00	1.000	0.0°	6	●	
608	16.00	16.00	15.00	135	17.00	85.13	86.00	1.000	0.0°	6	●	



Material

Hardened tool steel
42 - 48 HRC

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
2.00	4	180	0.025	0.600	0.800	28650	2865	0.50
3.00	4	180	0.035	0.600	1.200	19100	2675	0.50
4.00	4	180	0.045	0.600	1.600	14325	2580	0.50
5.00	4	180	0.045	0.600	2.000	11460	2065	0.50
6.00	4	180	0.050	0.600	2.400	9550	1910	0.50
8.00	4	180	0.060	0.600	3.200	7160	1720	0.50
10.00	4	180	0.080	0.600	4.000	5730	1835	0.50
12.00	4	180	0.095	0.600	4.800	4775	1815	0.50

Hardened tool steel
48 - 52 HRC


2.00	4	140	0.025	0.600	0.800	22280	2230	0.50
3.00	4	140	0.030	0.600	1.200	14855	1785	0.50
4.00	4	140	0.040	0.600	1.600	11140	1785	0.50
5.00	4	140	0.040	0.600	2.000	8915	1425	0.50
6.00	4	140	0.045	0.600	2.400	7425	1335	0.50
8.00	4	140	0.055	0.600	3.200	5570	1225	0.50
10.00	4	140	0.070	0.600	4.000	4455	1250	0.50
12.00	4	140	0.085	0.600	4.800	3715	1265	0.50

Hardened tool steel
52 - 56 HRC

2.00	4	100	0.020	0.600	0.800	15915	1275	0.50
3.00	4	100	0.030	0.600	1.200	10610	1275	0.50
4.00	4	100	0.035	0.600	1.600	7960	1115	0.50
5.00	4	100	0.035	0.600	2.000	6365	890	0.50
6.00	4	100	0.040	0.600	2.400	5305	850	0.50
8.00	4	100	0.050	0.600	3.200	3980	795	0.50
10.00	4	100	0.065	0.600	4.000	3185	830	0.50
12.00	4	100	0.080	0.600	4.800	2655	850	0.50

Hardened tool steel
56 - 60 HRC

2.00	4	70	0.015	0.600	0.800	11140	670	0.50
3.00	4	70	0.020	0.600	1.200	7425	595	0.50
4.00	4	70	0.025	0.600	1.600	5570	555	0.50
5.00	4	70	0.025	0.600	2.000	4455	445	0.50
6.00	4	70	0.030	0.600	2.400	3715	445	0.50
8.00	4	70	0.035	0.600	3.200	2785	390	0.50
10.00	4	70	0.045	0.600	4.000	2230	400	0.50
12.00	4	70	0.055	0.600	4.800	1855	410	0.50



Material

Hardened tool steel
42 - 48 HRC

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
2.00	4	263	0.045	0.100	0.100	1.99	42070	7570	45°
3.00	4	360	0.065	0.120	0.120	3.00	38195	9930	45°
4.00	4	360	0.085	0.120	0.120	4.00	28650	9740	45°
5.00	4	360	0.100	0.160	0.160	5.00	22920	9165	45°
6.00	4	360	0.135	0.180	0.180	6.00	19100	10315	45°
8.00	4	360	0.150	0.200	0.200	7.99	14340	8605	45°
10.00	4	360	0.200	0.240	0.240	9.97	11495	9195	45°
12.00	4	360	0.170	0.260	0.260	11.96	9580	6515	45°

Hardened tool steel
48 - 52 HRC

2.00	4	250	0.045	0.100	0.100	1.99	39990	7200	45°
3.00	4	250	0.060	0.120	0.120	3.00	26525	6365	45°
4.00	4	250	0.080	0.120	0.120	4.00	19895	6365	45°
5.00	4	250	0.095	0.160	0.160	5.00	15915	6050	45°
6.00	4	250	0.130	0.180	0.180	6.00	13265	6895	45°
8.00	4	250	0.145	0.200	0.200	7.99	9960	5775	45°
10.00	4	250	0.190	0.240	0.240	9.97	7980	6065	45°
12.00	4	250	0.160	0.260	0.260	11.96	6655	4260	45°

Hardened tool steel
52 - 56 HRC



2.00	4	180	0.040	0.100	0.100	1.99	28790	4605	45°
3.00	4	180	0.055	0.120	0.120	3.00	19100	4200	45°
4.00	4	180	0.075	0.120	0.120	4.00	14325	4295	45°
5.00	4	180	0.085	0.160	0.160	5.00	11460	3895	45°
6.00	4	180	0.115	0.180	0.180	6.00	9550	4395	45°
8.00	4	180	0.130	0.200	0.200	7.99	7170	3730	45°
10.00	4	180	0.170	0.240	0.240	9.97	5745	3910	45°
12.00	4	180	0.145	0.260	0.260	11.96	4790	2780	45°

Hardened tool steel
56 - 60 HRC

2.00	4	100	0.025	0.100	0.100	1.99	15995	1600	45°
3.00	4	100	0.035	0.120	0.120	3.00	10610	1485	45°
4.00	4	100	0.045	0.120	0.120	4.00	7960	1430	45°
5.00	4	100	0.050	0.160	0.160	5.00	6365	1275	45°
6.00	4	100	0.070	0.180	0.180	6.00	5305	1485	45°
8.00	4	100	0.075	0.200	0.200	7.99	3985	1195	45°
10.00	4	100	0.100	0.240	0.240	9.97	3195	1275	45°
12.00	4	100	0.085	0.260	0.260	11.96	2660	905	45°

Corner radius end mills ToroX


Tolerance r 0/+0.015, 6xd

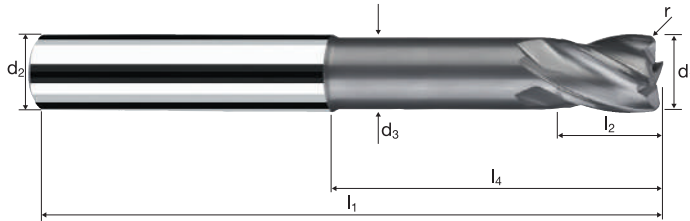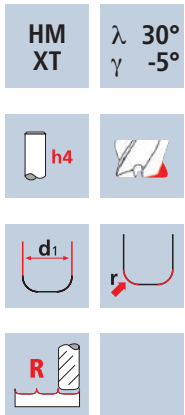

Rm	Rm	Rm	HRC	HRC	HRC	Ti	GG(G)
850-1100	1100-1300	1300-1500	48-56	56-60	> 60	Titanium	Tool Steel HSS

Ø Code	Coating			Article-N°		ø-Code		r 0/+0.015	α	z	X-AL
	Example: Order-N°	X	7104	138							
	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄				X7104
138	2.00	6.00	1.90	66	3.00	12.00	20.31	0.200	5.9°	4	●
178	3.00	6.00	2.80	66	4.00	18.00	24.63	0.200	3.7°	4	●
218	4.00	6.00	3.70	69	5.00	24.00	28.95	0.200	2.1°	4	●
258	5.00	6.00	4.60	75	6.00	30.00	33.27	0.200	0.9°	4	●
297	6.00	6.00	5.50	80	7.00	42.34	43.00	0.200	0.0°	4	●
385	8.00	8.00	7.40	90	9.00	52.29	53.00	0.200	0.0°	4	●
445	10.00	10.00	9.20	105	11.00	63.20	64.00	0.200	0.0°	4	●
496	12.00	12.00	11.00	120	13.00	73.13	74.00	0.200	0.0°	4	●
140	2.00	6.00	1.90	66	3.00	12.00	20.31	0.500	6.0°	4	●
180	3.00	6.00	2.80	66	4.00	18.00	24.63	0.500	3.7°	4	●
220	4.00	6.00	3.70	69	5.00	24.00	28.95	0.500	2.1°	4	●
260	5.00	6.00	4.60	75	6.00	30.00	33.27	0.500	0.9°	4	●
300	6.00	6.00	5.50	80	7.00	42.34	43.00	0.500	0.0°	4	●
388	8.00	8.00	7.40	90	9.00	52.29	53.00	0.500	0.0°	4	●
448	10.00	10.00	9.20	105	11.00	63.20	64.00	0.500	0.0°	4	●
498	12.00	12.00	11.00	120	13.00	73.13	74.00	0.500	0.0°	4	●

Application



Material

Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC




Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Application



Material

Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
4.00	4	200	0.045	0.600	2.400	3.83	16620	2990	1.00
5.00	4	200	0.050	0.600	3.000	4.83	13180	2635	1.00
6.00	4	200	0.055	0.600	3.600	5.83	10920	2400	1.00
8.00	4	200	0.070	0.600	4.800	7.83	8130	2275	1.00
10.00	4	200	0.090	0.600	6.000	9.83	6475	2330	1.00
12.00	4	200	0.105	0.600	7.200	11.83	5380	2260	1.00

4.00	4	160	0.040	0.600	2.400	3.83	13300	2130	1.00
5.00	4	160	0.045	0.600	3.000	4.83	10545	1900	1.00
6.00	4	160	0.050	0.600	3.600	5.83	8735	1745	1.00
8.00	4	160	0.065	0.600	4.800	7.83	6505	1690	1.00
10.00	4	160	0.080	0.600	6.000	9.83	5180	1660	1.00
12.00	4	160	0.095	0.600	7.200	11.83	4305	1635	1.00

4.00	4	150	0.035	0.600	2.400	3.83	12465	1745	1.00
5.00	4	150	0.040	0.600	3.000	4.83	9885	1580	1.00
6.00	4	150	0.045	0.600	3.600	5.83	8190	1475	1.00
8.00	4	150	0.055	0.600	4.800	7.83	6100	1340	1.00
10.00	4	150	0.075	0.600	6.000	9.83	4855	1455	1.00
12.00	4	150	0.085	0.600	7.200	11.83	4035	1370	1.00

4.00	4	70	0.025	0.600	1.600	3.83	5820	580	1.00
5.00	4	70	0.030	0.600	2.000	4.83	4615	555	1.00
6.00	4	70	0.030	0.600	2.400	5.83	3820	460	1.00
8.00	4	70	0.040	0.600	3.200	7.83	2845	455	1.00
10.00	4	70	0.050	0.600	4.000	9.83	2265	455	1.00
12.00	4	70	0.060	0.600	4.800	11.83	1885	450	1.00

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
4.00	4	300	0.065	0.180	0.180	3.97	24055	6255	45°
5.00	4	300	0.075	0.240	0.240	4.99	19135	5740	45°
6.00	4	300	0.090	0.270	0.270	6.00	15915	5730	45°
8.00	4	300	0.125	0.300	0.300	8.00	11935	5970	45°
10.00	4	300	0.145	0.360	0.360	9.99	9560	5545	45°
12.00	4	300	0.170	0.390	0.390	11.98	7970	5420	45°



4.00	4	220	0.060	0.180	0.180	3.97	17640	4235	45°
5.00	4	220	0.070	0.240	0.240	4.99	14035	3930	45°
6.00	4	220	0.085	0.270	0.270	6.00	11670	3970	45°
8.00	4	220	0.120	0.300	0.300	8.00	8755	4200	45°
10.00	4	220	0.140	0.360	0.360	9.99	7010	3925	45°
12.00	4	220	0.160	0.390	0.390	11.98	5845	3740	45°

4.00	4	160	0.055	0.180	0.180	3.97	12830	2820	45°
5.00	4	160	0.065	0.240	0.240	4.99	10205	2655	45°
6.00	4	160	0.075	0.270	0.270	6.00	8490	2545	45°
8.00	4	160	0.110	0.300	0.300	8.00	6365	2800	45°
10.00	4	160	0.125	0.360	0.360	9.99	5100	2550	45°
12.00	4	160	0.145	0.390	0.390	11.98	4250	2465	45°

4.00	4	80	0.035	0.180	0.180	3.97	6415	900	45°
5.00	4	80	0.040	0.240	0.240	4.99	5105	815	45°
6.00	4	80	0.045	0.270	0.270	6.00	4245	765	45°
8.00	4	80	0.065	0.300	0.300	8.00	3185	830	45°
10.00	4	80	0.075	0.360	0.360	9.99	2550	765	45°
12.00	4	80	0.085	0.390	0.390	11.98	2125	725	45°


Corner radius end mills ToroX

Tolerance r 0/+0.015, 6xd

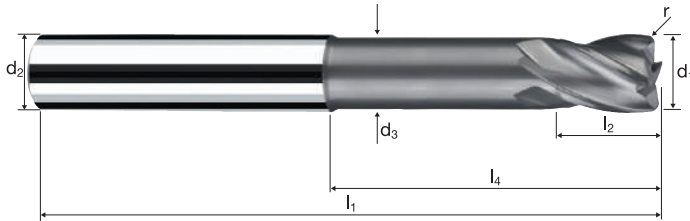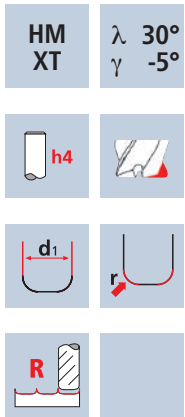

Rm	Rm	Rm	HRC	HRC	HRC	Ti	GG(G)
850-1100	1100-1300	1300-1500	48-56	56-60	> 60	Titanium	Tool Steel HSS

Example: Order-N°.											X-AL
											X7104
Ø	d ₁	d ₂	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	
Code	0/-0.01	h4						0/+0.015			
222	4.00	6.00	3.70	69	5.00	24.00	28.95	1.000	2.1°	4	●
262	5.00	6.00	4.60	75	6.00	30.00	33.27	1.000	1.0°	4	●
302	6.00	6.00	5.50	80	7.00	42.34	43.00	1.000	0.0°	4	●
391	8.00	8.00	7.40	90	9.00	52.29	53.00	1.000	0.0°	4	●
450	10.00	10.00	9.20	105	11.00	63.20	64.00	1.000	0.0°	4	●
501	12.00	12.00	11.00	120	13.00	73.13	74.00	1.000	0.0°	4	●
395	8.00	8.00	7.40	90	9.00	52.29	53.00	2.000	0.0°	4	●
455	10.00	10.00	9.20	105	11.00	63.20	64.00	2.000	0.0°	4	●
505	12.00	12.00	11.00	120	13.00	73.13	74.00	2.000	0.0°	4	●



Material

Steel
< 850 N/mm²

	P
	P

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
3.00	4	200	0.040	0.150	0.900	2.71	23490	3760	0.50
4.00	4	200	0.050	0.180	1.200	3.77	16885	3375	0.50
5.00	4	200	0.055	0.200	1.500	4.80	13265	2920	0.50
6.00	6	200	0.060	0.220	1.800	5.83	10920	2930	0.50
8.00	6	200	0.075	0.250	2.400	7.87	8090	3640	0.50
10.00	6	200	0.090	0.280	3.000	9.90	6430	3470	0.50
12.00	6	200	0.110	0.300	3.600	11.92	5340	3525	0.50
16.00	6	200	0.120	0.650	4.800	15.47	4115	2965	1.50

Steel
850 - 1100 N/mm²

	P
	P

3.00	4	180	0.040	0.150	0.900	2.71	21140	3385	0.50
4.00	4	180	0.050	0.180	1.200	3.77	15200	3040	0.50
5.00	4	180	0.050	0.200	1.500	4.80	11935	2385	0.50
6.00	6	180	0.055	0.220	1.800	5.83	9830	3245	0.50
8.00	6	180	0.070	0.250	2.400	7.87	7280	3060	0.50
10.00	6	180	0.085	0.280	3.000	9.90	5785	2950	0.50
12.00	6	180	0.105	0.300	3.600	11.92	4805	3030	0.50
16.00	6	180	0.115	0.650	4.800	15.47	3705	2555	1.50

Steel
1100 - 1300 N/mm²


	P
	P

3.00	4	150	0.035	0.150	0.900	2.71	17620	2465	0.50
4.00	4	150	0.045	0.180	1.200	3.77	12665	2280	0.50
5.00	4	150	0.050	0.200	1.500	4.80	9945	1990	0.50
6.00	6	150	0.055	0.220	1.800	5.83	8190	2705	0.50
8.00	6	150	0.065	0.250	2.400	7.87	6065	2365	0.50
10.00	6	150	0.080	0.280	3.000	9.90	4825	2315	0.50
12.00	6	150	0.095	0.300	3.600	11.92	4005	2285	0.50
16.00	6	150	0.105	0.650	4.800	15.47	3085	1945	1.50

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

	P
--	----------

3.00	4	60	0.025	0.150	0.700	2.71	7045	705	0.50
4.00	4	60	0.030	0.180	1.000	3.77	5065	610	0.50
5.00	4	60	0.035	0.200	1.200	4.80	3980	555	0.50
6.00	6	60	0.040	0.220	1.400	5.83	3275	785	0.50
8.00	6	60	0.050	0.250	1.900	7.87	2425	730	0.50
10.00	6	60	0.055	0.280	2.400	9.90	1930	635	0.50
12.00	6	60	0.070	0.300	2.900	11.92	1600	675	0.50
16.00	6	60	0.075	0.650	3.800	15.47	1235	555	1.50



Material

Steel
< 850 N/mm²

	P
	P

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
3.00	4	388	0.025	0.050	0.050	2.94	42010	4200	45°
4.00	4	420	0.030	0.060	0.060	3.96	33760	4050	45°
5.00	4	420	0.035	0.060	0.060	4.96	26955	3775	45°
6.00	6	420	0.040	0.080	0.080	5.98	22355	5365	45°
8.00	6	420	0.045	0.080	0.080	7.98	16755	4525	45°
10.00	6	420	0.050	0.100	0.100	9.99	13380	4015	45°
12.00	6	420	0.055	0.100	0.100	11.99	11150	3680	45°
16.00	6	420	0.065	0.180	0.180	15.87	8425	3285	45°

Steel
850 - 1100 N/mm²

	P
	P

3.00	4	360	0.025	0.050	0.050	2.94	38975	3900	45°
4.00	4	360	0.030	0.060	0.060	3.96	28935	3470	45°
5.00	4	360	0.035	0.060	0.060	4.96	23105	3235	45°
6.00	6	360	0.040	0.080	0.080	5.98	19160	4600	45°
8.00	6	360	0.045	0.080	0.080	7.98	14360	3875	45°
10.00	6	360	0.050	0.100	0.100	9.99	11470	3440	45°
12.00	6	360	0.050	0.100	0.100	11.99	9555	2865	45°
16.00	6	360	0.060	0.180	0.180	15.87	7220	2600	45°

Steel
1100 - 1300 N/mm²

	P
	P

3.00	4	320	0.020	0.050	0.050	2.94	34645	2770	45°
4.00	4	320	0.025	0.060	0.060	3.96	25720	2570	45°
5.00	4	320	0.030	0.060	0.060	4.96	20535	2465	45°
6.00	6	320	0.035	0.080	0.080	5.98	17035	3575	45°
8.00	6	320	0.040	0.080	0.080	7.98	12765	3065	45°
10.00	6	320	0.045	0.100	0.100	9.99	10195	2755	45°
12.00	6	320	0.050	0.100	0.100	11.99	8495	2550	45°
16.00	6	320	0.055	0.180	0.180	15.87	6420	2120	45°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

	P
--	----------


3.00	4	145	0.020	0.050	0.050	2.94	15700	1255	45°
4.00	4	145	0.025	0.060	0.060	3.96	11655	1165	45°
5.00	4	145	0.030	0.060	0.060	4.96	9305	1115	45°
6.00	6	145	0.030	0.080	0.080	5.98	7720	1390	45°
8.00	6	145	0.035	0.080	0.080	7.98	5785	1215	45°
10.00	6	145	0.040	0.100	0.100	9.99	4620	1110	45°
12.00	6	145	0.045	0.100	0.100	11.99	3850	1040	45°
16.00	6	145	0.050	0.180	0.180	15.87	2910	870	45°

Corner radius end mills Multispeed

Tolerance r 0/+0.03, 3xd



HM MG10	λ 45° γ 5°

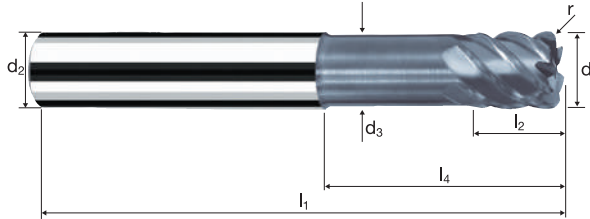

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G)
-------------	----------------	-----------------	-----------------	--	--	--	-------------------	----------------	-------

Example: Order-N°.											POLYCHROM	
											P5250	
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	α	z		
180	3.00	6.00	2.80	57	4.00	14.00	20.63	0.500	4.4°	4	●	
220	4.00	6.00	3.70	57	5.00	16.00	20.95	0.500	2.9°	4	●	
260	5.00	6.00	4.60	57	6.00	18.00	21.27	0.500	1.5°	4	●	
297	6.00	6.00	5.50	57	7.00	19.34	20.00	0.500	0.0°	6	●	
388	8.00	8.00	7.40	63	9.00	25.29	26.00	0.500	0.0°	6	●	
445	10.00	10.00	9.20	72	11.00	30.20	31.00	0.500	0.0°	6	●	
496	12.00	12.00	11.00	83	13.00	36.13	37.00	0.500	0.0°	6	●	
300	6.00	6.00	5.50	57	7.00	19.34	20.00	0.800	0.0°	6	●	
391	8.00	8.00	7.40	63	9.00	25.29	26.00	1.000	0.0°	6	●	
450	10.00	10.00	9.20	72	11.00	30.20	31.00	1.000	0.0°	6	●	
501	12.00	12.00	11.00	83	13.00	36.13	37.00	1.500	0.0°	6	●	
610	16.00	16.00	15.00	92	17.00	42.13	43.00	1.500	0.0°	6	●	

Application

Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	r [mm]
2.00	4	80	0.015	0.600	1.200	12730	765	0.50
3.00	4	80	0.025	0.600	1.800	8490	850	0.50
4.00	4	80	0.035	0.600	2.400	6365	890	0.50
5.00	4	80	0.040	0.600	3.000	5095	815	0.50
6.00	4	80	0.050	0.600	3.600	4245	850	0.50
8.00	4	80	0.065	0.600	4.800	3185	830	0.50
10.00	4	80	0.085	0.600	6.000	2545	865	0.50
12.00	4	80	0.100	0.600	7.200	2120	850	0.50

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]

2.00	4	70	0.015	0.600	1.200	11140	670	0.50
3.00	4	70	0.025	0.600	1.800	7425	745	0.50
4.00	4	70	0.030	0.600	2.400	5570	670	0.50
5.00	4	70	0.035	0.600	3.000	4455	625	0.50
6.00	4	70	0.045	0.600	3.600	3715	670	0.50
8.00	4	70	0.060	0.600	4.800	2785	670	0.50
10.00	4	70	0.075	0.600	6.000	2230	670	0.50
12.00	4	70	0.090	0.600	7.200	1855	670	0.50

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]

2.00	4	50	0.010	0.600	1.200	7960	320	0.50
3.00	4	50	0.020	0.600	1.800	5305	425	0.50
4.00	4	50	0.025	0.600	2.400	3980	400	0.50
5.00	4	50	0.030	0.600	3.000	3185	380	0.50
6.00	4	50	0.035	0.600	3.600	2655	370	0.50
8.00	4	50	0.045	0.600	4.800	1990	360	0.50
10.00	4	50	0.060	0.600	6.000	1590	380	0.50
12.00	4	50	0.070	0.600	7.200	1325	370	0.50

Steel
< 850 N/mm²

2.00	4	180	0.020	0.600	1.200	28650	2290	0.50
3.00	4	180	0.035	0.600	1.800	19100	2675	0.50
4.00	4	180	0.045	0.600	2.400	14325	2580	0.50
5.00	4	180	0.050	0.600	3.000	11460	2290	0.50
6.00	4	180	0.065	0.600	3.600	9550	2485	0.50
8.00	4	180	0.085	0.600	4.800	7160	2435	0.50
10.00	4	180	0.110	0.600	6.000	5730	2520	0.50
12.00	4	180	0.130	0.600	7.200	4775	2485	0.50

Application

Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _r [mm/min]	β [°]
2.00	4	160	0.030	0.100	0.100	1.99	25595	3070	45°
3.00	4	160	0.050	0.120	0.120	3.00	16975	3395	45°
4.00	4	160	0.070	0.120	0.120	4.00	12730	3565	45°
5.00	4	160	0.080	0.160	0.160	5.00	10185	3260	45°
6.00	4	160	0.100	0.180	0.180	6.00	8490	3395	45°
8.00	4	160	0.130	0.200	0.200	7.99	6375	3315	45°
10.00	4	160	0.170	0.240	0.240	9.97	5110	3475	45°
12.00	4	160	0.200	0.260	0.260	11.96	4260	3405	45°

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]

2.00	4	140	0.030	0.100	0.100	1.99	22395	2685	45°
3.00	4	140	0.050	0.120	0.120	3.00	14855	2970	45°
4.00	4	140	0.060	0.120	0.120	4.00	11140	2675	45°
5.00	4	140	0.070	0.160	0.160	5.00	8915	2495	45°
6.00	4	140	0.090	0.180	0.180	6.00	7425	2675	45°
8.00	4	140	0.120	0.200	0.200	7.99	5575	2675	45°
10.00	4	140	0.150	0.240	0.240	9.97	4470	2680	45°
12.00	4	140	0.180	0.260	0.260	11.96	3725	2685	45°

Inox difficile
[Cr-Ni-Mo+/1.4529]
Heat resistant steel
[1.4841]

2.00	4	110	0.020	0.100	0.100	1.99	17595	1410	45°
3.00	4	110	0.040	0.120	0.120	3.00	11670	1865	45°
4.00	4	110	0.050	0.120	0.120	4.00	8755	1750	45°
5.00	4	110	0.060	0.160	0.160	5.00	7005	1680	45°
6.00	4	110	0.070	0.180	0.180	6.00	5835	1635	45°
8.00	4	110	0.090	0.200	0.200	7.99	4380	1580	45°
10.00	4	110	0.120	0.240	0.240	9.97	3510	1685	45°
12.00	4	110	0.140	0.260	0.260	11.96	2930	1640	45°

Steel
< 850 N/mm²


2.00	4	263	0.040	0.100	0.100	1.99	42070	6730	45°
3.00	4	396	0.070	0.120	0.120	3.00	42015	11765	45°
4.00	4	400	0.090	0.120	0.120	4.00	31830	11460	45°
5.00	4	400	0.100	0.160	0.160	5.00	25465	10185	45°
6.00	4	400	0.130	0.180	0.180	6.00	21220	11035	45°
8.00	4	400	0.170	0.200	0.200	7.99	15935	10835	45°
10.00	4	400	0.220	0.240	0.240	9.97	12770	11240	45°
12.00	4	400	0.260	0.260	0.260	11.96	10645	11070	45°

Corner radius end mills Torocut

Tolerance r 0/+0.03, 3xd



HM
MG10 λ 40°
 γ 5°

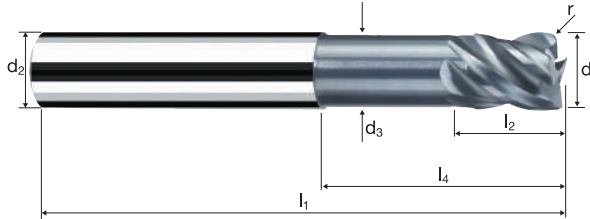

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	--------------------------------------

Example: Order-N°.											POLYCHROM	
											P7340	
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	α	z		
	Coating: P			Article-N°: 7340			ø-Code: 138					
138	2.00	6.00	1.90	57	3.00	6.00	14.31	0.200	8.5°	4	●	
178	3.00	6.00	2.80	57	4.00	9.00	15.63	0.200	5.8°	4	●	
218	4.00	6.00	3.70	57	5.00	12.00	16.95	0.200	3.6°	4	●	
258	5.00	6.00	4.60	57	6.00	15.00	18.27	0.200	1.7°	4	●	
297	6.00	6.00	5.50	57	7.00	19.34	20.00	0.200	0.0°	4	●	
385	8.00	8.00	7.40	63	9.00	25.29	26.00	0.200	0.0°	4	●	
445	10.00	10.00	9.20	72	11.00	30.20	31.00	0.200	0.0°	4	●	
496	12.00	12.00	11.00	83	13.00	36.13	37.00	0.200	0.0°	4	●	
140	2.00	6.00	1.90	57	3.00	6.00	14.31	0.500	8.7°	4	●	
180	3.00	6.00	2.80	57	4.00	9.00	15.63	0.500	6.0°	4	●	
220	4.00	6.00	3.70	57	5.00	12.00	16.95	0.500	3.7°	4	●	
260	5.00	6.00	4.60	57	6.00	15.00	18.27	0.500	1.7°	4	●	
300	6.00	6.00	5.50	57	7.00	19.34	20.00	0.500	0.0°	4	●	
388	8.00	8.00	7.40	63	9.00	25.29	26.00	0.500	0.0°	4	●	
448	10.00	10.00	9.20	72	11.00	30.20	31.00	0.500	0.0°	4	●	
498	12.00	12.00	11.00	83	13.00	36.13	37.00	0.500	0.0°	4	●	

Application	Material	d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]	4.00	4	100	0.035	0.600	2.400	3.83	8310	1165	1.00
		5.00	4	100	0.045	0.600	3.000	4.83	6590	1185	1.00
		6.00	4	100	0.055	0.600	3.600	5.83	5460	1200	1.00
		8.00	4	100	0.075	0.600	4.800	7.83	4065	1220	1.00
		10.00	4	100	0.090	0.600	6.000	9.83	3240	1165	1.00
		12.00	4	100	0.110	0.600	7.200	11.83	2690	1185	1.00
		16.00	4	100	0.090	1.200	9.600	15.67	2030	730	2.00

	Inox medium [Cr-Ni-Mo+/1.4539] Duplex steel [17-4 PH]	4.00	4	80	0.030	0.600	2.400	3.83	6650	800	1.00
		5.00	4	80	0.040	0.600	3.000	4.83	5270	845	1.00
		6.00	4	80	0.050	0.600	3.600	5.83	4370	875	1.00
		8.00	4	80	0.070	0.600	4.800	7.83	3250	910	1.00
		10.00	4	80	0.080	0.600	6.000	9.83	2590	830	1.00
		12.00	4	80	0.100	0.600	7.200	11.83	2155	860	1.00
		16.00	4	80	0.080	1.200	9.600	15.67	1625	520	2.00

	Inox difficult [Cr-Ni-Mo+/1.4529] Heat resistant steel [1.4841]	4.00	4	55	0.025	0.600	2.400	3.83	4570	455	1.00
		5.00	4	55	0.030	0.600	3.000	4.83	3625	435	1.00
		6.00	4	55	0.040	0.600	3.600	5.83	3005	480	1.00
		8.00	4	55	0.055	0.600	4.800	7.83	2235	490	1.00
		10.00	4	55	0.065	0.600	6.000	9.83	1780	465	1.00
		12.00	4	55	0.075	0.600	7.200	11.83	1480	445	1.00
		16.00	4	55	0.060	1.200	9.600	15.67	1115	270	2.00

	Steel < 850 N/mm ²	4.00	4	200	0.045	0.600	2.400	3.83	16620	2990	1.00
		5.00	4	200	0.060	0.600	3.000	4.83	13180	3165	1.00
		6.00	4	200	0.070	0.600	3.600	5.83	10920	3060	1.00
		8.00	4	200	0.100	0.600	4.800	7.83	8130	3250	1.00
		10.00	4	200	0.115	0.600	6.000	9.83	6475	2980	1.00
		12.00	4	200	0.145	0.600	7.200	11.83	5380	3120	1.00
		16.00	4	200	0.115	1.200	9.600	15.67	4065	1870	2.00

Application	Material	d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]	4.00	4	160	0.070	0.180	0.180	3.97	12830	3590	45°
		5.00	4	160	0.090	0.240	0.240	4.99	10205	3675	45°
		6.00	4	160	0.110	0.270	0.270	6.00	8490	3735	45°
		8.00	4	160	0.150	0.300	0.300	8.00	6365	3820	45°
		10.00	4	160	0.180	0.360	0.360	9.99	5100	3670	45°
		12.00	4	160	0.220	0.390	0.390	11.98	4250	3740	45°
		16.00	4	160	0.250	0.450	0.450	15.98	3185	3185	45°

	Inox medium [Cr-Ni-Mo+/1.4539] Duplex steel [17-4 PH]	4.00	4	140	0.060	0.180	0.180	3.97	11225	2695	45°
		5.00	4	140	0.080	0.240	0.240	4.99	8930	2860	45°
		6.00	4	140	0.100	0.270	0.270	6.00	7425	2970	45°
		8.00	4	140	0.140	0.300	0.300	8.00	5570	3120	45°
		10.00	4	140	0.160	0.360	0.360	9.99	4460	2855	45°
		12.00	4	140	0.200	0.390	0.390	11.98	3720	2975	45°
		16.00	4	140	0.220	0.450	0.450	15.98	2790	2455	45°

	Inox difficult [Cr-Ni-Mo+/1.4529] Heat resistant steel [1.4841]	4.00	4	110	0.050	0.180	0.180	3.97	8820	1765	45°
		5.00	4	110	0.060	0.240	0.240	4.99	7015	1685	45°
		6.00	4	110	0.080	0.270	0.270	6.00	5835	1865	45°
		8.00	4	110	0.110	0.300	0.300	8.00	4375	1925	45°
		10.00	4	110	0.130	0.360	0.360	9.99	3505	1825	45°
		12.00	4	110	0.150	0.390	0.390	11.98	2925	1755	45°
		16.00	4	110	0.170	0.450	0.450	15.98	2190	1490	45°

	Steel < 850 N/mm ²	4.00	4	400	0.090	0.180	0.180	3.97	32070	11545	45°
		5.00	4	400	0.120	0.240	0.240	4.99	25515	12250	45°
		6.00	4	400	0.140	0.270	0.270	6.00	21220	11885	45°
		8.00	4	400	0.200	0.300	0.300	8.00	15915	12730	45°
		10.00	4	400	0.230	0.360	0.360	9.99	12745	11725	45°
		12.00	4	400	0.290	0.390	0.390	11.98	10630	12330	45°
		16.00	4	400	0.320	0.450	0.450	15.98	7970	10200	45°

Corner radius end mills Torocut


Tolerance r 0/+0.03, 3xd



HM
MG10

λ 40°
 γ 5°

Vario

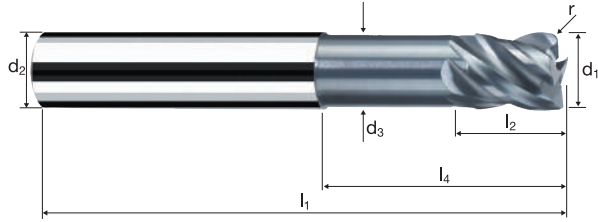

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56		Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
--------------------	-----------------------	------------------------	------------------------	---------------------	--	--------------------------	-----------------------	---



											POLYCHROM	
Example: Order-N°.												
											P7340	
\emptyset Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	α	z		
222	4.00	6.00	3.70	57	5.00	12.00	16.95	1.000	3.8°	4	●	
262	5.00	6.00	4.60	57	6.00	15.00	18.27	1.000	1.8°	4	●	
302	6.00	6.00	5.50	57	7.00	19.34	20.00	1.000	0.0°	4	●	
391	8.00	8.00	7.40	63	9.00	25.29	26.00	1.000	0.0°	4	●	
450	10.00	10.00	9.20	72	11.00	30.20	31.00	1.000	0.0°	4	●	
501	12.00	12.00	11.00	83	13.00	36.13	37.00	1.000	0.0°	4	●	
453	10.00	10.00	9.20	72	11.00	30.20	31.00	1.500	0.0°	4	●	
503	12.00	12.00	11.00	83	13.00	36.13	37.00	1.500	0.0°	4	●	
611	16.00	16.00	15.00	92	17.00	42.13	43.00	2.000	0.0°	4	●	

Application	Material	d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
	Steel < 850 N/mm ² 	6.00	6	200	0.050	0.150	1.320	5.33	11945	3585	0.80
		8.00	6	200	0.065	0.180	1.760	7.14	8915	3475	1.00
		10.00	6	200	0.080	0.200	2.200	9.20	6920	3320	1.00
		12.00	6	200	0.090	0.220	2.640	10.56	6030	3255	1.50
		16.00	6	200	0.115	0.250	3.520	14.66	4345	2995	1.50
Steel 850 - 1100 N/mm ² 	6.00	6	180	0.050	0.150	1.320	5.33	10750	3225	0.80	
	8.00	6	180	0.060	0.180	1.760	7.14	8025	2890	1.00	
	10.00	6	180	0.075	0.200	2.200	9.20	6230	2805	1.00	
	12.00	6	180	0.085	0.220	2.640	10.56	5425	2765	1.50	
	16.00	6	180	0.110	0.250	3.520	14.66	3910	2580	1.50	
Steel 1100 - 1300 N/mm ² 	6.00	6	150	0.045	0.150	1.320	5.33	8960	2420	0.80	
	8.00	6	150	0.055	0.180	1.760	7.14	6685	2205	1.00	
	10.00	6	150	0.070	0.200	2.200	9.20	5190	2180	1.00	
	12.00	6	150	0.080	0.220	2.640	10.56	4520	2170	1.50	
	16.00	6	150	0.100	0.250	3.520	14.66	3255	1955	1.50	
Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	6.00	6	60	0.040	0.120	1.060	5.24	3645	875	0.80	
	8.00	6	60	0.050	0.144	1.400	7.03	2715	815	1.00	
	10.00	6	60	0.065	0.160	1.760	9.09	2100	820	1.00	
	12.00	6	60	0.070	0.176	2.120	10.41	1835	770	1.50	
	16.00	6	60	0.090	0.200	2.820	14.50	1315	710	1.50	

Application	Material	d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
	Steel < 850 N/mm ² 	6.00	6	420	0.040	0.100	0.100	5.94	22505	5400	45°
		8.00	6	420	0.045	0.110	0.110	7.90	16925	4570	45°
		10.00	6	420	0.050	0.140	0.140	9.94	13450	4035	45°
		12.00	6	420	0.055	0.170	0.170	11.86	11270	3720	45°
		16.00	6	420	0.065	0.180	0.180	15.87	8425	3285	45°
Steel 850 - 1100 N/mm ² 	6.00	6	360	0.040	0.100	0.100	5.94	19290	4630	45°	
	8.00	6	360	0.045	0.110	0.110	7.90	14505	3915	45°	
	10.00	6	360	0.050	0.140	0.140	9.94	11530	3460	45°	
	12.00	6	360	0.050	0.170	0.170	11.86	9660	2900	45°	
	16.00	6	360	0.060	0.180	0.180	15.87	7220	2600	45°	
Steel 1100 - 1300 N/mm ² 	6.00	6	320	0.035	0.100	0.100	5.94	17150	3600	45°	
	8.00	6	320	0.040	0.110	0.110	7.90	12895	3095	45°	
	10.00	6	320	0.045	0.140	0.140	9.94	10245	2765	45°	
	12.00	6	320	0.050	0.170	0.170	11.86	8590	2575	45°	
	16.00	6	320	0.055	0.180	0.180	15.87	6420	2120	45°	
Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	6.00	6	145	0.030	0.100	0.100	5.94	7770	1400	45°	
	8.00	6	145	0.035	0.110	0.110	7.90	5840	1225	45°	
	10.00	6	145	0.040	0.140	0.140	9.94	4645	1115	45°	
	12.00	6	145	0.045	0.170	0.170	11.86	3890	1050	45°	
	16.00	6	145	0.050	0.180	0.180	15.87	2910	870	45°	




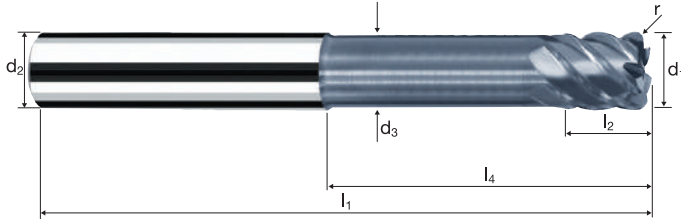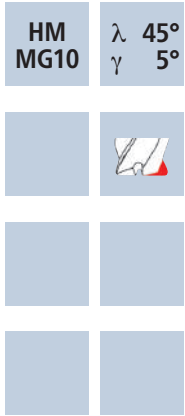

Corner radius end mills Multispeed






Tolerance r 0/+0.03, 5xd



Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G)
----------	-------------	--------------	--------------	--	--	--	-------------------	----------------	-------

Example: Order-N°.										POLYCHROM	
										P5252	
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	z		
300	6.00	6.00	5.50	70	7.00	32.34	33.00	0.800	6	●	
391	8.00	8.00	7.40	80	9.00	42.29	43.00	1.000	6	●	
450	10.00	10.00	9.20	84	11.00	42.20	43.00	1.000	6	●	
501	12.00	12.00	11.00	97	13.00	50.13	51.00	1.500	6	●	
610	16.00	16.00	15.00	115	17.00	65.13	66.00	1.500	6	●	

Application	Material	d1 [mm]	z	v _r [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]	
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]	2.00	4	80	0.015	0.600	0.800	12730	765	0.50	
		3.00	4	80	0.020	0.600	1.200	8490	680	0.50	
		4.00	4	80	0.030	0.600	1.600	6365	765	0.50	
		5.00	4	80	0.035	0.600	2.000	5095	715	0.50	
		6.00	4	80	0.045	0.600	2.400	4245	765	0.50	
		8.00	4	80	0.055	0.600	3.200	3185	700	0.50	
		10.00	4	80	0.070	0.600	4.000	2545	715	0.50	
		12.00	4	80	0.085	0.600	4.800	2120	720	0.50	
		Inox medium [Cr-Ni-Mo+/1.4539] Duplex steel [17-4 PH]	2.00	4	70	0.015	0.600	0.800	11140	670	0.50
			3.00	4	70	0.020	0.600	1.200	7425	595	0.50
			4.00	4	70	0.025	0.600	1.600	5570	555	0.50
5.00	4		70	0.030	0.600	2.000	4455	535	0.50		
6.00	4		70	0.040	0.600	2.400	3715	595	0.50		
8.00	4		70	0.050	0.600	3.200	2785	555	0.50		
10.00	4		70	0.065	0.600	4.000	2230	580	0.50		
12.00	4		70	0.075	0.600	4.800	1855	555	0.50		
Inox difficile [Cr-Ni-Mo+//1.4529] Heat resistant steel [1.4841]	2.00		4	50	0.010	0.600	0.800	7960	320	0.50	
	3.00		4	50	0.015	0.600	1.200	5305	320	0.50	
	4.00		4	50	0.020	0.600	1.600	3980	320	0.50	
	5.00	4	50	0.025	0.600	2.000	3185	320	0.50		
	6.00	4	50	0.030	0.600	2.400	2655	320	0.50		
	8.00	4	50	0.040	0.600	3.200	1990	320	0.50		
	10.00	4	50	0.050	0.600	4.000	1590	320	0.50		
	12.00	4	50	0.060	0.600	4.800	1325	320	0.50		
	Steel < 850 N/mm ²	2.00	4	180	0.020	0.600	0.800	28650	2290	0.50	
		3.00	4	180	0.025	0.600	1.200	19100	1910	0.50	
		4.00	4	180	0.040	0.600	1.600	14325	2290	0.50	
5.00		4	180	0.045	0.600	2.000	11460	2065	0.50		
6.00		4	180	0.060	0.600	2.400	9550	2290	0.50		
8.00		4	180	0.070	0.600	3.200	7160	2005	0.50		
10.00		4	180	0.090	0.600	4.000	5730	2065	0.50		
12.00		4	180	0.110	0.600	4.800	4775	2100	0.50		

Application	Material	d1 [mm]	z	v _r [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]	
	Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571]	2.00	4	160	0.030	0.100	0.100	1.99	25595	3070	45°	
		3.00	4	160	0.040	0.120	0.120	3.00	16975	2715	45°	
		4.00	4	160	0.060	0.120	0.120	4.00	12730	3055	45°	
		5.00	4	160	0.070	0.160	0.160	5.00	10185	2850	45°	
		6.00	4	160	0.090	0.180	0.180	6.00	8490	3055	45°	
		8.00	4	160	0.110	0.200	0.200	7.99	6375	2805	45°	
		10.00	4	160	0.140	0.240	0.240	9.97	5110	2860	45°	
		12.00	4	160	0.170	0.260	0.260	11.96	4260	2895	45°	
		Inox medium [Cr-Ni-Mo+/1.4539] Duplex steel [17-4 PH]	2.00	4	140	0.030	0.100	0.100	1.99	22395	2685	45°
			3.00	4	140	0.040	0.120	0.120	3.00	14855	2375	45°
			4.00	4	140	0.050	0.120	0.120	4.00	11140	2230	45°
5.00	4		140	0.060	0.160	0.160	5.00	8915	2140	45°		
6.00	4		140	0.080	0.180	0.180	6.00	7425	2375	45°		
8.00	4		140	0.100	0.200	0.200	7.99	5575	2230	45°		
10.00	4		140	0.130	0.240	0.240	9.97	4470	2325	45°		
12.00	4		140	0.150	0.260	0.260	11.96	3725	2235	45°		
Inox difficile [Cr-Ni-Mo+//1.4529] Heat resistant steel [1.4841]	2.00		4	110	0.020	0.100	0.100	1.99	17595	1410	45°	
	3.00		4	110	0.030	0.120	0.120	3.00	11670	1400	45°	
	4.00		4	110	0.040	0.120	0.120	4.00	8755	1400	45°	
	5.00	4	110	0.050	0.160	0.160	5.00	7005	1400	45°		
	6.00	4	110	0.060	0.180	0.180	6.00	5835	1400	45°		
	8.00	4	110	0.080	0.200	0.200	7.99	4380	1400	45°		
	10.00	4	110	0.100	0.240	0.240	9.97	3510	1405	45°		
	12.00	4	110	0.120	0.260	0.260	11.96	2930	1405	45°		
	Steel < 850 N/mm ²	2.00	4	263	0.040	0.100	0.100	1.99	42070	6730	45°	
		3.00	4	396	0.050	0.120	0.120	3.00	42015	8405	45°	
		4.00	4	400	0.080	0.120	0.120	4.00	31830	10185	45°	
5.00		4	400	0.090	0.160	0.160	5.00	25465	9165	45°		
6.00		4	400	0.120	0.180	0.180	6.00	21220	10185	45°		
8.00		4	400	0.140	0.200	0.200	7.99	15935	8925	45°		
10.00		4	400	0.180	0.240	0.240	9.97	12770	9195	45°		
12.00		4	400	0.220	0.260	0.260	11.96	10645	9370	45°		

Corner radius end mills Torocut


Tolerance r 0/+0.03, 6xd



HM
MG10

λ 40°
 γ 5°


Vario

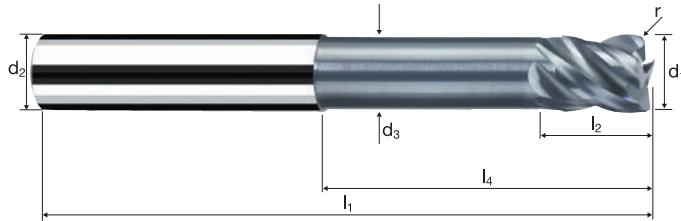

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56			Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
-------------	----------------	-----------------	-----------------	--------------	--	--	-------------------	----------------	--------------------------------------

Example: Order-N°.											POLYCHROM	
											P7344	
\emptyset Code	d_1 e8	d_2 h6	d_3	l_1	l_2	l_3	l_4	r 0/+0.03	α	z		
138	2.00	6.00	1.90	66	3.00	12.00	20.31	0.200	5.9°	4	●	
178	3.00	6.00	2.80	66	4.00	18.00	24.63	0.200	3.7°	4	●	
218	4.00	6.00	3.70	69	5.00	24.00	28.95	0.200	2.1°	4	●	
258	5.00	6.00	4.60	75	6.00	30.00	33.27	0.200	0.9°	4	●	
297	6.00	6.00	5.50	80	7.00	42.34	43.00	0.200	0.0°	4	●	
385	8.00	8.00	7.40	90	9.00	52.29	53.00	0.200	0.0°	4	●	
445	10.00	10.00	9.20	105	11.00	63.20	64.00	0.200	0.0°	4	●	
496	12.00	12.00	11.00	120	13.00	73.13	74.00	0.200	0.0°	4	●	
140	2.00	6.00	1.90	66	3.00	12.00	20.31	0.500	6.0°	4	●	
180	3.00	6.00	2.80	66	4.00	18.00	24.63	0.500	3.7°	4	●	
220	4.00	6.00	3.70	69	5.00	24.00	28.95	0.500	2.1°	4	●	
260	5.00	6.00	4.60	75	6.00	30.00	33.27	0.500	0.9°	4	●	
300	6.00	6.00	5.50	80	7.00	42.34	43.00	0.500	0.0°	4	●	
388	8.00	8.00	7.40	90	9.00	52.29	53.00	0.500	0.0°	4	●	
448	10.00	10.00	9.20	105	11.00	63.20	64.00	0.500	0.0°	4	●	
498	12.00	12.00	11.00	120	13.00	73.13	74.00	0.500	0.0°	4	●	

Application



Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
4.00	4	100	0.030	0.600	1.600	3.83	8310	995	1.00
5.00	4	100	0.040	0.600	2.000	4.83	6590	1055	1.00
6.00	4	100	0.045	0.600	2.400	5.83	5460	985	1.00
8.00	4	100	0.060	0.600	3.200	7.83	4065	975	1.00
10.00	4	100	0.080	0.600	4.000	9.83	3240	1035	1.00
12.00	4	100	0.095	0.600	4.800	11.83	2690	1020	1.00

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
4.00	4	80	0.025	0.600	1.600	3.83	6650	665	1.00
5.00	4	80	0.035	0.600	2.000	4.83	5270	740	1.00
6.00	4	80	0.040	0.600	2.400	5.83	4370	700	1.00
8.00	4	80	0.055	0.600	3.200	7.83	3250	715	1.00
10.00	4	80	0.070	0.600	4.000	9.83	2590	725	1.00
12.00	4	80	0.085	0.600	4.800	11.83	2155	730	1.00

Inox difficile
[Cr-Ni-Mo+//1.4529]
Heat resistant steel
[1.4841]




d1 [mm]	z	v _c [m/min]	f _c [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
4.00	4	55	0.020	0.600	1.600	3.83	4570	365	1.00
5.00	4	55	0.030	0.600	2.000	4.83	3625	435	1.00
6.00	4	55	0.030	0.600	2.400	5.83	3005	360	1.00
8.00	4	55	0.040	0.600	3.200	7.83	2235	360	1.00
10.00	4	55	0.055	0.600	4.000	9.83	1780	390	1.00
12.00	4	55	0.065	0.600	4.800	11.83	1480	385	1.00

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
4.00	4	200	0.040	0.600	1.600	3.83	16620	2660	1.00
5.00	4	200	0.050	0.600	2.000	4.83	13180	2635	1.00
6.00	4	200	0.060	0.600	2.400	5.83	10920	2620	1.00
8.00	4	200	0.080	0.600	3.200	7.83	8130	2600	1.00
10.00	4	200	0.105	0.600	4.000	9.83	6475	2720	1.00
12.00	4	200	0.125	0.600	4.800	11.83	5380	2690	1.00

Application



Material

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
4.00	4	160	0.060	0.180	0.180	3.97	12830	3080	45°
5.00	4	160	0.080	0.240	0.240	4.99	10205	3265	45°
6.00	4	160	0.090	0.270	0.270	6.00	8490	3055	45°
8.00	4	160	0.120	0.300	0.300	8.00	6365	3055	45°
10.00	4	160	0.160	0.360	0.360	9.99	5100	3265	45°
12.00	4	160	0.190	0.390	0.390	11.98	4250	3230	45°

Inox medium
[Cr-Ni-Mo+/1.4539]
Duplex steel
[17-4 PH]



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
4.00	4	140	0.050	0.180	0.180	3.97	11225	2245	45°
5.00	4	140	0.070	0.240	0.240	4.99	8930	2500	45°
6.00	4	140	0.080	0.270	0.270	6.00	7425	2375	45°
8.00	4	140	0.110	0.300	0.300	8.00	5570	2450	45°
10.00	4	140	0.140	0.360	0.360	9.99	4460	2500	45°
12.00	4	140	0.170	0.390	0.390	11.98	3720	2530	45°

Inox difficile
[Cr-Ni-Mo+//1.4529]
Heat resistant steel
[1.4841]



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
4.00	4	110	0.040	0.180	0.180	3.97	8820	1410	45°
5.00	4	110	0.060	0.240	0.240	4.99	7015	1685	45°
6.00	4	110	0.060	0.270	0.270	6.00	5835	1400	45°
8.00	4	110	0.080	0.300	0.300	8.00	4375	1400	45°
10.00	4	110	0.110	0.360	0.360	9.99	3505	1540	45°
12.00	4	110	0.130	0.390	0.390	11.98	2925	1520	45°

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
4.00	4	400	0.080	0.180	0.180	3.97	32070	10265	45°
5.00	4	400	0.100	0.240	0.240	4.99	25515	10205	45°
6.00	4	400	0.120	0.270	0.270	6.00	21220	10185	45°
8.00	4	400	0.160	0.300	0.300	8.00	15915	10185	45°
10.00	4	400	0.210	0.360	0.360	9.99	12745	10705	45°
12.00	4	400	0.250	0.390	0.390	11.98	10630	10630	45°

Corner radius end mills Torocut


Tolerance r 0/+0.03, 6xd



HM
MG10 λ 40°
 γ 5°






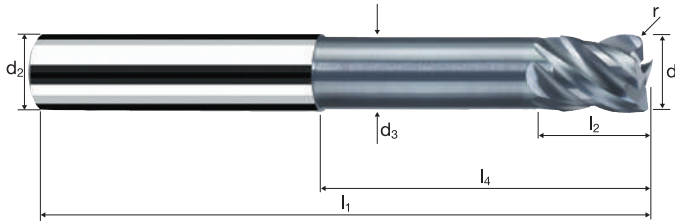


Vario





Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56		Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
--------------------	-----------------------	------------------------	------------------------	---------------------	--	--------------------------	-----------------------	---

Example: Order-N°.											POLYCHROM	
											P7344	
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	α	z		
222	4.00	6.00	3.70	69	5.00	24.00	28.95	1.000	2.1°	4	●	
262	5.00	6.00	4.60	75	6.00	30.00	33.27	1.000	1.0°	4	●	
302	6.00	6.00	5.50	80	7.00	42.34	43.00	1.000	0.0°	4	●	
391	8.00	8.00	7.40	90	9.00	52.29	53.00	1.000	0.0°	4	●	
450	10.00	10.00	9.20	105	11.00	63.20	64.00	1.000	0.0°	4	●	
501	12.00	12.00	11.00	120	13.00	73.13	74.00	1.000	0.0°	4	●	

Application	Material	d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
	Hardened tool steel 48 - 52 HRC  H	2.00	4	140	0.070	0.060	1.500	22280	6240	0.6
		3.00	4	140	0.105	0.089	2.250	14855	6240	1.2
		4.00	4	140	0.140	0.140	3.000	11140	6240	2.6
		5.00	4	140	0.175	0.175	3.750	8915	6240	4.1
		6.00	6	105	0.147	0.210	4.500	5570	4915	4.6
		8.00	6	105	0.196	0.280	6.000	4180	4915	8.3
		10.00	6	105	0.245	0.350	7.500	3340	4915	12.9
		12.00	6	105	0.294	0.420	9.000	2785	4915	18.6
		16.00	6	105	0.392	0.560	12.000	2090	4915	33.0
			Hardened tool steel 52 - 56 HRC  H	2.00	4	120	0.070	0.060	1.500	19100
3.00	4			120	0.105	0.089	2.250	12730	5350	1.1
4.00	4			120	0.140	0.140	3.000	9550	5350	2.2
5.00	4			120	0.175	0.175	3.750	7640	5350	3.5
6.00	6			90	0.147	0.210	4.500	4775	4210	4.0
8.00	6			90	0.196	0.280	6.000	3580	4210	7.1
10.00	6			90	0.245	0.350	7.500	2865	4210	11.1
12.00	6			90	0.294	0.420	9.000	2385	4210	15.9
16.00	6			90	0.392	0.560	12.000	1790	4210	28.3
	Hardened tool steel 56 - 60 HRC  H			2.00	4	90	0.054	0.051	1.500	14325
		3.00	4	90	0.081	0.077	2.250	9550	3095	0.5
		4.00	4	90	0.108	0.120	3.000	7160	3095	1.1
		5.00	4	90	0.135	0.150	3.750	5730	3095	1.7
		6.00	6	80	0.144	0.180	4.500	4245	3665	3.0
		8.00	6	70	0.168	0.240	6.000	2785	2805	4.0
		10.00	6	60	0.180	0.300	7.500	1910	2065	4.6
		12.00	6	60	0.216	0.360	9.000	1590	2065	6.7
		16.00	6	50	0.240	0.480	12.000	995	1430	8.3
			Hardened tool steel > 60 HRC  H	2.00	4	70	0.045	0.050	1.500	11140
3.00	4			70	0.068	0.075	2.250	7425	2020	0.3
4.00	4			70	0.090	0.100	3.000	5570	2005	0.6
5.00	4			70	0.113	0.125	3.750	4455	2015	0.9
6.00	6			65	0.120	0.150	4.500	3450	2485	1.7
8.00	6			55	0.140	0.200	6.000	2190	1840	2.2
10.00	6			50	0.150	0.250	7.500	1590	1430	2.7
12.00	6			50	0.180	0.300	9.000	1325	1430	3.9
16.00	6			40	0.200	0.400	12.000	795	955	4.6
	High speed steel, hardened 64 - 70 HRC  H			2.00	4	40	0.024	0.040	1.500	6365
		3.00	4	40	0.036	0.060	2.250	4245	610	0.1
		4.00	4	40	0.048	0.080	3.000	3185	610	0.1
		5.00	4	40	0.060	0.100	3.750	2545	610	0.2
		6.00	6	35	0.063	0.120	4.500	1855	700	0.4
		8.00	6	30	0.072	0.160	6.000	1195	515	0.5
		10.00	6	30	0.090	0.200	7.500	955	515	0.8
		12.00	6	30	0.108	0.240	9.000	795	515	1.1
		16.00	6	25	0.120	0.320	12.000	495	360	1.4

High feed end mills XFeed-H


Cylindrical neck, 3xd

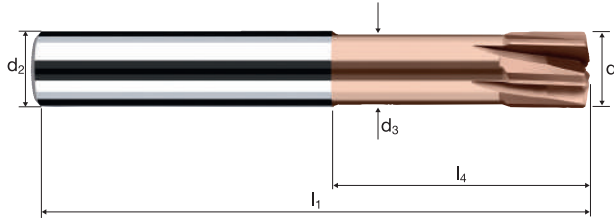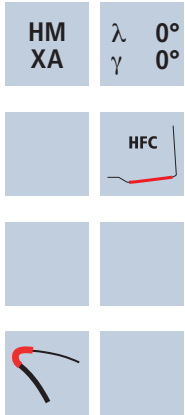

				HRC 48-56	HRC 56-60	HRC > 60			HSS
--	--	--	--	--------------	--------------	-------------	--	--	-----

Example: Order-N°.												DURO-Si
												H7610
Coating: H Article-N°: 7610 ø-Code: 100												
Ø Code	d ₁ e8	d ₂ h5	d ₃	l ₁	l ₃	l ₄	ap _{max}	R _{theo.}	α	z		
100	1.00	6.00	0.95	57	3.00	13.08	0.04	0.09	11.5°	4	●	
140	2.00	6.00	1.90	57	6.00	14.31	0.08	0.18	8.5°	4	●	
180	3.00	6.00	2.80	57	9.00	15.63	0.12	0.27	6.0°	4	●	
220	4.00	6.00	3.70	57	12.00	16.95	0.16	0.36	3.8°	4	●	
260	5.00	6.00	4.60	57	15.00	18.27	0.20	0.45	1.8°	4	●	
300	6.00	6.00	5.50	57	19.34	20.00	0.25	0.54	0.0°	6	●	
391	8.00	8.00	7.40	63	25.29	26.00	0.33	0.72	0.0°	6	●	
450	10.00	10.00	9.20	72	30.20	31.00	0.41	0.90	0.0°	6	●	
501	12.00	12.00	11.00	83	36.13	37.00	0.50	1.08	0.0°	6	●	
610	16.00	16.00	15.00	92	42.13	43.00	0.69	1.44	0.0°	6	●	

Application







Material





Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Steel
1300 - 1500 N/mm²



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC





Hardened tool steel
56 - 60 HRC

Hardened tool steel
> 60 HRC



Cast iron
(lamellar / spheroidal)

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
2.00	4	250	0.135	0.050	1.200	39790	21485	1.3
3.00	4	250	0.200	0.080	1.800	26525	21220	3.1
4.00	4	250	0.265	0.120	2.400	19895	21090	6.1
5.00	4	250	0.335	0.160	3.000	15915	21325	10.2
6.00	4	250	0.400	0.200	3.600	13265	21220	15.3
8.00	4	250	0.535	0.250	4.800	9945	21285	25.5
10.00	4	250	0.665	0.320	6.000	7960	21170	40.6
12.00	4	250	0.800	0.400	7.200	6630	21220	61.1
16.00	4	250	1.065	0.480	9.600	4975	21190	97.6
2.00	4	220	0.115	0.050	1.200	35015	16105	1.0
3.00	4	220	0.170	0.080	1.800	23345	15875	2.3
4.00	4	220	0.225	0.120	2.400	17505	15755	4.5
5.00	4	220	0.285	0.160	3.000	14005	15965	7.7
6.00	4	220	0.340	0.200	3.600	11670	15875	11.4
8.00	4	220	0.455	0.250	4.800	8755	15930	19.1
10.00	4	220	0.565	0.320	6.000	7005	15825	30.4
12.00	4	220	0.680	0.400	7.200	5835	15875	45.7
16.00	4	220	0.905	0.480	9.600	4375	15845	73.0
2.00	4	200	0.105	0.050	1.200	31830	13370	0.8
3.00	4	200	0.155	0.070	1.800	21220	13155	1.7
4.00	4	200	0.205	0.110	2.400	15915	13050	3.4
5.00	4	200	0.260	0.140	3.000	12730	13240	5.6
6.00	4	200	0.310	0.180	3.600	10610	13155	8.5
8.00	4	200	0.415	0.230	4.800	7960	13210	14.6
10.00	4	200	0.520	0.290	6.000	6365	13240	23.0
12.00	4	200	0.625	0.360	7.200	5305	13265	34.4
16.00	4	200	0.830	0.430	9.600	3980	13210	54.5
2.00	4	160	0.060	0.070	1.200	25465	6110	0.5
3.00	4	160	0.090	0.110	1.800	16975	6110	1.2
4.00	4	160	0.120	0.140	2.400	12730	6110	2.1
5.00	4	160	0.150	0.180	3.000	10185	6110	3.3
6.00	4	160	0.180	0.210	3.600	8490	6110	4.6
8.00	4	160	0.240	0.280	4.800	6365	6110	8.2
10.00	4	160	0.300	0.350	6.000	5095	6110	12.8
12.00	4	160	0.360	0.420	7.200	4245	6110	18.5
16.00	4	160	0.480	0.560	9.600	3185	6110	32.9
2.00	4	140	0.050	0.070	1.200	22280	4455	0.4
3.00	4	140	0.075	0.110	1.800	14855	4455	0.9
4.00	4	140	0.100	0.140	2.400	11140	4455	1.5
5.00	4	140	0.125	0.180	3.000	8915	4455	2.4
6.00	4	140	0.150	0.210	3.600	7425	4455	3.4
8.00	4	140	0.200	0.280	4.800	5570	4455	6.0
10.00	4	140	0.250	0.350	6.000	4455	4455	9.4
12.00	4	140	0.300	0.420	7.200	3715	4455	13.5
16.00	4	140	0.400	0.560	9.600	2785	4455	24.0
2.00	4	100	0.030	0.060	1.200	15915	1910	0.1
3.00	4	100	0.045	0.090	1.800	10610	1910	0.3
4.00	4	100	0.060	0.120	2.400	7960	1910	0.6
5.00	4	100	0.075	0.150	3.000	6365	1910	0.9
6.00	4	100	0.090	0.180	3.600	5305	1910	1.2
8.00	4	100	0.120	0.240	4.800	3980	1910	2.2
10.00	4	100	0.150	0.300	6.000	3185	1910	3.4
12.00	4	100	0.180	0.360	7.200	2655	1910	5.0
16.00	4	100	0.240	0.480	9.600	1990	1910	8.8
2.00	4	60	0.020	0.050	1.200	9550	765	0.0
3.00	4	60	0.030	0.075	1.800	6365	765	0.1
4.00	4	60	0.040	0.100	2.400	4775	765	0.2
5.00	4	60	0.050	0.125	3.000	3820	765	0.3
6.00	4	60	0.060	0.150	3.600	3185	765	0.4
8.00	4	60	0.080	0.200	4.800	2385	765	0.7
10.00	4	60	0.100	0.250	6.000	1910	765	1.1
12.00	4	60	0.120	0.300	7.200	1590	765	1.7
16.00	4	60	0.160	0.400	9.600	1195	765	2.9
2.00	4	250	0.135	0.050	1.200	39790	21485	1.3
3.00	4	250	0.200	0.080	1.800	26525	21220	3.1
4.00	4	250	0.265	0.120	2.400	19895	21090	6.1
5.00	4	250	0.335	0.160	3.000	15915	21325	10.2
6.00	4	250	0.400	0.200	3.600	13265	21220	15.3
8.00	4	250	0.535	0.250	4.800	9945	21285	25.5
10.00	4	250	0.665	0.320	6.000	7960	21170	40.6
12.00	4	250	0.800	0.400	7.200	6630	21220	61.1
16.00	4	250	1.065	0.480	9.600	4975	21190	97.6

High feed end mills XFeed


Cylindrical neck, 3xd

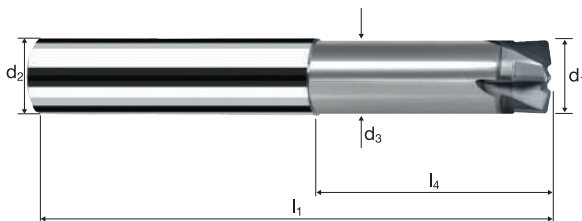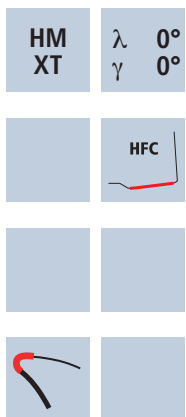

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	HSS GG(G)
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	----------------	--------------

Example: Order-Nº. Coating: X Article-Nº: 7600 ø-Code: 100												X-AL
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₃	l ₄	ap _{max}	R _{theo.}	α	z		X7600
100	1.00	6.00	0.95	57	3.00	13.08	0.04	0.09	11.5°	4		●
140	2.00	6.00	1.90	57	6.00	14.31	0.08	0.18	8.5°	4		●
180	3.00	6.00	2.80	57	9.00	15.63	0.12	0.27	6.0°	4		●
220	4.00	6.00	3.70	57	12.00	16.95	0.16	0.36	3.8°	4		●
260	5.00	6.00	4.60	57	15.00	18.27	0.20	0.45	1.8°	4		●
300	6.00	6.00	5.50	57	19.34	20.00	0.25	0.54	0.0°	4		●
391	8.00	8.00	7.40	63	25.29	26.00	0.33	0.72	0.0°	4		●
450	10.00	10.00	9.20	72	30.20	31.00	0.41	0.90	0.0°	4		●
501	12.00	12.00	11.00	83	36.13	37.00	0.50	1.08	0.0°	4		●
610	16.00	16.00	15.00	92	42.13	43.00	0.69	1.44	0.0°	4		●

Application





Material


Steel
850 - 1100 N/mm²



 



Steel
1100 - 1300 N/mm²



 

Steel
1300 - 1500 N/mm²


 

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	250	0.315	0.240	3.600	13265	16710	14.4
8.00	4	250	0.420	0.320	4.800	9945	16710	25.7
10.00	4	250	0.525	0.400	6.000	7960	16710	40.1
12.00	4	250	0.630	0.480	7.200	6630	16710	57.8
16.00	4	250	0.695	0.560	9.600	4975	13825	74.3
6.00	4	220	0.270	0.240	3.600	11670	12605	10.9
8.00	4	220	0.355	0.320	4.800	8755	12430	19.1
10.00	4	220	0.445	0.400	6.000	7005	12465	29.9
12.00	4	220	0.535	0.480	7.200	5835	12490	43.2
16.00	4	220	0.590	0.560	9.600	4375	10330	55.5
6.00	4	200	0.245	0.220	3.600	10610	10400	8.2
8.00	4	200	0.330	0.290	4.800	7960	10505	14.6
10.00	4	200	0.410	0.360	6.000	6365	10440	22.6
12.00	4	200	0.490	0.430	7.200	5305	10400	32.2
16.00	4	200	0.540	0.500	9.600	3980	8595	41.3
6.00	4	160	0.180	0.210	3.600	8490	6110	4.6
8.00	4	160	0.240	0.280	4.800	6365	6110	8.2
10.00	4	160	0.300	0.350	6.000	5095	6110	12.8
12.00	4	160	0.360	0.420	7.200	4245	6110	18.5
16.00	4	160	0.480	0.560	9.600	3185	6110	32.9
6.00	4	140	0.150	0.210	3.600	7425	4455	3.4
8.00	4	140	0.200	0.280	4.800	5570	4455	6.0
10.00	4	140	0.250	0.350	6.000	4455	4455	9.4
12.00	4	140	0.300	0.420	7.200	3715	4455	13.5
16.00	4	140	0.400	0.560	9.600	2785	4455	24.0
6.00	4	100	0.090	0.180	3.600	5305	1910	1.2
8.00	4	100	0.120	0.240	4.800	3980	1910	2.2
10.00	4	100	0.150	0.300	6.000	3185	1910	3.4
12.00	4	100	0.180	0.360	7.200	2655	1910	5.0
16.00	4	100	0.240	0.480	9.600	1990	1910	8.8

High feed end mills XFeed

Cylindrical neck, 3xd




HM XT	λ 0° γ -10°
	HFC

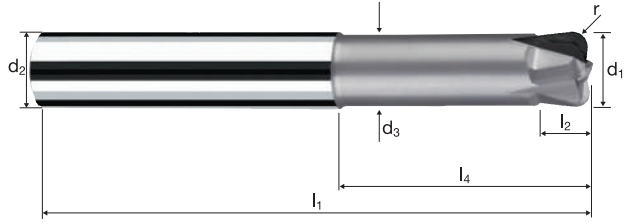

Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60		HSS GG(G)
----------------	-----------------	-----------------	--------------	--------------	-------------	--	--------------

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	z	Example: Order-N°.	
										Coating X	Article-N° 7620
											X-AL
											X7620
300	6.00	6.00	5.50	57	3.00	19.34	20.00	1.000	4		●
304	6.00	6.00	5.50	57	3.00	19.34	20.00	1.500	4		●
391	8.00	8.00	7.40	63	4.00	25.29	26.00	1.500	4		●
395	8.00	8.00	7.40	63	4.00	25.29	26.00	2.000	4		●
450	10.00	10.00	9.20	72	5.00	30.20	31.00	2.000	4		●
457	10.00	10.00	9.20	72	5.00	30.20	31.00	2.500	4		●
501	12.00	12.00	11.00	83	6.00	36.13	37.00	2.500	4		●
507	12.00	12.00	11.00	83	6.00	36.13	37.00	3.000	4		●
610	16.00	16.00	15.00	92	8.00	42.13	43.00	3.000	4		●

Application



Material

Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



High speed steel,
hardened
64 - 70 HRC




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
2.00	4	130	0.070	0.060	1.500	20690	5795	0.5
3.00	4	130	0.105	0.089	2.250	13795	5795	1.2
4.00	4	130	0.140	0.140	3.000	10345	5795	2.4
5.00	4	130	0.175	0.175	3.750	8275	5795	3.8
6.00	6	95	0.147	0.210	4.500	5040	4445	4.2
8.00	6	95	0.196	0.280	6.000	3780	4445	7.5
10.00	6	95	0.245	0.350	7.500	3025	4445	11.7
12.00	6	95	0.294	0.420	9.000	2520	4445	16.8
16.00	6	95	0.392	0.560	12.000	1890	4445	29.9
2.00	4	110	0.070	0.060	1.500	17505	4900	0.4
3.00	4	110	0.105	0.089	2.250	11670	4900	1.0
4.00	4	110	0.140	0.140	3.000	8755	4900	2.1
5.00	4	110	0.175	0.175	3.750	7005	4900	3.2
6.00	6	80	0.147	0.210	4.500	4245	3745	3.5
8.00	6	80	0.196	0.280	6.000	3185	3745	6.3
10.00	6	80	0.245	0.350	7.500	2545	3745	9.8
12.00	6	80	0.294	0.420	9.000	2120	3745	14.1
16.00	6	80	0.392	0.560	12.000	1590	3745	25.2
2.00	4	65	0.054	0.051	1.500	10345	2235	0.2
3.00	4	65	0.081	0.077	2.250	6895	2235	0.4
4.00	4	65	0.108	0.120	3.000	5175	2235	0.8
5.00	4	65	0.135	0.150	3.750	4140	2235	1.3
6.00	6	65	0.144	0.180	4.500	3450	2980	2.4
8.00	6	65	0.168	0.240	6.000	2585	2605	3.8
10.00	6	65	0.180	0.300	7.500	2070	2235	5.0
12.00	6	65	0.216	0.360	9.000	1725	2235	7.2
16.00	6	50	0.240	0.480	12.000	995	1430	8.3
2.00	4	50	0.045	0.040	1.500	7960	1430	0.1
3.00	4	50	0.068	0.075	2.250	5305	1445	0.2
4.00	4	50	0.090	0.100	3.000	3980	1430	0.4
5.00	4	50	0.113	0.125	3.750	3185	1440	0.7
6.00	6	50	0.120	0.150	4.500	2655	1910	1.3
8.00	6	50	0.140	0.200	6.000	1990	1670	2.0
10.00	6	50	0.150	0.250	7.500	1590	1430	2.7
12.00	6	50	0.180	0.300	9.000	1325	1430	3.9
16.00	6	40	0.200	0.400	12.000	795	955	4.6
2.00	4	30	0.024	0.032	1.500	4775	460	0.0
3.00	4	30	0.036	0.060	2.250	3185	460	0.1
4.00	4	30	0.048	0.080	3.000	2385	460	0.1
5.00	4	30	0.060	0.100	3.750	1910	460	0.2
6.00	6	30	0.063	0.120	4.500	1590	600	0.3
8.00	6	30	0.072	0.160	6.000	1195	515	0.5
10.00	6	30	0.090	0.200	7.500	955	515	0.8
12.00	6	30	0.108	0.240	9.000	795	515	1.1
16.00	6	25	0.120	0.320	12.000	495	360	1.4

High feed end mills XFeed-H

Cylindrical neck, 4.5xd






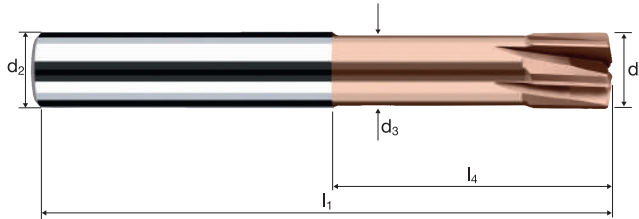






HM	λ	0°
XA	γ	0°
	HFC	



				HRC	HRC	HRC			HSS
				48-56	56-60	> 60			

Ø Code	d ₁ e8	d ₂ h5	d ₃	l ₁	l ₃	l ₄	ap _{max}	R _{theo.}	α	z	DURO-Si	
												H7612
100	1.00	6.00	0.95	61	4.50	14.58	0.04	0.09	10.0°	4	●	
140	2.00	6.00	1.90	61	9.00	17.31	0.08	0.18	6.8°	4	●	
180	3.00	6.00	2.80	61	13.50	20.13	0.12	0.27	4.5°	4	●	
220	4.00	6.00	3.70	66	18.00	22.95	0.16	0.36	2.7°	4	●	
260	5.00	6.00	4.60	66	22.50	25.77	0.20	0.45	1.3°	4	●	
300	6.00	6.00	5.50	69	30.34	31.00	0.25	0.54	0.0°	6	●	
391	8.00	8.00	7.40	80	39.29	40.00	0.33	0.72	0.0°	6	●	
450	10.00	10.00	9.20	90	47.20	48.00	0.41	0.90	0.0°	6	●	
501	12.00	12.00	11.00	105	54.13	55.00	0.50	1.08	0.0°	6	●	
610	16.00	16.00	15.00	125	74.13	75.00	0.69	1.44	0.0°	6	●	


Application	Material	d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
	Hardened tool steel 48 - 52 HRC 	3.00	4	112	0.105	0.069	2.250	11885	4990	0.8
		4.00	4	112	0.140	0.108	3.000	8915	4990	1.6
		5.00	4	112	0.175	0.135	3.750	7130	4990	2.5
		6.00	6	75	0.147	0.162	4.500	3980	3510	2.6
		8.00	6	75	0.196	0.216	6.000	2985	3510	4.5
		10.00	6	75	0.245	0.270	7.500	2385	3510	7.1
		12.00	6	75	0.294	0.324	9.000	1990	3510	10.2
16.00	6	75	0.392	0.432	12.000	1490	3510	18.2		
Hardened tool steel 52 - 56 HRC 	Hardened tool steel 52 - 56 HRC 	3.00	4	90	0.105	0.069	2.250	9550	4010	0.6
		4.00	4	90	0.140	0.108	3.000	7160	4010	1.3
		5.00	4	90	0.175	0.135	3.750	5730	4010	2.0
		6.00	6	60	0.147	0.162	4.500	3185	2805	2.0
		8.00	6	60	0.196	0.216	6.000	2385	2805	3.6
		10.00	6	60	0.245	0.270	7.500	1910	2805	5.7
		12.00	6	60	0.294	0.324	9.000	1590	2805	8.2
16.00	6	60	0.392	0.432	12.000	1195	2805	14.6		
Hardened tool steel 56 - 60 HRC 	Hardened tool steel 56 - 60 HRC 	3.00	4	65	0.081	0.059	2.250	6895	2235	0.3
		4.00	4	65	0.108	0.092	3.000	5175	2235	0.6
		5.00	4	65	0.135	0.115	3.750	4140	2235	1.0
		6.00	6	65	0.144	0.138	4.500	3450	2980	1.9
		8.00	6	65	0.168	0.184	6.000	2585	2605	2.9
		10.00	6	65	0.180	0.230	7.500	2070	2235	3.9
		12.00	6	65	0.216	0.276	9.000	1725	2235	5.6
16.00	6	50	0.240	0.368	12.000	995	1430	6.3		
Hardened tool steel > 60 HRC 	Hardened tool steel > 60 HRC 	3.00	4	50	0.068	0.057	2.250	5305	1445	0.2
		4.00	4	50	0.090	0.076	3.000	3980	1430	0.3
		5.00	4	50	0.113	0.095	3.750	3185	1440	0.5
		6.00	6	50	0.120	0.114	4.500	2655	1910	1.0
		8.00	6	50	0.140	0.152	6.000	1990	1670	1.5
		10.00	6	50	0.150	0.190	7.500	1590	1430	2.0
		12.00	6	50	0.180	0.228	9.000	1325	1430	2.9
16.00	6	30	0.200	0.304	12.000	595	715	2.6		
High speed steel, hardened 64 - 70 HRC 	High speed steel, hardened 64 - 70 HRC 	3.00	4	30	0.036	0.027	2.250	3185	460	0.0
		4.00	4	30	0.048	0.036	3.000	2385	460	0.0
		5.00	4	30	0.060	0.045	3.750	1910	460	0.1
		6.00	6	30	0.063	0.054	4.500	1590	600	0.1
		8.00	6	30	0.072	0.072	6.000	1195	515	0.2
		10.00	6	30	0.090	0.070	7.500	955	515	0.3
		12.00	6	30	0.108	0.084	9.000	795	515	0.4
16.00	6	25	0.120	0.112	12.000	495	360	0.5		

High feed end mills XFeed-H

Cylindrical neck, 6xd




HM	λ	0°
XA	γ	0°
	HFC	

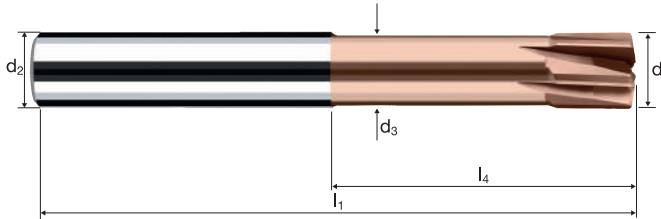

				HRC	HRC	HRC				HSS
				48-56	56-60	> 60				

Example: Order-N°.												DURO-Si
												H7614
												H7614
\emptyset Code	d_1 e8	d_2 h5	d_3	l_1	l_3	l_4	ap_{max}	$R_{theo.}$	α	z		
180	3.00	6.00	2.80	66	18.00	24.63	0.12	0.27	3.7°	4		●
220	4.00	6.00	3.70	69	24.00	28.95	0.16	0.36	2.1°	4		●
260	5.00	6.00	4.60	75	30.00	33.27	0.20	0.45	1.0°	4		●
300	6.00	6.00	5.50	80	42.34	43.00	0.25	0.54	0.0°	6		●
391	8.00	8.00	7.40	90	52.29	53.00	0.33	0.72	0.0°	6		●
450	10.00	10.00	9.20	105	63.20	64.00	0.41	0.90	0.0°	6		●
501	12.00	12.00	11.00	120	73.13	74.00	0.50	1.08	0.0°	6		●
610	16.00	16.00	15.00	135	85.13	86.00	0.69	1.44	0.0°	6		●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●
												●

Application



Material

Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Steel
1300 - 1500 N/mm²



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



Cast iron
(lamellar / spheroidal)



d1 [mm]	z	v _r [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	100	0.200	0.080	1.800	10610	8490	1.2
4.00	4	100	0.265	0.120	2.400	7960	8435	2.4
5.00	4	100	0.335	0.160	3.000	6365	8530	4.1
6.00	4	100	0.400	0.200	3.600	5305	8490	6.1
8.00	4	100	0.535	0.250	4.800	3980	8515	10.2
10.00	4	100	0.665	0.320	6.000	3185	8465	16.3
12.00	4	100	0.800	0.400	7.200	2655	8490	24.4
16.00	4	100	1.065	0.480	9.600	1990	8475	39.1

3.00	4	95	0.170	0.080	1.800	10080	6855	1.0
4.00	4	95	0.225	0.120	2.400	7560	6805	2.0
5.00	4	95	0.285	0.160	3.000	6050	6895	3.3
6.00	4	95	0.340	0.200	3.600	5040	6855	4.9
8.00	4	95	0.455	0.250	4.800	3780	6880	8.3
10.00	4	95	0.565	0.320	6.000	3025	6835	13.1
12.00	4	95	0.680	0.400	7.200	2520	6855	19.7
16.00	4	95	0.905	0.480	9.600	1890	6840	31.5

3.00	4	90	0.155	0.070	1.800	9550	5920	0.7
4.00	4	90	0.205	0.110	2.400	7160	5875	1.6
5.00	4	90	0.260	0.140	3.000	5730	5960	2.5
6.00	4	90	0.310	0.180	3.600	4775	5920	3.8
8.00	4	90	0.415	0.230	4.800	3580	5945	6.6
10.00	4	90	0.520	0.290	6.000	2865	5960	10.4
12.00	4	90	0.625	0.360	7.200	2385	5970	15.5
16.00	4	90	0.830	0.430	9.600	1790	5945	24.5

3.00	4	85	0.120	0.060	1.800	9020	4330	0.5
4.00	4	85	0.160	0.100	2.400	6765	4330	1.0
5.00	4	85	0.200	0.130	3.000	5410	4330	1.7
6.00	4	85	0.240	0.160	3.600	4510	4330	2.5
8.00	4	85	0.320	0.200	4.800	3380	4330	4.2
10.00	4	85	0.400	0.260	6.000	2705	4330	6.8
12.00	4	85	0.480	0.320	7.200	2255	4330	10.0
16.00	4	85	0.640	0.380	9.600	1690	4330	15.8

3.00	4	80	0.090	0.060	1.800	8490	3055	0.3
4.00	4	80	0.120	0.080	2.400	6365	3055	0.6
5.00	4	80	0.150	0.110	3.000	5095	3055	1.0
6.00	4	80	0.180	0.140	3.600	4245	3055	1.5
8.00	4	80	0.240	0.180	4.800	3185	3055	2.6
10.00	4	80	0.300	0.220	6.000	2545	3055	4.0
12.00	4	80	0.360	0.280	7.200	2120	3055	6.2
16.00	4	80	0.480	0.340	9.600	1590	3055	10.0

3.00	4	65	0.055	0.050	1.800	6895	1515	0.1
4.00	4	65	0.075	0.080	2.400	5175	1550	0.3
5.00	4	65	0.095	0.100	3.000	4140	1570	0.5
6.00	4	65	0.110	0.130	3.600	3450	1515	0.7
8.00	4	65	0.150	0.160	4.800	2585	1550	1.2
10.00	4	65	0.185	0.210	6.000	2070	1530	1.9
12.00	4	65	0.225	0.260	7.200	1725	1550	2.9
16.00	4	65	0.300	0.310	9.600	1295	1550	4.6

3.00	4	40	0.045	0.050	1.800	4245	765	0.1
4.00	4	40	0.060	0.070	2.400	3185	765	0.1
5.00	4	40	0.075	0.100	3.000	2545	765	0.2
6.00	4	40	0.090	0.120	3.600	2120	765	0.3
8.00	4	40	0.120	0.150	4.800	1590	765	0.6
10.00	4	40	0.145	0.190	6.000	1275	740	0.8
12.00	4	40	0.175	0.240	7.200	1060	745	1.3
16.00	4	40	0.235	0.290	9.600	795	750	2.1


3.00	4	120	0.200	0.080	1.800	12730	10185	1.5
4.00	4	120	0.265	0.120	2.400	9550	10120	2.9
5.00	4	120	0.335	0.160	3.000	7640	10235	4.9
6.00	4	120	0.400	0.200	3.600	6365	10185	7.3
8.00	4	120	0.535	0.250	4.800	4775	10220	12.3
10.00	4	120	0.665	0.320	6.000	3820	10160	19.5
12.00	4	120	0.800	0.400	7.200	3185	10185	29.3
16.00	4	120	1.065	0.480	9.600	2385	10170	46.9

High feed end mills XFeed

Cylindrical neck, 6xd




HM XT	λ 0° γ 0°
	HFC

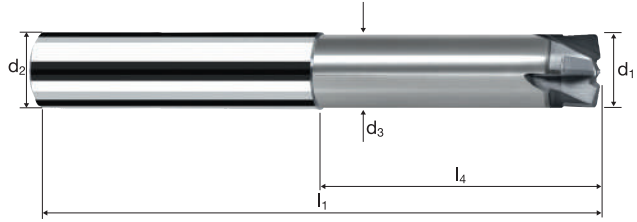

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	HSS GG(G)
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	----------------	--------------




Example: Order-N°.												X-AL
Coating: X Article-N°: 7604 ø-Code: 180												X7604
Ø Code	d_1 e8	d_2 h6	d_3	l_1	l_3	l_4	ap_{max}	$R_{theo.}$	α	z		
180	3.00	6.00	2.80	66	18.00	24.63	0.12	0.27	3.7°	4		●
220	4.00	6.00	3.70	69	24.00	28.95	0.16	0.36	2.1°	4		●
260	5.00	6.00	4.60	75	30.00	33.27	0.20	0.45	1.0°	4		●
300	6.00	6.00	5.50	80	42.34	43.00	0.25	0.54	0.0°	4		●
391	8.00	8.00	7.40	90	52.29	53.00	0.33	0.72	0.0°	4		●
450	10.00	10.00	9.20	105	63.20	64.00	0.41	0.90	0.0°	4		●
501	12.00	12.00	11.00	120	73.13	74.00	0.50	1.08	0.0°	4		●
610	16.00	16.00	15.00	135	85.13	86.00	0.69	1.44	0.0°	4		●

Application







Material





Steel
850 - 1100 N/mm²


Steel
1100 - 1300 N/mm²



Steel
1300 - 1500 N/mm²

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	4	85	0.315	0.240	3.600	4510	5680	4.9
8.00	4	85	0.420	0.320	4.800	3380	5680	8.7
10.00	4	85	0.525	0.400	6.000	2705	5680	13.6
12.00	4	85	0.630	0.480	7.200	2255	5680	19.6
16.00	4	85	0.695	0.560	9.600	1690	4700	25.3
6.00	4	80	0.270	0.240	3.600	4245	4585	4.0
8.00	4	80	0.355	0.320	4.800	3185	4520	6.9
10.00	4	80	0.445	0.400	6.000	2545	4535	10.9
12.00	4	80	0.535	0.480	7.200	2120	4540	15.7
16.00	4	80	0.590	0.560	9.600	1590	3755	20.2
6.00	4	75	0.245	0.220	3.600	3980	3900	3.1
8.00	4	75	0.330	0.290	4.800	2985	3940	5.5
10.00	4	75	0.410	0.360	6.000	2385	3915	8.5
12.00	4	75	0.490	0.430	7.200	1990	3900	12.1
16.00	4	75	0.540	0.500	9.600	1490	3225	15.5
6.00	4	70	0.190	0.190	3.600	3715	2820	1.9
8.00	4	70	0.250	0.260	4.800	2785	2785	3.5
10.00	4	70	0.315	0.320	6.000	2230	2805	5.4
12.00	4	70	0.380	0.380	7.200	1855	2820	7.7
16.00	4	70	0.415	0.450	9.600	1395	2310	10.0
6.00	4	65	0.140	0.170	3.600	3450	1930	1.2
8.00	4	65	0.190	0.220	4.800	2585	1965	2.1
10.00	4	65	0.235	0.280	6.000	2070	1945	3.3
12.00	4	65	0.285	0.340	7.200	1725	1965	4.8
16.00	4	65	0.315	0.390	9.600	1295	1630	6.1
6.00	4	55	0.090	0.160	3.600	2920	1050	0.6
8.00	4	55	0.120	0.210	4.800	2190	1050	1.1
10.00	4	55	0.145	0.260	6.000	1750	1015	1.6
12.00	4	55	0.175	0.310	7.200	1460	1020	2.3
16.00	4	55	0.195	0.360	9.600	1095	855	2.9

High feed end mills XFeed

Cylindrical neck, 6xd




HM XT	λ 0° γ -10°
	HFC

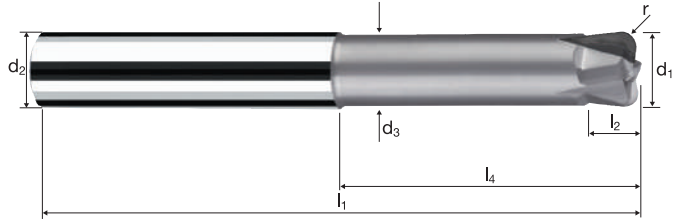

Rm	Rm	Rm	HRC	HRC	HRC		HSS
850-1100	1100-1300	1300-1500	48-56	56-60	> 60		GG(G)

Example: Order-N°.											X-AL
											X7624
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r	α	z	
300	6.00	6.00	5.50	80	3.00	42.34	43.00	1.000	0.0°	4	●
391	8.00	8.00	7.40	90	4.00	52.29	53.00	1.500	0.0°	4	●
450	10.00	10.00	9.20	105	5.00	63.20	64.00	2.000	0.0°	4	●
501	12.00	12.00	11.00	120	6.00	73.13	74.00	2.500	0.0°	4	●
610	16.00	16.00	15.00	135	8.00	85.13	86.00	3.000	0.0°	4	●



Material

Steel
850 - 1100 N/mm²

d1 [mm]	z	v _r [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	4	80	0.200	0.040	1.800	8490	6790	0.5
4.00	4	80	0.265	0.060	2.400	6365	6750	1.0
5.00	4	80	0.335	0.080	3.000	5095	6825	1.6
6.00	4	80	0.400	0.100	3.600	4245	6790	2.4
8.00	4	80	0.535	0.130	4.800	3185	6810	4.3
10.00	4	80	0.665	0.160	6.000	2545	6775	6.5
12.00	4	80	0.800	0.200	7.200	2120	6790	9.8
16.00	4	80	1.065	0.240	9.600	1590	6780	15.6

Steel
1100 - 1300 N/mm²

3.00	4	75	0.170	0.040	1.800	7960	5410	0.4
4.00	4	75	0.225	0.060	2.400	5970	5370	0.8
5.00	4	75	0.285	0.080	3.000	4775	5445	1.3
6.00	4	75	0.340	0.100	3.600	3980	5410	1.9
8.00	4	75	0.455	0.130	4.800	2985	5430	3.4
10.00	4	75	0.565	0.160	6.000	2385	5395	5.2
12.00	4	75	0.680	0.200	7.200	1990	5410	7.8
16.00	4	75	0.905	0.240	9.600	1490	5400	12.4

Steel
1300 - 1500 N/mm²

3.00	4	70	0.155	0.040	1.800	7425	4605	0.3
4.00	4	70	0.205	0.060	2.400	5570	4570	0.7
5.00	4	70	0.260	0.070	3.000	4455	4635	1.0
6.00	4	70	0.310	0.090	3.600	3715	4605	1.5
8.00	4	70	0.415	0.120	4.800	2785	4625	2.7
10.00	4	70	0.520	0.150	6.000	2230	4635	4.2
12.00	4	70	0.625	0.180	7.200	1855	4640	6.0
16.00	4	70	0.830	0.220	9.600	1395	4625	9.8

Hardened tool steel
48 - 52 HRC

3.00	4	65	0.120	0.030	1.800	6895	3310	0.2
4.00	4	65	0.160	0.050	2.400	5175	3310	0.4
5.00	4	65	0.200	0.070	3.000	4140	3310	0.7
6.00	4	65	0.240	0.080	3.600	3450	3310	1.0
8.00	4	65	0.320	0.100	4.800	2585	3310	1.6
10.00	4	65	0.400	0.130	6.000	2070	3310	2.6
12.00	4	65	0.480	0.160	7.200	1725	3310	3.8
16.00	4	65	0.640	0.190	9.600	1295	3310	6.0

Hardened tool steel
52 - 56 HRC

3.00	4	60	0.090	0.030	1.800	6365	2290	0.1
4.00	4	60	0.120	0.040	2.400	4775	2290	0.2
5.00	4	60	0.150	0.060	3.000	3820	2290	0.4
6.00	4	60	0.180	0.070	3.600	3185	2290	0.6
8.00	4	60	0.240	0.090	4.800	2385	2290	1.0
10.00	4	60	0.300	0.110	6.000	1910	2290	1.5
12.00	4	60	0.360	0.140	7.200	1590	2290	2.3
16.00	4	60	0.480	0.170	9.600	1195	2290	3.7

Hardened tool steel
56 - 60 HRC

3.00	4	55	0.055	0.030	1.800	5835	1285	0.1
4.00	4	55	0.075	0.040	2.400	4375	1315	0.1
5.00	4	55	0.095	0.050	3.000	3500	1330	0.2
6.00	4	55	0.110	0.070	3.600	2920	1285	0.3
8.00	4	55	0.150	0.080	4.800	2190	1315	0.5
10.00	4	55	0.185	0.110	6.000	1750	1295	0.9
12.00	4	55	0.225	0.130	7.200	1460	1315	1.2
16.00	4	55	0.300	0.160	9.600	1095	1315	2.0

Hardened tool steel
> 60 HRC

3.00	4	30	0.045	0.030	1.800	3185	575	0.0
4.00	4	30	0.060	0.040	2.400	2385	575	0.1
5.00	4	30	0.075	0.050	3.000	1910	575	0.1
6.00	4	30	0.090	0.060	3.600	1590	575	0.1
8.00	4	30	0.120	0.080	4.800	1195	575	0.2
10.00	4	30	0.145	0.100	6.000	955	555	0.3
12.00	4	30	0.175	0.120	7.200	795	555	0.5
16.00	4	30	0.235	0.150	9.600	595	560	0.8

Cast iron
(lamellar / spheroidal)


3.00	4	95	0.200	0.040	1.800	10080	8065	0.6
4.00	4	95	0.265	0.060	2.400	7560	8015	1.2
5.00	4	95	0.335	0.080	3.000	6050	8105	1.9
6.00	4	95	0.400	0.100	3.600	5040	8065	2.9
8.00	4	95	0.535	0.130	4.800	3780	8090	5.0
10.00	4	95	0.665	0.160	6.000	3025	8045	7.7
12.00	4	95	0.800	0.200	7.200	2520	8065	11.6
16.00	4	95	1.065	0.240	9.600	1890	8050	18.6

High feed end mills XFeed

Cylindrical neck, 9xd



HM XT	λ 0° γ 0°
	HFC

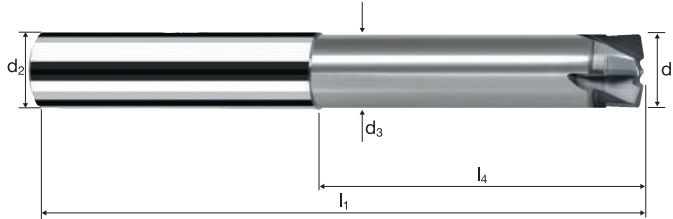


Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	HSS GG(G)
----------	-------------	--------------	--------------	-----------	-----------	----------	-------------	-----------

Example: Order-N°.												X-AL
Coating: X Article-N°: 7608 ø-Code: 180												X7608
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₃	l ₄	ap _{max}	R _{theo.}	α	z		
180	3.00	6.00	2.80	75	27.00	33.63	0.12	0.27	2.7°	4		●
220	4.00	6.00	3.70	80	36.00	40.95	0.16	0.36	1.5°	4		●
260	5.00	6.00	4.60	87	45.00	48.27	0.20	0.45	0.7°	4		●
300	6.00	6.00	5.50	100	62.34	63.00	0.25	0.54	0.0°	4		●
391	8.00	8.00	7.40	120	82.29	83.00	0.33	0.72	0.0°	4		●
450	10.00	10.00	9.20	135	93.20	94.00	0.41	0.90	0.0°	4		●
501	12.00	12.00	11.00	160	113.13	114.00	0.50	1.08	0.0°	4		●
610	16.00	16.00	15.00	180	130.13	131.00	0.69	1.44	0.0°	4		●

Application data for high-performance milling of carbides

Always up to date

Please contact us for the latest application know-how in the field of high-performance milling of carbide and the current cutting data for SpheroCarb, Sphero-CVD and Toro-CVD. The FRAISA application engineers will be happy to advise you.

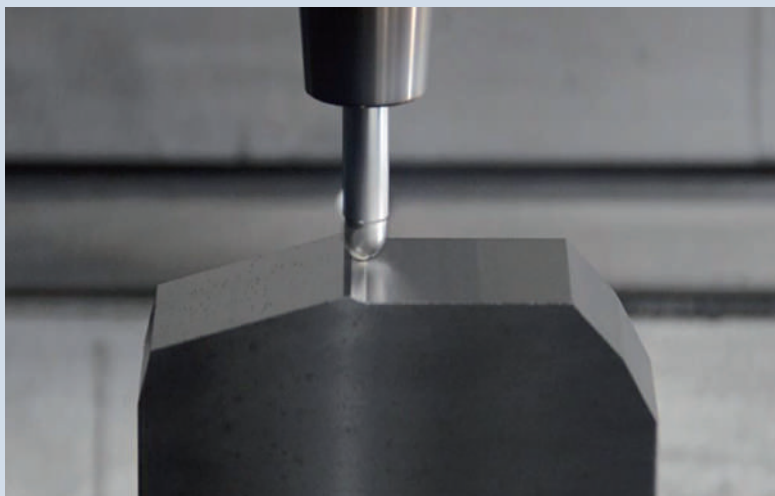

This way to the online product catalogue:

High-performance milling of carbides with Sphero-CVD, SpheroCarb and Toro-CVD or on the FRAISA website at


www.fraisa.com/en/products/end-milling-tools

Ball nose end mills

Tolerance r js8 (\pm), 3xd




HM λ 30°
XA γ -10°

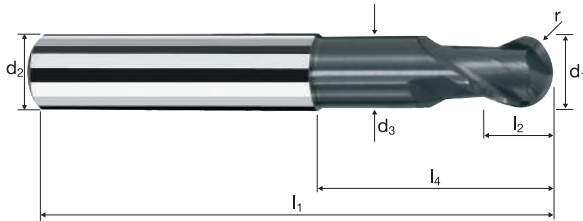

Al Aluminium Cast	Cu Copper	CuZn Brass	C Graphite	HM < 1200 HV	HM < 1600 HV	Ceramics
-------------------------	--------------	---------------	---------------	-----------------	-----------------	----------

Ø Code	d ₁ ±	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r js8	α	z	DIA-C
											Example: Order-N°.
100	1.00	6.00	0.95	57	1.50	3.00	13.08	0.500	11.8°	2	●
120	1.50	6.00	1.40	57	2.00	4.50	13.74	0.750	10.4°	2	●
140	2.00	6.00	1.90	57	3.00	6.00	14.31	1.000	9.0°	2	●
160	2.50	6.00	2.30	57	3.50	7.50	15.06	1.250	7.6°	2	●
180	3.00	6.00	2.80	57	4.00	9.00	15.63	1.500	6.4°	2	●
220	4.00	6.00	3.70	57	5.00	12.00	16.95	2.000	4.0°	2	●
260	5.00	6.00	4.60	57	6.00	15.00	18.27	2.500	2.0°	2	●
300	6.00	6.00	5.50	57	7.00	19.34	20.00	3.000	0.0°	2	●
391	8.00	8.00	7.40	63	9.00	25.29	26.00	4.000	0.0°	2	●
450	10.00	10.00	9.20	72	11.00	30.20	31.00	5.000	0.0°	2	●
501	12.00	12.00	11.00	83	13.00	36.13	37.00	6.000	0.0°	2	●

Application



Material

Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
4.00	2	488	0.020	0.018	0.018	3.70	41980	1680	60°
5.00	2	608	0.025	0.020	0.020	4.61	41980	2100	60°
6.00	2	700	0.030	0.022	0.022	5.52	40365	2420	60°
8.00	2	700	0.040	0.026	0.026	7.34	30355	2430	60°
10.00	2	700	0.040	0.028	0.028	9.14	24380	1950	60°
12.00	2	700	0.050	0.032	0.032	10.96	20330	2035	60°
4.00	2	488	0.020	0.018	0.018	3.70	41980	1680	60°
5.00	2	608	0.025	0.020	0.020	4.61	41980	2100	60°
6.00	2	650	0.025	0.022	0.022	5.52	37480	1875	60°
8.00	2	650	0.035	0.026	0.026	7.34	28190	1975	60°
10.00	2	650	0.035	0.028	0.028	9.14	22635	1585	60°
12.00	2	650	0.045	0.032	0.032	10.96	18880	1700	60°
4.00	2	488	0.015	0.018	0.018	3.70	41980	1260	60°
5.00	2	600	0.020	0.020	0.020	4.61	41430	1655	60°
6.00	2	600	0.025	0.022	0.022	5.52	34600	1730	60°
8.00	2	600	0.030	0.026	0.026	7.34	26020	1560	60°
10.00	2	600	0.030	0.028	0.028	9.14	20895	1255	60°
12.00	2	600	0.040	0.032	0.032	10.96	17425	1395	60°

Ball nose end mills

Cylindrical neck, 3xd




CBN λ 0°
 γ 0°

h5

r


F

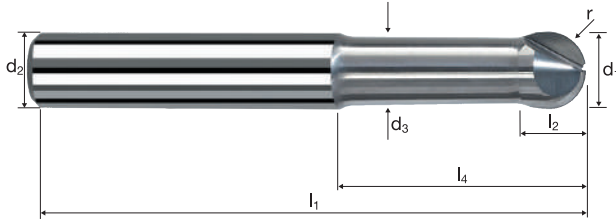

HRC 48-56 HRC 56-60 HRC > 60 HSS

Ø Code	d ₁ 0/-0.01	d ₂ h5	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	β	z	Example: Order-N°.	
											Coating	Article-N°.
											31700	220
220	4.00	6.00	3.70	80	3.20	12.00	16.95	2.000	4°	2	●	
260	5.00	6.00	4.60	80	4.00	15.00	18.27	2.500	2°	2	●	
300	6.00	6.00	5.50	80	4.80	20.00	-	3.000	0°	2	●	
391	8.00	8.00	7.40	100	6.40	26.00	-	4.000	0°	2	●	
450	10.00	10.00	9.20	100	8.00	31.00	-	5.000	0°	2	●	
501	12.00	12.00	11.00	120	9.60	37.00	-	6.000	0°	2	●	

Application



Material

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


Hardened tool steel
> 60 HRC

d1 [mm]	z	v _c [m/min]	f _c [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
4.00	2	433	0.020	0.020	0.040	3.28	42020	1680	0.50
5.00	2	570	0.025	0.026	0.050	4.32	42000	2100	0.50
6.00	2	650	0.030	0.030	0.060	5.34	38745	2325	0.50
8.00	2	650	0.040	0.040	0.080	7.39	27995	2240	0.50
10.00	2	650	0.050	0.030	0.100	9.34	22150	2215	0.50
12.00	2	650	0.060	0.036	0.120	11.37	18195	2185	0.50

4.00	2	433	0.020	0.020	0.040	3.28	42020	1680	0.50
5.00	2	570	0.025	0.026	0.050	4.32	42000	2100	0.50
6.00	2	620	0.030	0.030	0.060	5.34	36955	2215	0.50
8.00	2	620	0.040	0.040	0.080	7.39	26705	2135	0.50
10.00	2	620	0.050	0.030	0.100	9.34	21130	2115	0.50
12.00	2	620	0.060	0.036	0.120	11.37	17355	2085	0.50

4.00	2	433	0.020	0.020	0.040	3.28	42020	1680	0.50
5.00	2	570	0.025	0.026	0.050	4.32	42000	2100	0.50
6.00	2	580	0.030	0.030	0.060	5.34	34575	2075	0.50
8.00	2	580	0.040	0.040	0.080	7.39	24980	2000	0.50
10.00	2	580	0.050	0.030	0.100	9.34	19765	1975	0.50
12.00	2	580	0.060	0.036	0.120	11.37	16235	1950	0.50

Application



Material

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

Hardened tool steel
> 60 HRC

d1 [mm]	z	v _c [m/min]	f _c [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
4.00	2	509	0.020	0.016	0.016	3.86	41975	1680	45°
5.00	2	644	0.025	0.020	0.020	4.88	42005	2100	45°
6.00	2	700	0.030	0.022	0.022	5.88	37895	2275	45°
8.00	2	700	0.040	0.024	0.024	7.89	28240	2260	45°
10.00	2	700	0.050	0.026	0.026	9.90	22505	2250	45°
12.00	2	700	0.060	0.032	0.032	11.91	18710	2245	45°

4.00	2	509	0.020	0.016	0.016	3.86	41975	1680	45°
5.00	2	644	0.025	0.020	0.020	4.88	42005	2100	45°
6.00	2	650	0.030	0.022	0.022	5.88	35185	2110	45°
8.00	2	650	0.040	0.024	0.024	7.89	26225	2100	45°
10.00	2	650	0.050	0.026	0.026	9.90	20900	2090	45°
12.00	2	650	0.060	0.032	0.032	11.91	17370	2085	45°


4.00	2	509	0.020	0.016	0.016	3.86	41975	1680	45°
5.00	2	600	0.025	0.020	0.020	4.88	39135	1955	45°
6.00	2	600	0.030	0.022	0.022	5.88	32480	1950	45°
8.00	2	600	0.040	0.024	0.024	7.89	24205	1935	45°
10.00	2	600	0.050	0.026	0.026	9.90	19290	1930	45°
12.00	2	600	0.060	0.032	0.032	11.91	16035	1925	45°

Corner radius end mills

Cylindrical neck, 3xd




CBN	λ 0°
	γ 0°

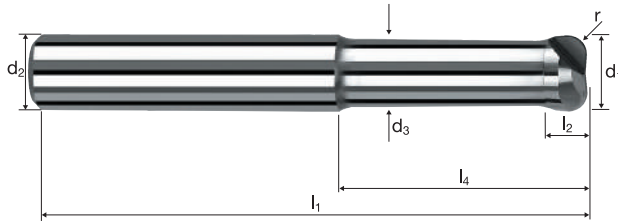

				HRC 48-56	HRC 56-60	HRC > 60				HSS
--	--	--	--	--------------	--------------	-------------	--	--	--	-----

Ø Code	Example: Order-N°.		Coating	Article-N°	ø-Code							31420	
	d ₁ 0/-0.01	d ₂ h5	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z			
220	4.00	6.00	3.70	80	1.90	12.00	16.95	0.500	3.7°	2	●		
260	5.00	6.00	4.60	80	2.50	15.00	18.27	0.500	1.7°	2	●		
300	6.00	6.00	5.50	80	3.00	20.00	-	0.500	0.0°	2	●		
391	8.00	8.00	7.40	100	4.00	26.00	-	0.500	0.0°	2	●		
450	10.00	10.00	9.20	100	5.00	31.00	-	0.500	0.0°	2	●		
501	12.00	12.00	11.00	120	6.00	37.00	-	0.500	0.0°	2	●		

Application



Material

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


Hardened tool steel
> 60 HRC

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
4.00	2	317	0.020	0.020	0.040	2.40	42045	1680	1.00
5.00	2	397	0.025	0.026	0.050	3.01	41985	2100	1.25
6.00	2	475	0.030	0.030	0.060	3.60	42000	2520	1.50
8.00	2	633	0.040	0.040	0.080	4.80	41975	3360	2.00
10.00	2	650	0.050	0.030	0.100	5.77	35860	3585	2.50
12.00	2	650	0.060	0.036	0.120	6.93	29855	3585	3.00

4.00	2	317	0.020	0.020	0.040	2.40	42045	1680	1.00
5.00	2	397	0.025	0.026	0.050	3.01	41985	2100	1.25
6.00	2	475	0.030	0.030	0.060	3.60	42000	2520	1.50
8.00	2	620	0.040	0.040	0.080	4.80	41115	3290	2.00
10.00	2	620	0.050	0.030	0.100	5.77	34205	3420	2.50
12.00	2	620	0.060	0.036	0.120	6.93	28480	3415	3.00

4.00	2	317	0.020	0.020	0.040	2.40	42045	1680	1.00
5.00	2	397	0.025	0.026	0.050	3.01	41985	2100	1.25
6.00	2	475	0.030	0.030	0.060	3.60	42000	2520	1.50
8.00	2	580	0.040	0.040	0.080	4.80	38460	3075	2.00
10.00	2	580	0.050	0.030	0.100	5.77	31995	3200	2.50
12.00	2	580	0.060	0.036	0.120	6.93	26640	3195	3.00

Application



Material

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

Hardened tool steel
> 60 HRC

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
4.00	2	480	0.020	0.016	0.016	3.64	41975	1680	45°
5.00	2	600	0.025	0.020	0.020	4.55	41975	2100	45°
6.00	2	700	0.030	0.022	0.022	5.45	40885	2455	45°
8.00	2	700	0.040	0.024	0.024	7.23	30820	2465	45°
10.00	2	700	0.050	0.026	0.026	9.01	24730	2475	45°
12.00	2	700	0.060	0.032	0.032	10.82	20595	2470	45°

4.00	2	480	0.020	0.016	0.016	3.64	41975	1680	45°
5.00	2	600	0.025	0.020	0.020	4.55	41975	2100	45°
6.00	2	650	0.030	0.022	0.022	5.45	37965	2280	45°
8.00	2	650	0.040	0.024	0.024	7.23	28615	2290	45°
10.00	2	650	0.050	0.026	0.026	9.01	22965	2295	45°
12.00	2	650	0.060	0.032	0.032	10.82	19120	2295	45°

4.00	2	480	0.020	0.016	0.016	3.64	41975	1680	45°
5.00	2	600	0.025	0.020	0.020	4.55	41975	2100	45°
6.00	2	600	0.030	0.022	0.022	5.45	35045	2105	45°
8.00	2	600	0.040	0.024	0.024	7.23	26415	2115	45°
10.00	2	600	0.050	0.026	0.026	9.01	21195	2120	45°
12.00	2	600	0.060	0.032	0.032	10.82	17650	2120	45°

Corner radius end mills

Cylindrical neck, 3xd




CBN λ 0°
 γ 0°

h5

d_1 r


F

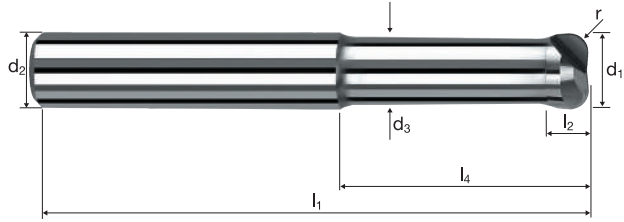

				HRC 48-56	HRC 56-60	HRC > 60				HSS
--	--	--	--	--------------	--------------	-------------	--	--	--	-----

Ø Code	d ₁ 0/-0.01	d ₂ h5	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z	Example: Order-N°.	
											Coating	Article-N°.
												31410
220	4.00	6.00	3.70	80	1.90	12.00	16.95	1.000	3.8°	2	●	
260	5.00	6.00	4.60	80	2.50	15.00	18.27	1.250	1.8°	2	●	
300	6.00	6.00	5.50	80	3.00	20.00	-	1.500	0.0°	2	●	
391	8.00	8.00	7.40	100	4.00	26.00	-	2.000	0.0°	2	●	
450	10.00	10.00	9.20	100	5.00	31.00	-	2.500	0.0°	2	●	
501	12.00	12.00	11.00	120	6.00	37.00	-	3.000	0.0°	2	●	

Application



Material

Hardened tool steel
52 - 56 HRC

Y

Hardened tool steel
56 - 60 HRC

Y

Hardened tool steel
> 60 HRC

Y

High speed steel,
hardened
64 - 70 HRC

Y


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.40	2	40	0.013	0.067	0.080	0.30	42440	1105	5.9
0.50	2	49	0.016	0.083	0.100	0.37	42155	1350	11.2
0.60	2	59	0.019	0.100	0.120	0.45	41735	1585	19.0
0.80	2	79	0.026	0.134	0.160	0.60	41910	2180	46.7
1.00	2	99	0.032	0.167	0.200	0.75	42015	2690	89.8
1.50	2	100	0.048	0.250	0.300	1.12	28420	2730	204.6
2.00	2	100	0.064	0.334	0.400	1.49	21365	2735	365.3

0.40	2	40	0.012	0.067	0.080	0.30	42440	995	5.3
0.50	2	49	0.014	0.083	0.100	0.37	42155	1215	10.1
0.60	2	59	0.017	0.100	0.120	0.45	41735	1425	17.1
0.80	2	60	0.023	0.134	0.160	0.60	31830	1490	31.9
1.00	2	60	0.029	0.167	0.200	0.75	25465	1465	49.0
1.50	2	60	0.043	0.250	0.300	1.12	17050	1475	110.5
2.00	2	60	0.058	0.334	0.400	1.49	12820	1475	197.3

0.40	2	36	0.009	0.054	0.080	0.27	42440	795	3.4
0.50	2	45	0.012	0.066	0.100	0.34	42130	970	6.4
0.60	2	50	0.014	0.080	0.120	0.41	38820	1060	10.2
0.80	2	50	0.019	0.107	0.160	0.55	28935	1085	18.6
1.00	2	50	0.023	0.134	0.200	0.68	23405	1080	28.8
1.50	2	50	0.035	0.200	0.300	1.02	15605	1080	64.7
2.00	2	50	0.046	0.267	0.400	1.36	11705	1080	115.3

0.40	2	33	0.007	0.043	0.080	0.25	42015	630	2.2
0.50	2	40	0.009	0.053	0.100	0.31	41070	755	4.0
0.60	2	40	0.011	0.064	0.120	0.37	34410	755	5.8
0.80	2	40	0.015	0.086	0.160	0.49	25985	780	10.7
1.00	2	40	0.018	0.107	0.200	0.62	20535	755	16.2
1.50	2	40	0.028	0.160	0.300	0.93	13690	755	36.3
2.00	2	40	0.037	0.214	0.400	1.24	10270	755	64.7

Application



Material

Hardened tool steel
52 - 56 HRC

Y

Hardened tool steel
56 - 60 HRC

Y

Hardened tool steel
> 60 HRC

Y

High speed steel,
hardened
64 - 70 HRC

Y

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.018	0.022	0.022	0.47	41990	1510	45°
0.60	2	74	0.018	0.026	0.026	0.56	42060	1515	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.030	0.064	0.064	1.40	42060	2525	45°
2.00	2	200	0.034	0.084	0.084	1.86	34225	2325	45°

0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.016	0.022	0.022	0.47	41990	1345	45°
0.60	2	74	0.016	0.026	0.026	0.56	42060	1345	45°
0.80	2	99	0.018	0.034	0.034	0.75	42015	1515	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°
1.50	2	150	0.028	0.064	0.064	1.40	34105	1910	45°
2.00	2	150	0.030	0.084	0.084	1.86	25670	1540	45°

0.40	2	48	0.010	0.010	0.010	0.36	42440	850	45°
0.50	2	61	0.015	0.020	0.020	0.46	42210	1265	45°
0.60	2	73	0.015	0.020	0.020	0.55	42250	1265	45°
0.80	2	98	0.015	0.030	0.030	0.74	42155	1265	45°
1.00	2	120	0.020	0.040	0.040	0.93	41070	1645	45°
1.50	2	120	0.020	0.060	0.060	1.39	27480	1100	45°
2.00	2	120	0.025	0.080	0.080	1.86	20535	1025	45°



0.40	2	48	0.010	0.010	0.010	0.36	42440	850	45°
0.50	2	61	0.010	0.020	0.020	0.46	42210	845	45°
0.60	2	73	0.010	0.020	0.020	0.55	42250	845	45°
0.80	2	85	0.010	0.020	0.030	0.71	38110	760	45°
1.00	2	85	0.015	0.030	0.040	0.91	29730	890	45°
1.50	2	85	0.015	0.040	0.050	1.35	20040	600	45°
2.00	2	85	0.015	0.050	0.060	1.79	15115	455	45°

Ball nose end mills MicroHX

Shank \varnothing 6mm, cylindrical neck, 1xd




HM λ 30°
XA γ -10°

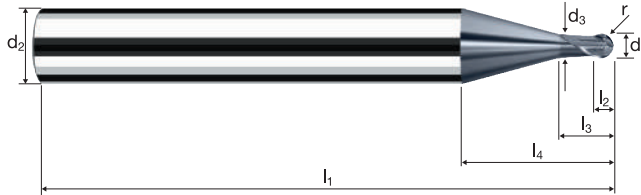

		Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	HSS
--	--	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-----

Example: Order-N°.											DURO-AI
											Y6460
\varnothing Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ± 0.005	α	z	
040	0.40	6.00	0.35	57	0.40	0.40	16.78	0.200	14.6°	2	●
050	0.50	6.00	0.45	57	0.50	0.50	11.50	0.250	14.5°	2	●
060	0.60	6.00	0.55	57	0.60	0.60	11.43	0.300	14.5°	2	●
080	0.80	6.00	0.75	57	0.80	0.80	11.30	0.400	14.3°	2	●
100	1.00	6.00	0.95	57	1.00	1.00	11.19	0.500	14.1°	2	●
120	1.50	6.00	1.40	57	1.50	1.50	10.86	0.750	13.5°	2	●
140	2.00	6.00	1.90	57	2.00	2.00	10.52	1.000	12.9°	2	●

Application



Material

Hardened tool steel
52 - 56 HRC

Y

Hardened tool steel
56 - 60 HRC

Y

Hardened tool steel
> 60 HRC

Y

High speed steel,
hardened
64 - 70 HRC

Y


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.40	2	29	0.010	0.032	0.080	0.22	41960	840	2.1
0.50	2	36	0.013	0.040	0.100	0.27	42440	1105	4.4
0.60	2	44	0.016	0.048	0.120	0.33	42440	1360	7.8
0.80	2	58	0.021	0.065	0.160	0.44	41960	1760	18.3
1.00	2	73	0.026	0.081	0.200	0.55	42250	2195	35.6
1.50	2	100	0.039	0.121	0.300	0.82	38820	3030	109.9
2.00	2	100	0.052	0.162	0.400	1.09	29205	3035	196.8

0.40	2	29	0.009	0.032	0.080	0.22	41960	755	1.9
0.50	2	36	0.012	0.040	0.100	0.27	42440	995	4.0
0.60	2	44	0.014	0.048	0.120	0.33	42440	1220	7.0
0.80	2	58	0.019	0.065	0.160	0.44	41960	1585	16.5
1.00	2	60	0.023	0.081	0.200	0.55	34725	1625	26.3
1.50	2	60	0.035	0.121	0.300	0.82	23290	1635	59.4
2.00	2	60	0.047	0.162	0.400	1.09	17520	1640	106.3

0.40	2	26	0.007	0.026	0.080	0.20	41380	595	1.2
0.50	2	32	0.009	0.032	0.100	0.24	42440	795	2.5
0.60	2	38	0.012	0.038	0.120	0.29	41710	960	4.4
0.80	2	50	0.015	0.052	0.160	0.39	40810	1235	10.3
1.00	2	50	0.019	0.065	0.200	0.49	32480	1215	15.8
1.50	2	50	0.028	0.097	0.300	0.74	21505	1210	35.1
2.00	2	50	0.037	0.130	0.400	0.98	16240	1215	63.0

0.40	2	24	0.006	0.020	0.080	0.18	42440	490	0.8
0.50	2	29	0.007	0.026	0.100	0.22	41960	630	1.6
0.60	2	34	0.009	0.031	0.120	0.26	41625	770	2.8
0.80	2	40	0.012	0.042	0.160	0.36	35370	855	5.7
1.00	2	40	0.015	0.052	0.200	0.44	28935	865	9.0
1.50	2	40	0.022	0.077	0.300	0.66	19290	865	20.1
2.00	2	40	0.030	0.104	0.400	0.89	14305	855	35.5

Application



Material

Hardened tool steel
52 - 56 HRC

Y

Hardened tool steel
56 - 60 HRC

Y

Hardened tool steel
> 60 HRC

Y

High speed steel,
hardened
64 - 70 HRC

Y

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.018	0.022	0.022	0.47	41990	1510	45°
0.60	2	74	0.018	0.026	0.026	0.56	42060	1515	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.030	0.064	0.064	1.40	42060	2525	45°
2.00	2	200	0.034	0.084	0.084	1.86	34225	2325	45°

0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.016	0.022	0.022	0.47	41990	1345	45°
0.60	2	74	0.016	0.026	0.026	0.56	42060	1345	45°
0.80	2	99	0.018	0.034	0.034	0.75	42015	1515	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°
1.50	2	150	0.028	0.064	0.064	1.40	34105	1910	45°
2.00	2	150	0.030	0.084	0.084	1.86	25670	1540	45°

0.40	2	48	0.010	0.010	0.010	0.36	42440	850	45°
0.50	2	61	0.015	0.020	0.020	0.46	42210	1265	45°
0.60	2	73	0.015	0.020	0.020	0.55	42250	1265	45°
0.80	2	98	0.015	0.030	0.030	0.74	42155	1265	45°
1.00	2	120	0.020	0.040	0.040	0.93	41070	1645	45°
1.50	2	120	0.020	0.060	0.060	1.39	27480	1100	45°
2.00	2	120	0.025	0.080	0.080	1.86	20535	1025	45°

0.40	2	48	0.010	0.010	0.010	0.36	42440	850	45°
0.50	2	61	0.010	0.020	0.020	0.46	42210	845	45°
0.60	2	73	0.010	0.020	0.020	0.55	42250	845	45°
0.80	2	85	0.010	0.020	0.030	0.71	38110	760	45°
1.00	2	85	0.015	0.030	0.040	0.91	29730	890	45°
1.50	2	85	0.015	0.040	0.050	1.35	20040	600	45°
2.00	2	85	0.015	0.050	0.060	1.79	15115	455	45°

Ball nose end mills MicroHX

Shank \varnothing 6mm, cylindrical neck, 2xd




HM λ 30°
XA γ -10°



		Rm	Rm	HRC	HRC	HRC	Inox	Ti	HSS
		1100-1300	1300-1500	48-56	56-60	> 60	Stainless	Titanium	

Order-N°.	Coating			Article-N°.		ø-Code						DURO-AI
	Y	6461	040									Y6461
Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z		
040	0.40	6.00	0.35	57	0.24	0.80	16.76	0.200	14.1°	2	●	
050	0.50	6.00	0.45	57	0.30	1.00	11.51	0.250	13.9°	2	●	
060	0.60	6.00	0.55	57	0.36	1.20	11.53	0.300	13.7°	2	●	
080	0.80	6.00	0.75	57	0.48	1.60	11.55	0.400	13.3°	2	●	
100	1.00	6.00	0.95	57	0.60	2.00	11.58	0.500	12.9°	2	●	
120	1.50	6.00	1.40	57	0.90	3.00	11.53	0.750	11.7°	2	●	
140	2.00	6.00	1.90	57	1.20	4.00	11.60	1.000	10.6°	2	●	

Application



Material

Hardened tool steel
52 - 56 HRC

Y

Hardened tool steel
56 - 60 HRC

Y

Hardened tool steel
> 60 HRC

Y

High speed steel,
hardened
64 - 70 HRC

Y


d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.40	2	26	0.010	0.026	0.080	0.20	41380	830	1.7
0.50	2	32	0.013	0.032	0.100	0.24	42440	1105	3.5
0.60	2	40	0.015	0.039	0.120	0.30	42440	1275	6.0
0.80	2	51	0.020	0.052	0.160	0.39	41625	1665	13.9
1.00	2	65	0.025	0.064	0.200	0.49	42225	2110	27.0

0.40	2	26	0.009	0.026	0.080	0.20	41380	745	1.5
0.50	2	32	0.012	0.032	0.100	0.24	42440	995	3.2
0.60	2	40	0.014	0.039	0.120	0.30	42440	1145	5.4
0.80	2	51	0.018	0.052	0.160	0.39	41625	1500	12.5
1.00	2	60	0.023	0.064	0.200	0.49	38975	1755	22.5

0.40	2	24	0.007	0.021	0.080	0.18	42440	610	1.0
0.50	2	29	0.009	0.026	0.100	0.22	41960	785	2.0
0.60	2	36	0.011	0.031	0.120	0.27	42440	915	3.4
0.80	2	48	0.014	0.042	0.160	0.36	42440	1220	8.1
1.00	2	50	0.018	0.051	0.200	0.44	36170	1300	13.3

0.40	2	21	0.006	0.017	0.080	0.16	41780	480	0.6
0.50	2	26	0.007	0.020	0.100	0.20	41380	620	1.3
0.60	2	32	0.009	0.025	0.120	0.24	42440	735	2.2
0.80	2	40	0.012	0.033	0.160	0.32	39790	915	4.9
1.00	2	40	0.014	0.041	0.200	0.40	31830	915	7.5

Application



Material

Hardened tool steel
52 - 56 HRC

Y

Hardened tool steel
56 - 60 HRC

Y

Hardened tool steel
> 60 HRC

Y

High speed steel,
hardened
64 - 70 HRC

Y

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.018	0.022	0.022	0.47	41990	1510	45°
0.60	2	74	0.018	0.026	0.026	0.56	42060	1515	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°

0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.016	0.022	0.022	0.47	41990	1345	45°
0.60	2	74	0.016	0.026	0.026	0.56	42060	1345	45°
0.80	2	99	0.018	0.034	0.034	0.75	42015	1515	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°

0.40	2	48	0.010	0.010	0.010	0.36	42440	850	45°
0.50	2	61	0.015	0.020	0.020	0.46	42210	1265	45°
0.60	2	73	0.015	0.020	0.020	0.55	42250	1265	45°
0.80	2	98	0.015	0.030	0.030	0.74	42155	1265	45°
1.00	2	120	0.020	0.040	0.040	0.93	41070	1645	45°



0.40	2	48	0.010	0.010	0.010	0.36	42440	850	45°
0.50	2	61	0.010	0.020	0.020	0.46	42210	845	45°
0.60	2	73	0.010	0.020	0.020	0.55	42250	845	45°
0.80	2	85	0.010	0.020	0.030	0.71	38110	760	45°
1.00	2	85	0.015	0.030	0.040	0.91	29730	890	45°

Ball nose end mills MicroHX

Shank \varnothing 6mm, cylindrical neck, 2.5xd




HM λ 30°
XA γ -10°

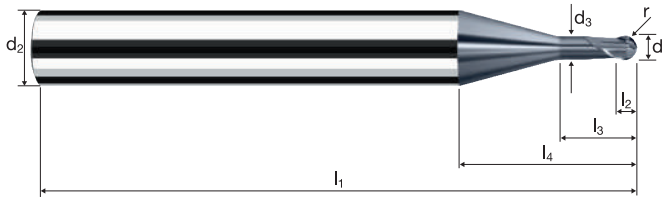

		Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	HSS
--	--	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-----

Example: Order-N°.											DURO-AI	
											Y6481	
\varnothing Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z		
040	0.40	6.00	0.35	57	0.24	1.00	16.96	0.200	13.9°	2		●
050	0.50	6.00	0.45	57	0.30	1.25	11.76	0.250	13.6°	2		●
060	0.60	6.00	0.55	57	0.36	1.50	11.83	0.300	13.4°	2		●
080	0.80	6.00	0.75	57	0.48	2.00	11.95	0.400	12.8°	2		●
100	1.00	6.00	0.95	57	0.60	2.50	12.08	0.500	12.3°	2		●

Application



Material

Hardened tool steel
52 - 56 HRC

Y

Hardened tool steel
56 - 60 HRC

Y

Hardened tool steel
> 60 HRC

Y

High speed steel,
hardened
64 - 70 HRC

Y


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.40	2	24	0.010	0.021	0.080	0.18	42440	850	1.4
0.50	2	30	0.013	0.027	0.100	0.23	41520	1080	2.9
0.60	2	36	0.015	0.032	0.120	0.27	42440	1275	4.9
0.80	2	48	0.020	0.043	0.160	0.36	42440	1700	11.7
1.00	2	59	0.025	0.054	0.200	0.45	41735	2085	22.5
1.50	2	88	0.038	0.080	0.300	0.67	41810	3175	76.3
2.00	2	100	0.051	0.107	0.400	0.90	35370	3610	154.4
2.50	2	100	0.063	0.134	0.500	1.13	28170	3550	237.8
3.00	2	100	0.076	0.161	0.600	1.35	23580	3585	346.2

0.40	2	24	0.009	0.021	0.080	0.18	42440	765	1.3
0.50	2	30	0.012	0.027	0.100	0.23	41520	970	2.6
0.60	2	36	0.014	0.032	0.120	0.27	42440	1145	4.4
0.80	2	48	0.018	0.043	0.160	0.36	42440	1530	10.5
1.00	2	59	0.023	0.054	0.200	0.45	41735	1880	20.3
1.50	2	60	0.034	0.080	0.300	0.67	28505	1950	46.8
2.00	2	60	0.046	0.107	0.400	0.90	21220	1950	83.4
2.50	2	60	0.057	0.134	0.500	1.13	16900	1915	128.4
3.00	2	60	0.068	0.161	0.600	1.35	14145	1935	187.0

0.40	2	21	0.007	0.017	0.080	0.16	41780	600	0.8
0.50	2	26	0.009	0.022	0.100	0.20	41380	775	1.7
0.60	2	32	0.011	0.026	0.120	0.24	42440	915	2.8
0.80	2	42	0.014	0.034	0.160	0.32	41780	1205	6.6
1.00	2	50	0.018	0.043	0.200	0.41	38820	1395	12.1
1.50	2	50	0.027	0.064	0.300	0.61	26090	1430	27.4
2.00	2	50	0.037	0.086	0.400	0.81	19650	1445	49.4
2.50	2	50	0.045	0.107	0.500	1.01	15760	1430	76.6
3.00	2	50	0.055	0.129	0.600	1.22	13045	1430	110.3

0.40	2	18	0.006	0.013	0.080	0.14	40925	470	0.5
0.50	2	24	0.007	0.017	0.100	0.18	42440	635	1.1
0.60	2	29	0.009	0.020	0.120	0.22	41960	725	1.8
0.80	2	38	0.012	0.028	0.160	0.29	41710	960	4.2
1.00	2	40	0.014	0.035	0.200	0.37	34410	990	6.9
1.50	2	40	0.022	0.051	0.300	0.54	23580	1030	15.9
2.00	2	40	0.029	0.068	0.400	0.73	17440	1025	28.1
2.50	2	40	0.036	0.086	0.500	0.91	13990	1015	43.5
3.00	2	40	0.044	0.103	0.600	1.09	11680	1025	63.2

Application



Material

Hardened tool steel
52 - 56 HRC

Y

Hardened tool steel
56 - 60 HRC

Y

Hardened tool steel
> 60 HRC

Y

High speed steel,
hardened
64 - 70 HRC

Y

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.018	0.022	0.022	0.47	41990	1510	45°
0.60	2	74	0.018	0.026	0.026	0.56	42060	1515	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.030	0.064	0.064	1.40	42060	2525	45°
2.00	2	200	0.034	0.084	0.084	1.86	34225	2325	45°
2.50	2	200	0.036	0.106	0.106	2.33	27325	1965	45°
3.00	2	200	0.042	0.126	0.126	2.79	22820	1915	45°

0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.016	0.022	0.022	0.47	41990	1345	45°
0.60	2	74	0.016	0.026	0.026	0.56	42060	1345	45°
0.80	2	99	0.018	0.034	0.034	0.75	42015	1515	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°
1.50	2	150	0.028	0.064	0.064	1.40	34105	1910	45°
2.00	2	150	0.030	0.084	0.084	1.86	25670	1540	45°
2.50	2	150	0.032	0.106	0.106	2.33	20490	1310	45°
3.00	2	150	0.036	0.126	0.126	2.79	17115	1230	45°

0.40	2	48	0.010	0.010	0.010	0.36	42440	850	45°
0.50	2	61	0.015	0.020	0.020	0.46	42210	1265	45°
0.60	2	73	0.015	0.020	0.020	0.55	42250	1265	45°
0.80	2	98	0.015	0.030	0.030	0.74	42155	1265	45°
1.00	2	120	0.020	0.040	0.040	0.93	41070	1645	45°
1.50	2	120	0.020	0.060	0.060	1.39	27480	1100	45°
2.00	2	120	0.025	0.080	0.080	1.86	20535	1025	45°
2.50	2	120	0.025	0.100	0.100	2.32	16465	825	45°
3.00	2	120	0.030	0.110	0.110	2.76	13840	830	45°



0.40	2	48	0.010	0.010	0.010	0.36	42440	850	45°
0.50	2	61	0.010	0.020	0.020	0.46	42210	845	45°
0.60	2	73	0.010	0.020	0.020	0.55	42250	845	45°
0.80	2	85	0.010	0.020	0.030	0.71	38110	760	45°
1.00	2	85	0.015	0.030	0.040	0.91	29730	890	45°
1.50	2	85	0.015	0.050	0.060	1.37	19750	590	45°
2.00	2	85	0.020	0.060	0.080	1.81	14950	600	45°
2.50	2	85	0.020	0.080	0.100	2.28	11865	475	45°
3.00	2	85	0.025	0.090	0.110	2.72	9945	495	45°

Ball nose end mills MicroHX

Shank \varnothing 6mm, cylindrical neck, 3xd




HM	λ 30°
XA	γ -10°

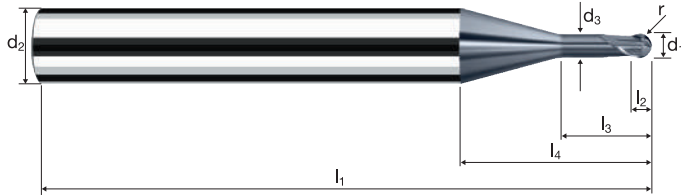

		Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	HSS
--	--	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-----

Ø Code	Example: Order-N°.											DURO-AI
	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z		Y6462
040	0.40	6.00	0.35	57	0.24	1.20	17.16	0.200	13.7°	2		•
050	0.50	6.00	0.45	57	0.30	1.50	12.01	0.250	13.3°	2		•
060	0.60	6.00	0.55	57	0.36	1.80	12.13	0.300	13.0°	2		•
080	0.80	6.00	0.75	57	0.48	2.40	12.35	0.400	12.4°	2		•
100	1.00	6.00	0.95	57	0.60	3.00	12.58	0.500	11.8°	2		•
108	1.20	6.00	1.10	57	0.72	3.60	12.69	0.600	11.2°	2		•
120	1.50	6.00	1.40	57	0.90	4.50	13.03	0.750	10.3°	2		•
140	2.00	6.00	1.90	57	1.20	6.00	13.60	1.000	9.0°	2		•
160	2.50	6.00	2.40	57	1.50	7.50	14.07	1.250	7.6°	2		•
180	3.00	6.00	2.90	57	1.80	9.00	14.64	1.500	6.4°	2		•

Application



Material

Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



High speed steel,
hardened
64 - 70 HRC




d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
0.40	2	22	0.010	0.018	0.080	0.17	41195	825	1.2
0.50	2	28	0.013	0.023	0.100	0.21	42440	1105	2.5
0.60	2	33	0.015	0.028	0.120	0.25	42015	1260	4.2
0.80	2	45	0.020	0.037	0.160	0.34	42130	1685	10.0
1.00	2	55	0.025	0.046	0.200	0.42	41685	2085	19.2

0.40	2	22	0.009	0.018	0.080	0.17	41195	740	1.1
0.50	2	28	0.012	0.023	0.100	0.21	42440	995	2.3
0.60	2	33	0.014	0.028	0.120	0.25	42015	1135	3.8
0.80	2	45	0.018	0.037	0.160	0.34	42130	1515	9.0
1.00	2	55	0.023	0.046	0.200	0.42	41685	1875	17.3

0.40	2	20	0.007	0.014	0.080	0.15	42440	610	0.7
0.50	2	25	0.009	0.018	0.100	0.19	41885	785	1.4
0.60	2	30	0.011	0.022	0.120	0.23	41520	895	2.4
0.80	2	40	0.014	0.030	0.160	0.30	42440	1220	5.8
1.00	2	50	0.018	0.037	0.200	0.38	41885	1510	11.1

0.40	2	17	0.006	0.012	0.080	0.13	41625	480	0.4
0.50	2	22	0.007	0.015	0.100	0.17	41195	615	0.9
0.60	2	26	0.009	0.018	0.120	0.20	41380	715	1.5
0.80	2	36	0.012	0.024	0.160	0.27	42440	980	3.7
1.00	2	40	0.014	0.029	0.200	0.34	37450	1080	6.4

Application



Material

Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Hardened tool steel
> 60 HRC



High speed steel,
hardened
64 - 70 HRC




d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.018	0.022	0.022	0.47	41990	1510	45°
0.60	2	74	0.018	0.026	0.026	0.56	42060	1515	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°

0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.016	0.022	0.022	0.47	41990	1345	45°
0.60	2	74	0.016	0.026	0.026	0.56	42060	1345	45°
0.80	2	99	0.018	0.034	0.034	0.75	42015	1515	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°

0.40	2	48	0.010	0.010	0.010	0.36	42440	850	45°
0.50	2	61	0.015	0.020	0.020	0.46	42210	1265	45°
0.60	2	73	0.015	0.020	0.020	0.55	42250	1265	45°
0.80	2	98	0.015	0.030	0.030	0.74	42155	1265	45°
1.00	2	120	0.020	0.040	0.040	0.93	41070	1645	45°

0.40	2	48	0.010	0.010	0.010	0.36	42440	850	45°
0.50	2	61	0.010	0.020	0.020	0.46	42210	845	45°
0.60	2	73	0.010	0.020	0.020	0.55	42250	845	45°
0.80	2	85	0.010	0.020	0.030	0.71	38110	760	45°
1.00	2	85	0.015	0.030	0.040	0.91	29730	890	45°

Application



Material

Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.40	2	21	0.010	0.016	0.080	0.16	41780	835	1.1
0.50	2	26	0.013	0.020	0.100	0.20	41380	1075	2.2
0.60	2	32	0.015	0.024	0.120	0.24	42440	1275	3.7
0.80	2	41	0.020	0.032	0.160	0.31	42100	1685	8.6
1.00	2	51	0.025	0.040	0.200	0.39	41625	2080	16.7
1.50	2	78	0.038	0.060	0.300	0.59	42080	3200	57.6
2.00	2	100	0.050	0.080	0.400	0.78	40810	4080	130.6

Hardened tool steel
56 - 60 HRC



0.40	2	21	0.009	0.016	0.080	0.16	41780	750	1.0
0.50	2	26	0.012	0.020	0.100	0.20	41380	970	1.9
0.60	2	32	0.014	0.024	0.120	0.24	42440	1145	3.3
0.80	2	41	0.018	0.032	0.160	0.31	42100	1515	7.8
1.00	2	51	0.023	0.040	0.200	0.39	41625	1875	15.0
1.50	2	60	0.034	0.060	0.300	0.59	32370	2215	39.9
2.00	2	60	0.045	0.080	0.400	0.78	24485	2205	70.5

Hardened tool steel
> 60 HRC




0.40	2	18	0.007	0.013	0.080	0.14	40925	590	0.6
0.50	2	24	0.009	0.016	0.100	0.18	42440	795	1.3
0.60	2	28	0.011	0.019	0.120	0.21	42440	915	2.1
0.80	2	37	0.014	0.026	0.160	0.28	42060	1210	5.0
1.00	2	46	0.018	0.032	0.200	0.35	41835	1505	9.6
1.50	2	50	0.027	0.048	0.300	0.53	30030	1645	23.7
2.00	2	50	0.036	0.064	0.400	0.70	22735	1635	41.9

High speed steel,
hardened
64 - 70 HRC



0.40	2	17	0.006	0.010	0.080	0.13	41625	480	0.4
0.50	2	21	0.007	0.013	0.100	0.16	41780	625	0.8
0.60	2	25	0.009	0.015	0.120	0.19	41885	725	1.3
0.80	2	33	0.012	0.020	0.160	0.25	42015	970	3.2
1.00	2	40	0.014	0.026	0.200	0.32	39790	1145	5.9
1.50	2	40	0.022	0.038	0.300	0.47	27090	1185	13.7
2.00	2	40	0.029	0.051	0.400	0.63	20210	1165	23.8

Application



Material

Hardened tool steel
52 - 56 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.018	0.022	0.022	0.47	41990	1510	45°
0.60	2	74	0.018	0.026	0.026	0.56	42060	1515	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.030	0.064	0.064	1.40	42060	2525	45°
2.00	2	200	0.034	0.084	0.084	1.86	34225	2325	45°

Hardened tool steel
56 - 60 HRC



0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.016	0.022	0.022	0.47	41990	1345	45°
0.60	2	74	0.016	0.026	0.026	0.56	42060	1345	45°
0.80	2	99	0.018	0.034	0.034	0.75	42015	1515	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°
1.50	2	150	0.028	0.064	0.064	1.40	34105	1910	45°
2.00	2	150	0.030	0.084	0.084	1.86	25670	1540	45°

Hardened tool steel
> 60 HRC



0.40	2	48	0.010	0.010	0.010	0.36	42440	850	45°
0.50	2	61	0.015	0.020	0.020	0.46	42210	1265	45°
0.60	2	73	0.015	0.020	0.020	0.55	42250	1265	45°
0.80	2	98	0.015	0.030	0.030	0.74	42155	1265	45°
1.00	2	120	0.020	0.040	0.040	0.93	41070	1645	45°
1.50	2	120	0.020	0.060	0.060	1.39	27480	1100	45°
2.00	2	120	0.025	0.080	0.080	1.86	20535	1025	45°

High speed steel,
hardened
64 - 70 HRC





0.40	2	48	0.010	0.010	0.010	0.36	42440	850	45°
0.50	2	61	0.010	0.020	0.020	0.46	42210	845	45°
0.60	2	73	0.010	0.020	0.020	0.55	42250	845	45°
0.80	2	85	0.010	0.020	0.030	0.71	38110	760	45°
1.00	2	85	0.015	0.030	0.040	0.91	29730	890	45°
1.50	2	85	0.015	0.050	0.060	1.37	19750	590	45°
2.00	2	85	0.020	0.060	0.080	1.81	14950	600	45°

Ball nose end mills MicroHX

Shank \varnothing 6mm, cylindrical neck, 4xd




HM
XA λ 30°
 γ -10°

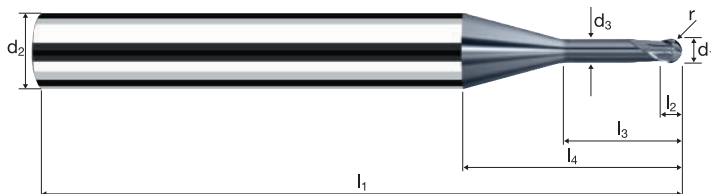

		Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	HSS
--	--	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-----

\varnothing Code	d_1	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z	DURO-AI
											Y6463
Example: Order-N°.											
			Coating Y	Article-N° 6463	\varnothing -Code 040						
040	0.40	6.00	0.35	57	0.24	1.60	17.56	0.200	13.2°	2	●
050	0.50	6.00	0.45	57	0.30	2.00	12.51	0.250	12.8°	2	●
060	0.60	6.00	0.55	57	0.36	2.40	12.73	0.300	12.4°	2	●
080	0.80	6.00	0.75	57	0.48	3.20	13.15	0.400	11.7°	2	●
100	1.00	6.00	0.95	57	0.60	4.00	13.58	0.500	11.0°	2	●
120	1.50	6.00	1.40	57	0.90	6.00	14.53	0.750	9.2°	2	●
140	2.00	6.00	1.90	57	1.20	8.00	15.60	1.000	7.8°	2	●

Application



Material

Hardened tool steel
52 - 56 HRC

Y

Hardened tool steel
56 - 60 HRC

Y

Hardened tool steel
> 60 HRC

Y

High speed steel,
hardened
64 - 70 HRC

Y


d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
0.40	2	20	0.010	0.014	0.080	0.15	42440	850	1.0
0.50	2	25	0.013	0.018	0.100	0.19	41885	1090	2.0
0.60	2	29	0.015	0.021	0.120	0.22	41960	1260	3.2
0.80	2	40	0.020	0.029	0.160	0.30	42440	1700	7.9
1.00	2	49	0.025	0.036	0.200	0.37	42155	2110	15.2

0.40	2	20	0.009	0.014	0.080	0.15	42440	765	0.9
0.50	2	25	0.012	0.018	0.100	0.19	41885	980	1.8
0.60	2	29	0.014	0.021	0.120	0.22	41960	1135	2.9
0.80	2	40	0.018	0.029	0.160	0.30	42440	1530	7.1
1.00	2	49	0.023	0.036	0.200	0.37	42155	1895	13.7

0.40	2	17	0.007	0.011	0.080	0.13	41625	600	0.5
0.50	2	22	0.009	0.014	0.100	0.17	41195	770	1.1
0.60	2	26	0.011	0.017	0.120	0.20	41380	895	1.8
0.80	2	36	0.014	0.023	0.160	0.27	42440	1220	4.5
1.00	2	44	0.018	0.029	0.200	0.33	42440	1530	8.8

0.40	2	12	0.001	0.005	0.080	0.09	42440	100	0.0
0.50	2	15	0.002	0.006	0.100	0.11	43405	150	0.1
0.60	2	17	0.002	0.008	0.120	0.13	41625	145	0.1
0.80	2	24	0.002	0.010	0.160	0.18	42440	195	0.3
1.00	2	29	0.003	0.013	0.200	0.22	41960	240	0.6

Application



Material

Hardened tool steel
52 - 56 HRC

Y

Hardened tool steel
56 - 60 HRC

Y

Hardened tool steel
> 60 HRC

Y

High speed steel,
hardened
64 - 70 HRC

Y

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.018	0.020	0.020	0.46	42210	1520	45°
0.60	2	74	0.018	0.024	0.024	0.56	42060	1515	45°
0.80	2	98	0.020	0.032	0.032	0.74	42155	1685	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°

0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.016	0.020	0.020	0.46	42210	1350	45°
0.60	2	74	0.016	0.024	0.024	0.56	42060	1345	45°
0.80	2	98	0.018	0.032	0.032	0.74	42155	1520	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°

0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.016	0.020	0.020	0.46	42210	1350	45°
0.60	2	74	0.016	0.024	0.024	0.56	42060	1345	45°
0.80	2	98	0.018	0.032	0.032	0.74	42155	1520	45°
1.00	2	120	0.022	0.042	0.042	0.93	41070	1805	45°


0.40	2	49	0.010	0.016	0.016	0.37	42155	845	45°
0.50	2	61	0.010	0.020	0.020	0.46	42210	845	45°
0.60	2	74	0.010	0.024	0.024	0.56	42060	840	45°
0.80	2	85	0.010	0.032	0.032	0.74	36565	730	45°
1.00	2	85	0.015	0.042	0.042	0.93	29095	875	45°

Ball nose end mills MicroHX

Shank \varnothing 6mm, cylindrical neck, 4.5xd




HM XA	λ 30° γ -10°

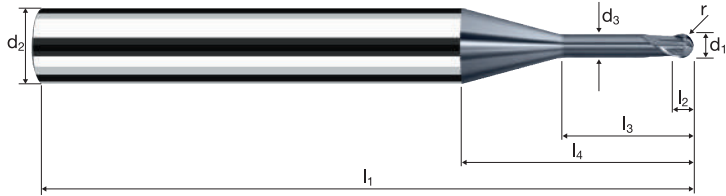

		Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	HSS
--	--	------------------------	------------------------	---------------------	---------------------	--------------------	--------------------------	-----------------------	------------

Example: Order-N°.											DURO-AI	
											Y6483	
\varnothing Code	d_1	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z		
040	0.40	6.00	0.35	57	0.24	1.80	17.76	0.200	13.0°	2	●	
050	0.50	6.00	0.45	57	0.30	2.25	12.76	0.250	12.6°	2	●	
060	0.60	6.00	0.55	57	0.36	2.70	13.03	0.300	12.1°	2	●	
080	0.80	6.00	0.75	57	0.48	3.60	13.55	0.400	11.3°	2	●	
100	1.00	6.00	0.95	57	0.60	4.50	14.08	0.500	10.6°	2	●	

Application



Material

Hardened tool steel
52 - 56 HRC

Y

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
0.40	2	18	0.010	0.013	0.080	0.14	40925	820	0.9
0.50	2	24	0.013	0.016	0.100	0.18	42440	1105	1.8
0.60	2	28	0.015	0.019	0.120	0.21	42440	1275	2.9
0.80	2	37	0.020	0.026	0.160	0.28	42060	1680	7.0
1.00	2	46	0.025	0.032	0.200	0.35	41835	2090	13.4
1.50	2	70	0.038	0.048	0.300	0.53	42040	3195	46.0
2.00	2	92	0.050	0.064	0.400	0.70	41835	4185	107.1
2.50	2	100	0.063	0.080	0.500	0.88	36170	4560	182.3
3.00	2	100	0.075	0.096	0.600	1.06	30030	4505	259.5

Hardened tool steel
56 - 60 HRC

Y

0.40	2	18	0.009	0.013	0.080	0.14	40925	735	0.8
0.50	2	24	0.012	0.016	0.100	0.18	42440	995	1.6
0.60	2	28	0.014	0.019	0.120	0.21	42440	1145	2.6
0.80	2	37	0.018	0.026	0.160	0.28	42060	1515	6.3
1.00	2	46	0.023	0.032	0.200	0.35	41835	1885	12.0
1.50	2	60	0.034	0.048	0.300	0.53	36035	2465	35.5
2.00	2	60	0.045	0.064	0.400	0.70	27285	2455	62.9
2.50	2	60	0.057	0.080	0.500	0.88	21705	2460	98.4
3.00	2	60	0.068	0.096	0.600	1.06	18020	2430	140.1

Hardened tool steel
> 60 HRC

Y


0.40	2	17	0.007	0.010	0.080	0.13	41625	600	0.5
0.50	2	21	0.009	0.013	0.100	0.16	41780	780	1.0
0.60	2	25	0.011	0.015	0.120	0.19	41885	905	1.7
0.80	2	33	0.014	0.021	0.160	0.25	42015	1210	4.0
1.00	2	42	0.018	0.026	0.200	0.32	41780	1505	7.7
1.50	2	50	0.027	0.038	0.300	0.47	33865	1855	21.3
2.00	2	50	0.036	0.051	0.400	0.63	25265	1820	37.3
2.50	2	50	0.045	0.064	0.500	0.79	20145	1830	58.5
3.00	2	50	0.054	0.077	0.600	0.95	16755	1810	83.4

High speed steel,
hardened
64 - 70 HRC

Y

0.40	2	15	0.006	0.008	0.080	0.11	43405	500	0.3
0.50	2	18	0.007	0.010	0.100	0.14	40925	615	0.6
0.60	2	22	0.009	0.012	0.120	0.17	41195	710	1.0
0.80	2	30	0.012	0.017	0.160	0.23	41520	955	2.5
1.00	2	37	0.014	0.020	0.200	0.28	42060	1210	5.0
1.50	2	40	0.022	0.031	0.300	0.42	30315	1325	12.2
2.00	2	40	0.029	0.041	0.400	0.57	22340	1285	21.1
2.50	2	40	0.036	0.051	0.500	0.71	17935	1300	33.3
3.00	2	40	0.043	0.061	0.600	0.85	14980	1295	47.7

Application



Material

Hardened tool steel
52 - 56 HRC

Y

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.018	0.020	0.020	0.46	42210	1520	45°
0.60	2	74	0.018	0.024	0.024	0.56	42060	1515	45°
0.80	2	98	0.020	0.032	0.032	0.74	42155	1685	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.030	0.062	0.062	1.40	42060	2525	45°
2.00	2	200	0.034	0.082	0.082	1.86	34225	2325	45°
2.50	2	200	0.036	0.102	0.102	2.32	27440	1975	45°
3.00	2	200	0.042	0.122	0.122	2.79	22820	1915	45°

Hardened tool steel
56 - 60 HRC

Y

0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.016	0.020	0.020	0.46	42210	1350	45°
0.60	2	74	0.016	0.024	0.024	0.56	42060	1345	45°
0.80	2	98	0.018	0.032	0.032	0.74	42155	1520	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°
1.50	2	150	0.028	0.062	0.062	1.40	34105	1910	45°
2.00	2	150	0.030	0.082	0.082	1.86	25670	1540	45°
2.50	2	150	0.032	0.102	0.102	2.32	20580	1315	45°
3.00	2	150	0.036	0.122	0.122	2.79	17115	1230	45°

Hardened tool steel
> 60 HRC

Y

0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.016	0.020	0.020	0.46	42210	1350	45°
0.60	2	74	0.016	0.024	0.024	0.56	42060	1345	45°
0.80	2	98	0.018	0.032	0.032	0.74	42155	1520	45°
1.00	2	120	0.022	0.042	0.042	0.93	41070	1805	45°
1.50	2	120	0.028	0.062	0.062	1.40	27285	1530	45°
2.00	2	120	0.030	0.082	0.082	1.86	20535	1230	45°
2.50	2	120	0.032	0.102	0.102	2.32	16465	1055	45°
3.00	2	120	0.036	0.122	0.122	2.79	13690	985	45°

High speed steel,
hardened
64 - 70 HRC

Y



0.40	2	49	0.010	0.016	0.016	0.37	42155	845	45°
0.50	2	61	0.010	0.020	0.020	0.46	42210	845	45°
0.60	2	74	0.010	0.024	0.024	0.56	42060	840	45°
0.80	2	85	0.010	0.032	0.032	0.74	36565	730	45°
1.00	2	85	0.015	0.042	0.042	0.93	29095	875	45°
1.50	2	85	0.015	0.062	0.062	1.40	19325	580	45°
2.00	2	85	0.020	0.082	0.082	1.86	14545	580	45°
2.50	2	85	0.020	0.102	0.102	2.32	11660	465	45°
3.00	2	85	0.025	0.122	0.122	2.79	9700	485	45°

Ball nose end mills MicroHX

Shank \varnothing 6mm, cylindrical neck, 5xd




HM	λ 30°
XA	γ -10°

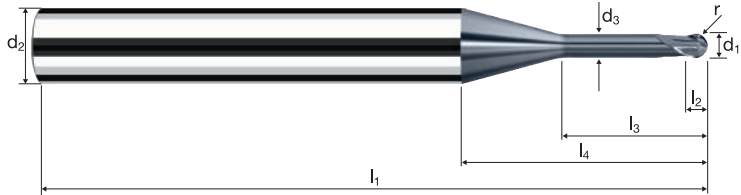

	Rm	Rm	HRC	HRC	HRC	Inox	Ti	HSS
	1100-1300	1300-1500	48-56	56-60	> 60	Stainless	Titanium	

Example: Order-N°.											DURO-AI	
											Y6464	
											Y6464	
\varnothing Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z		
040	0.40	6.00	0.35	57	0.24	2.00	17.96	0.200	12.8°	2	●	
050	0.50	6.00	0.45	57	0.30	2.50	13.01	0.250	12.3°	2	●	
060	0.60	6.00	0.55	57	0.36	3.00	13.33	0.300	11.9°	2	●	
080	0.80	6.00	0.75	57	0.48	4.00	13.95	0.400	11.0°	2	●	
100	1.00	6.00	0.95	57	0.60	5.00	14.58	0.500	10.2°	2	●	
108	1.20	6.00	1.10	57	0.72	6.00	15.09	0.600	9.4°	2	●	
120	1.50	6.00	1.40	61	0.90	7.50	16.03	0.750	8.4°	2	●	
140	2.00	6.00	1.90	61	1.20	10.00	17.60	1.000	6.9°	2	●	
160	2.50	6.00	2.40	61	1.50	12.50	19.07	1.250	5.5°	2	●	
180	3.00	6.00	2.90	66	1.80	15.00	20.64	1.500	4.4°	2	●	

Application



Material


Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.20	2	20	0.008	0.033	0.040	0.15	42440	640	0.8
0.30	2	29	0.013	0.050	0.060	0.22	41960	1055	3.2
0.40	2	40	0.016	0.067	0.080	0.30	42440	1390	7.5
0.50	2	49	0.020	0.083	0.100	0.37	42155	1700	14.1
0.60	2	59	0.024	0.100	0.120	0.45	41735	2000	24.0
0.80	2	79	0.033	0.134	0.160	0.60	41910	2745	58.9
1.00	2	99	0.040	0.167	0.200	0.75	42015	3390	113.2
1.50	2	140	0.060	0.250	0.300	1.12	39790	4815	361.0
2.00	2	140	0.081	0.334	0.400	1.49	29910	4825	644.4

0.20	2	20	0.007	0.033	0.040	0.15	42440	610	0.8
0.30	2	29	0.012	0.050	0.060	0.22	41960	1005	3.0
0.40	2	40	0.016	0.067	0.080	0.30	42440	1325	7.1
0.50	2	49	0.019	0.083	0.100	0.37	42155	1620	13.4
0.60	2	59	0.023	0.100	0.120	0.45	41735	1905	22.8
0.80	2	79	0.031	0.134	0.160	0.60	41910	2615	56.1
1.00	2	99	0.038	0.167	0.200	0.75	42015	3225	107.8
1.50	2	120	0.058	0.250	0.300	1.12	34105	3930	294.7
2.00	2	120	0.077	0.334	0.400	1.49	25635	3940	526.1

0.20	2	20	0.006	0.033	0.040	0.15	42440	510	0.7
0.30	2	29	0.010	0.050	0.060	0.22	41960	840	2.5
0.40	2	40	0.013	0.067	0.080	0.30	42440	1105	5.9
0.50	2	49	0.016	0.083	0.100	0.37	42155	1350	11.2
0.60	2	59	0.019	0.100	0.120	0.45	41735	1585	19.0
0.80	2	79	0.026	0.134	0.160	0.60	41910	2180	46.7
1.00	2	99	0.032	0.167	0.200	0.75	42015	2690	89.8
1.50	2	100	0.048	0.250	0.300	1.12	28420	2730	204.6
2.00	2	100	0.064	0.334	0.400	1.49	21365	2735	365.3

0.20	2	20	0.005	0.033	0.040	0.15	42440	460	0.6
0.30	2	29	0.009	0.050	0.060	0.22	41960	755	2.3
0.40	2	40	0.012	0.067	0.080	0.30	42440	995	5.3
0.50	2	49	0.014	0.083	0.100	0.37	42155	1215	10.1
0.60	2	59	0.017	0.100	0.120	0.45	41735	1425	17.1
0.80	2	60	0.023	0.134	0.160	0.60	31830	1490	31.9
1.00	2	60	0.029	0.167	0.200	0.75	25465	1465	49.0
1.50	2	60	0.043	0.250	0.300	1.12	17050	1475	110.5
2.00	2	60	0.058	0.334	0.400	1.49	12820	1475	197.3

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	62	0.020	0.022	0.022	0.47	41990	1680	45°
0.60	2	74	0.020	0.026	0.026	0.56	42060	1680	45°
0.80	2	99	0.022	0.034	0.034	0.75	42015	1850	45°
1.00	2	123	0.028	0.042	0.042	0.93	42100	2360	45°
1.50	2	185	0.034	0.064	0.064	1.40	42060	2860	45°
2.00	2	245	0.038	0.084	0.084	1.86	41930	3185	45°

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	62	0.020	0.022	0.022	0.47	41990	1680	45°
0.60	2	74	0.020	0.026	0.026	0.56	42060	1680	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.032	0.064	0.064	1.40	42060	2690	45°
2.00	2	245	0.036	0.084	0.084	1.86	41930	3020	45°

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.018	0.022	0.022	0.47	41990	1510	45°
0.60	2	74	0.018	0.026	0.026	0.56	42060	1515	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.030	0.064	0.064	1.40	42060	2525	45°
2.00	2	200	0.034	0.084	0.084	1.86	34225	2325	45°



0.20	2	25	0.006	0.008	0.008	0.19	41885	505	45°
0.30	2	37	0.008	0.012	0.012	0.28	42060	675	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.016	0.022	0.022	0.47	41990	1345	45°
0.60	2	74	0.016	0.026	0.026	0.56	42060	1345	45°
0.80	2	99	0.018	0.034	0.034	0.75	42015	1515	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°
1.50	2	150	0.028	0.064	0.064	1.40	34105	1910	45°
2.00	2	150	0.030	0.084	0.084	1.86	25670	1540	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 1xd




HM λ 30°
XA γ -10°

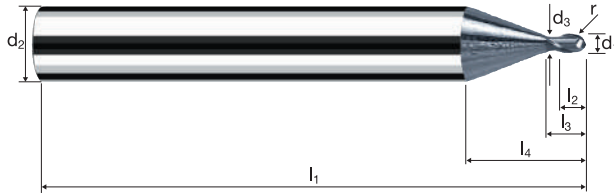

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL
											X6560
\varnothing Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ± 0.005	α	z	
010	0.10	6.00	0.09	57	0.10	0.10	17.27	0.050	14.9°	2	●
020	0.20	6.00	0.18	57	0.20	0.20	17.10	0.100	14.8°	2	●
030	0.30	6.00	0.25	57	0.30	0.30	16.94	0.150	14.7°	2	●
040	0.40	6.00	0.35	57	0.40	0.40	16.78	0.200	14.6°	2	●
050	0.50	6.00	0.45	57	0.50	0.50	11.50	0.250	14.5°	2	●
060	0.60	6.00	0.55	57	0.60	0.60	11.43	0.300	14.5°	2	●
080	0.80	6.00	0.75	57	0.80	0.80	11.30	0.400	14.3°	2	●
100	1.00	6.00	0.95	57	1.00	1.00	11.19	0.500	14.1°	2	●
120	1.50	6.00	1.40	57	1.50	1.50	10.86	0.750	13.5°	2	●
140	2.00	6.00	1.90	57	2.00	2.00	10.52	1.000	12.9°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
0.20	2	15	0.006	0.016	0.040	0.11	43405	545	0.4
0.30	2	21	0.010	0.024	0.060	0.16	41780	840	1.2
0.40	2	29	0.013	0.032	0.080	0.22	41960	1055	2.7
0.50	2	36	0.016	0.040	0.100	0.27	42440	1390	5.6
0.60	2	44	0.020	0.048	0.120	0.33	42440	1710	9.9
0.80	2	58	0.026	0.065	0.160	0.44	41960	2220	23.1
1.00	2	73	0.033	0.081	0.200	0.55	42250	2770	44.8
1.50	2	108	0.049	0.121	0.300	0.82	41925	4120	149.6
2.00	2	140	0.066	0.162	0.400	1.09	40885	5355	347.2

0.20	2	15	0.006	0.016	0.040	0.11	43405	520	0.3
0.30	2	21	0.010	0.024	0.060	0.16	41780	800	1.2
0.40	2	29	0.012	0.032	0.080	0.22	41960	1005	2.6
0.50	2	36	0.016	0.040	0.100	0.27	42440	1325	5.3
0.60	2	44	0.019	0.048	0.120	0.33	42440	1630	9.4
0.80	2	58	0.025	0.065	0.160	0.44	41960	2115	22.0
1.00	2	73	0.031	0.081	0.200	0.55	42250	2635	42.7
1.50	2	108	0.047	0.121	0.300	0.82	41925	3925	142.4
2.00	2	120	0.062	0.162	0.400	1.09	35045	4375	283.4

0.20	2	15	0.005	0.016	0.040	0.11	43405	435	0.3
0.30	2	21	0.008	0.024	0.060	0.16	41780	670	1.0
0.40	2	29	0.010	0.032	0.080	0.22	41960	840	2.1
0.50	2	36	0.013	0.040	0.100	0.27	42440	1105	4.4
0.60	2	44	0.016	0.048	0.120	0.33	42440	1360	7.8
0.80	2	58	0.021	0.065	0.160	0.44	41960	1760	18.3
1.00	2	73	0.026	0.081	0.200	0.55	42250	2195	35.6
1.50	2	100	0.039	0.121	0.300	0.82	38820	3030	109.9
2.00	2	100	0.052	0.162	0.400	1.09	29205	3035	196.8

0.20	2	15	0.004	0.016	0.040	0.11	43405	390	0.3
0.30	2	21	0.007	0.024	0.060	0.16	41780	600	0.9
0.40	2	29	0.009	0.032	0.080	0.22	41960	755	1.9
0.50	2	36	0.012	0.040	0.100	0.27	42440	995	4.0
0.60	2	44	0.014	0.048	0.120	0.33	42440	1220	7.0
0.80	2	58	0.019	0.065	0.160	0.44	41960	1585	16.5
1.00	2	60	0.023	0.081	0.200	0.55	34725	1625	26.3
1.50	2	60	0.035	0.121	0.300	0.82	23290	1635	59.4
2.00	2	60	0.047	0.162	0.400	1.09	17520	1640	106.3

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _r [mm/min]	β [°]
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	62	0.020	0.022	0.022	0.47	41990	1680	45°
0.60	2	74	0.020	0.026	0.026	0.56	42060	1680	45°
0.80	2	99	0.022	0.034	0.034	0.75	42015	1850	45°
1.00	2	123	0.028	0.042	0.042	0.93	42100	2360	45°
1.50	2	185	0.034	0.064	0.064	1.40	42060	2860	45°
2.00	2	245	0.038	0.084	0.084	1.86	41930	3185	45°

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	62	0.020	0.022	0.022	0.47	41990	1680	45°
0.60	2	74	0.020	0.026	0.026	0.56	42060	1680	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.032	0.064	0.064	1.40	42060	2690	45°
2.00	2	245	0.036	0.084	0.084	1.86	41930	3020	45°

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.018	0.022	0.022	0.47	41990	1510	45°
0.60	2	74	0.018	0.026	0.026	0.56	42060	1515	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.030	0.064	0.064	1.40	42060	2525	45°
2.00	2	200	0.034	0.084	0.084	1.86	34225	2325	45°



0.20	2	25	0.006	0.008	0.008	0.19	41885	505	45°
0.30	2	37	0.008	0.012	0.012	0.28	42060	675	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.016	0.022	0.022	0.47	41990	1345	45°
0.60	2	74	0.016	0.026	0.026	0.56	42060	1345	45°
0.80	2	99	0.018	0.034	0.034	0.75	42015	1515	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°
1.50	2	150	0.028	0.064	0.064	1.40	34105	1910	45°
2.00	2	150	0.030	0.084	0.084	1.86	25670	1540	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 2xd




HM λ 30°
XA γ -10°

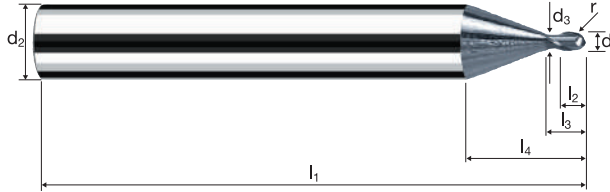

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL
											X6561
\varnothing Code	d_1	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z	
010	0.10	6.00	0.09	57	0.10	0.20	17.45	0.050	14.8°	2	●
020	0.20	6.00	0.18	57	0.20	0.40	17.34	0.100	14.6°	2	●
030	0.30	6.00	0.25	57	0.30	0.60	17.34	0.150	14.3°	2	●
040	0.40	6.00	0.35	57	0.40	0.80	17.26	0.200	14.1°	2	●
050	0.50	6.00	0.45	57	0.50	1.00	12.01	0.250	13.9°	2	●
060	0.60	6.00	0.55	57	0.60	1.20	12.03	0.300	13.7°	2	●
080	0.80	6.00	0.75	57	0.80	1.60	12.05	0.400	13.3°	2	●
100	1.00	6.00	0.95	57	1.00	2.00	12.08	0.500	12.9°	2	●
120	1.50	6.00	1.40	57	1.50	3.00	12.24	0.750	11.7°	2	●
140	2.00	6.00	1.90	57	2.00	4.00	12.31	1.000	10.6°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.10	2	7	0.004	0.006	0.020	0.05	44565	335	0.0
0.20	2	13	0.006	0.013	0.040	0.10	41380	520	0.3
0.30	2	20	0.010	0.019	0.060	0.15	42440	855	1.0
0.40	2	26	0.013	0.026	0.080	0.20	41380	1045	2.2
0.50	2	32	0.016	0.032	0.100	0.24	42440	1390	4.4
0.60	2	40	0.019	0.039	0.120	0.30	42440	1605	7.5
0.80	2	51	0.025	0.052	0.160	0.39	41625	2100	17.5
1.00	2	65	0.032	0.064	0.200	0.49	42225	2660	34.1

Hardened tool steel
48 - 52 HRC



0.10	2	7	0.004	0.006	0.020	0.05	44565	320	0.0
0.20	2	13	0.006	0.013	0.040	0.10	41380	495	0.3
0.30	2	20	0.010	0.019	0.060	0.15	42440	815	0.9
0.40	2	26	0.012	0.026	0.080	0.20	41380	995	2.1
0.50	2	32	0.016	0.032	0.100	0.24	42440	1325	4.2
0.60	2	40	0.018	0.039	0.120	0.30	42440	1530	7.2
0.80	2	51	0.024	0.052	0.160	0.39	41625	2000	16.6
1.00	2	65	0.030	0.064	0.200	0.49	42225	2535	32.4

Hardened tool steel
52 - 56 HRC




0.10	2	7	0.003	0.006	0.020	0.05	44565	265	0.0
0.20	2	13	0.005	0.013	0.040	0.10	41380	415	0.2
0.30	2	20	0.008	0.019	0.060	0.15	42440	680	0.8
0.40	2	26	0.010	0.026	0.080	0.20	41380	830	1.7
0.50	2	32	0.013	0.032	0.100	0.24	42440	1105	3.5
0.60	2	40	0.015	0.039	0.120	0.30	42440	1275	6.0
0.80	2	51	0.020	0.052	0.160	0.39	41625	1665	13.9
1.00	2	65	0.025	0.064	0.200	0.49	42225	2110	27.0

Hardened tool steel
56 - 60 HRC



0.10	2	7	0.003	0.006	0.020	0.05	44565	240	0.0
0.20	2	13	0.004	0.013	0.040	0.10	41380	370	0.2
0.30	2	20	0.007	0.019	0.060	0.15	42440	610	0.7
0.40	2	26	0.009	0.026	0.080	0.20	41380	745	1.5
0.50	2	32	0.012	0.032	0.100	0.24	42440	995	3.2
0.60	2	40	0.014	0.039	0.120	0.30	42440	1145	5.4
0.80	2	51	0.018	0.052	0.160	0.39	41625	1500	12.5
1.00	2	60	0.023	0.064	0.200	0.49	38975	1755	22.5

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.10	2	12	0.006	0.004	0.004	0.09	42440	510	45°
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	62	0.020	0.022	0.022	0.47	41990	1680	45°
0.60	2	74	0.020	0.026	0.026	0.56	42060	1680	45°
0.80	2	99	0.022	0.034	0.034	0.75	42015	1850	45°
1.00	2	123	0.028	0.042	0.042	0.93	42100	2360	45°

Hardened tool steel
48 - 52 HRC



0.10	2	12	0.006	0.004	0.004	0.09	42440	510	45°
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	62	0.020	0.022	0.022	0.47	41990	1680	45°
0.60	2	74	0.020	0.026	0.026	0.56	42060	1680	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°

Hardened tool steel
52 - 56 HRC



0.10	2	12	0.006	0.004	0.004	0.09	42440	510	45°
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.018	0.022	0.022	0.47	41990	1510	45°
0.60	2	74	0.018	0.026	0.026	0.56	42060	1515	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°

Hardened tool steel
56 - 60 HRC





0.10	2	12	0.004	0.004	0.004	0.09	42440	340	45°
0.20	2	25	0.006	0.008	0.008	0.19	41885	505	45°
0.30	2	37	0.008	0.012	0.012	0.28	42060	675	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.016	0.022	0.022	0.47	41990	1345	45°
0.60	2	74	0.016	0.026	0.026	0.56	42060	1345	45°
0.80	2	99	0.018	0.034	0.034	0.75	42015	1515	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 2.5xd




HM	λ 30°
XA	γ -10°

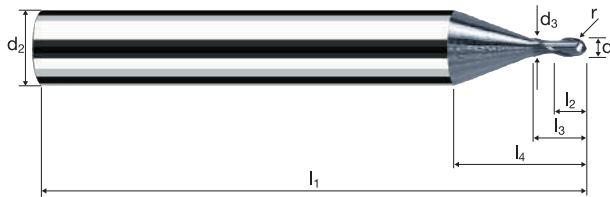

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------

Example: Order-N°.											X-AL
Coating: X Article-N°: 6581 ø-Code: 010											X6581
Ø Code	d1	d2 h4	d3	l1	l2	l3	l4	r ±0.005	α	z	
010	0.10	6.00	0.09	57	0.10	0.25	17.50	0.050	14.8°	2	●
020	0.20	6.00	0.18	57	0.20	0.50	17.44	0.100	14.5°	2	●
030	0.30	6.00	0.25	57	0.30	0.75	17.49	0.150	14.1°	2	●
040	0.40	6.00	0.35	57	0.40	1.00	17.46	0.200	13.9°	2	●
050	0.50	6.00	0.45	57	0.50	1.25	12.26	0.250	13.6°	2	●
060	0.60	6.00	0.55	57	0.60	1.50	12.33	0.300	13.4°	2	●
080	0.80	6.00	0.75	57	0.80	2.00	12.45	0.400	12.9°	2	●
100	1.00	6.00	0.95	57	1.00	2.50	12.58	0.500	12.3°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.20	2	12	0.006	0.011	0.040	0.09	42440	535	0.2
0.40	2	24	0.013	0.021	0.080	0.18	42440	1070	1.8
0.50	2	30	0.016	0.027	0.100	0.23	41520	1360	3.7
0.80	2	48	0.025	0.043	0.160	0.36	42440	2140	14.7
1.00	2	59	0.032	0.054	0.200	0.45	41735	2630	28.4
1.50	2	88	0.048	0.080	0.300	0.67	41810	4005	96.1
2.00	2	119	0.064	0.107	0.400	0.90	42090	5410	231.5
2.50	2	140	0.079	0.134	0.500	1.13	39435	6260	419.5
3.00	2	140	0.096	0.161	0.600	1.35	33010	6320	610.7

Hardened tool steel
48 - 52 HRC



0.20	2	12	0.006	0.011	0.040	0.09	42440	510	0.2
0.40	2	24	0.012	0.021	0.080	0.18	42440	1020	1.7
0.50	2	30	0.016	0.027	0.100	0.23	41520	1295	3.5
0.80	2	48	0.024	0.043	0.160	0.36	42440	2035	14.0
1.00	2	59	0.030	0.054	0.200	0.45	41735	2505	27.0
1.50	2	88	0.046	0.080	0.300	0.67	41810	3815	91.5
2.00	2	119	0.061	0.107	0.400	0.90	42090	5150	220.5
2.50	2	120	0.076	0.134	0.500	1.13	33805	5110	342.4
3.00	2	120	0.091	0.161	0.600	1.35	28295	5160	498.5

Hardened tool steel
52 - 56 HRC




0.20	2	12	0.005	0.011	0.040	0.09	42440	425	0.2
0.40	2	24	0.010	0.021	0.080	0.18	42440	850	1.4
0.50	2	30	0.013	0.027	0.100	0.23	41520	1080	2.9
0.80	2	48	0.020	0.043	0.160	0.36	42440	1700	11.7
1.00	2	59	0.025	0.054	0.200	0.45	41735	2085	22.5
1.50	2	88	0.038	0.080	0.300	0.67	41810	3175	76.3
2.00	2	100	0.051	0.107	0.400	0.90	35370	3610	154.4
2.50	2	100	0.063	0.134	0.500	1.13	28170	3550	237.8
3.00	2	100	0.076	0.161	0.600	1.35	23580	3585	346.2

Hardened tool steel
56 - 60 HRC



0.20	2	12	0.004	0.011	0.040	0.09	42440	380	0.2
0.40	2	24	0.009	0.021	0.080	0.18	42440	765	1.3
0.50	2	30	0.012	0.027	0.100	0.23	41520	970	2.6
0.80	2	48	0.018	0.043	0.160	0.36	42440	1530	10.5
1.00	2	59	0.023	0.054	0.200	0.45	41735	1880	20.3
1.50	2	60	0.034	0.080	0.300	0.67	28505	1950	46.8
2.00	2	60	0.046	0.107	0.400	0.90	21220	1950	83.4
2.50	2	60	0.057	0.134	0.500	1.13	16900	1915	128.4
3.00	2	60	0.068	0.161	0.600	1.35	14145	1935	187.0

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	62	0.020	0.022	0.022	0.47	41990	1680	45°
0.80	2	99	0.022	0.034	0.034	0.75	42015	1850	45°
1.00	2	123	0.028	0.042	0.042	0.93	42100	2360	45°
1.50	2	185	0.034	0.064	0.064	1.40	42060	2860	45°
2.00	2	245	0.038	0.084	0.084	1.86	41930	3185	45°
2.50	2	300	0.040	0.106	0.106	2.33	40985	3280	45°
3.00	2	300	0.046	0.126	0.126	2.79	34225	3150	45°

Hardened tool steel
48 - 52 HRC



0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	62	0.020	0.022	0.022	0.47	41990	1680	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.032	0.064	0.064	1.40	42060	2690	45°
2.00	2	245	0.036	0.084	0.084	1.86	41930	3020	45°
2.50	2	250	0.038	0.106	0.106	2.33	34155	2595	45°
3.00	2	250	0.044	0.126	0.126	2.79	28520	2510	45°

Hardened tool steel
52 - 56 HRC



0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.018	0.022	0.022	0.47	41990	1510	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.030	0.064	0.064	1.40	42060	2525	45°
2.00	2	200	0.034	0.084	0.084	1.86	34225	2325	45°
2.50	2	200	0.036	0.106	0.106	2.33	27325	1965	45°
3.00	2	200	0.042	0.126	0.126	2.79	22820	1915	45°

Hardened tool steel
56 - 60 HRC





0.20	2	25	0.006	0.008	0.008	0.19	41885	505	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.016	0.022	0.022	0.47	41990	1345	45°
0.80	2	99	0.018	0.034	0.034	0.75	42015	1515	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°
1.50	2	150	0.028	0.064	0.064	1.40	34105	1910	45°
2.00	2	150	0.030	0.084	0.084	1.86	25670	1540	45°
2.50	2	150	0.032	0.106	0.106	2.33	20490	1310	45°
3.00	2	150	0.036	0.126	0.126	2.79	17115	1230	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 3xd




HM XA	λ 30° γ -10°
----------	--------------------------------

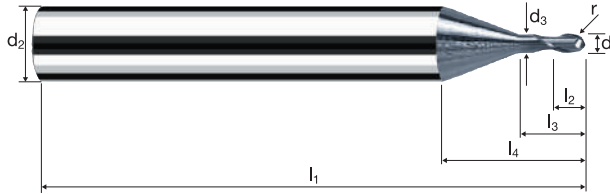

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL
Coating: X Article-N°: 6562 ø-Code: 010											
Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	X6562
010	0.10	6.00	0.09	57	0.10	0.30	17.55	0.050	14.7°	2	●
020	0.20	6.00	0.18	57	0.20	0.60	17.54	0.100	14.4°	2	●
030	0.30	6.00	0.25	57	0.30	0.90	17.64	0.150	14.0°	2	●
040	0.40	6.00	0.35	57	0.40	1.20	17.66	0.200	13.7°	2	●
050	0.50	6.00	0.45	57	0.50	1.50	12.51	0.250	13.3°	2	●
060	0.60	6.00	0.55	57	0.60	1.80	12.63	0.300	13.0°	2	●
080	0.80	6.00	0.75	57	0.80	2.40	12.85	0.400	12.4°	2	●
100	1.00	6.00	0.95	57	1.00	3.00	13.08	0.500	11.8°	2	●
108	1.20	6.00	1.10	57	1.20	3.60	13.40	0.600	11.2°	2	●
120	1.50	6.00	1.40	57	1.50	4.50	13.74	0.750	10.3°	2	●
140	2.00	6.00	1.90	57	2.00	6.00	14.31	1.000	9.0°	2	●
152	2.30	6.00	2.10	57	2.30	6.90	14.84	1.150	8.1°	2	●
160	2.50	6.00	2.30	57	2.50	7.50	15.06	1.250	7.6°	2	●
172	2.80	6.00	2.60	57	2.80	8.40	15.40	1.400	6.8°	2	●
180	3.00	6.00	2.80	57	3.00	9.00	15.63	1.500	6.4°	2	●

Application



Material


Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.10	2	5	0.004	0.005	0.020	0.04	39790	300	0.0
0.20	2	11	0.006	0.009	0.040	0.08	43770	550	0.2
0.30	2	17	0.010	0.014	0.060	0.13	41625	840	0.7
0.40	2	22	0.013	0.018	0.080	0.17	41195	1040	1.5
0.50	2	28	0.016	0.023	0.100	0.21	42440	1390	3.2
0.60	2	33	0.019	0.028	0.120	0.25	42015	1590	5.3
0.80	2	45	0.025	0.037	0.160	0.34	42130	2125	12.6
1.00	2	55	0.032	0.046	0.200	0.42	41685	2625	24.2

0.10	2	5	0.004	0.005	0.020	0.04	39790	285	0.0
0.20	2	11	0.006	0.009	0.040	0.08	43770	525	0.2
0.30	2	17	0.010	0.014	0.060	0.13	41625	800	0.7
0.40	2	22	0.012	0.018	0.080	0.17	41195	990	1.4
0.50	2	28	0.016	0.023	0.100	0.21	42440	1325	3.0
0.60	2	33	0.018	0.028	0.120	0.25	42015	1515	5.1
0.80	2	45	0.024	0.037	0.160	0.34	42130	2020	12.0
1.00	2	55	0.030	0.046	0.200	0.42	41685	2500	23.0

0.10	2	5	0.003	0.005	0.020	0.04	39790	240	0.0
0.20	2	11	0.005	0.009	0.040	0.08	43770	440	0.2
0.30	2	17	0.008	0.014	0.060	0.13	41625	665	0.6
0.40	2	22	0.010	0.018	0.080	0.17	41195	825	1.2
0.50	2	28	0.013	0.023	0.100	0.21	42440	1105	2.5
0.60	2	33	0.015	0.028	0.120	0.25	42015	1260	4.2
0.80	2	45	0.020	0.037	0.160	0.34	42130	1685	10.0
1.00	2	55	0.025	0.046	0.200	0.42	41685	2085	19.2

0.10	2	5	0.003	0.005	0.020	0.04	39790	215	0.0
0.20	2	11	0.004	0.009	0.040	0.08	43770	395	0.1
0.30	2	17	0.007	0.014	0.060	0.13	41625	600	0.5
0.40	2	22	0.009	0.018	0.080	0.17	41195	740	1.1
0.50	2	28	0.012	0.023	0.100	0.21	42440	995	2.3
0.60	2	33	0.014	0.028	0.120	0.25	42015	1135	3.8
0.80	2	45	0.018	0.037	0.160	0.34	42130	1515	9.0
1.00	2	55	0.023	0.046	0.200	0.42	41685	1875	17.3

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.10	2	12	0.006	0.004	0.004	0.09	42440	510	45°
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	62	0.020	0.022	0.022	0.47	41990	1680	45°
0.60	2	74	0.020	0.026	0.026	0.56	42060	1680	45°
0.80	2	99	0.022	0.034	0.034	0.75	42015	1850	45°
1.00	2	123	0.028	0.042	0.042	0.93	42100	2360	45°

0.10	2	12	0.006	0.004	0.004	0.09	42440	510	45°
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	62	0.020	0.022	0.022	0.47	41990	1680	45°
0.60	2	74	0.020	0.026	0.026	0.56	42060	1680	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°

0.10	2	12	0.006	0.004	0.004	0.09	42440	510	45°
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.018	0.022	0.022	0.47	41990	1510	45°
0.60	2	74	0.018	0.026	0.026	0.56	42060	1515	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°



0.10	2	12	0.004	0.004	0.004	0.09	42440	340	45°
0.20	2	25	0.006	0.008	0.008	0.19	41885	505	45°
0.30	2	37	0.008	0.012	0.012	0.28	42060	675	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.016	0.022	0.022	0.47	41990	1345	45°
0.60	2	74	0.016	0.026	0.026	0.56	42060	1345	45°
0.80	2	99	0.018	0.034	0.034	0.75	42015	1515	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 3.5xd




HM λ 30°
XA γ -10°

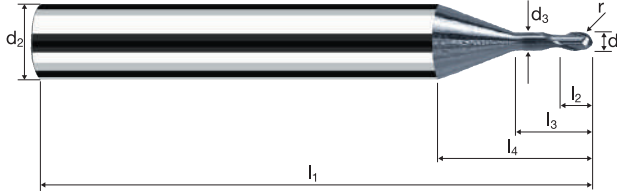

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------

Example: Order-N°.											X-AL
											X6582
	Coating		Article-N°.		ø-Code						
	X		6582		010						
\varnothing Code	d_1	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z	
010	0.10	6.00	0.09	57	0.10	0.35	17.60	0.050	14.6°	2	●
020	0.20	6.00	0.18	57	0.20	0.70	17.64	0.100	14.2°	2	●
030	0.30	6.00	0.25	57	0.30	1.05	17.79	0.150	13.8°	2	●
040	0.40	6.00	0.35	57	0.40	1.40	17.86	0.200	13.4°	2	●
050	0.50	6.00	0.45	57	0.50	1.75	12.76	0.250	13.1°	2	●
060	0.60	6.00	0.55	57	0.60	2.10	12.93	0.300	12.7°	2	●
080	0.80	6.00	0.75	57	0.80	2.80	13.25	0.400	12.0°	2	●
100	1.00	6.00	0.95	57	1.00	3.50	13.58	0.500	11.4°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
0.20	2	11	0.006	0.008	0.040	0.08	43770	550	0.2
0.30	2	16	0.010	0.012	0.060	0.12	42440	855	0.6
0.40	2	21	0.013	0.016	0.080	0.16	41780	1055	1.3
0.50	2	26	0.016	0.020	0.100	0.20	41380	1355	2.7
0.60	2	32	0.019	0.024	0.120	0.24	42440	1605	4.6
0.80	2	41	0.025	0.032	0.160	0.31	42100	2120	10.9
1.00	2	51	0.032	0.040	0.200	0.39	41625	2620	21.0
1.50	2	78	0.048	0.060	0.300	0.59	42080	4030	72.5
2.00	2	103	0.063	0.080	0.400	0.78	42035	5295	169.5

0.20	2	11	0.006	0.008	0.040	0.08	43770	525	0.2
0.30	2	16	0.010	0.012	0.060	0.12	42440	815	0.6
0.40	2	21	0.012	0.016	0.080	0.16	41780	1005	1.3
0.50	2	26	0.016	0.020	0.100	0.20	41380	1290	2.6
0.60	2	32	0.018	0.024	0.120	0.24	42440	1530	4.4
0.80	2	41	0.024	0.032	0.160	0.31	42100	2020	10.3
1.00	2	51	0.030	0.040	0.200	0.39	41625	2500	20.0
1.50	2	78	0.046	0.060	0.300	0.59	42080	3840	69.1
2.00	2	103	0.060	0.080	0.400	0.78	42035	5045	161.4

0.20	2	11	0.005	0.008	0.040	0.08	43770	440	0.1
0.30	2	16	0.008	0.012	0.060	0.12	42440	680	0.5
0.40	2	21	0.010	0.016	0.080	0.16	41780	835	1.1
0.50	2	26	0.013	0.020	0.100	0.20	41380	1075	2.2
0.60	2	32	0.015	0.024	0.120	0.24	42440	1275	3.7
0.80	2	41	0.020	0.032	0.160	0.31	42100	1685	8.6
1.00	2	51	0.025	0.040	0.200	0.39	41625	2080	16.7
1.50	2	78	0.038	0.060	0.300	0.59	42080	3200	57.6
2.00	2	100	0.050	0.080	0.400	0.78	40810	4080	130.6

0.20	2	11	0.004	0.008	0.040	0.08	43770	395	0.1
0.30	2	16	0.007	0.012	0.060	0.12	42440	610	0.4
0.40	2	21	0.009	0.016	0.080	0.16	41780	750	1.0
0.50	2	26	0.012	0.020	0.100	0.20	41380	970	1.9
0.60	2	32	0.014	0.024	0.120	0.24	42440	1145	3.3
0.80	2	41	0.018	0.032	0.160	0.31	42100	1515	7.8
1.00	2	51	0.023	0.040	0.200	0.39	41625	1875	15.0
1.50	2	60	0.034	0.060	0.300	0.59	32370	2215	39.9
2.00	2	60	0.045	0.080	0.400	0.78	24485	2205	70.5

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	62	0.020	0.022	0.022	0.47	41990	1680	45°
0.60	2	74	0.020	0.026	0.026	0.56	42060	1680	45°
0.80	2	99	0.022	0.034	0.034	0.75	42015	1850	45°
1.00	2	123	0.028	0.042	0.042	0.93	42100	2360	45°
1.50	2	185	0.034	0.064	0.064	1.40	42060	2860	45°
2.00	2	245	0.038	0.084	0.084	1.86	41930	3185	45°

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	62	0.020	0.022	0.022	0.47	41990	1680	45°
0.60	2	74	0.020	0.026	0.026	0.56	42060	1680	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.032	0.064	0.064	1.40	42060	2690	45°
2.00	2	245	0.036	0.084	0.084	1.86	41930	3020	45°

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.018	0.022	0.022	0.47	41990	1510	45°
0.60	2	74	0.018	0.026	0.026	0.56	42060	1515	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.030	0.064	0.064	1.40	42060	2525	45°
2.00	2	200	0.034	0.084	0.084	1.86	34225	2325	45°



0.20	2	25	0.006	0.008	0.008	0.19	41885	505	45°
0.30	2	37	0.008	0.012	0.012	0.28	42060	675	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	62	0.016	0.022	0.022	0.47	41990	1345	45°
0.60	2	74	0.016	0.026	0.026	0.56	42060	1345	45°
0.80	2	99	0.018	0.034	0.034	0.75	42015	1515	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°
1.50	2	150	0.028	0.064	0.064	1.40	34105	1910	45°
2.00	2	150	0.030	0.084	0.084	1.86	25670	1540	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 4xd




HM λ 30°
XA γ -10°

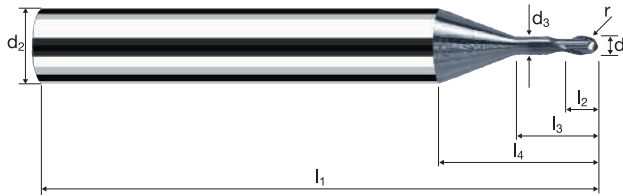

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL
											X6563
\varnothing Code	d_1	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z	
010	0.10	6.00	0.09	57	0.10	0.40	17.65	0.050	14.6°	2	●
020	0.20	6.00	0.18	57	0.20	0.80	17.74	0.100	14.1°	2	●
030	0.30	6.00	0.25	57	0.30	1.20	17.94	0.150	13.6°	2	●
040	0.40	6.00	0.35	57	0.40	1.60	18.06	0.200	13.2°	2	●
050	0.50	6.00	0.45	57	0.50	2.00	13.01	0.250	12.8°	2	●
060	0.60	6.00	0.55	57	0.60	2.40	13.23	0.300	12.4°	2	●
080	0.80	6.00	0.75	57	0.80	3.20	13.65	0.400	11.7°	2	●
100	1.00	6.00	0.95	57	1.00	4.00	14.08	0.500	11.0°	2	●
120	1.50	6.00	1.40	57	1.50	6.00	15.24	0.750	9.3°	2	●
140	2.00	6.00	1.90	61	2.00	8.00	16.31	1.000	7.8°	2	●

Application



Material


Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.10	2	5	0.004	0.004	0.020	0.04	39790	300	0.0
0.20	2	9	0.006	0.007	0.040	0.07	40925	515	0.1
0.30	2	15	0.010	0.011	0.060	0.11	43405	875	0.6
0.40	2	20	0.013	0.014	0.080	0.15	42440	1070	1.2
0.50	2	25	0.016	0.018	0.100	0.19	41885	1370	2.5
0.60	2	29	0.019	0.021	0.120	0.22	41960	1585	4.0
0.80	2	40	0.025	0.029	0.160	0.30	42440	2140	9.9
1.00	2	49	0.032	0.036	0.200	0.37	42155	2655	19.1

0.10	2	5	0.004	0.004	0.020	0.04	39790	285	0.0
0.20	2	9	0.006	0.007	0.040	0.07	40925	490	0.1
0.30	2	15	0.010	0.011	0.060	0.11	43405	835	0.6
0.40	2	20	0.012	0.014	0.080	0.15	42440	1020	1.1
0.50	2	25	0.016	0.018	0.100	0.19	41885	1305	2.4
0.60	2	29	0.018	0.021	0.120	0.22	41960	1510	3.8
0.80	2	40	0.024	0.029	0.160	0.30	42440	2035	9.5
1.00	2	49	0.030	0.036	0.200	0.37	42155	2530	18.2

0.10	2	5	0.003	0.004	0.020	0.04	39790	240	0.0
0.20	2	9	0.005	0.007	0.040	0.07	40925	410	0.1
0.30	2	15	0.008	0.011	0.060	0.11	43405	695	0.5
0.40	2	20	0.010	0.014	0.080	0.15	42440	850	1.0
0.50	2	25	0.013	0.018	0.100	0.19	41885	1090	2.0
0.60	2	29	0.015	0.021	0.120	0.22	41960	1260	3.2
0.80	2	40	0.020	0.029	0.160	0.30	42440	1700	7.9
1.00	2	49	0.025	0.036	0.200	0.37	42155	2110	15.2

0.10	2	5	0.003	0.004	0.020	0.04	39790	215	0.0
0.20	2	9	0.004	0.007	0.040	0.07	40925	370	0.1
0.30	2	15	0.007	0.011	0.060	0.11	43405	625	0.4
0.40	2	20	0.009	0.014	0.080	0.15	42440	765	0.9
0.50	2	25	0.012	0.018	0.100	0.19	41885	980	1.8
0.60	2	29	0.014	0.021	0.120	0.22	41960	1135	2.9
0.80	2	40	0.018	0.029	0.160	0.30	42440	1530	7.1
1.00	2	49	0.023	0.036	0.200	0.37	42155	1895	13.7

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.10	2	12	0.006	0.004	0.004	0.09	42440	510	45°
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	61	0.020	0.020	0.020	0.46	42210	1690	45°
0.60	2	74	0.020	0.024	0.024	0.56	42060	1680	45°
0.80	2	98	0.022	0.032	0.032	0.74	42155	1855	45°
1.00	2	123	0.028	0.042	0.042	0.93	42100	2360	45°

0.10	2	12	0.006	0.004	0.004	0.09	42440	510	45°
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	61	0.020	0.020	0.020	0.46	42210	1690	45°
0.60	2	74	0.020	0.024	0.024	0.56	42060	1680	45°
0.80	2	98	0.020	0.032	0.032	0.74	42155	1685	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°

0.10	2	12	0.006	0.004	0.004	0.09	42440	510	45°
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.018	0.020	0.020	0.46	42210	1520	45°
0.60	2	74	0.018	0.024	0.024	0.56	42060	1515	45°
0.80	2	98	0.020	0.032	0.032	0.74	42155	1685	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°



0.10	2	12	0.004	0.004	0.004	0.09	42440	340	45°
0.20	2	25	0.006	0.008	0.008	0.19	41885	505	45°
0.30	2	37	0.008	0.012	0.012	0.28	42060	675	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.016	0.020	0.020	0.46	42210	1350	45°
0.60	2	74	0.016	0.024	0.024	0.56	42060	1345	45°
0.80	2	98	0.018	0.032	0.032	0.74	42155	1520	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 4.5xd




HM λ 30°
XA γ -10°

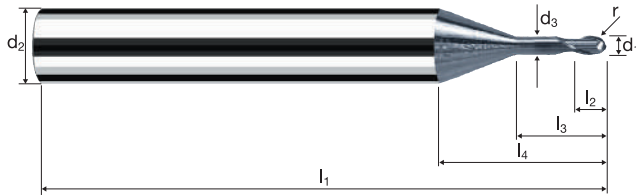

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL
Coating: X Article-N°: 6583 ø-Code: 010											X6583
Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	
010	0.10	6.00	0.09	57	0.10	0.45	17.65	0.050	14.5°	2	●
020	0.20	6.00	0.18	57	0.20	0.90	17.84	0.100	14.0°	2	●
030	0.30	6.00	0.25	57	0.30	1.35	18.09	0.150	13.5°	2	●
040	0.40	6.00	0.35	57	0.40	1.80	18.26	0.200	13.0°	2	●
050	0.50	6.00	0.45	57	0.50	2.25	13.26	0.250	12.6°	2	●
060	0.60	6.00	0.55	57	0.60	2.70	13.53	0.300	12.1°	2	●
080	0.80	6.00	0.75	57	0.80	3.60	14.05	0.400	11.8°	2	●
100	1.00	6.00	0.95	57	1.00	4.50	14.58	0.500	10.6°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.20	2	9	0.006	0.006	0.040	0.07	40925	515	0.1
0.40	2	18	0.013	0.013	0.080	0.14	40925	1030	1.1
0.50	2	24	0.016	0.016	0.100	0.18	42440	1390	2.2
0.80	2	37	0.025	0.026	0.160	0.28	42060	2120	8.8
1.00	2	46	0.032	0.032	0.200	0.35	41835	2635	16.9
1.50	2	70	0.048	0.048	0.300	0.53	42040	4025	58.0
2.00	2	92	0.063	0.064	0.400	0.70	41835	5270	134.9
2.50	2	116	0.079	0.080	0.500	0.88	41960	6660	266.5
3.00	2	140	0.094	0.096	0.600	1.06	42040	7945	457.7

Hardened tool steel
48 - 52 HRC

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.20	2	9	0.006	0.006	0.040	0.07	40925	490	0.1
0.40	2	18	0.012	0.013	0.080	0.14	40925	980	1.0
0.50	2	24	0.016	0.016	0.100	0.18	42440	1325	2.1
0.80	2	37	0.024	0.026	0.160	0.28	42060	2020	8.4
1.00	2	46	0.030	0.032	0.200	0.35	41835	2510	16.1
1.50	2	70	0.046	0.048	0.300	0.53	42040	3835	55.2
2.00	2	92	0.060	0.064	0.400	0.70	41835	5020	128.5
2.50	2	116	0.076	0.080	0.500	0.88	41960	6345	253.8
3.00	2	120	0.090	0.096	0.600	1.06	36035	6485	373.6


Hardened tool steel
52 - 56 HRC

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.20	2	9	0.005	0.006	0.040	0.07	40925	410	0.1
0.40	2	18	0.010	0.013	0.080	0.14	40925	820	0.9
0.50	2	24	0.013	0.016	0.100	0.18	42440	1105	1.8
0.80	2	37	0.020	0.026	0.160	0.28	42060	1680	7.0
1.00	2	46	0.025	0.032	0.200	0.35	41835	2090	13.4
1.50	2	70	0.038	0.048	0.300	0.53	42040	3195	46.0
2.00	2	92	0.050	0.064	0.400	0.70	41835	4185	107.1
2.50	2	100	0.063	0.080	0.500	0.88	36170	4560	182.3
3.00	2	100	0.075	0.096	0.600	1.06	30030	4505	259.5

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.20	2	9	0.004	0.006	0.040	0.07	40925	370	0.1
0.40	2	18	0.009	0.013	0.080	0.14	40925	735	0.8
0.50	2	24	0.012	0.016	0.100	0.18	42440	995	1.6
0.80	2	37	0.018	0.026	0.160	0.28	42060	1515	6.3
1.00	2	46	0.023	0.032	0.200	0.35	41835	1885	12.0
1.50	2	60	0.034	0.048	0.300	0.53	36035	2465	35.5
2.00	2	60	0.045	0.064	0.400	0.70	27285	2455	62.9
2.50	2	60	0.057	0.080	0.500	0.88	21705	2460	98.4
3.00	2	60	0.068	0.096	0.600	1.06	18020	2430	140.1

Application



Material

Hardened tool steel
42 - 48 HRC

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	61	0.020	0.020	0.020	0.46	42210	1690	45°
0.80	2	98	0.022	0.032	0.032	0.74	42155	1855	45°
1.00	2	123	0.028	0.042	0.042	0.93	42100	2360	45°
1.50	2	185	0.034	0.062	0.062	1.40	42060	2860	45°
2.00	2	245	0.038	0.082	0.082	1.86	41930	3185	45°
2.50	2	300	0.040	0.102	0.102	2.32	41160	3295	45°
3.00	2	300	0.046	0.122	0.122	2.79	34225	3150	45°

Hardened tool steel
48 - 52 HRC

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	61	0.020	0.020	0.020	0.46	42210	1690	45°
0.80	2	98	0.020	0.032	0.032	0.74	42155	1685	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.032	0.062	0.062	1.40	42060	2690	45°
2.00	2	245	0.036	0.082	0.082	1.86	41930	3020	45°
2.50	2	250	0.038	0.102	0.102	2.32	34300	2605	45°
3.00	2	250	0.044	0.122	0.122	2.79	28520	2510	45°

Hardened tool steel
52 - 56 HRC

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.018	0.020	0.020	0.46	42210	1520	45°
0.80	2	98	0.020	0.032	0.032	0.74	42155	1685	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.030	0.062	0.062	1.40	42060	2525	45°
2.00	2	200	0.034	0.082	0.082	1.86	34225	2325	45°
2.50	2	200	0.036	0.102	0.102	2.32	27440	1975	45°
3.00	2	200	0.042	0.122	0.122	2.79	22820	1915	45°

Hardened tool steel
56 - 60 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.20	2	25	0.006	0.008	0.008	0.19	41885	505	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.016	0.020	0.020	0.46	42210	1350	45°
0.80	2	98	0.018	0.032	0.032	0.74	42155	1520	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°
1.50	2	150	0.028	0.062	0.062	1.40	34105	1910	45°
2.00	2	150	0.030	0.082	0.082	1.86	25670	1540	45°
2.50	2	150	0.032	0.102	0.102	2.32	20580	1315	45°
3.00	2	150	0.036	0.122	0.122	2.79	17115	1230	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 5xd




HM λ 30°
XA γ -10°

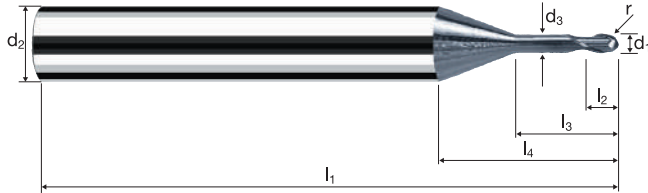

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------

Example: Order-N°.											X-AL
Coating X Article-N° 6564 ø-Code 010											X6564
Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	
010	0.10	6.00	0.09	57	0.10	0.50	17.70	0.050	14.5°	2	●
020	0.20	6.00	0.18	57	0.20	1.00	17.94	0.100	13.9°	2	●
030	0.30	6.00	0.25	57	0.30	1.50	18.24	0.150	13.8°	2	●
040	0.40	6.00	0.35	57	0.40	2.00	18.46	0.200	12.8°	2	●
050	0.50	6.00	0.45	57	0.50	2.50	13.51	0.250	12.3°	2	●
060	0.60	6.00	0.55	57	0.60	3.00	13.83	0.300	11.9°	2	●
080	0.80	6.00	0.75	57	0.80	4.00	14.45	0.400	11.0°	2	●
100	1.00	6.00	0.95	57	1.00	5.00	15.08	0.500	10.2°	2	●
108	1.20	6.00	1.10	57	1.20	6.00	15.80	0.600	9.4°	2	●
120	1.50	6.00	1.40	61	1.50	7.50	16.74	0.750	8.4°	2	●
140	2.00	6.00	1.90	61	2.00	10.00	18.31	1.000	6.9°	2	●
152	2.30	6.00	2.10	61	2.30	11.50	19.44	1.150	6.0°	2	●
160	2.50	6.00	2.30	61	2.50	12.50	20.06	1.250	5.5°	2	●
172	2.80	6.00	2.60	61	2.80	14.00	21.00	1.400	4.9°	2	●
180	3.00	6.00	2.80	66	3.00	15.00	21.63	1.500	4.4°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.20	2	8	0.006	0.005	0.040	0.06	42440	535	0.1
0.30	2	13	0.010	0.008	0.060	0.10	41380	835	0.4
0.40	2	17	0.013	0.011	0.080	0.13	41625	1050	0.9
0.50	2	21	0.016	0.013	0.100	0.16	41780	1370	1.8
0.60	2	25	0.019	0.016	0.120	0.19	41885	1585	3.0
0.80	2	34	0.025	0.021	0.160	0.26	41625	2100	7.0
1.00	2	42	0.032	0.027	0.200	0.32	41780	2630	14.2
1.50	2	63	0.048	0.040	0.300	0.48	41780	4000	48.0
2.00	2	84	0.063	0.053	0.400	0.64	41780	5265	111.6

Hardened tool steel
48 - 52 HRC

0.20	2	8	0.006	0.005	0.040	0.06	42440	510	0.1
0.30	2	13	0.010	0.008	0.060	0.10	41380	795	0.4
0.40	2	17	0.012	0.011	0.080	0.13	41625	1000	0.9
0.50	2	21	0.016	0.013	0.100	0.16	41780	1305	1.7
0.60	2	25	0.018	0.016	0.120	0.19	41885	1510	2.9
0.80	2	34	0.024	0.021	0.160	0.26	41625	2000	6.7
1.00	2	42	0.030	0.027	0.200	0.32	41780	2505	13.5
1.50	2	63	0.046	0.040	0.300	0.48	41780	3810	45.7
2.00	2	84	0.060	0.053	0.400	0.64	41780	5015	106.3


Hardened tool steel
52 - 56 HRC

0.20	2	8	0.005	0.005	0.040	0.06	42440	425	0.1
0.30	2	13	0.008	0.008	0.060	0.10	41380	660	0.3
0.40	2	17	0.010	0.011	0.080	0.13	41625	835	0.7
0.50	2	21	0.013	0.013	0.100	0.16	41780	1085	1.4
0.60	2	25	0.015	0.016	0.120	0.19	41885	1255	2.4
0.80	2	34	0.020	0.021	0.160	0.26	41625	1665	5.6
1.00	2	42	0.025	0.027	0.200	0.32	41780	2090	11.3
1.50	2	63	0.038	0.040	0.300	0.48	41780	3175	38.1
2.00	2	84	0.050	0.053	0.400	0.64	41780	4180	88.6

Hardened tool steel
56 - 60 HRC

0.20	2	8	0.004	0.005	0.040	0.06	42440	380	0.1
0.30	2	13	0.007	0.008	0.060	0.10	41380	595	0.3
0.40	2	17	0.009	0.011	0.080	0.13	41625	750	0.7
0.50	2	21	0.012	0.013	0.100	0.16	41780	980	1.3
0.60	2	25	0.014	0.016	0.120	0.19	41885	1130	2.2
0.80	2	34	0.018	0.021	0.160	0.26	41625	1500	5.0
1.00	2	42	0.023	0.027	0.200	0.32	41780	1880	10.2
1.50	2	60	0.034	0.040	0.300	0.48	39790	2720	32.7
2.00	2	60	0.045	0.053	0.400	0.64	29840	2685	56.9

Application



Material

Hardened tool steel
42 - 48 HRC

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	61	0.020	0.020	0.020	0.46	42210	1690	45°
0.60	2	74	0.020	0.024	0.024	0.56	42060	1680	45°
0.80	2	98	0.022	0.032	0.032	0.74	42155	1855	45°
1.00	2	123	0.028	0.042	0.042	0.93	42100	2360	45°
1.50	2	185	0.034	0.062	0.062	1.40	42060	2860	45°
2.00	2	245	0.038	0.082	0.082	1.86	41930	3185	45°

Hardened tool steel
48 - 52 HRC

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	61	0.020	0.020	0.020	0.46	42210	1690	45°
0.60	2	74	0.020	0.024	0.024	0.56	42060	1680	45°
0.80	2	98	0.020	0.032	0.032	0.74	42155	1685	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.032	0.062	0.062	1.40	42060	2690	45°
2.00	2	245	0.036	0.082	0.082	1.86	41930	3020	45°

Hardened tool steel
52 - 56 HRC

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.018	0.020	0.020	0.46	42210	1520	45°
0.60	2	74	0.018	0.024	0.024	0.56	42060	1515	45°
0.80	2	98	0.020	0.032	0.032	0.74	42155	1685	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.030	0.062	0.062	1.40	42060	2525	45°
2.00	2	200	0.034	0.082	0.082	1.86	34225	2325	45°

Hardened tool steel
56 - 60 HRC



0.20	2	25	0.006	0.008	0.008	0.19	41885	505	45°
0.30	2	37	0.008	0.012	0.012	0.28	42060	675	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.016	0.020	0.020	0.46	42210	1350	45°
0.60	2	74	0.016	0.024	0.024	0.56	42060	1345	45°
0.80	2	98	0.018	0.032	0.032	0.74	42155	1520	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°
1.50	2	150	0.028	0.062	0.062	1.40	34105	1910	45°
2.00	2	150	0.030	0.082	0.082	1.86	25670	1540	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 6xd




HM XA	λ 30° γ -10°
----------	--------------------------------

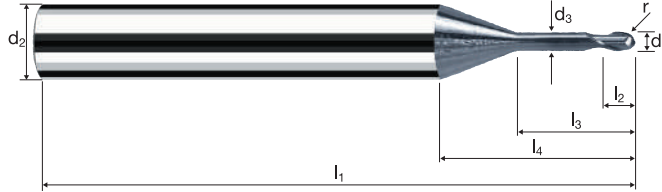

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL
Coating: X											X6565
Article-N°: 6565											
ø-Code: 020											X6565
Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	
020	0.20	6.00	0.18	57	0.20	1.20	18.14	0.100	13.7°	2	●
030	0.30	6.00	0.25	57	0.30	1.80	18.54	0.150	13.0°	2	●
040	0.40	6.00	0.35	57	0.40	2.40	18.86	0.200	12.4°	2	●
050	0.50	6.00	0.45	57	0.50	3.00	14.01	0.250	11.9°	2	●
060	0.60	6.00	0.55	57	0.60	3.60	14.43	0.300	11.4°	2	●
080	0.80	6.00	0.75	57	0.80	4.80	15.25	0.400	10.4°	2	●
100	1.00	6.00	0.95	57	1.00	6.00	16.08	0.500	9.5°	2	●
120	1.50	6.00	1.40	61	1.50	9.00	18.24	0.750	7.6°	2	●
140	2.00	6.00	1.90	66	2.00	12.00	20.31	1.000	6.1°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_t [mm/min]	Q [mm ³ /min]
0.20	2	8	0.006	0.005	0.040	0.06	42440	535	0.1
0.30	2	12	0.010	0.007	0.060	0.09	42440	855	0.4
0.40	2	16	0.013	0.009	0.080	0.12	42440	1070	0.8
0.50	2	20	0.016	0.011	0.100	0.15	42440	1390	1.5
0.60	2	24	0.019	0.014	0.120	0.18	42440	1605	2.7
0.80	2	32	0.025	0.018	0.160	0.24	42440	2140	6.2
1.00	2	40	0.032	0.023	0.200	0.30	42440	2675	12.3
1.50	2	59	0.048	0.034	0.300	0.45	41735	3995	40.8
2.00	2	79	0.063	0.046	0.400	0.60	41910	5280	97.2

0.20	2	8	0.006	0.005	0.040	0.06	42440	510	0.1
0.30	2	12	0.010	0.007	0.060	0.09	42440	815	0.3
0.40	2	16	0.012	0.009	0.080	0.12	42440	1020	0.7
0.50	2	20	0.016	0.011	0.100	0.15	42440	1325	1.5
0.60	2	24	0.018	0.014	0.120	0.18	42440	1530	2.6
0.80	2	32	0.024	0.018	0.160	0.24	42440	2035	5.9
1.00	2	40	0.030	0.023	0.200	0.30	42440	2545	11.7
1.50	2	59	0.046	0.034	0.300	0.45	41735	3805	38.8
2.00	2	79	0.060	0.046	0.400	0.60	41910	5030	92.5

0.20	2	8	0.005	0.005	0.040	0.06	42440	425	0.1
0.30	2	12	0.008	0.007	0.060	0.09	42440	680	0.3
0.40	2	16	0.010	0.009	0.080	0.12	42440	850	0.6
0.50	2	20	0.013	0.011	0.100	0.15	42440	1105	1.2
0.60	2	24	0.015	0.014	0.120	0.18	42440	1275	2.1
0.80	2	32	0.020	0.018	0.160	0.24	42440	1700	4.9
1.00	2	40	0.025	0.023	0.200	0.30	42440	2120	9.8
1.50	2	59	0.038	0.034	0.300	0.45	41735	3170	32.4
2.00	2	79	0.050	0.046	0.400	0.60	41910	4190	77.1

0.20	2	8	0.004	0.005	0.040	0.06	42440	380	0.1
0.30	2	12	0.007	0.007	0.060	0.09	42440	610	0.3
0.40	2	16	0.009	0.009	0.080	0.12	42440	765	0.6
0.50	2	20	0.012	0.011	0.100	0.15	42440	995	1.1
0.60	2	24	0.014	0.014	0.120	0.18	42440	1145	1.9
0.80	2	32	0.018	0.018	0.160	0.24	42440	1530	4.4
1.00	2	40	0.023	0.023	0.200	0.30	42440	1910	8.8
1.50	2	59	0.034	0.034	0.300	0.45	41735	2855	29.1
2.00	2	60	0.045	0.046	0.400	0.60	31830	2865	52.7

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_t [mm/min]	β [°]
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	61	0.020	0.020	0.020	0.46	42210	1690	45°
0.60	2	74	0.020	0.024	0.024	0.56	42060	1680	45°
0.80	2	98	0.022	0.032	0.032	0.74	42155	1855	45°
1.00	2	123	0.028	0.042	0.042	0.93	42100	2360	45°
1.50	2	185	0.034	0.062	0.062	1.40	42060	2860	45°
2.00	2	245	0.038	0.082	0.082	1.86	41930	3185	45°

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	61	0.020	0.020	0.020	0.46	42210	1690	45°
0.60	2	74	0.020	0.024	0.024	0.56	42060	1680	45°
0.80	2	98	0.020	0.032	0.032	0.74	42155	1685	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.032	0.062	0.062	1.40	42060	2690	45°
2.00	2	245	0.036	0.082	0.082	1.86	41930	3020	45°

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.018	0.020	0.020	0.46	42210	1520	45°
0.60	2	74	0.018	0.024	0.024	0.56	42060	1515	45°
0.80	2	98	0.020	0.032	0.032	0.74	42155	1685	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.50	2	185	0.030	0.062	0.062	1.40	42060	2525	45°
2.00	2	200	0.034	0.082	0.082	1.86	34225	2325	45°



0.20	2	25	0.006	0.008	0.008	0.19	41885	505	45°
0.30	2	37	0.008	0.012	0.012	0.28	42060	675	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.016	0.020	0.020	0.46	42210	1350	45°
0.60	2	74	0.016	0.024	0.024	0.56	42060	1345	45°
0.80	2	98	0.018	0.032	0.032	0.74	42155	1520	45°
1.00	2	123	0.022	0.042	0.042	0.93	42100	1850	45°
1.50	2	150	0.028	0.062	0.062	1.40	34105	1910	45°
2.00	2	150	0.030	0.082	0.082	1.86	25670	1540	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 7xd



HM λ 30°
XA γ -10°

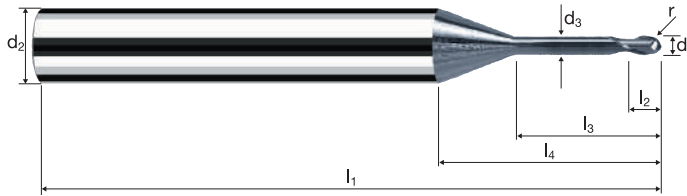


Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL
											X6579
\varnothing Code	d_1	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z	
020	0.20	6.00	0.18	57	0.20	1.40	18.02	0.100	13.4°	2	●
030	0.30	6.00	0.25	57	0.30	2.10	18.34	0.150	12.7°	2	●
040	0.40	6.00	0.35	57	0.40	2.80	18.76	0.200	12.1°	2	●
050	0.50	6.00	0.45	57	0.50	3.50	14.51	0.250	11.5°	2	●
060	0.60	6.00	0.55	57	0.60	4.20	15.03	0.300	10.9°	2	●
080	0.80	6.00	0.75	57	0.80	5.60	16.05	0.400	9.9°	2	●
100	1.00	6.00	0.95	61	1.00	7.00	17.08	0.500	9.0°	2	●
120	1.50	6.00	1.40	61	1.50	10.50	19.74	0.750	7.0°	2	●
140	2.00	6.00	1.90	66	2.00	14.00	22.31	1.000	5.6°	2	●

Application

Material



Hardened tool steel
42 - 48 HRC

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_t [mm/min]	Q [mm ³ /min]
0.20	2	8	0.006	0.004	0.040	0.06	42440	535	0.1
0.40	2	15	0.013	0.008	0.080	0.11	43405	1095	0.7
0.50	2	18	0.016	0.010	0.100	0.14	40925	1340	1.3
0.80	2	29	0.025	0.016	0.160	0.22	41960	2115	5.4
1.00	2	37	0.032	0.020	0.200	0.28	42060	2650	10.6
1.20	2	45	0.038	0.024	0.240	0.34	42130	3185	18.3
1.50	2	55	0.048	0.030	0.300	0.42	41685	3990	35.9
2.00	2	74	0.063	0.040	0.400	0.56	42060	5300	84.8
2.50	2	92	0.079	0.050	0.500	0.70	41835	6640	166.0

Hardened tool steel
48 - 52 HRC

0.20	2	8	0.006	0.004	0.040	0.06	42440	510	0.1
0.40	2	15	0.012	0.008	0.080	0.11	43405	1040	0.7
0.50	2	18	0.016	0.010	0.100	0.14	40925	1275	1.3
0.80	2	29	0.024	0.016	0.160	0.22	41960	2015	5.2
1.00	2	37	0.030	0.020	0.200	0.28	42060	2525	10.1
1.20	2	45	0.036	0.024	0.240	0.34	42130	3035	17.5
1.50	2	55	0.046	0.030	0.300	0.42	41685	3800	34.2
2.00	2	74	0.060	0.040	0.400	0.56	42060	5045	80.8
2.50	2	92	0.076	0.050	0.500	0.70	41835	6325	158.1

Hardened tool steel
52 - 56 HRC


0.20	2	8	0.005	0.004	0.040	0.06	42440	425	0.1
0.40	2	15	0.010	0.008	0.080	0.11	43405	870	0.6
0.50	2	18	0.013	0.010	0.100	0.14	40925	1065	1.1
0.80	2	29	0.020	0.016	0.160	0.22	41960	1680	4.3
1.00	2	37	0.025	0.020	0.200	0.28	42060	2105	8.4
1.20	2	45	0.030	0.024	0.240	0.34	42130	2530	14.6
1.50	2	55	0.038	0.030	0.300	0.42	41685	3170	28.5
2.00	2	74	0.050	0.040	0.400	0.56	42060	4205	67.3
2.50	2	92	0.063	0.050	0.500	0.70	41835	5270	131.8

Hardened tool steel
56 - 60 HRC

0.20	2	8	0.004	0.004	0.040	0.06	42440	380	0.1
0.40	2	15	0.009	0.008	0.080	0.11	43405	780	0.5
0.50	2	18	0.012	0.010	0.100	0.14	40925	960	1.0
0.80	2	29	0.018	0.016	0.160	0.22	41960	1510	3.9
1.00	2	37	0.023	0.020	0.200	0.28	42060	1895	7.6
1.20	2	45	0.027	0.024	0.240	0.34	42130	2275	13.1
1.50	2	55	0.034	0.030	0.300	0.42	41685	2850	25.7
2.00	2	60	0.045	0.040	0.400	0.56	34105	3070	49.1
2.50	2	60	0.057	0.050	0.500	0.70	27285	3095	77.3

Application

Material



Hardened tool steel
42 - 48 HRC

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_t [mm/min]	β [°]
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	61	0.020	0.020	0.020	0.46	42210	1690	45°
0.80	2	98	0.024	0.032	0.032	0.74	42155	2025	45°
1.00	2	123	0.028	0.040	0.040	0.93	42100	2360	45°
1.20	2	146	0.030	0.048	0.048	1.11	41870	2510	45°
1.50	2	183	0.034	0.060	0.060	1.39	41905	2850	45°
2.00	2	245	0.038	0.080	0.080	1.86	41930	3185	45°
2.50	2	300	0.040	0.100	0.100	2.32	41160	3295	45°

Hardened tool steel
48 - 52 HRC

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.40	2	49	0.014	0.016	0.016	0.37	42155	1180	45°
0.50	2	61	0.020	0.020	0.020	0.46	42210	1690	45°
0.80	2	98	0.022	0.032	0.032	0.74	42155	1855	45°
1.00	2	123	0.026	0.040	0.040	0.93	42100	2190	45°
1.20	2	146	0.028	0.048	0.048	1.11	41870	2345	45°
1.50	2	183	0.032	0.060	0.060	1.39	41905	2680	45°
2.00	2	245	0.036	0.080	0.080	1.86	41930	3020	45°
2.50	2	250	0.038	0.100	0.100	2.32	34300	2605	45°

Hardened tool steel
52 - 56 HRC

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.018	0.020	0.020	0.46	42210	1520	45°
0.80	2	98	0.022	0.032	0.032	0.74	42155	1855	45°
1.00	2	123	0.026	0.040	0.040	0.93	42100	2190	45°
1.20	2	146	0.028	0.048	0.048	1.11	41870	2345	45°
1.50	2	183	0.030	0.060	0.060	1.39	41905	2515	45°
2.00	2	200	0.034	0.080	0.080	1.86	34225	2325	45°
2.50	2	200	0.036	0.100	0.100	2.32	27440	1975	45°

Hardened tool steel
56 - 60 HRC


0.20	2	25	0.006	0.008	0.008	0.19	41885	505	45°
0.40	2	49	0.012	0.016	0.016	0.37	42155	1010	45°
0.50	2	61	0.016	0.020	0.020	0.46	42210	1350	45°
0.80	2	98	0.020	0.032	0.032	0.74	42155	1685	45°
1.00	2	123	0.022	0.040	0.040	0.93	42100	1850	45°
1.20	2	146	0.024	0.048	0.048	1.11	41870	2010	45°
1.50	2	150	0.028	0.060	0.060	1.39	34350	1925	45°
2.00	2	150	0.030	0.080	0.080	1.86	25670	1540	45°
2.50	2	150	0.032	0.100	0.100	2.32	20580	1315	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 8xd




HM XA	λ 30° γ -10°

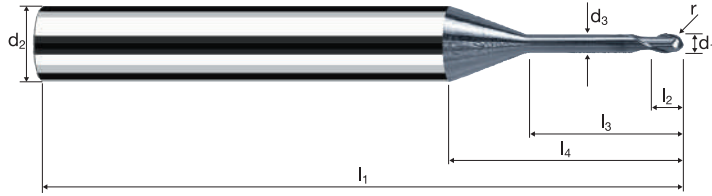

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL
Coating: X											
Article-N°: 6566											
ø-Code: 020											
Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	X6566
020	0.20	6.00	0.18	57	0.20	1.60	18.22	0.100	13.2°	2	●
030	0.30	6.00	0.25	57	0.30	2.40	18.64	0.150	12.4°	2	●
040	0.40	6.00	0.35	57	0.40	3.20	19.16	0.200	11.7°	2	●
050	0.50	6.00	0.45	57	0.50	4.00	15.01	0.250	11.1°	2	●
060	0.60	6.00	0.55	57	0.60	4.80	15.63	0.300	10.5°	2	●
080	0.80	6.00	0.75	57	0.80	6.40	16.85	0.400	9.4°	2	●
100	1.00	6.00	0.95	61	1.00	8.00	18.08	0.500	8.4°	2	●
108	1.20	6.00	1.10	61	1.20	9.60	19.40	0.600	7.6°	2	●
120	1.50	6.00	1.40	61	1.50	12.00	21.24	0.750	6.5°	2	●
140	2.00	6.00	1.90	66	2.00	16.00	24.31	1.000	5.1°	2	●
160	2.50	6.00	2.30	69	2.50	20.00	27.56	1.250	3.9°	2	●
180	3.00	6.00	2.80	75	3.00	24.00	30.63	1.500	3.1°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC




Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



Application



Material

Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_t [mm/min]	Q [mm ³ /min]
0.20	2	8	0.006	0.004	0.040	0.06	42440	535	0.1
0.30	2	11	0.010	0.005	0.060	0.08	43770	880	0.3
0.40	2	13	0.013	0.007	0.080	0.10	41380	1045	0.6
0.50	2	17	0.016	0.009	0.100	0.13	41625	1365	1.2
0.60	2	21	0.019	0.011	0.120	0.16	41780	1580	2.1
0.80	2	28	0.025	0.014	0.160	0.21	42440	2140	4.8
1.00	2	36	0.032	0.018	0.200	0.27	42440	2675	9.6
1.50	2	53	0.048	0.027	0.300	0.40	42175	4040	32.7
2.00	2	70	0.063	0.036	0.400	0.53	42040	5295	76.3

0.20	2	8	0.006	0.004	0.040	0.06	42440	510	0.1
0.30	2	11	0.010	0.005	0.060	0.08	43770	840	0.3
0.40	2	13	0.012	0.007	0.080	0.10	41380	995	0.6
0.50	2	17	0.016	0.009	0.100	0.13	41625	1300	1.2
0.60	2	21	0.018	0.011	0.120	0.16	41780	1505	2.0
0.80	2	28	0.024	0.014	0.160	0.21	42440	2035	4.6
1.00	2	36	0.030	0.018	0.200	0.27	42440	2545	9.2
1.50	2	53	0.046	0.027	0.300	0.40	42175	3845	31.2
2.00	2	70	0.060	0.036	0.400	0.53	42040	5045	72.6

0.20	2	8	0.005	0.004	0.040	0.06	42440	425	0.1
0.30	2	11	0.008	0.005	0.060	0.08	43770	700	0.2
0.40	2	13	0.010	0.007	0.080	0.10	41380	830	0.5
0.50	2	17	0.013	0.009	0.100	0.13	41625	1080	1.0
0.60	2	21	0.015	0.011	0.120	0.16	41780	1255	1.7
0.80	2	28	0.020	0.014	0.160	0.21	42440	1700	3.8
1.00	2	36	0.025	0.018	0.200	0.27	42440	2120	7.6
1.50	2	53	0.038	0.027	0.300	0.40	42175	3205	26.0
2.00	2	70	0.050	0.036	0.400	0.53	42040	4205	60.5

0.20	2	8	0.004	0.004	0.040	0.06	42440	380	0.1
0.30	2	11	0.007	0.005	0.060	0.08	43770	630	0.2
0.40	2	13	0.009	0.007	0.080	0.10	41380	745	0.4
0.50	2	17	0.012	0.009	0.100	0.13	41625	975	0.9
0.60	2	21	0.014	0.011	0.120	0.16	41780	1130	1.5
0.80	2	28	0.018	0.014	0.160	0.21	42440	1530	3.4
1.00	2	36	0.023	0.018	0.200	0.27	42440	1910	6.9
1.50	2	53	0.034	0.027	0.300	0.40	42175	2885	23.4
2.00	2	60	0.045	0.036	0.400	0.53	36035	3245	46.7

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_t [mm/min]	β [°]
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	36	0.010	0.010	0.010	0.27	42440	850	45°
0.40	2	49	0.012	0.014	0.014	0.37	42155	1010	45°
0.50	2	61	0.016	0.018	0.018	0.46	42210	1350	45°
0.60	2	73	0.018	0.022	0.022	0.55	42250	1520	45°
0.80	2	96	0.020	0.028	0.028	0.73	41860	1675	45°
1.00	2	121	0.026	0.036	0.036	0.92	41865	2175	45°
1.50	2	182	0.030	0.052	0.052	1.38	41980	2520	45°
2.00	2	243	0.034	0.070	0.070	1.84	42040	2860	45°

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	36	0.010	0.010	0.010	0.27	42440	850	45°
0.40	2	49	0.012	0.014	0.014	0.37	42155	1010	45°
0.50	2	61	0.016	0.018	0.018	0.46	42210	1350	45°
0.60	2	73	0.018	0.022	0.022	0.55	42250	1520	45°
0.80	2	96	0.020	0.028	0.028	0.73	41860	1675	45°
1.00	2	121	0.024	0.036	0.036	0.92	41865	2010	45°
1.50	2	182	0.028	0.052	0.052	1.38	41980	2350	45°
2.00	2	243	0.032	0.070	0.070	1.84	42040	2690	45°

0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.30	2	36	0.010	0.010	0.010	0.27	42440	850	45°
0.40	2	49	0.010	0.014	0.014	0.37	42155	845	45°
0.50	2	61	0.014	0.018	0.018	0.46	42210	1180	45°
0.60	2	73	0.016	0.022	0.022	0.55	42250	1350	45°
0.80	2	96	0.018	0.028	0.028	0.73	41860	1505	45°
1.00	2	121	0.024	0.036	0.036	0.92	41865	2010	45°
1.50	2	182	0.028	0.052	0.052	1.38	41980	2350	45°
2.00	2	200	0.030	0.070	0.070	1.84	34600	2075	45°


0.20	2	25	0.006	0.008	0.008	0.19	41885	505	45°
0.30	2	36	0.008	0.010	0.010	0.27	42440	680	45°
0.40	2	49	0.010	0.014	0.014	0.37	42155	845	45°
0.50	2	61	0.012	0.018	0.018	0.46	42210	1015	45°
0.60	2	73	0.014	0.022	0.022	0.55	42250	1185	45°
0.80	2	96	0.016	0.028	0.028	0.73	41860	1340	45°
1.00	2	121	0.020	0.036	0.036	0.92	41865	1675	45°
1.50	2	150	0.024	0.052	0.052	1.38	34600	1660	45°
2.00	2	150	0.028	0.070	0.070	1.84	25950	1455	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 9xd




HM XA	λ 30° γ -10°

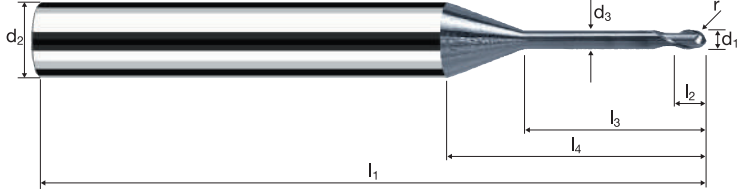

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

\varnothing Code	Example: Order-N°.											X-AL
	d_1	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z		
	Coating: X		Article-N°: 6567		ø-Code: 020							X6567
020	0.20	6.00	0.18	57	0.20	1.80	18.42	0.100	13.0°	2	●	
030	0.30	6.00	0.25	57	0.30	2.70	18.94	0.150	12.1°	2	●	
040	0.40	6.00	0.35	57	0.40	3.60	19.56	0.200	11.4°	2	●	
050	0.50	6.00	0.45	57	0.50	4.50	15.51	0.250	10.7°	2	●	
060	0.60	6.00	0.55	57	0.60	5.40	16.23	0.300	10.1°	2	●	
080	0.80	6.00	0.75	61	0.80	7.20	17.65	0.400	8.9°	2	●	
100	1.00	6.00	0.95	61	1.00	9.00	19.08	0.500	8.0°	2	●	
120	1.50	6.00	1.40	66	1.50	13.50	22.74	0.750	6.1°	2	●	
140	2.00	6.00	1.90	69	2.00	18.00	26.31	1.000	4.7°	2	●	

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
0.20	2	7	0.006	0.003	0.004	0.05	44565	560	0.0
0.40	2	13	0.013	0.006	0.080	0.10	41380	1045	0.5
0.50	2	17	0.016	0.008	0.100	0.13	41625	1365	1.1
0.80	2	26	0.025	0.013	0.160	0.20	41380	2085	4.3
1.00	2	33	0.032	0.016	0.200	0.25	42015	2645	8.5
1.20	2	40	0.038	0.019	0.240	0.30	42440	3210	14.6
1.50	2	50	0.048	0.024	0.300	0.38	41885	4010	28.9
2.00	2	66	0.063	0.032	0.400	0.50	42015	5295	67.8
2.50	2	83	0.079	0.040	0.500	0.63	41935	6660	133.2

Hardened tool steel
48 - 52 HRC



0.20	2	7	0.006	0.003	0.004	0.05	44565	535	0.0
0.40	2	13	0.012	0.006	0.080	0.10	41380	995	0.5
0.50	2	17	0.016	0.008	0.100	0.13	41625	1300	1.0
0.80	2	26	0.024	0.013	0.160	0.20	41380	1985	4.1
1.00	2	33	0.030	0.016	0.200	0.25	42015	2520	8.1
1.20	2	40	0.036	0.019	0.240	0.30	42440	3055	13.9
1.50	2	50	0.046	0.024	0.300	0.38	41885	3820	27.5
2.00	2	66	0.060	0.032	0.400	0.50	42015	5040	64.5
2.50	2	83	0.076	0.040	0.500	0.63	41935	6340	126.8

Hardened tool steel
52 - 56 HRC




0.20	2	7	0.005	0.003	0.004	0.05	44565	445	0.0
0.40	2	13	0.010	0.006	0.080	0.10	41380	830	0.4
0.50	2	17	0.013	0.008	0.100	0.13	41625	1080	0.9
0.80	2	26	0.020	0.013	0.160	0.20	41380	1655	3.4
1.00	2	33	0.025	0.016	0.200	0.25	42015	2100	6.7
1.20	2	40	0.030	0.019	0.240	0.30	42440	2545	11.6
1.50	2	50	0.038	0.024	0.300	0.38	41885	3185	22.9
2.00	2	66	0.050	0.032	0.400	0.50	42015	4200	53.8
2.50	2	83	0.063	0.040	0.500	0.63	41935	5285	105.7

Hardened tool steel
56 - 60 HRC



0.20	2	7	0.004	0.003	0.004	0.05	44565	400	0.0
0.40	2	13	0.009	0.006	0.080	0.10	41380	745	0.4
0.50	2	17	0.012	0.008	0.100	0.13	41625	975	0.8
0.80	2	26	0.018	0.013	0.160	0.20	41380	1490	3.1
1.00	2	33	0.023	0.016	0.200	0.25	42015	1890	6.1
1.20	2	40	0.027	0.019	0.240	0.30	42440	2290	10.5
1.50	2	50	0.034	0.024	0.300	0.38	41885	2865	20.6
2.00	2	60	0.045	0.032	0.400	0.50	38195	3440	44.0
2.50	2	60	0.057	0.040	0.500	0.63	30315	3440	68.8

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.40	2	49	0.012	0.014	0.014	0.37	42155	1010	45°
0.50	2	61	0.016	0.018	0.018	0.46	42210	1350	45°
0.80	2	96	0.020	0.028	0.028	0.73	41860	1675	45°
1.00	2	121	0.026	0.036	0.036	0.92	41865	2175	45°
1.20	2	145	0.028	0.042	0.042	1.10	41960	2350	45°
1.50	2	182	0.030	0.052	0.052	1.38	41980	2520	45°
2.00	2	243	0.034	0.070	0.070	1.84	42040	2860	45°
2.50	2	300	0.036	0.088	0.088	2.29	41700	3000	45°

Hardened tool steel
48 - 52 HRC



0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.40	2	49	0.012	0.014	0.014	0.37	42155	1010	45°
0.50	2	61	0.016	0.018	0.018	0.46	42210	1350	45°
0.80	2	96	0.020	0.028	0.028	0.73	41860	1675	45°
1.00	2	121	0.024	0.036	0.036	0.92	41865	2010	45°
1.20	2	145	0.026	0.042	0.042	1.10	41960	2180	45°
1.50	2	182	0.028	0.052	0.052	1.38	41980	2350	45°
2.00	2	243	0.032	0.070	0.070	1.84	42040	2690	45°
2.50	2	250	0.034	0.088	0.088	2.29	34750	2365	45°

Hardened tool steel
52 - 56 HRC



0.20	2	25	0.008	0.008	0.008	0.19	41885	670	45°
0.40	2	49	0.010	0.014	0.014	0.37	42155	845	45°
0.50	2	61	0.014	0.018	0.018	0.46	42210	1180	45°
0.80	2	96	0.018	0.028	0.028	0.73	41860	1505	45°
1.00	2	121	0.024	0.036	0.036	0.92	41865	2010	45°
1.20	2	145	0.026	0.042	0.042	1.10	41960	2180	45°
1.50	2	182	0.028	0.052	0.052	1.38	41980	2350	45°
2.00	2	200	0.030	0.070	0.070	1.84	34600	2075	45°
2.50	2	200	0.032	0.088	0.088	2.29	27800	1780	45°

Hardened tool steel
56 - 60 HRC




0.20	2	25	0.006	0.008	0.008	0.19	41885	505	45°
0.40	2	49	0.010	0.014	0.014	0.37	42155	845	45°
0.50	2	61	0.012	0.018	0.018	0.46	42210	1015	45°
0.80	2	96	0.016	0.028	0.028	0.73	41860	1340	45°
1.00	2	121	0.020	0.036	0.036	0.92	41865	1675	45°
1.20	2	145	0.022	0.042	0.042	1.10	41960	1845	45°
1.50	2	150	0.024	0.052	0.052	1.38	34600	1660	45°
2.00	2	150	0.028	0.070	0.070	1.84	25950	1455	45°
2.50	2	150	0.028	0.088	0.088	2.29	20850	1170	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 10xd




HM XA	λ 30° γ -10°

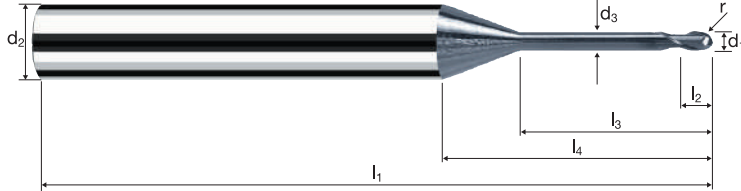

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL
Coating: X											X6568
Article-N°: 6568											
ø-Code: 020											X6568
Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	
020	0.20	6.00	0.18	57	0.20	2.00	18.62	0.100	12.8°	2	●
030	0.30	6.00	0.25	57	0.30	3.00	19.24	0.150	11.9°	2	●
040	0.40	6.00	0.35	57	0.40	4.00	19.96	0.200	11.1°	2	●
050	0.50	6.00	0.45	57	0.50	5.00	16.01	0.250	10.3°	2	●
060	0.60	6.00	0.55	57	0.60	6.00	16.83	0.300	9.7°	2	●
080	0.80	6.00	0.75	61	0.80	8.00	18.45	0.400	8.5°	2	●
100	1.00	6.00	0.95	61	1.00	10.00	20.08	0.500	7.6°	2	●
108	1.20	6.00	1.10	66	1.20	12.00	21.80	0.600	6.7°	2	●
120	1.50	6.00	1.40	66	1.50	15.00	24.24	0.750	5.7°	2	●
140	2.00	6.00	1.90	69	2.00	20.00	28.31	1.000	4.3°	2	●
160	2.50	6.00	2.30	75	2.50	25.00	32.56	1.250	3.3°	2	●
180	3.00	6.00	2.80	80	3.00	30.00	36.63	1.500	2.5°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC




d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
0.50	2	21	0.019	0.013	0.100	0.16	41780	1580	2.1
0.60	2	25	0.023	0.016	0.120	0.19	41885	1900	3.6
0.80	2	34	0.030	0.021	0.160	0.26	41625	2515	8.5
1.00	2	42	0.038	0.027	0.200	0.32	41780	3160	17.1
1.50	2	63	0.057	0.040	0.300	0.48	41780	4740	56.9
2.00	2	84	0.076	0.053	0.400	0.64	41780	6315	133.9

0.50	2	21	0.018	0.013	0.100	0.16	41780	1505	2.0
0.60	2	25	0.022	0.016	0.120	0.19	41885	1810	3.5
0.80	2	34	0.029	0.021	0.160	0.26	41625	2400	8.1
1.00	2	42	0.036	0.027	0.200	0.32	41780	3010	16.2
1.50	2	63	0.054	0.040	0.300	0.48	41780	4510	54.1
2.00	2	84	0.072	0.053	0.400	0.64	41780	6015	127.5

0.50	2	21	0.015	0.013	0.100	0.16	41780	1255	1.6
0.60	2	25	0.018	0.016	0.120	0.19	41885	1510	2.9
0.80	2	34	0.024	0.021	0.160	0.26	41625	2000	6.7
1.00	2	42	0.030	0.027	0.200	0.32	41780	2505	13.5
1.50	2	63	0.045	0.040	0.300	0.48	41780	3760	45.1
2.00	2	84	0.060	0.053	0.400	0.64	41780	5015	106.3

0.50	2	21	0.014	0.013	0.100	0.16	41780	1130	1.5
0.60	2	25	0.016	0.016	0.120	0.19	41885	1355	2.6
0.80	2	34	0.022	0.021	0.160	0.26	41625	1800	6.0
1.00	2	42	0.027	0.027	0.200	0.32	41780	2255	12.2
1.50	2	60	0.041	0.040	0.300	0.48	39790	3225	38.7
2.00	2	60	0.054	0.053	0.400	0.64	29840	3225	68.3

Application



Material

Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
0.50	2	61	0.024	0.020	0.020	0.46	42210	2025	45°
0.60	2	74	0.026	0.024	0.024	0.56	42060	2185	45°
0.80	2	98	0.030	0.032	0.032	0.74	42155	2530	45°
1.00	2	123	0.034	0.040	0.040	0.93	42100	2865	45°
1.50	2	183	0.040	0.060	0.060	1.39	41905	3355	45°
2.00	2	245	0.046	0.080	0.080	1.86	41930	3855	45°

0.50	2	61	0.022	0.020	0.020	0.46	42210	1855	45°
0.60	2	74	0.024	0.024	0.024	0.56	42060	2020	45°
0.80	2	98	0.028	0.032	0.032	0.74	42155	2360	45°
1.00	2	123	0.032	0.040	0.040	0.93	42100	2695	45°
1.50	2	183	0.038	0.060	0.060	1.39	41905	3185	45°
2.00	2	245	0.044	0.080	0.080	1.86	41930	3690	45°

0.50	2	61	0.022	0.020	0.020	0.46	42210	1855	45°
0.60	2	74	0.024	0.024	0.024	0.56	42060	2020	45°
0.80	2	98	0.028	0.032	0.032	0.74	42155	2360	45°
1.00	2	123	0.030	0.040	0.040	0.93	42100	2525	45°
1.50	2	183	0.036	0.060	0.060	1.39	41905	3015	45°
2.00	2	200	0.042	0.080	0.080	1.86	34225	2875	45°



0.50	2	61	0.020	0.020	0.020	0.46	42210	1690	45°
0.60	2	74	0.020	0.024	0.024	0.56	42060	1680	45°
0.80	2	98	0.024	0.032	0.032	0.74	42155	2025	45°
1.00	2	123	0.028	0.040	0.040	0.93	42100	2360	45°
1.50	2	150	0.032	0.060	0.060	1.39	34350	2200	45°
2.00	2	150	0.036	0.080	0.080	1.86	25670	1850	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, conical neck 0.9°, 6xd




HM λ 30°
XA γ -10°

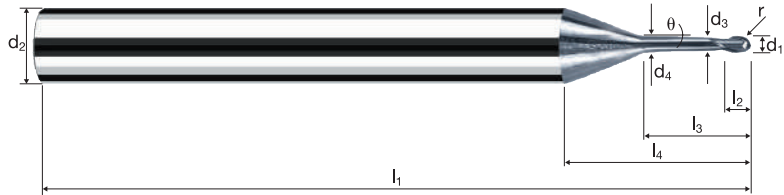

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------

Ø Code	Example: Order-N°.												X-AL	
	d1	d2 h4	d3	d4	l1	l2	l3	l4	θ	r ±0.005	α	z		
	Coating: X Article-N°: 6765 ø-Code: 050													
													X6765	
050	0.50	6.00	0.45	0.53	57	0.40	3.00	13.87	0.9°	0.250	11.9°	2	●	
060	0.60	6.00	0.55	0.65	57	0.50	3.60	14.24	0.9°	0.300	11.4°	2	●	
080	0.80	6.00	0.75	0.88	57	0.65	4.80	15.01	0.9°	0.400	10.4°	2	●	
100	1.00	6.00	0.95	1.11	57	0.80	6.00	15.78	0.9°	0.500	9.5°	2	●	
120	1.50	6.00	1.40	1.65	61	1.20	9.00	17.78	0.9°	0.750	7.6°	2	●	
140	2.00	6.00	1.90	2.23	66	1.60	12.00	19.69	0.9°	1.000	6.1°	2	●	

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.50	2	18	0.019	0.010	0.100	0.14	40925	1545	1.5
0.60	2	22	0.023	0.012	0.120	0.17	41195	1870	2.7
0.80	2	29	0.030	0.016	0.160	0.22	41960	2540	6.5
1.00	2	37	0.038	0.020	0.200	0.28	42060	3180	12.7
1.20	2	45	0.045	0.024	0.240	0.34	42130	3820	22.0
1.50	2	55	0.057	0.030	0.300	0.42	41685	4725	42.5
2.00	2	74	0.076	0.040	0.400	0.56	42060	6360	101.8
2.50	2	92	0.094	0.050	0.500	0.70	41835	7905	197.7
3.00	2	111	0.113	0.060	0.600	0.84	42060	9540	343.4

0.50	2	18	0.018	0.010	0.100	0.14	40925	1475	1.5
0.60	2	22	0.022	0.012	0.120	0.17	41195	1780	2.6
0.80	2	29	0.029	0.016	0.160	0.22	41960	2415	6.2
1.00	2	37	0.036	0.020	0.200	0.28	42060	3030	12.1
1.20	2	45	0.043	0.024	0.240	0.34	42130	3640	21.0
1.50	2	55	0.054	0.030	0.300	0.42	41685	4500	40.5
2.00	2	74	0.072	0.040	0.400	0.56	42060	6055	96.9
2.50	2	92	0.090	0.050	0.500	0.70	41835	7530	188.3
3.00	2	111	0.108	0.060	0.600	0.84	42060	9085	327.1

0.50	2	18	0.015	0.010	0.100	0.14	40925	1230	1.2
0.60	2	22	0.018	0.012	0.120	0.17	41195	1485	2.1
0.80	2	29	0.024	0.016	0.160	0.22	41960	2015	5.2
1.00	2	37	0.030	0.020	0.200	0.28	42060	2525	10.1
1.20	2	45	0.036	0.024	0.240	0.34	42130	3035	17.5
1.50	2	55	0.045	0.030	0.300	0.42	41685	3750	33.8
2.00	2	74	0.060	0.040	0.400	0.56	42060	5045	80.8
2.50	2	92	0.075	0.050	0.500	0.70	41835	6275	156.9
3.00	2	100	0.090	0.060	0.600	0.84	37895	6820	245.6





0.50	2	18	0.014	0.010	0.100	0.14	40925	1105	1.1
0.60	2	22	0.016	0.012	0.120	0.17	41195	1335	1.9
0.80	2	29	0.022	0.016	0.160	0.22	41960	1815	4.6
1.00	2	37	0.027	0.020	0.200	0.28	42060	2270	9.1
1.20	2	45	0.032	0.024	0.240	0.34	42130	2730	15.7
1.50	2	55	0.041	0.030	0.300	0.42	41685	3375	30.4
2.00	2	60	0.054	0.040	0.400	0.56	34105	3685	58.9
2.50	2	60	0.068	0.050	0.500	0.70	27285	3685	92.1
3.00	2	60	0.081	0.060	0.600	0.84	22735	3685	132.6

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.50	2	61	0.024	0.020	0.020	0.46	42210	2025	45°
0.60	2	74	0.026	0.024	0.024	0.56	42060	2185	45°
0.80	2	98	0.030	0.032	0.032	0.74	42155	2530	45°
1.00	2	123	0.034	0.040	0.040	0.93	42100	2865	45°
1.20	2	146	0.036	0.048	0.048	1.11	41870	3015	45°
1.50	2	183	0.040	0.060	0.060	1.39	41905	3355	45°
2.00	2	245	0.046	0.080	0.080	1.86	41930	3855	45°
2.50	2	300	0.048	0.100	0.100	2.32	41160	3950	45°
3.00	2	300	0.056	0.120	0.120	2.78	34350	3845	45°

0.50	2	61	0.022	0.020	0.020	0.46	42210	1855	45°
0.60	2	74	0.024	0.024	0.024	0.56	42060	2020	45°
0.80	2	98	0.028	0.032	0.032	0.74	42155	2360	45°
1.00	2	123	0.032	0.040	0.040	0.93	42100	2695	45°
1.20	2	146	0.034	0.048	0.048	1.11	41870	2845	45°
1.50	2	183	0.038	0.060	0.060	1.39	41905	3185	45°
2.00	2	245	0.044	0.080	0.080	1.86	41930	3690	45°
2.50	2	250	0.046	0.100	0.100	2.32	34300	3155	45°
3.00	2	250	0.054	0.120	0.120	2.78	28625	3090	45°

0.50	2	61	0.022	0.020	0.020	0.46	42210	1855	45°
0.60	2	74	0.024	0.024	0.024	0.56	42060	2020	45°
0.80	2	98	0.028	0.032	0.032	0.74	42155	2360	45°
1.00	2	123	0.030	0.040	0.040	0.93	42100	2525	45°
1.20	2	146	0.032	0.048	0.048	1.11	41870	2680	45°
1.50	2	183	0.036	0.060	0.060	1.39	41905	3015	45°
2.00	2	200	0.042	0.080	0.080	1.86	34225	2875	45°
2.50	2	200	0.044	0.100	0.100	2.32	27440	2415	45°
3.00	2	200	0.050	0.120	0.120	2.78	22900	2290	45°


0.50	2	61	0.020	0.020	0.020	0.46	42210	1690	45°
0.60	2	74	0.020	0.024	0.024	0.56	42060	1680	45°
0.80	2	98	0.024	0.032	0.032	0.74	42155	2025	45°
1.00	2	123	0.028	0.040	0.040	0.93	42100	2360	45°
1.20	2	146	0.028	0.048	0.048	1.11	41870	2345	45°
1.50	2	150	0.032	0.060	0.060	1.39	34350	2200	45°
2.00	2	150	0.036	0.080	0.080	1.86	25670	1850	45°
2.50	2	150	0.038	0.100	0.100	2.32	20580	1565	45°
3.00	2	150	0.044	0.120	0.120	2.78	17175	1510	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, conical neck 0.9°, 8xd



HM XA	λ 30° γ -10°

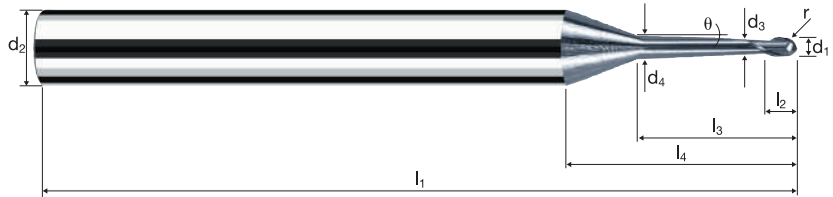

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------



Ø Code	Example: Order-N°.												X-AL
	d ₁	d ₂ h4	d ₃	d ₄	l ₁	l ₂	l ₃	l ₄	θ	r ±0.005	α	z	X6766
050	0.50	6.00	0.45	0.56	57	0.40	4.00	14.81	0.9°	0.250	11.1°	2	●
060	0.60	6.00	0.55	0.69	57	0.50	4.80	15.37	0.9°	0.300	10.5°	2	●
080	0.80	6.00	0.75	0.93	57	0.65	6.40	16.52	0.9°	0.400	9.4°	2	●
100	1.00	6.00	0.95	1.18	61	0.80	8.00	17.65	0.9°	0.500	8.4°	2	●
108	1.20	6.00	1.10	1.37	61	1.00	9.60	18.90	0.9°	0.600	7.6°	2	●
120	1.50	6.00	1.40	1.74	61	1.20	12.00	20.61	0.9°	0.750	6.5°	2	●
140	2.00	6.00	1.90	2.35	66	1.60	16.00	23.47	0.9°	1.000	5.1°	2	●
160	2.50	6.00	2.30	2.87	69	2.00	20.00	26.50	0.9°	1.250	3.9°	2	●
180	3.00	6.00	2.80	3.48	75	2.40	24.00	29.36	0.9°	1.500	3.1°	2	●

Application	Material	d ₁ [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _r [mm/min]	Q [mm ³ /min]
	Hardened tool steel 42 - 48 HRC 	0.50	2	17	0.019	0.008	0.100	0.13	41625	1575	1.3
		0.60	2	20	0.023	0.010	0.120	0.15	42440	1925	2.3
		0.80	2	26	0.030	0.013	0.160	0.20	41380	2505	5.2
		1.00	2	33	0.038	0.016	0.200	0.25	42015	3175	10.2
		1.20	2	40	0.045	0.019	0.240	0.30	42440	3850	17.6
		1.50	2	50	0.057	0.024	0.300	0.38	41885	4750	34.2
		2.00	2	66	0.076	0.032	0.400	0.50	42015	6355	81.3
		2.50	2	83	0.094	0.040	0.500	0.63	41935	7925	158.5
		3.00	2	99	0.113	0.048	0.600	0.75	42015	9530	274.4
		0.50	2	17	0.018	0.008	0.100	0.13	41625	1500	1.2
		0.60	2	20	0.022	0.010	0.120	0.15	42440	1835	2.2
		0.80	2	26	0.029	0.013	0.160	0.20	41380	2385	5.0
		1.00	2	33	0.036	0.016	0.200	0.25	42015	3025	9.7
1.20	2	40	0.043	0.019	0.240	0.30	42440	3665	16.7		
1.50	2	50	0.054	0.024	0.300	0.38	41885	4525	32.6		
2.00	2	66	0.072	0.032	0.400	0.50	42015	6050	77.4		
2.50	2	83	0.090	0.040	0.500	0.63	41935	7550	151.0		
3.00	2	99	0.108	0.048	0.600	0.75	42015	9075	261.4		
0.50	2	17	0.015	0.008	0.100	0.13	41625	1250	1.0		
0.60	2	20	0.018	0.010	0.120	0.15	42440	1530	1.8		
0.80	2	26	0.024	0.013	0.160	0.20	41380	1985	4.1		
1.00	2	33	0.030	0.016	0.200	0.25	42015	2520	8.1		
1.20	2	40	0.036	0.019	0.240	0.30	42440	3055	13.9		
1.50	2	50	0.045	0.024	0.300	0.38	41885	3770	27.1		
2.00	2	66	0.060	0.032	0.400	0.50	42015	5040	64.5		
2.50	2	83	0.075	0.040	0.500	0.63	41935	6290	125.8		
3.00	2	99	0.090	0.048	0.600	0.75	42015	7565	217.8		
0.50	2	17	0.014	0.008	0.100	0.13	41625	1125	0.9		
0.60	2	20	0.016	0.010	0.120	0.15	42440	1375	1.7		
0.80	2	26	0.022	0.013	0.160	0.20	41380	1790	3.7		
1.00	2	33	0.027	0.016	0.200	0.25	42015	2270	7.3		
1.20	2	40	0.032	0.019	0.240	0.30	42440	2750	12.5		
1.50	2	50	0.041	0.024	0.300	0.38	41885	3395	24.4		
2.00	2	60	0.054	0.032	0.400	0.50	38195	4125	52.8		
2.50	2	60	0.068	0.040	0.500	0.63	30315	4095	81.9		
3.00	2	60	0.081	0.048	0.600	0.75	25465	4125	118.8		

Application	Material	d ₁ [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _r [mm/min]	β [°]
	Hardened tool steel 42 - 48 HRC 	0.50	2	61	0.022	0.018	0.018	0.46	42210	1855	45°
		0.60	2	73	0.024	0.022	0.022	0.55	42250	2030	45°
		0.80	2	96	0.026	0.028	0.028	0.73	41860	2175	45°
		1.00	2	121	0.032	0.036	0.036	0.92	41865	2680	45°
		1.20	2	145	0.034	0.042	0.042	1.10	41960	2855	45°
		1.50	2	182	0.038	0.052	0.052	1.38	41980	3190	45°
		2.00	2	243	0.042	0.070	0.070	1.84	42040	3530	45°
		2.50	2	300	0.044	0.088	0.088	2.29	41700	3670	45°
		3.00	2	300	0.050	0.106	0.106	2.75	34725	3470	45°
		0.50	2	61	0.020	0.018	0.018	0.46	42210	1690	45°
		0.60	2	73	0.022	0.022	0.022	0.55	42250	1860	45°
		0.80	2	96	0.024	0.028	0.028	0.73	41860	2010	45°
		1.00	2	121	0.030	0.036	0.036	0.92	41865	2510	45°
1.20	2	145	0.032	0.042	0.042	1.10	41960	2685	45°		
1.50	2	182	0.036	0.052	0.052	1.38	41980	3025	45°		
2.00	2	243	0.040	0.070	0.070	1.84	42040	3365	45°		
2.50	2	250	0.042	0.088	0.088	2.29	34750	2920	45°		
3.00	2	250	0.048	0.106	0.106	2.75	28935	2780	45°		
0.50	2	61	0.020	0.018	0.018	0.46	42210	1690	45°		
0.60	2	73	0.022	0.022	0.022	0.55	42250	1860	45°		
0.80	2	96	0.024	0.028	0.028	0.73	41860	2010	45°		
1.00	2	121	0.028	0.036	0.036	0.92	41865	2345	45°		
1.20	2	145	0.030	0.042	0.042	1.10	41960	2520	45°		
1.50	2	182	0.034	0.052	0.052	1.38	41980	2855	45°		
2.00	2	200	0.038	0.070	0.070	1.84	34600	2630	45°		
2.50	2	200	0.040	0.088	0.088	2.29	27800	2225	45°		
3.00	2	200	0.046	0.106	0.106	2.75	23150	2130	45°		
0.50	2	61	0.018	0.018	0.018	0.46	42210	1520	45°		
0.60	2	73	0.020	0.022	0.022	0.55	42250	1690	45°		
0.80	2	96	0.020	0.028	0.028	0.73	41860	1675	45°		
1.00	2	121	0.026	0.036	0.036	0.92	41865	2175	45°		
1.20	2	145	0.028	0.042	0.042	1.10	41960	2350	45°		
1.50	2	150	0.030	0.052	0.052	1.38	34600	2075	45°		
2.00	2	150	0.034	0.070	0.070	1.84	25950	1765	45°		
2.50	2	150	0.036	0.088	0.088	2.29	20850	1500	45°		
3.00	2	150	0.040	0.106	0.106	2.75	17360	1390	45°		

Ball nose end mills MicroX


Shank \varnothing 6mm, conical neck 0.9°, 10xd

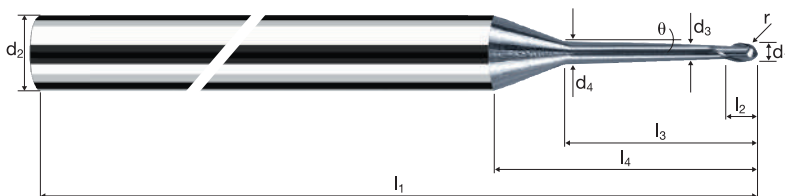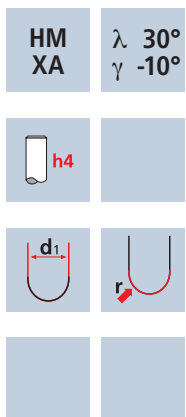

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------


Example: Order-N°.												X-AL	
Coating: X Article-N°: 6768 ø-Code: 050												X6768	
Ø Code	d ₁	d ₂ h4	d ₃	d ₄	l ₁	l ₂	l ₃	l ₄	θ	r ±0.005	α	z	
050	0.50	6.00	0.45	0.59	57	0.40	5.00	15.75	0.9°	0.250	10.3°	2	●
060	0.60	6.00	0.55	0.72	57	0.50	6.00	16.51	0.9°	0.300	9.7°	2	●
080	0.80	6.00	0.75	0.98	61	0.65	8.00	18.03	0.9°	0.400	8.5°	2	●
100	1.00	6.00	0.95	1.24	61	0.80	10.00	19.54	0.9°	0.500	7.6°	2	●
108	1.20	6.00	1.10	1.45	66	1.00	12.00	21.15	0.9°	0.600	6.7°	2	●
120	1.50	6.00	1.40	1.83	66	1.20	15.00	23.44	0.9°	0.750	5.7°	2	●
140	2.00	6.00	1.90	2.48	69	1.60	20.00	27.23	0.9°	1.000	4.3°	2	●
160	2.50	6.00	2.30	3.02	75	2.00	25.00	31.22	0.9°	1.250	3.3°	2	●
180	3.00	6.00	2.80	3.67	75	2.40	30.00	35.01	0.9°	1.500	2.5°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.50	2	16	0.019	0.007	0.100	0.12	42440	1605	1.1
0.60	2	18	0.023	0.008	0.120	0.14	40925	1855	1.8
0.80	2	25	0.030	0.011	0.160	0.19	41885	2535	4.5
1.00	2	30	0.038	0.013	0.200	0.23	41520	3140	8.2
1.20	2	37	0.045	0.016	0.240	0.28	42060	3815	14.7
1.50	2	45	0.057	0.020	0.300	0.34	42130	4775	28.7
2.00	2	61	0.076	0.027	0.400	0.46	42210	6380	68.9
2.50	2	75	0.094	0.033	0.500	0.57	41885	7915	130.6
3.00	2	91	0.113	0.040	0.600	0.69	41980	9520	228.5

Hardened tool steel
48 - 52 HRC



0.50	2	16	0.018	0.007	0.100	0.12	42440	1530	1.1
0.60	2	18	0.022	0.008	0.120	0.14	40925	1770	1.7
0.80	2	25	0.029	0.011	0.160	0.19	41885	2410	4.2
1.00	2	30	0.036	0.013	0.200	0.23	41520	2990	7.8
1.20	2	37	0.043	0.016	0.240	0.28	42060	3635	14.0
1.50	2	45	0.054	0.020	0.300	0.34	42130	4550	27.3
2.00	2	61	0.072	0.027	0.400	0.46	42210	6080	65.6
2.50	2	75	0.090	0.033	0.500	0.57	41885	7540	124.4
3.00	2	91	0.108	0.040	0.600	0.69	41980	9070	217.6

Hardened tool steel
52 - 56 HRC




0.50	2	16	0.015	0.007	0.100	0.12	42440	1275	0.9
0.60	2	18	0.018	0.008	0.120	0.14	40925	1475	1.4
0.80	2	25	0.024	0.011	0.160	0.19	41885	2010	3.5
1.00	2	30	0.030	0.013	0.200	0.23	41520	2490	6.5
1.20	2	37	0.036	0.016	0.240	0.28	42060	3030	11.6
1.50	2	45	0.045	0.020	0.300	0.34	42130	3790	22.7
2.00	2	61	0.060	0.027	0.400	0.46	42210	5065	54.7
2.50	2	75	0.075	0.033	0.500	0.57	41885	6280	103.7
3.00	2	91	0.090	0.040	0.600	0.69	41980	7555	181.4

Hardened tool steel
56 - 60 HRC



0.50	2	16	0.014	0.007	0.100	0.12	42440	1145	0.8
0.60	2	18	0.016	0.008	0.120	0.14	40925	1325	1.3
0.80	2	25	0.022	0.011	0.160	0.19	41885	1810	3.2
1.00	2	30	0.027	0.013	0.200	0.23	41520	2240	5.8
1.20	2	37	0.032	0.016	0.240	0.28	42060	2725	10.5
1.50	2	45	0.041	0.020	0.300	0.34	42130	3410	20.5
2.00	2	60	0.054	0.027	0.400	0.46	41520	4485	48.4
2.50	2	60	0.068	0.033	0.500	0.57	33505	4525	74.6
3.00	2	60	0.081	0.040	0.600	0.69	27680	4485	107.6

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.50	2	61	0.018	0.016	0.016	0.46	42210	1520	45°
0.60	2	71	0.018	0.016	0.016	0.54	41850	1505	45°
0.80	2	95	0.020	0.024	0.024	0.72	42000	1680	45°
1.00	2	120	0.026	0.030	0.030	0.91	41975	2185	45°
1.20	2	144	0.028	0.036	0.036	1.09	42050	2355	45°
1.50	2	179	0.030	0.046	0.046	1.36	41895	2515	45°
2.00	2	239	0.034	0.060	0.060	1.81	42030	2860	45°
2.50	2	300	0.036	0.076	0.076	2.27	42065	3030	45°
3.00	2	300	0.042	0.090	0.090	2.72	35110	2950	45°

Hardened tool steel
48 - 52 HRC



0.50	2	61	0.018	0.016	0.016	0.46	42210	1520	45°
0.60	2	71	0.018	0.016	0.016	0.54	41850	1505	45°
0.80	2	95	0.020	0.024	0.024	0.72	42000	1680	45°
1.00	2	120	0.024	0.030	0.030	0.91	41975	2015	45°
1.20	2	144	0.026	0.036	0.036	1.09	42050	2185	45°
1.50	2	179	0.028	0.046	0.046	1.36	41895	2345	45°
2.00	2	239	0.032	0.060	0.060	1.81	42030	2690	45°
2.50	2	250	0.034	0.076	0.076	2.27	35055	2385	45°
3.00	2	250	0.040	0.090	0.090	2.72	29255	2340	45°

Hardened tool steel
52 - 56 HRC



0.50	2	61	0.016	0.016	0.016	0.46	42210	1350	45°
0.60	2	71	0.016	0.016	0.016	0.54	41850	1340	45°
0.80	2	95	0.018	0.024	0.024	0.72	42000	1510	45°
1.00	2	120	0.024	0.030	0.030	0.91	41975	2015	45°
1.20	2	144	0.026	0.036	0.036	1.09	42050	2185	45°
1.50	2	179	0.028	0.046	0.046	1.36	41895	2345	45°
2.00	2	200	0.030	0.060	0.060	1.81	35170	2110	45°
2.50	2	200	0.032	0.076	0.076	2.27	28045	1795	45°
3.00	2	200	0.038	0.090	0.090	2.72	23405	1780	45°

Hardened tool steel
56 - 60 HRC




0.50	2	61	0.014	0.016	0.016	0.46	42210	1180	45°
0.60	2	71	0.014	0.016	0.016	0.54	41850	1170	45°
0.80	2	95	0.016	0.024	0.024	0.72	42000	1345	45°
1.00	2	120	0.020	0.030	0.030	0.91	41975	1680	45°
1.20	2	144	0.022	0.036	0.036	1.09	42050	1850	45°
1.50	2	150	0.024	0.046	0.046	1.36	35110	1685	45°
2.00	2	150	0.028	0.060	0.060	1.81	26380	1475	45°
2.50	2	150	0.028	0.076	0.076	2.27	21035	1180	45°
3.00	2	150	0.034	0.090	0.090	2.72	17555	1195	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, conical neck 0.9°, 12xd




HM XA	λ 30° γ -10°

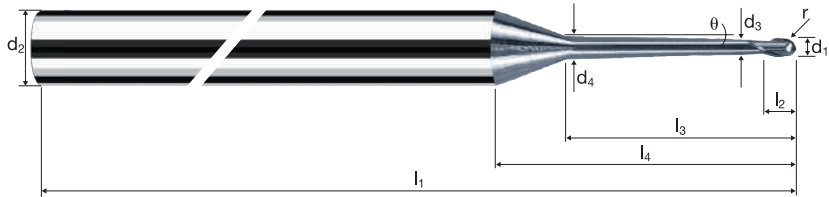

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--------------------	--------------------------	-----------------------	---------------------------------------

Ø Code	Example: Order-N°.												X-AL	
	d ₁	d ₂ h4	d ₃	d ₄	l ₁	l ₂	l ₃	l ₄	θ	r ±0.005	α	z	X6770	
050	0.50	6.00	0.45	0.63	57	0.40	6.00	16.68	0.9°	0.250	9.9°	2	●	
060	0.60	6.00	0.55	0.76	57	0.50	7.20	17.64	0.9°	0.300	9.0°	2	●	
080	0.80	6.00	0.75	1.03	61	0.65	9.60	19.53	0.9°	0.400	8.0°	2	●	
100	1.00	6.00	0.95	1.30	66	0.80	12.00	21.43	0.9°	0.500	7.0°	2	●	
108	1.20	6.00	1.10	1.52	66	1.00	14.40	23.42	0.9°	0.600	6.1°	2	●	
120	1.50	6.00	1.40	1.93	69	1.20	18.00	26.25	0.9°	0.750	5.1°	2	●	
140	2.00	6.00	1.90	2.60	75	1.60	24.00	31.00	0.9°	1.000	3.9°	2	●	
160	2.50	6.00	2.30	3.18	80	2.00	30.00	35.92	0.9°	1.250	2.9°	2	●	
180	3.00	6.00	2.80	3.86	87	2.40	36.00	40.65	0.9°	1.500	2.2°	2	●	

Application



Material

Hardened tool steel
42 - 48 HRC

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
0.50	2	13	0.019	0.005	0.100	0.10	41380	1565	0.8
0.60	2	16	0.023	0.006	0.120	0.12	42440	1925	1.4
0.80	2	22	0.030	0.009	0.160	0.17	41195	2490	3.6
1.00	2	28	0.038	0.011	0.200	0.21	42440	3210	7.1
1.20	2	33	0.045	0.013	0.240	0.25	42015	3810	11.9
1.50	2	41	0.057	0.016	0.300	0.31	42100	4775	22.9
2.00	2	54	0.076	0.021	0.400	0.41	41925	6340	53.2
2.50	2	69	0.094	0.027	0.500	0.52	42235	7985	107.8
3.00	2	82	0.113	0.032	0.600	0.62	42100	9550	183.3

Hardened tool steel
48 - 52 HRC

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
0.50	2	13	0.018	0.005	0.100	0.10	41380	1490	0.7
0.60	2	16	0.022	0.006	0.120	0.12	42440	1835	1.3
0.80	2	22	0.029	0.009	0.160	0.17	41195	2375	3.4
1.00	2	28	0.036	0.011	0.200	0.21	42440	3055	6.7
1.20	2	33	0.043	0.013	0.240	0.25	42015	3630	11.3
1.50	2	41	0.054	0.016	0.300	0.31	42100	4545	21.8
2.00	2	54	0.072	0.021	0.400	0.41	41925	6035	50.7
2.50	2	69	0.090	0.027	0.500	0.52	42235	7605	102.6
3.00	2	82	0.108	0.032	0.600	0.62	42100	9095	174.6


Hardened tool steel
52 - 56 HRC

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
0.50	2	13	0.015	0.005	0.100	0.10	41380	1240	0.6
0.60	2	16	0.018	0.006	0.120	0.12	42440	1530	1.1
0.80	2	22	0.024	0.009	0.160	0.17	41195	1975	2.8
1.00	2	28	0.030	0.011	0.200	0.21	42440	2545	5.6
1.20	2	33	0.036	0.013	0.240	0.25	42015	3025	9.4
1.50	2	41	0.045	0.016	0.300	0.31	42100	3790	18.2
2.00	2	54	0.060	0.021	0.400	0.41	41925	5030	42.3
2.50	2	69	0.075	0.027	0.500	0.52	42235	6335	85.5
3.00	2	82	0.090	0.032	0.600	0.62	42100	7580	145.5

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ³ /min]
0.50	2	13	0.014	0.005	0.100	0.10	41380	1115	0.6
0.60	2	16	0.016	0.006	0.120	0.12	42440	1375	1.0
0.80	2	22	0.022	0.009	0.160	0.17	41195	1780	2.6
1.00	2	28	0.027	0.011	0.200	0.21	42440	2290	5.0
1.20	2	33	0.032	0.013	0.240	0.25	42015	2725	8.5
1.50	2	41	0.041	0.016	0.300	0.31	42100	3410	16.4
2.00	2	54	0.054	0.021	0.400	0.41	41925	4530	38.0
2.50	2	60	0.068	0.027	0.500	0.52	36730	4960	66.9
3.00	2	60	0.081	0.032	0.600	0.62	30805	4990	95.8

Application



Material

Hardened tool steel
42 - 48 HRC

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
0.50	2	58	0.018	0.012	0.012	0.44	41960	1510	45°
0.60	2	70	0.018	0.012	0.012	0.53	42040	1515	45°
0.80	2	94	0.020	0.020	0.020	0.71	42140	1685	45°
1.00	2	119	0.026	0.026	0.026	0.90	42090	2190	45°
1.20	2	141	0.028	0.030	0.030	1.07	41945	2350	45°
1.50	2	177	0.030	0.038	0.038	1.34	42045	2525	45°
2.00	2	236	0.034	0.050	0.050	1.79	41965	2855	45°
2.50	2	294	0.036	0.062	0.062	2.23	41965	3020	45°
3.00	2	300	0.042	0.076	0.076	2.68	35630	2995	45°

Hardened tool steel
48 - 52 HRC

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
0.50	2	58	0.018	0.012	0.012	0.44	41960	1510	45°
0.60	2	70	0.018	0.012	0.012	0.53	42040	1515	45°
0.80	2	94	0.020	0.020	0.020	0.71	42140	1685	45°
1.00	2	119	0.024	0.026	0.026	0.90	42090	2020	45°
1.20	2	141	0.026	0.030	0.030	1.07	41945	2180	45°
1.50	2	177	0.028	0.038	0.038	1.34	42045	2355	45°
2.00	2	236	0.032	0.050	0.050	1.79	41965	2685	45°
2.50	2	250	0.034	0.062	0.062	2.23	35685	2425	45°
3.00	2	250	0.040	0.076	0.076	2.68	29695	2375	45°

Hardened tool steel
52 - 56 HRC

d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
0.50	2	58	0.016	0.012	0.012	0.44	41960	1345	45°
0.60	2	70	0.016	0.012	0.012	0.53	42040	1345	45°
0.80	2	94	0.018	0.020	0.020	0.71	42140	1515	45°
1.00	2	119	0.024	0.026	0.026	0.90	42090	2020	45°
1.20	2	141	0.026	0.030	0.030	1.07	41945	2180	45°
1.50	2	177	0.028	0.038	0.038	1.34	42045	2355	45°
2.00	2	200	0.030	0.050	0.050	1.79	35565	2135	45°
2.50	2	200	0.032	0.062	0.062	2.23	28550	1825	45°
3.00	2	200	0.038	0.076	0.076	2.68	23755	1805	45°

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
0.50	2	58	0.014	0.012	0.012	0.44	41960	1175	45°
0.60	2	70	0.014	0.012	0.012	0.53	42040	1175	45°
0.80	2	94	0.016	0.020	0.020	0.71	42140	1350	45°
1.00	2	119	0.020	0.026	0.026	0.90	42090	1685	45°
1.20	2	141	0.022	0.030	0.030	1.07	41945	1845	45°
1.50	2	150	0.024	0.038	0.038	1.34	35630	1710	45°
2.00	2	150	0.028	0.050	0.050	1.79	26675	1495	45°
2.50	2	150	0.028	0.062	0.062	2.23	21410	1200	45°
3.00	2	150	0.034	0.076	0.076	2.68	17815	1210	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, conical neck 0.9°, 15xd




HM XA	λ 30° γ -10°

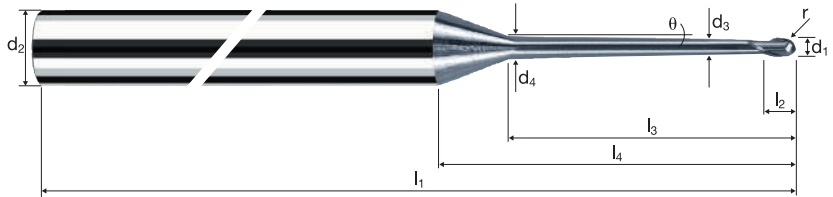

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Ø Code	Example: Order-N°.												X-AL	
	d ₁	d ₂ h4	d ₃	d ₄	l ₁	l ₂	l ₃	l ₄	θ	r ±0.005	α	z	X6772	
050	0.50	6.00	0.45	0.67	61	0.40	7.50	18.10	0.9°	0.250	9.1°	2	●	
060	0.60	6.00	0.55	0.82	61	0.50	9.00	19.32	0.9°	0.300	8.2°	2	●	
080	0.80	6.00	0.75	1.11	66	0.65	12.00	21.78	0.9°	0.400	7.1°	2	●	
100	1.00	6.00	0.95	1.40	66	0.80	15.00	24.24	0.9°	0.500	6.1°	2	●	
108	1.20	6.00	1.10	1.63	69	1.00	18.00	26.81	0.9°	0.600	5.3°	2	●	
120	1.50	6.00	1.40	2.07	75	1.20	22.50	30.49	0.9°	0.750	4.5°	2	●	
140	2.00	6.00	1.90	2.79	80	1.60	30.00	36.65	0.9°	1.000	3.3°	2	●	
160	2.50	6.00	2.30	3.42	87	2.00	37.50	42.97	0.9°	1.250	2.4°	2	●	
180	3.00	6.00	2.80	4.14	100	2.40	45.00	49.13	0.9°	1.500	1.8°	2	●	

Application



Material

Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ³ /min]
0.50	2	12	0.019	0.004	0.100	0.09	42440	1605	0.6
0.60	2	15	0.023	0.005	0.120	0.11	43405	1970	1.2
0.80	2	18	0.030	0.006	0.160	0.14	40925	2475	2.4
1.00	2	24	0.038	0.008	0.200	0.18	42440	3210	5.1
1.50	2	32	0.045	0.010	0.240	0.24	42440	3850	9.2
2.00	2	41	0.057	0.012	0.300	0.31	42100	4775	17.2
2.50	2	53	0.076	0.016	0.400	0.40	42175	6375	40.8
3.00	2	65	0.094	0.020	0.500	0.49	42225	7980	79.8

0.50	2	12	0.018	0.004	0.100	0.09	42440	1530	0.6
0.60	2	15	0.022	0.005	0.120	0.11	43405	1875	1.1
0.80	2	18	0.029	0.006	0.160	0.14	40925	2355	2.3
1.00	2	24	0.036	0.008	0.200	0.18	42440	3055	4.9
1.50	2	32	0.043	0.010	0.240	0.24	42440	3665	8.8
2.00	2	41	0.054	0.012	0.300	0.31	42100	4545	16.4
2.50	2	53	0.072	0.016	0.400	0.40	42175	6075	38.9
3.00	2	65	0.090	0.020	0.500	0.49	42225	7600	76.0

0.50	2	12	0.015	0.004	0.100	0.09	42440	1275	0.5
0.60	2	15	0.018	0.005	0.120	0.11	43405	1565	0.9
0.80	2	18	0.024	0.006	0.160	0.14	40925	1965	1.9
1.00	2	24	0.030	0.008	0.200	0.18	42440	2545	4.1
1.50	2	32	0.036	0.010	0.240	0.24	42440	3055	7.3
2.00	2	41	0.045	0.012	0.300	0.31	42100	3790	13.6
2.50	2	53	0.060	0.016	0.400	0.40	42175	5060	32.4
3.00	2	65	0.075	0.020	0.500	0.49	42225	6335	63.3

0.50	2	12	0.014	0.004	0.100	0.09	42440	1145	0.5
0.60	2	15	0.016	0.005	0.120	0.11	43405	1405	0.8
0.80	2	18	0.022	0.006	0.160	0.14	40925	1770	1.7
1.00	2	24	0.027	0.008	0.200	0.18	42440	2290	3.7
1.50	2	32	0.032	0.010	0.240	0.24	42440	2750	6.6
2.00	2	41	0.041	0.012	0.300	0.31	42100	3410	12.3
2.50	2	53	0.054	0.016	0.400	0.40	42175	4555	29.2
3.00	2	60	0.068	0.020	0.500	0.49	38975	5260	52.6

Application



Material

Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
0.50	2	58	0.018	0.012	0.012	0.44	41960	1510	45°
0.60	2	70	0.018	0.012	0.012	0.53	42040	1515	45°
0.80	2	94	0.020	0.020	0.020	0.71	42140	1685	45°
1.00	2	119	0.026	0.026	0.026	0.90	42090	2190	45°
1.50	2	177	0.030	0.038	0.038	1.34	42045	2525	45°
2.00	2	236	0.034	0.050	0.050	1.79	41965	2855	45°
2.50	2	294	0.036	0.062	0.062	2.23	41965	3020	45°
3.00	2	300	0.042	0.076	0.076	2.68	35630	2995	45°

0.50	2	58	0.018	0.012	0.012	0.44	41960	1510	45°
0.60	2	70	0.018	0.012	0.012	0.53	42040	1515	45°
0.80	2	94	0.020	0.020	0.020	0.71	42140	1685	45°
1.00	2	119	0.024	0.026	0.026	0.90	42090	2020	45°
1.50	2	177	0.028	0.038	0.038	1.34	42045	2355	45°
2.00	2	236	0.032	0.050	0.050	1.79	41965	2685	45°
2.50	2	250	0.034	0.062	0.062	2.23	35685	2425	45°
3.00	2	250	0.040	0.076	0.076	2.68	29695	2375	45°

0.50	2	58	0.016	0.012	0.012	0.44	41960	1345	45°
0.60	2	70	0.016	0.012	0.012	0.53	42040	1345	45°
0.80	2	94	0.018	0.020	0.020	0.71	42140	1515	45°
1.00	2	119	0.024	0.026	0.026	0.90	42090	2020	45°
1.50	2	177	0.028	0.038	0.038	1.34	42045	2355	45°
2.00	2	200	0.030	0.050	0.050	1.79	35565	2135	45°
2.50	2	200	0.032	0.062	0.062	2.23	28550	1825	45°
3.00	2	200	0.038	0.076	0.076	2.68	23755	1805	45°


0.50	2	58	0.014	0.012	0.012	0.44	41960	1175	45°
0.60	2	70	0.014	0.012	0.012	0.53	42040	1175	45°
0.80	2	94	0.016	0.020	0.020	0.71	42140	1350	45°
1.00	2	119	0.020	0.026	0.026	0.90	42090	1685	45°
1.50	2	150	0.024	0.038	0.038	1.34	35630	1710	45°
2.00	2	150	0.028	0.050	0.050	1.79	26675	1495	45°
2.50	2	150	0.028	0.062	0.062	2.23	21410	1200	45°
3.00	2	150	0.034	0.076	0.076	2.68	17815	1210	45°

Ball nose end mills MicroX

Shank \varnothing 6mm, conical neck 0.9°, 20xd




HM XA	λ 30° γ -10°

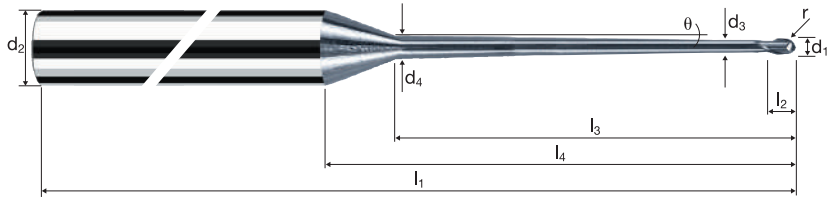

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.													X-AL
Coating: X Article-N°: 6774 ø-Code: 050													X6774
Ø Code	d ₁	d ₂ h4	d ₃	d ₄	l ₁	l ₂	l ₃	l ₄	θ	r ±0.005	α	z	
050	0.50	6.00	0.45	0.75	61	0.40	10.00	20.45	0.9°	0.250	7.8°	2	●
060	0.60	6.00	0.55	0.91	66	0.50	12.00	22.16	0.9°	0.300	7.1°	2	●
080	0.80	6.00	0.75	1.23	69	0.65	16.00	25.56	0.9°	0.400	5.9°	2	●
100	1.00	6.00	0.95	1.55	69	0.80	20.00	28.96	0.9°	0.500	5.0°	2	●
120	1.50	6.00	1.40	2.30	80	1.20	30.00	37.56	0.9°	0.750	3.4°	2	●
140	2.00	6.00	1.90	3.11	87	1.60	40.00	46.05	0.9°	1.000	2.5°	2	●
160	2.50	6.00	2.30	3.81	100	2.00	50.00	54.74	0.9°	1.250	1.8°	2	●
180	3.00	6.00	2.80	4.61	100	2.40	60.00	63.25	0.9°	1.500	1.4°	2	●

Application



Material

Steel
850 - 1100 N/mm²

d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ² /min]
0.20	2	14	0.005	0.016	0.070	0.11	40512	429	0.5
0.30	2	21	0.008	0.024	0.105	0.16	41778	668	1.7
0.40	2	34	0.013	0.048	0.120	0.26	41625	1057	6.1
0.50	2	43	0.016	0.060	0.150	0.32	42773	1360	12.3
0.60	2	51	0.019	0.072	0.180	0.39	41625	1590	20.6
0.80	2	69	0.026	0.096	0.240	0.52	42237	2154	49.7
1.00	2	86	0.032	0.120	0.300	0.65	42115	2679	96.5
1.50	2	145	0.054	0.240	0.375	1.10	41959	4523	407.1
2.00	2	160	0.072	0.320	0.500	1.47	34646	4982	797.2

Hardened tool steel
52 - 56 HRC

0.20	2	14	0.003	0.016	0.070	0.11	40512	203	0.3
0.30	2	21	0.004	0.024	0.105	0.16	41778	309	0.8
0.40	2	34	0.006	0.048	0.120	0.26	41625	500	2.9
0.50	2	43	0.008	0.060	0.150	0.32	42773	642	5.8
0.60	2	51	0.009	0.072	0.180	0.39	41625	749	9.7
0.80	2	69	0.012	0.096	0.240	0.52	42237	1014	23.4
1.00	2	86	0.015	0.120	0.300	0.65	42115	1255	45.2
1.50	2	90	0.025	0.240	0.375	1.10	26044	1318	118.6
2.00	2	90	0.034	0.320	0.500	1.47	19488	1314	210.2


Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

0.20	2	12	0.003	0.010	0.060	0.09	42441	246	0.2
0.30	2	17	0.004	0.015	0.090	0.13	41625	358	0.5
0.40	2	23	0.006	0.020	0.120	0.17	43065	500	1.2
0.50	2	36	0.009	0.040	0.125	0.27	42441	764	3.8
0.60	2	43	0.011	0.048	0.150	0.33	41477	888	6.4
0.80	2	57	0.014	0.064	0.200	0.43	42195	1207	15.5
1.00	2	72	0.018	0.080	0.250	0.54	42441	1519	30.4
1.50	2	100	0.032	0.180	0.300	0.97	32815	2113	114.1
2.00	2	100	0.043	0.240	0.400	1.30	24485	2101	201.7

Titanium alloys
> 300 HB
[Ti6Al4V]

0.20	2	12	0.003	0.010	0.060	0.09	42441	255	0.2
0.30	2	17	0.004	0.015	0.090	0.13	41625	366	0.5
0.40	2	23	0.006	0.020	0.120	0.17	43065	508	1.2
0.50	2	36	0.009	0.040	0.125	0.27	42441	781	3.9
0.60	2	43	0.011	0.048	0.150	0.33	41477	921	6.7
0.80	2	57	0.015	0.064	0.200	0.43	42195	1249	16.0
1.00	2	72	0.018	0.080	0.250	0.54	42441	1562	31.3
1.50	2	75	0.033	0.180	0.300	0.97	24612	1629	88.0
2.00	2	75	0.044	0.240	0.400	1.30	18364	1623	155.9

Application



Material

Steel
850 - 1100 N/mm²

d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
0.20	2	22	0.026	0.010	0.040	0.19	36857	1917	45°
0.30	2	33	0.033	0.010	0.050	0.27	38905	2568	45°
0.40	2	42	0.037	0.010	0.057	0.36	37136	2748	45°
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.60	2	65	0.046	0.020	0.070	0.55	37618	3461	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.50	2	156	0.068	0.030	0.105	1.32	37618	5116	45°
2.00	2	208	0.078	0.040	0.120	1.75	37833	5902	45°

Hardened tool steel
52 - 56 HRC

0.20	2	22	0.026	0.010	0.040	0.19	36857	1917	45°
0.30	2	33	0.033	0.010	0.050	0.27	38905	2568	45°
0.40	2	42	0.037	0.010	0.057	0.36	37136	2748	45°
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.60	2	65	0.046	0.020	0.070	0.55	37618	3461	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.50	2	144	0.068	0.030	0.105	1.32	34725	4723	45°
2.00	2	144	0.078	0.040	0.120	1.75	26192	4086	45°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

0.20	2	22	0.026	0.010	0.040	0.19	36857	1917	45°
0.30	2	33	0.033	0.010	0.050	0.27	38905	2568	45°
0.40	2	42	0.037	0.010	0.057	0.36	37136	2748	45°
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.60	2	65	0.046	0.020	0.070	0.55	37618	3461	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.50	2	144	0.068	0.030	0.105	1.32	34725	4723	45°
2.00	2	144	0.078	0.040	0.120	1.75	26192	4086	45°

Titanium alloys
> 300 HB
[Ti6Al4V]



0.20	2	22	0.026	0.010	0.040	0.19	36857	1917	45°
0.30	2	33	0.033	0.010	0.050	0.27	38905	2568	45°
0.40	2	42	0.037	0.010	0.057	0.36	37136	2748	45°
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.60	2	65	0.046	0.020	0.070	0.55	37618	3461	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.50	2	108	0.068	0.030	0.105	1.32	26044	3542	45°
2.00	2	108	0.078	0.040	0.120	1.75	19644	3065	45°

Ball nose end mills Microcut

Shank \varnothing 4mm, 1xd




new!

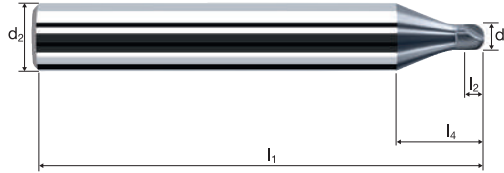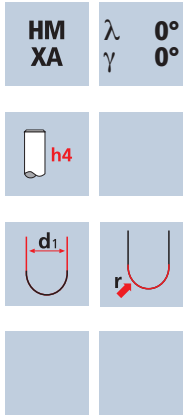

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------------	----------------	--

Example: Order-N°		Coating X	Article-N° 6832	Ø-Code 020							X-AL
Ø Code	d ₁	d ₂ h4	l ₁	l ₂	l ₄	r ±0.005	α	z	X6832		
020	0.20	4.00	50	0.12	11.41	0.100	9.7°	2	●		
030	0.30	4.00	50	0.18	11.23	0.150	9.6°	2	●		
040	0.40	4.00	50	0.24	11.05	0.200	9.5°	2	●		
050	0.50	4.00	50	0.30	7.69	0.250	13.0°	2	●		
060	0.60	4.00	50	0.36	7.60	0.300	12.8°	2	●		
080	0.80	4.00	50	0.48	7.43	0.400	12.4°	2	●		
100	1.00	4.00	50	0.60	7.26	0.500	11.9°	2	●		
120	1.50	4.00	50	0.90	6.82	0.750	10.6°	2	●		
140	2.00	4.00	50	1.20	6.39	1.000	9.1°	2	●		

Application



Material

Steel
850 - 1100 N/mm²

d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ² /min]
0.20	2	14	0.005	0.016	0.070	0.11	40512	429	0.5
0.40	2	34	0.013	0.048	0.120	0.26	41625	1057	6.1
0.50	2	43	0.016	0.060	0.150	0.32	42773	1360	12.3
0.80	2	69	0.026	0.096	0.240	0.52	42237	2154	49.7
1.00	2	86	0.032	0.120	0.300	0.65	42115	2679	96.5
1.50	2	145	0.054	0.240	0.375	1.10	41959	4523	407.1
2.00	2	160	0.072	0.320	0.500	1.47	34646	4982	797.2
2.50	2	160	0.090	0.400	0.625	1.83	27830	4998	1249.6
3.00	2	160	0.108	0.480	0.750	2.20	23150	4991	1796.8

Hardened tool steel
52 - 56 HRC

0.20	2	14	0.003	0.016	0.070	0.11	40512	203	0.3
0.40	2	34	0.006	0.048	0.120	0.26	41625	500	2.9
0.50	2	43	0.008	0.060	0.150	0.32	42773	642	5.8
0.80	2	69	0.012	0.096	0.240	0.52	42237	1014	23.4
1.00	2	86	0.015	0.120	0.300	0.65	42115	1255	45.2
1.50	2	90	0.025	0.240	0.375	1.10	26044	1318	118.6
2.00	2	90	0.034	0.320	0.500	1.47	19488	1314	210.2
2.50	2	90	0.042	0.400	0.625	1.83	15655	1321	330.4
3.00	2	90	0.051	0.480	0.750	2.20	13022	1318	474.4


Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

0.20	2	12	0.003	0.010	0.060	0.09	42441	246	0.2
0.40	2	23	0.006	0.020	0.120	0.17	43065	500	1.2
0.50	2	36	0.009	0.040	0.125	0.27	42441	764	3.8
0.80	2	57	0.014	0.064	0.200	0.43	42195	1207	15.5
1.00	2	72	0.018	0.080	0.250	0.54	42441	1519	30.4
1.50	2	100	0.032	0.180	0.300	0.97	32815	2113	114.1
2.00	2	100	0.043	0.240	0.400	1.30	24485	2101	201.7
2.50	2	100	0.054	0.300	0.500	1.62	19649	2106	316.0
3.00	2	100	0.064	0.360	0.600	1.95	16324	2099	453.5

Titanium alloys
> 300 HB
[Ti6Al4V]

0.20	2	12	0.003	0.010	0.060	0.09	42441	255	0.2
0.40	2	23	0.006	0.020	0.120	0.17	43065	508	1.2
0.50	2	36	0.009	0.040	0.125	0.27	42441	781	3.9
0.80	2	57	0.015	0.064	0.200	0.43	42195	1249	16.0
1.00	2	72	0.018	0.080	0.250	0.54	42441	1562	31.3
1.50	2	75	0.033	0.180	0.300	0.97	24612	1629	88.0
2.00	2	75	0.044	0.240	0.400	1.30	18364	1623	155.9
2.50	2	75	0.055	0.300	0.500	1.62	14737	1627	244.1
3.00	2	75	0.066	0.360	0.600	1.95	12243	1623	350.7

Application



Material

Steel
850 - 1100 N/mm²

d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
0.20	2	22	0.026	0.010	0.040	0.19	36857	1917	45°
0.40	2	42	0.037	0.010	0.057	0.36	37136	2748	45°
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.50	2	156	0.068	0.030	0.105	1.32	37618	5116	45°
2.00	2	208	0.078	0.040	0.120	1.75	37833	5902	45°
2.50	2	230	0.088	0.040	0.135	2.15	34052	5993	45°
3.00	2	230	0.098	0.050	0.150	2.59	28267	5540	45°

Hardened tool steel
52 - 56 HRC

0.20	2	22	0.026	0.010	0.040	0.19	36857	1917	45°
0.40	2	42	0.037	0.010	0.057	0.36	37136	2748	45°
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.50	2	144	0.068	0.030	0.105	1.32	34725	4723	45°
2.00	2	144	0.078	0.040	0.120	1.75	26192	4086	45°
2.50	2	144	0.088	0.040	0.135	2.15	21319	3752	45°
3.00	2	144	0.098	0.050	0.150	2.59	17698	3469	45°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

0.20	2	22	0.026	0.010	0.040	0.19	36857	1917	45°
0.40	2	42	0.037	0.010	0.057	0.36	37136	2748	45°
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.50	2	144	0.068	0.030	0.105	1.32	34725	4723	45°
2.00	2	144	0.078	0.040	0.120	1.75	26192	4086	45°
2.50	2	144	0.088	0.040	0.135	2.15	21319	3752	45°
3.00	2	144	0.098	0.050	0.150	2.59	17698	3469	45°

Titanium alloys
> 300 HB
[Ti6Al4V]



0.20	2	22	0.026	0.010	0.040	0.19	36857	1917	45°
0.40	2	42	0.037	0.010	0.057	0.36	37136	2748	45°
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.50	2	108	0.068	0.030	0.105	1.32	26044	3542	45°
2.00	2	108	0.078	0.040	0.120	1.75	19644	3065	45°
2.50	2	108	0.088	0.040	0.135	2.15	15990	2814	45°
3.00	2	108	0.098	0.050	0.150	2.59	13273	2602	45°

Ball nose end mills Microcut

Shank \varnothing 4mm, cylindrical neck, 3xd




new!

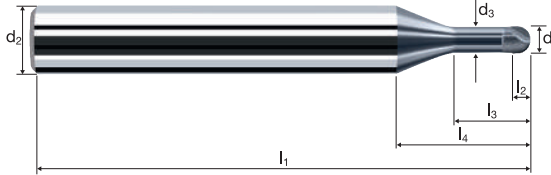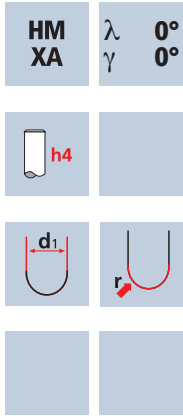

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------------	----------------	--

Example: Order-N°											X-AL
Coating Article-N° \varnothing -Code X 6836 020											X6836
\varnothing Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ± 0.005	α	z	
020	0.20	4.00	0.18	50	0.12	0.60	11.55	0.100	9.5°	2	●
030	0.30	4.00	0.25	50	0.18	0.90	11.47	0.150	9.4°	2	●
040	0.40	4.00	0.35	50	0.24	1.20	11.49	0.200	9.1°	2	●
050	0.50	4.00	0.45	50	0.30	1.50	8.28	0.250	12.1°	2	●
060	0.60	4.00	0.55	50	0.36	1.80	8.40	0.300	11.6°	2	●
080	0.80	4.00	0.75	50	0.48	2.40	8.62	0.400	10.7°	2	●
100	1.00	4.00	0.95	50	0.60	3.00	8.85	0.500	9.8°	2	●
108	1.20	4.00	1.10	50	0.72	3.60	8.96	0.600	9.1°	2	●
120	1.50	4.00	1.40	50	0.90	4.50	9.30	0.750	7.9°	2	●
140	2.00	4.00	1.90	50	1.20	6.00	9.87	1.000	6.0°	2	●
160	2.50	4.00	2.30	50	1.50	7.50	10.34	1.250	4.3°	2	●
180	3.00	4.00	2.80	50	1.80	9.00	10.91	1.500	2.8°	2	●

Application



Material

Steel
850 - 1100 N/mm²

d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ² /min]
0.20	2	12	0.004	0.010	0.070	0.09	42441	314	0.2
0.40	2	32	0.010	0.040	0.120	0.24	42441	874	4.2
0.50	2	40	0.013	0.050	0.150	0.30	42441	1095	8.2
0.80	2	63	0.021	0.080	0.240	0.48	41778	1721	33.1
1.00	2	79	0.026	0.100	0.300	0.60	41911	2163	64.9
1.50	2	133	0.043	0.195	0.375	1.01	41916	3638	266.1
2.00	2	145	0.058	0.260	0.500	1.35	34189	3952	513.8
2.50	2	145	0.072	0.325	0.625	1.68	27473	3973	807.0
3.00	2	145	0.087	0.390	0.750	2.02	22849	3967	1160.3

Hardened tool steel
52 - 56 HRC

0.20	2	12	0.003	0.010	0.070	0.09	42441	221	0.2
0.40	2	32	0.007	0.040	0.120	0.24	42441	611	3.0
0.50	2	40	0.009	0.050	0.150	0.30	42441	764	5.8
0.80	2	63	0.014	0.080	0.240	0.48	41778	1203	23.1
1.00	2	70	0.018	0.100	0.300	0.60	37136	1337	40.1
1.50	2	70	0.030	0.195	0.375	1.01	22061	1337	97.8
2.00	2	70	0.040	0.260	0.500	1.35	16505	1334	173.4
2.50	2	70	0.050	0.325	0.625	1.68	13263	1337	271.6
3.00	2	70	0.061	0.390	0.750	2.02	11031	1335	390.5


Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

0.20	2	9	0.002	0.006	0.060	0.07	40926	188	0.1
0.40	2	18	0.005	0.012	0.120	0.14	40926	368	0.6
0.50	2	36	0.009	0.040	0.125	0.27	42441	764	3.8
0.80	2	57	0.014	0.064	0.200	0.43	42195	1207	15.5
1.00	2	70	0.018	0.080	0.250	0.54	41262	1477	29.6
1.50	2	70	0.033	0.195	0.300	1.01	22061	1469	86.0
2.00	2	70	0.044	0.260	0.400	1.35	16505	1466	152.4
2.50	2	70	0.056	0.325	0.500	1.68	13263	1472	239.3
3.00	2	70	0.067	0.390	0.600	2.02	11031	1469	343.8

Titanium alloys
> 300 HB
[Ti6Al4V]

0.20	2	9	0.002	0.006	0.060	0.07	40926	188	0.1
0.40	2	18	0.005	0.012	0.120	0.14	40926	368	0.6
0.50	2	36	0.009	0.040	0.125	0.27	42441	764	3.8
0.80	2	45	0.014	0.064	0.200	0.43	33311	953	12.2
1.00	2	45	0.018	0.080	0.250	0.54	26526	950	19.0
1.50	2	45	0.033	0.195	0.300	1.01	14182	945	55.3
2.00	2	45	0.044	0.260	0.400	1.35	10610	942	98.0
2.50	2	45	0.056	0.325	0.500	1.68	8526	946	153.8
3.00	2	45	0.067	0.390	0.600	2.02	7091	945	221.0

Application



Material

Steel
850 - 1100 N/mm²

d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
0.20	2	22	0.026	0.010	0.040	0.19	36857	1917	45°
0.40	2	42	0.037	0.010	0.057	0.36	37136	2748	45°
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.50	2	156	0.068	0.030	0.105	1.32	37618	5116	45°
2.00	2	207	0.078	0.040	0.120	1.75	37652	5874	45°
2.50	2	207	0.088	0.040	0.135	2.15	30647	5394	45°
3.00	2	207	0.098	0.050	0.150	2.59	25440	4986	45°

Hardened tool steel
52 - 56 HRC

0.20	2	22	0.026	0.010	0.040	0.19	36857	1917	45°
0.40	2	42	0.037	0.010	0.057	0.36	37136	2748	45°
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.50	2	130	0.068	0.030	0.105	1.32	31349	4264	45°
2.00	2	130	0.078	0.040	0.120	1.75	23646	3689	45°
2.50	2	130	0.088	0.040	0.135	2.15	19247	3388	45°
3.00	2	130	0.098	0.050	0.150	2.59	15977	3132	45°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

0.20	2	22	0.026	0.010	0.040	0.19	36857	1917	45°
0.40	2	42	0.037	0.010	0.057	0.36	37136	2748	45°
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.50	2	130	0.068	0.030	0.105	1.32	31349	4264	45°
2.00	2	130	0.078	0.040	0.120	1.75	23646	3689	45°
2.50	2	130	0.088	0.040	0.135	2.15	19247	3388	45°
3.00	2	130	0.098	0.050	0.150	2.59	15977	3132	45°

Titanium alloys
> 300 HB
[Ti6Al4V]



0.20	2	22	0.026	0.010	0.040	0.19	36857	1917	45°
0.40	2	42	0.037	0.010	0.057	0.36	37136	2748	45°
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	97	0.058	0.030	0.090	0.91	33930	3936	45°
1.50	2	97	0.068	0.030	0.105	1.32	23391	3181	45°
2.00	2	97	0.078	0.040	0.120	1.75	17643	2752	45°
2.50	2	97	0.088	0.040	0.135	2.15	14361	2528	45°
3.00	2	97	0.098	0.050	0.150	2.59	11921	2337	45°

Ball nose end mills Microcut

Shank \varnothing 4mm, cylindrical neck, 5xd



HM	λ	0°
XA	γ	0°

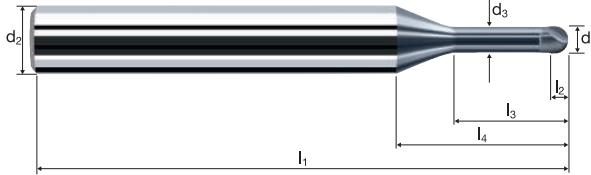


new!

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
----------	-------------	--------------	--------------	-----------	-----------	----------------	-------------	--------------------------------------

Example: Order-N°											X-AL
Coating Article-N° \varnothing -Code											
X 6840 020											X6840
\varnothing Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ± 0.005	α	z	
020	0.20	4.00	0.18	50	0.12	1.00	11.95	0.100	9.2°	2	●
030	0.30	4.00	0.25	50	0.18	1.50	12.07	0.150	8.9°	2	●
040	0.40	4.00	0.35	50	0.24	2.00	12.29	0.200	8.5°	2	●
050	0.50	4.00	0.45	50	0.30	2.50	9.28	0.250	10.9°	2	●
060	0.60	4.00	0.55	50	0.36	3.00	9.60	0.300	10.2°	2	●
080	0.80	4.00	0.75	50	0.48	4.00	10.22	0.400	9.1°	2	●
100	1.00	4.00	0.95	50	0.60	5.00	10.85	0.500	8.1°	2	●
108	1.20	4.00	1.10	50	0.72	6.00	11.36	0.600	7.2°	2	●
120	1.50	4.00	1.40	50	0.90	7.50	12.30	0.750	6.0°	2	●
140	2.00	4.00	1.90	50	1.20	10.00	13.87	1.000	4.3°	2	●
160	2.50	4.00	2.30	50	1.50	12.50	15.34	1.250	3.0°	2	●
180	3.00	4.00	2.80	50	1.80	15.00	16.91	1.500	1.9°	2	●

Application



Material

Steel
850 - 1100 N/mm²

d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ² /min]
0.50	2	29	0.009	0.025	0.110	0.22	41959	747	2.1
0.60	2	35	0.011	0.030	0.132	0.26	42849	917	3.7
0.80	2	46	0.014	0.040	0.176	0.35	41835	1197	8.4
1.00	2	58	0.018	0.050	0.220	0.44	41959	1502	16.5
1.20	2	86	0.027	0.096	0.204	0.65	42115	2249	44.1
1.50	2	107	0.033	0.120	0.255	0.81	42048	2809	86.0
2.00	2	120	0.045	0.160	0.340	1.09	35043	3119	169.7
2.50	2	120	0.056	0.200	0.425	1.36	28086	3123	265.5
3.00	2	120	0.067	0.240	0.510	1.63	23434	3126	382.7

Hardened tool steel
52 - 56 HRC

0.50	2	29	0.006	0.025	0.110	0.22	41959	529	1.5
0.60	2	35	0.008	0.030	0.132	0.26	42849	651	2.6
0.80	2	46	0.010	0.040	0.176	0.35	41835	845	6.0
1.00	2	58	0.013	0.050	0.220	0.44	41959	1057	11.7
1.20	2	60	0.019	0.096	0.204	0.65	29382	1111	21.8
1.50	2	60	0.024	0.120	0.255	0.81	23579	1113	34.1
2.00	2	60	0.032	0.160	0.340	1.09	17522	1104	60.1
2.50	2	60	0.039	0.200	0.425	1.36	14043	1104	93.8
3.00	2	60	0.047	0.240	0.510	1.63	11717	1106	135.4


Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

0.50	2	29	0.007	0.025	0.110	0.22	41959	546	1.5
0.60	2	35	0.008	0.030	0.132	0.26	42849	668	2.7
0.80	2	46	0.011	0.040	0.176	0.35	41835	879	6.2
1.00	2	58	0.013	0.050	0.220	0.44	41959	1099	12.1
1.20	2	60	0.020	0.096	0.204	0.65	29382	1146	22.5
1.50	2	60	0.024	0.120	0.255	0.81	23579	1151	35.2
2.00	2	60	0.033	0.160	0.340	1.09	17522	1142	62.2
2.50	2	60	0.041	0.200	0.425	1.36	14043	1143	97.2
3.00	2	60	0.049	0.240	0.510	1.63	11717	1144	140.0

Titanium alloys
> 300 HB
[Ti6Al4V]

0.50	2	29	0.007	0.025	0.110	0.22	41959	587	1.6
0.60	2	35	0.008	0.030	0.132	0.26	42849	720	2.9
0.80	2	40	0.011	0.040	0.176	0.35	36378	815	5.8
1.00	2	40	0.014	0.050	0.220	0.44	28937	804	8.9
1.20	2	40	0.021	0.096	0.204	0.65	19588	815	16.0
1.50	2	40	0.026	0.120	0.255	0.81	15719	817	25.0
2.00	2	40	0.035	0.160	0.340	1.09	11681	811	44.1
2.50	2	40	0.043	0.200	0.425	1.36	9362	813	69.1
3.00	2	40	0.052	0.240	0.510	1.63	7811	814	99.6

Application



Material

Steel
850 - 1100 N/mm²

d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.60	2	65	0.046	0.020	0.070	0.55	37618	3461	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.20	2	127	0.062	0.030	0.095	1.07	37781	4685	45°
1.50	2	156	0.068	0.030	0.105	1.32	37618	5116	45°
2.00	2	173	0.078	0.040	0.120	1.75	31467	4909	45°
2.50	2	173	0.088	0.040	0.135	2.15	25613	4508	45°
3.00	2	173	0.098	0.050	0.150	2.59	21262	4167	45°

Hardened tool steel
52 - 56 HRC

0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.60	2	65	0.046	0.020	0.070	0.55	37618	3461	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.20	2	108	0.062	0.030	0.095	1.07	32128	3984	45°
1.50	2	108	0.068	0.030	0.105	1.32	26044	3542	45°
2.00	2	108	0.078	0.040	0.120	1.75	19644	3065	45°
2.50	2	108	0.088	0.040	0.135	2.15	15990	2814	45°
3.00	2	108	0.098	0.050	0.150	2.59	13273	2602	45°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.60	2	65	0.046	0.020	0.070	0.55	37618	3461	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.20	2	108	0.062	0.030	0.095	1.07	32128	3984	45°
1.50	2	108	0.068	0.030	0.105	1.32	26044	3542	45°
2.00	2	108	0.078	0.040	0.120	1.75	19644	3065	45°
2.50	2	108	0.088	0.040	0.135	2.15	15990	2814	45°
3.00	2	108	0.098	0.050	0.150	2.59	13273	2602	45°

Titanium alloys
> 300 HB
[Ti6Al4V]

0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.60	2	65	0.046	0.020	0.070	0.55	37618	3461	45°
0.80	2	65	0.052	0.020	0.080	0.71	29141	3031	45°
1.00	2	81	0.058	0.030	0.090	0.91	28333	3287	45°
1.20	2	81	0.062	0.030	0.095	1.07	24096	2988	45°
1.50	2	81	0.068	0.030	0.105	1.32	19533	2657	45°
2.00	2	81	0.078	0.040	0.120	1.75	14733	2298	45°
2.50	2	81	0.088	0.040	0.135	2.15	11992	2111	45°
3.00	2	81	0.098	0.050	0.150	2.59	9955	1951	45°


Ball nose end mills Microcut

Shank \varnothing 4mm, cylindrical neck, 8xd



HM	λ	0°
XA	γ	0°


new!

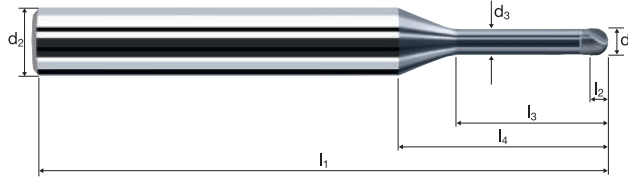

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60		Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--	--------------------------	-----------------------	---

Ø Code	Example: Order-N°										X-AL
	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	X6844
050	0.50	4.00	0.45	50	0.30	4.00	10.78	0.250	9.4°	2	●
060	0.60	4.00	0.55	50	0.36	4.80	11.40	0.300	8.7°	2	●
080	0.80	4.00	0.75	50	0.48	6.40	12.62	0.400	7.4°	2	●
100	1.00	4.00	0.95	50	0.60	8.00	13.85	0.500	6.4°	2	●
108	1.20	4.00	1.10	50	0.72	9.60	14.96	0.600	5.5°	2	●
120	1.50	4.00	1.40	50	0.90	12.00	16.80	0.750	4.5°	2	●
140	2.00	4.00	1.90	50	1.20	16.00	19.87	1.000	3.1°	2	●
160	2.50	4.00	2.30	57	1.50	20.00	22.84	1.250	2.1°	2	●
180	3.00	4.00	2.80	57	1.80	24.00	25.91	1.500	1.3°	2	●

Application



Material

Steel
850 - 1100 N/mm²



d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ² /min]
0.50	2	26	0.007	0.020	0.100	0.20	41380	596	1.2
0.60	2	31	0.009	0.024	0.120	0.24	41115	715	2.1
0.80	2	41	0.012	0.032	0.160	0.31	42099	977	5.0
1.00	2	52	0.015	0.040	0.200	0.39	42441	1231	9.9
1.50	2	101	0.028	0.105	0.225	0.77	41752	2355	55.7
2.00	2	108	0.038	0.140	0.300	1.02	33703	2541	106.8
2.50	2	108	0.047	0.175	0.375	1.28	26857	2530	166.0
3.00	2	108	0.057	0.210	0.450	1.53	22469	2539	240.0

Hardened tool steel
52 - 56 HRC



0.50	2	26	0.005	0.020	0.100	0.20	41380	422	0.9
0.60	2	31	0.006	0.024	0.120	0.24	41115	502	1.5
0.80	2	41	0.008	0.032	0.160	0.31	42099	690	3.6
1.00	2	52	0.010	0.040	0.200	0.39	42441	866	7.0
1.50	2	54	0.020	0.105	0.225	0.77	22323	893	21.1
2.00	2	54	0.027	0.140	0.300	1.02	16852	897	37.7
2.50	2	54	0.033	0.175	0.375	1.28	13429	894	58.7
3.00	2	54	0.040	0.210	0.450	1.53	11234	899	85.0

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




0.50	2	26	0.005	0.020	0.100	0.20	41380	439	0.9
0.60	2	31	0.006	0.024	0.120	0.24	41115	518	1.5
0.80	2	41	0.009	0.032	0.160	0.31	42099	716	3.7
1.00	2	52	0.011	0.040	0.200	0.39	42441	900	7.2
1.50	2	54	0.021	0.105	0.225	0.77	22323	924	21.9
2.00	2	54	0.028	0.140	0.300	1.02	16852	930	39.1
2.50	2	54	0.034	0.175	0.375	1.28	13429	924	60.7
3.00	2	54	0.041	0.210	0.450	1.53	11234	928	87.7

Titanium alloys
> 300 HB
[Ti6Al4V]



0.50	2	26	0.006	0.020	0.100	0.20	41380	464	1.0
0.60	2	31	0.007	0.024	0.120	0.24	41115	559	1.6
0.80	2	36	0.009	0.032	0.160	0.31	36965	665	3.4
1.00	2	36	0.011	0.040	0.200	0.39	29382	664	5.3
1.50	2	36	0.022	0.105	0.225	0.77	14882	655	15.5
2.00	2	36	0.029	0.140	0.300	1.02	11234	661	27.8
2.50	2	36	0.037	0.175	0.375	1.28	8952	657	43.1
3.00	2	36	0.044	0.210	0.450	1.53	7490	661	62.5

Application



Material

Steel
850 - 1100 N/mm²



d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.60	2	65	0.046	0.020	0.070	0.55	37618	3461	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.50	2	150	0.068	0.030	0.105	1.32	36172	4919	45°
2.00	2	150	0.078	0.040	0.120	1.75	27284	4256	45°
2.50	2	150	0.088	0.040	0.135	2.15	22208	3909	45°
3.00	2	150	0.098	0.050	0.150	2.59	18435	3613	45°

Hardened tool steel
52 - 56 HRC



0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.60	2	65	0.046	0.020	0.070	0.55	37618	3461	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	94	0.058	0.030	0.090	0.91	32880	3814	45°
1.50	2	94	0.068	0.030	0.105	1.32	22668	3083	45°
2.00	2	94	0.078	0.040	0.120	1.75	17098	2667	45°
2.50	2	94	0.088	0.040	0.135	2.15	13917	2449	45°
3.00	2	94	0.098	0.050	0.150	2.59	11553	2264	45°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.60	2	65	0.046	0.020	0.070	0.55	37618	3461	45°
0.80	2	85	0.052	0.020	0.080	0.71	38108	3963	45°
1.00	2	94	0.058	0.030	0.090	0.91	32880	3814	45°
1.50	2	94	0.068	0.030	0.105	1.32	22668	3083	45°
2.00	2	94	0.078	0.040	0.120	1.75	17098	2667	45°
2.50	2	94	0.088	0.040	0.135	2.15	13917	2449	45°
3.00	2	94	0.098	0.050	0.150	2.59	11553	2264	45°

Titanium alloys
> 300 HB
[Ti6Al4V]




0.50	2	55	0.042	0.020	0.065	0.46	38059	3197	45°
0.60	2	65	0.046	0.020	0.070	0.55	37618	3461	45°
0.80	2	56	0.052	0.020	0.080	0.71	25106	2611	45°
1.00	2	70	0.058	0.030	0.090	0.91	24485	2840	45°
1.50	2	70	0.068	0.030	0.105	1.32	16880	2296	45°
2.00	2	70	0.078	0.040	0.120	1.75	12732	1986	45°
2.50	2	70	0.088	0.040	0.135	2.15	10364	1824	45°
3.00	2	70	0.098	0.050	0.150	2.59	8603	1686	45°

Ball nose end mills Microcut

Shank \varnothing 4mm, cylindrical neck, 10xd




HM XA	λ γ	0° 0°

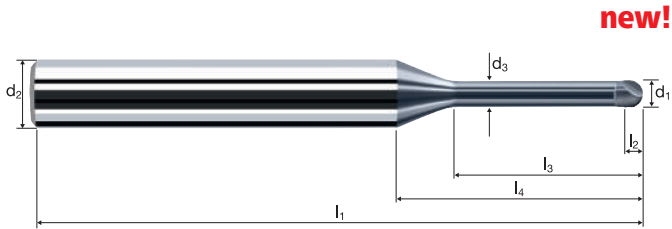

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60		Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--	--------------------------	-----------------------	---

Ø Code	Example: Order-N°										X-AL
	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	X6846
050	0.50	4.00	0.45	50	0.30	5.00	11.78	0.250	8.6°	2	●
060	0.60	4.00	0.55	50	0.36	6.00	12.60	0.300	7.9°	2	●
080	0.80	4.00	0.75	50	0.48	8.00	14.22	0.400	6.6°	2	●
100	1.00	4.00	0.95	50	0.60	10.00	15.85	0.500	5.6°	2	●
120	1.50	4.00	1.40	50	0.90	15.00	19.80	0.750	3.8°	2	●
140	2.00	4.00	1.90	57	1.20	20.00	23.87	1.000	2.6°	2	●
160	2.50	4.00	2.30	57	1.50	25.00	27.84	1.250	1.7°	2	●
180	3.00	4.00	2.80	61	1.80	30.00	31.91	1.500	1.1°	2	●

Application



Material

Steel
850 - 1100 N/mm²



Hardened tool steel
52 - 56 HRC



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Titanium alloys
> 300 HB
[Ti6Al4V]




d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ² /min]
1.00	2	37	0.010	0.020	0.150	0.28	42062	824	2.5
1.50	2	78	0.021	0.060	0.150	0.59	42082	1734	15.6
2.00	2	97	0.028	0.080	0.200	0.78	39585	2177	34.9
3.00	2	97	0.041	0.120	0.300	1.18	26166	2156	77.6

1.00	2	37	0.007	0.020	0.150	0.28	42062	581	1.8
1.50	2	49	0.015	0.060	0.150	0.59	26436	772	7.0
2.00	2	49	0.019	0.080	0.200	0.78	19996	776	12.4
3.00	2	49	0.029	0.120	0.300	1.18	13218	772	27.8

1.00	2	37	0.007	0.020	0.150	0.28	42062	606	1.8
1.50	2	49	0.015	0.060	0.150	0.59	26436	798	7.2
2.00	2	49	0.020	0.080	0.200	0.78	19996	804	12.9
3.00	2	49	0.030	0.120	0.300	1.18	13218	798	28.8

1.00	2	32	0.008	0.020	0.150	0.28	36378	560	1.7
1.50	2	32	0.016	0.060	0.150	0.59	17264	556	5.0
2.00	2	32	0.021	0.080	0.200	0.78	13059	559	9.0
3.00	2	32	0.032	0.120	0.300	1.18	8632	556	20.0

Application



Material

Steel
850 - 1100 N/mm²



Hardened tool steel
52 - 56 HRC



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Titanium alloys
> 300 HB
[Ti6Al4V]



d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
1.00	2	108	0.058	0.030	0.090	0.91	37777	4382	45°
1.50	2	127	0.068	0.030	0.105	1.32	30625	4165	45°
2.00	2	127	0.078	0.040	0.120	1.75	23100	3604	45°
3.00	2	127	0.098	0.050	0.150	2.59	15608	3059	45°

1.00	2	79	0.058	0.030	0.090	0.91	27633	3205	45°
1.50	2	79	0.068	0.030	0.105	1.32	19050	2591	45°
2.00	2	79	0.078	0.040	0.120	1.75	14369	2242	45°
3.00	2	79	0.098	0.050	0.150	2.59	9709	1903	45°

1.00	2	79	0.058	0.030	0.090	0.91	27633	3205	45°
1.50	2	79	0.068	0.030	0.105	1.32	19050	2591	45°
2.00	2	79	0.078	0.040	0.120	1.75	14369	2242	45°
3.00	2	79	0.098	0.050	0.150	2.59	9709	1903	45°


1.00	2	59	0.058	0.030	0.090	0.91	20638	2394	45°
1.50	2	59	0.068	0.030	0.105	1.32	14227	1935	45°
2.00	2	59	0.078	0.040	0.120	1.75	10732	1674	45°
3.00	2	59	0.098	0.050	0.150	2.59	7251	1421	45°

Ball nose end mills Microcut

Shank \varnothing 4mm, cylindrical neck, 12xd




HM λ **0°**
XA γ **0°**

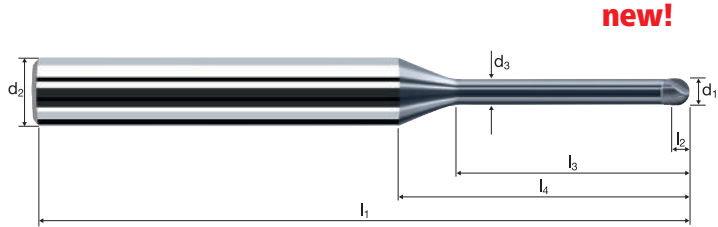

Rm < 850 **Rm** 850-1100 **Rm** 1100-1300 **Rm** 1300-1500 **HRC** 48-56 **HRC** 56-60 **Inox** Stainless **Ti** Titanium **Cobalt-Chrome** Gold / Platinum Copper

Ø Code	Example: Order-N°										X-AL
	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	X6847
100	1.00	4.00	0.95	50	0.60	12.00	17.85	0.500	5.0°	2	●
120	1.50	4.00	1.40	57	0.90	18.00	22.80	0.750	3.3°	2	●
140	2.00	4.00	1.90	57	1.20	24.00	27.87	1.000	2.3°	2	●
180	3.00	4.00	2.80	75	1.80	36.00	37.91	1.500	1.0°	2	●

Application



Material

Steel
850 - 1100 N/mm²

d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ² /min]
1.00	2	37	0.009	0.020	0.150	0.28	42062	782	2.4
1.50	2	78	0.020	0.060	0.150	0.59	42082	1650	14.9
2.00	2	87	0.026	0.080	0.200	0.78	35504	1853	29.7
3.00	2	87	0.039	0.120	0.300	1.18	23469	1840	66.3

Hardened tool steel
52 - 56 HRC

1.00	2	37	0.007	0.020	0.150	0.28	42062	555	1.7
1.50	2	44	0.014	0.060	0.150	0.59	23738	655	5.9
2.00	2	44	0.019	0.080	0.200	0.78	17956	664	10.7
3.00	2	44	0.028	0.120	0.300	1.18	11869	658	23.7


Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

1.00	2	37	0.007	0.020	0.150	0.28	42062	572	1.7
1.50	2	44	0.014	0.060	0.150	0.59	23738	679	6.1
2.00	2	44	0.019	0.080	0.200	0.78	17956	686	11.0
3.00	2	44	0.029	0.120	0.300	1.18	11869	681	24.6

Titanium alloys
> 300 HB
[Ti6Al4V]

1.00	2	29	0.007	0.020	0.150	0.28	32968	481	1.5
1.50	2	29	0.015	0.060	0.150	0.59	15646	479	4.3
2.00	2	29	0.020	0.080	0.200	0.78	11835	483	7.8
3.00	2	29	0.031	0.120	0.300	1.18	7823	479	17.3

Application



Material

Steel
850 - 1100 N/mm²

d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
1.00	2	92	0.058	0.030	0.090	0.91	32181	3733	45°
1.50	2	92	0.068	0.030	0.105	1.32	22185	3017	45°
2.00	2	92	0.078	0.040	0.120	1.75	16734	2611	45°
3.00	2	92	0.098	0.050	0.150	2.59	11307	2216	45°

Hardened tool steel
52 - 56 HRC

1.00	2	58	0.058	0.030	0.090	0.91	20288	2353	45°
1.50	2	58	0.068	0.030	0.105	1.32	13986	1902	45°
2.00	2	58	0.078	0.040	0.120	1.75	10550	1646	45°
3.00	2	58	0.098	0.050	0.150	2.59	7128	1397	45°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

1.00	2	58	0.058	0.030	0.090	0.91	20288	2353	45°
1.50	2	58	0.068	0.030	0.105	1.32	13986	1902	45°
2.00	2	58	0.078	0.040	0.120	1.75	10550	1646	45°
3.00	2	58	0.098	0.050	0.150	2.59	7128	1397	45°

Titanium alloys
> 300 HB
[Ti6Al4V]


1.00	2	43	0.058	0.030	0.090	0.91	15041	1745	45°
1.50	2	43	0.068	0.030	0.105	1.32	10369	1410	45°
2.00	2	43	0.078	0.040	0.120	1.75	7821	1220	45°
3.00	2	43	0.098	0.050	0.150	2.59	5285	1036	45°

Ball nose end mills Microcut


Shank \varnothing 4mm, cylindrical neck, 15xd



HM	λ	0°
XA	γ	0°




new!

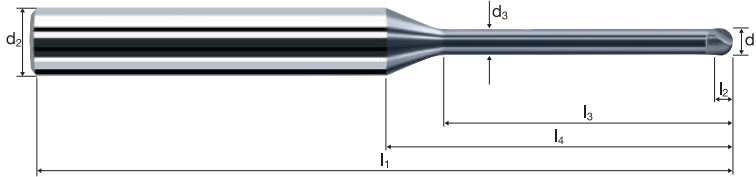

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--------------------------	-----------------------	---

		Coating		Article-N°		ø-Code						X-AL
Example:		X		6848		100						X6848
Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z		
100	1.00	4.00	0.95	50	0.60	15.00	20.85	0.500	4.3°	2	●	
120	1.50	4.00	1.40	57	0.90	22.50	27.30	0.750	2.8°	2	●	
140	2.00	4.00	1.90	61	1.20	30.00	33.87	1.000	1.9°	2	●	
180	3.00	4.00	2.80	75	1.80	45.00	46.91	1.500	0.8°	2	●	

Application



Material

Steel
850 - 1100 N/mm²



d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	Q [mm ² /min]
1.00	2	32	0.008	0.015	0.100	0.24	42441	654	1.0
1.50	2	55	0.013	0.030	0.150	0.42	41683	1109	5.0
2.00	2	70	0.018	0.040	0.200	0.56	39789	1409	11.3
3.00	2	70	0.027	0.060	0.300	0.84	26526	1411	25.4

Hardened tool steel
52 - 56 HRC



1.00	2	32	0.005	0.015	0.100	0.24	42441	458	0.7
1.50	2	35	0.009	0.030	0.150	0.42	26526	499	2.3
2.00	2	35	0.013	0.040	0.200	0.56	19894	497	4.0
3.00	2	35	0.019	0.060	0.300	0.84	13263	499	9.0

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




1.00	2	32	0.006	0.015	0.100	0.24	42441	475	0.7
1.50	2	35	0.010	0.030	0.150	0.42	26526	515	2.3
2.00	2	35	0.013	0.040	0.200	0.56	19894	517	4.2
3.00	2	35	0.019	0.060	0.300	0.84	13263	515	9.3

Titanium alloys
> 300 HB
[Ti6Al4V]



1.00	2	23	0.006	0.015	0.100	0.24	30505	366	0.6
1.50	2	23	0.010	0.030	0.150	0.42	17431	363	1.7
2.00	2	23	0.014	0.040	0.200	0.56	13073	361	2.9
3.00	2	23	0.021	0.060	0.300	0.84	8716	361	6.5

Application



Material

Steel
850 - 1100 N/mm²



d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]
1.00	2	35	0.058	0.030	0.090	0.91	12243	1420	45°
1.50	2	35	0.068	0.030	0.105	1.32	8440	1148	45°
2.00	2	35	0.078	0.040	0.120	1.75	6366	993	45°
3.00	2	35	0.098	0.050	0.150	2.59	4301	843	45°

Hardened tool steel
52 - 56 HRC



1.00	2	22	0.058	0.030	0.090	0.91	7695	893	45°
1.50	2	22	0.068	0.030	0.105	1.32	5305	722	45°
2.00	2	22	0.078	0.040	0.120	1.75	4002	624	45°
3.00	2	22	0.098	0.050	0.150	2.59	2704	530	45°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



1.00	2	22	0.058	0.030	0.090	0.91	7695	893	45°
1.50	2	22	0.068	0.030	0.105	1.32	5305	722	45°
2.00	2	22	0.078	0.040	0.120	1.75	4002	624	45°
3.00	2	22	0.098	0.050	0.150	2.59	2704	530	45°

Titanium alloys
> 300 HB
[Ti6Al4V]



1.00	2	16	0.058	0.030	0.090	0.91	5597	649	45°
1.50	2	16	0.068	0.030	0.105	1.32	3858	525	45°
2.00	2	16	0.078	0.040	0.120	1.75	2910	454	45°
3.00	2	16	0.098	0.050	0.150	2.59	1966	385	45°


Ball nose end mills Microcut

Shank \varnothing 4mm, cylindrical neck, 20xd



HM XA	λ γ	0° 0°


new!

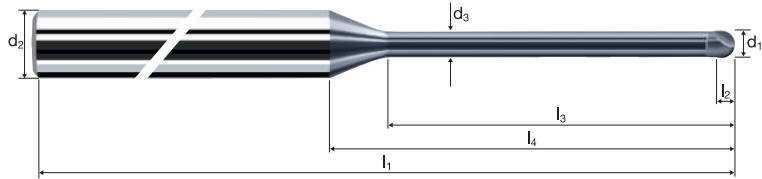

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------------	----------------	--

Example: Order-N°											X-AL
Coating Article-N° \varnothing -Code											
X 6849 100											X6849
\varnothing Code	d1	d2 h4	d3	l1	l2	l3	l4	r ± 0.005	α	z	
100	1.00	4.00	0.95	57	0.60	20.00	25.85	0.500	3.5°	2	●
120	1.50	4.00	1.40	66	0.90	30.00	34.80	0.750	2.3°	2	●
140	2.00	4.00	1.90	75	1.20	40.00	43.87	1.000	1.5°	2	●
180	3.00	4.00	2.80	100	1.80	60.00	61.91	1.500	0.7°	2	●

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.30	2	20	0.010	0.020	0.060	0.15	42440	850	1.0
0.50	2	36	0.018	0.040	0.100	0.27	42440	1530	6.1
0.80	2	55	0.028	0.060	0.160	0.42	41685	2335	22.4
1.00	2	71	0.036	0.080	0.200	0.54	41850	3015	48.2
1.20	2	87	0.042	0.100	0.240	0.66	41960	3525	84.6
1.50	2	107	0.054	0.120	0.300	0.81	42050	4540	163.5
2.00	2	144	0.072	0.160	0.400	1.09	42050	6055	387.6
2.50	2	179	0.090	0.200	0.500	1.36	41895	7540	754.1
3.00	2	180	0.108	0.240	0.600	1.63	35150	7595	1093.3

0.30	2	20	0.010	0.020	0.060	0.15	42440	850	1.0
0.50	2	36	0.016	0.040	0.100	0.27	42440	1360	5.4
0.80	2	55	0.026	0.060	0.160	0.42	41685	2170	20.8
1.00	2	71	0.032	0.080	0.200	0.54	41850	2680	42.9
1.20	2	87	0.038	0.100	0.240	0.66	41960	3190	76.5
1.50	2	107	0.048	0.120	0.300	0.81	42050	4035	145.3
2.00	2	144	0.064	0.160	0.400	1.09	42050	5385	344.5
2.50	2	160	0.082	0.200	0.500	1.36	37450	6140	614.2
3.00	2	160	0.098	0.240	0.600	1.63	31245	6125	881.9

0.30	2	20	0.010	0.020	0.060	0.15	42440	850	1.0
0.50	2	36	0.016	0.040	0.100	0.27	42440	1360	5.4
0.80	2	55	0.026	0.060	0.160	0.42	41685	2170	20.8
1.00	2	71	0.032	0.080	0.200	0.54	41850	2680	42.9
1.20	2	80	0.038	0.100	0.240	0.66	38585	2930	70.4
1.50	2	80	0.048	0.120	0.300	0.81	31440	3020	108.6
2.00	2	80	0.064	0.160	0.400	1.09	23360	2990	191.4
2.50	2	80	0.082	0.200	0.500	1.36	18725	3070	307.1
3.00	2	80	0.098	0.240	0.600	1.63	15625	3060	440.9

0.30	2	20	0.008	0.020	0.060	0.15	42440	680	0.8
0.50	2	36	0.012	0.040	0.100	0.27	42440	1020	4.1
0.80	2	55	0.020	0.060	0.160	0.42	41685	1665	16.0
1.00	2	60	0.026	0.080	0.200	0.54	35370	1840	29.4
1.20	2	60	0.030	0.100	0.240	0.66	28935	1735	41.7
1.50	2	60	0.038	0.120	0.300	0.81	23580	1790	64.5
2.00	2	60	0.050	0.160	0.400	1.09	17520	1750	112.1
2.50	2	60	0.064	0.200	0.500	1.36	14045	1800	179.8
3.00	2	60	0.076	0.240	0.600	1.63	11715	1780	256.5

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.30	2	37	0.012	0.012	0.012	0.28	42060	1010	45°
0.50	2	62	0.020	0.022	0.022	0.47	41990	1680	45°
0.80	2	99	0.022	0.034	0.034	0.75	42015	1850	45°
1.00	2	123	0.028	0.042	0.042	0.93	42100	2360	45°
1.20	2	148	0.030	0.050	0.050	1.12	42060	2525	45°
1.50	2	185	0.034	0.064	0.064	1.40	42060	2860	45°
2.00	2	245	0.038	0.084	0.084	1.86	41930	3185	45°
2.50	2	300	0.040	0.106	0.106	2.33	40985	3280	45°
3.00	2	300	0.046	0.126	0.126	2.79	34225	3150	45°

0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.50	2	62	0.018	0.022	0.022	0.47	41990	1510	45°
0.80	2	99	0.020	0.034	0.034	0.75	42015	1680	45°
1.00	2	123	0.026	0.042	0.042	0.93	42100	2190	45°
1.20	2	148	0.028	0.050	0.050	1.12	42060	2355	45°
1.50	2	185	0.030	0.064	0.064	1.40	42060	2525	45°
2.00	2	245	0.034	0.084	0.084	1.86	41930	2850	45°
2.50	2	250	0.036	0.106	0.106	2.33	34155	2460	45°
3.00	2	250	0.042	0.126	0.126	2.79	28520	2395	45°

0.30	2	37	0.010	0.012	0.012	0.28	42060	840	45°
0.50	2	62	0.016	0.022	0.022	0.47	41990	1345	45°
0.80	2	99	0.018	0.034	0.034	0.75	42015	1515	45°
1.00	2	120	0.022	0.042	0.042	0.93	41070	1805	45°
1.20	2	120	0.024	0.050	0.050	1.12	34105	1635	45°
1.50	2	120	0.028	0.064	0.064	1.40	27285	1530	45°
2.00	2	120	0.030	0.084	0.084	1.86	20535	1230	45°
2.50	2	120	0.032	0.106	0.106	2.33	16395	1050	45°
3.00	2	120	0.036	0.126	0.126	2.79	13690	985	45°



0.30	2	37	0.008	0.012	0.012	0.28	42060	675	45°
0.50	2	62	0.014	0.022	0.022	0.47	41990	1175	45°
0.80	2	99	0.016	0.034	0.034	0.75	42015	1345	45°
1.00	2	100	0.020	0.042	0.042	0.93	34225	1370	45°
1.20	2	100	0.022	0.050	0.050	1.12	28420	1250	45°
1.50	2	100	0.024	0.064	0.064	1.40	22735	1090	45°
2.00	2	100	0.026	0.084	0.084	1.86	17115	890	45°
2.50	2	100	0.028	0.106	0.106	2.33	13660	765	45°
3.00	2	100	0.032	0.126	0.126	2.79	11410	730	45°

Ball nose end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 3xd




HM	λ 30°
MG10	γ 5°

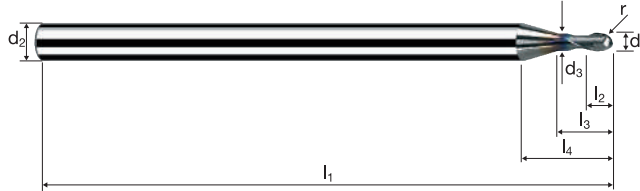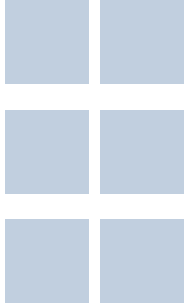

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
----------	-------------	--------------	--------------	--	--	--	----------------	-------------	--------------------------------------

Example: Order-N°.											MICRO
											M5782
\varnothing Code	d_1 ± 0.01	d_2 h6	d_3	l_1	l_2	l_3	l_4	r ± 0.01	α	z	
020	0.20	3.00	0.18	40	0.24	0.60	8.86	0.100	9.4°	2	●
030	0.30	3.00	0.25	40	0.36	0.90	8.96	0.150	9.0°	2	●
040	0.40	3.00	0.35	40	0.48	1.20	8.98	0.200	8.7°	2	●
050	0.50	3.00	0.45	40	0.60	1.50	6.65	0.250	11.8°	2	●
060	0.60	3.00	0.55	40	0.72	1.80	6.77	0.300	11.2°	2	●
080	0.80	3.00	0.75	40	0.96	2.40	6.99	0.400	10.1°	2	●
100	1.00	3.00	0.95	50	1.20	3.00	7.22	0.500	9.0°	2	●
108	1.20	3.00	1.10	50	1.44	3.60	7.54	0.600	7.9°	2	●
120	1.50	3.00	1.40	50	1.80	4.50	7.88	0.750	6.5°	2	●
140	2.00	3.00	1.90	50	2.40	6.00	8.45	1.000	4.1°	2	●
160	2.50	3.00	2.30	50	3.00	7.50	9.20	1.250	2.0°	2	●
180	3.00	3.00	2.80	50	3.60	8.56	9.00	1.500	0.0°	2	●

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.50	2	36	0.018	0.040	0.100	0.27	42440	1530	6.1
0.60	2	40	0.022	0.040	0.120	0.30	42440	1865	9.0
0.80	2	55	0.028	0.060	0.160	0.42	41685	2335	22.4
1.00	2	67	0.036	0.070	0.200	0.51	41815	3010	42.2
1.20	2	79	0.042	0.080	0.240	0.60	41910	3520	67.6
1.50	2	103	0.054	0.110	0.300	0.78	42035	4540	149.8
2.00	2	135	0.072	0.140	0.400	1.02	42130	6065	339.7
2.50	2	170	0.090	0.180	0.500	1.29	41950	7550	679.6
3.00	2	180	0.108	0.210	0.600	1.53	37450	8090	1019.2

0.50	2	36	0.016	0.040	0.100	0.27	42440	1360	5.4
0.60	2	40	0.020	0.040	0.120	0.30	42440	1700	8.1
0.80	2	55	0.026	0.060	0.160	0.42	41685	2170	20.8
1.00	2	67	0.032	0.070	0.200	0.51	41815	2675	37.5
1.20	2	79	0.038	0.080	0.240	0.60	41910	3185	61.2
1.50	2	103	0.048	0.110	0.300	0.78	42035	4035	133.2
2.00	2	135	0.064	0.140	0.400	1.02	42130	5395	302.0
2.50	2	160	0.082	0.180	0.500	1.29	39480	6475	582.7
3.00	2	160	0.098	0.210	0.600	1.53	33285	6525	822.1

0.50	2	36	0.016	0.040	0.100	0.27	42440	1360	5.4
0.60	2	40	0.020	0.040	0.120	0.30	42440	1700	8.1
0.80	2	55	0.026	0.060	0.160	0.42	41685	2170	20.8
1.00	2	67	0.032	0.070	0.200	0.51	41815	2675	37.5
1.20	2	79	0.038	0.080	0.240	0.60	41910	3185	61.2
1.50	2	80	0.048	0.110	0.300	0.78	32645	3135	103.4
2.00	2	80	0.064	0.140	0.400	1.02	24965	3195	179.0
2.50	2	80	0.082	0.180	0.500	1.29	19740	3235	291.4
3.00	2	80	0.098	0.210	0.600	1.53	16645	3260	411.0

0.50	2	36	0.012	0.040	0.100	0.27	42440	1020	4.1
0.60	2	40	0.016	0.040	0.120	0.30	42440	1360	6.5
0.80	2	55	0.020	0.060	0.160	0.42	41685	1665	16.0
1.00	2	60	0.026	0.070	0.200	0.51	37450	1945	27.3
1.20	2	60	0.030	0.080	0.240	0.60	31830	1910	36.7
1.50	2	60	0.038	0.110	0.300	0.78	24485	1860	61.4
2.00	2	60	0.050	0.140	0.400	1.02	18725	1870	104.9
2.50	2	60	0.064	0.180	0.500	1.29	14805	1895	170.6
3.00	2	60	0.076	0.210	0.600	1.53	12485	1895	239.1

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.50	2	61	0.014	0.020	0.020	0.46	42210	1180	45°
0.60	2	74	0.016	0.024	0.024	0.56	42060	1345	45°
0.80	2	98	0.018	0.032	0.032	0.74	42155	1520	45°
1.00	2	123	0.022	0.040	0.040	0.93	42100	1850	45°
1.20	2	146	0.024	0.048	0.048	1.11	41870	2010	45°
1.50	2	183	0.028	0.060	0.060	1.39	41905	2345	45°
2.00	2	245	0.030	0.080	0.080	1.86	41930	2515	45°
2.50	2	300	0.032	0.100	0.100	2.32	41160	2635	45°
3.00	2	300	0.036	0.120	0.120	2.78	34350	2475	45°

0.50	2	57	0.012	0.008	0.008	0.43	42195	1015	45°
0.60	2	73	0.014	0.020	0.020	0.55	42250	1185	45°
0.80	2	98	0.016	0.032	0.032	0.74	42155	1350	45°
1.00	2	123	0.020	0.040	0.040	0.93	42100	1685	45°
1.20	2	146	0.022	0.048	0.048	1.11	41870	1840	45°
1.50	2	183	0.026	0.060	0.060	1.39	41905	2180	45°
2.00	2	245	0.028	0.080	0.080	1.86	41930	2350	45°
2.50	2	250	0.028	0.100	0.100	2.32	34300	1920	45°
3.00	2	250	0.032	0.120	0.120	2.78	28625	1830	45°

0.50	2	57	0.012	0.008	0.008	0.43	42195	1015	45°
0.60	2	73	0.012	0.020	0.020	0.55	42250	1015	45°
0.80	2	98	0.014	0.032	0.032	0.74	42155	1180	45°
1.00	2	120	0.018	0.040	0.040	0.93	41070	1480	45°
1.20	2	120	0.020	0.048	0.048	1.11	34410	1375	45°
1.50	2	120	0.022	0.060	0.060	1.39	27480	1210	45°
2.00	2	120	0.024	0.080	0.080	1.86	20535	985	45°
2.50	2	120	0.026	0.100	0.100	2.32	16465	855	45°
3.00	2	120	0.028	0.120	0.120	2.78	13740	770	45°


0.50	2	57	0.010	0.008	0.008	0.43	42195	845	45°
0.60	2	73	0.012	0.020	0.020	0.55	42250	1015	45°
0.80	2	98	0.012	0.032	0.032	0.74	42155	1010	45°
1.00	2	100	0.016	0.040	0.040	0.93	34225	1095	45°
1.20	2	100	0.016	0.048	0.048	1.11	28675	920	45°
1.50	2	100	0.020	0.060	0.060	1.39	22900	915	45°
2.00	2	100	0.022	0.080	0.080	1.86	17115	755	45°
2.50	2	100	0.022	0.100	0.100	2.32	13720	605	45°
3.00	2	100	0.026	0.120	0.120	2.78	11450	595	45°

Ball nose end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 5xd




HM	λ 30°
MG10	γ 5°

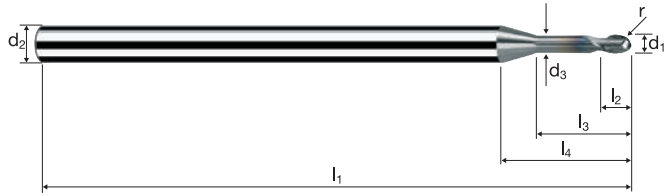

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
----------	-------------	--------------	--------------	--	--	--	----------------	-------------	--------------------------------------

Example: Order-N°.											MICRO
											M5784
											M5784
\varnothing Code	d_1 ± 0.01	d_2 h6	d_3	l_1	l_2	l_3	l_4	r ± 0.01	α	z	
050	0.50	3.00	0.45	40	0.60	2.50	7.65	0.250	10.1°	2	●
060	0.60	3.00	0.55	40	0.72	3.00	7.97	0.300	9.4°	2	●
070	0.70	3.00	0.65	40	0.84	3.50	8.28	0.350	8.7°	2	●
080	0.80	3.00	0.75	40	0.96	4.00	8.59	0.400	8.0°	2	●
090	0.90	3.00	0.85	40	1.08	4.50	8.91	0.450	7.4°	2	●
100	1.00	3.00	0.95	50	1.20	5.00	9.22	0.500	6.9°	2	●
108	1.20	3.00	1.10	50	1.44	6.00	9.94	0.600	5.8°	2	●
120	1.50	3.00	1.40	50	1.80	7.50	10.88	0.750	4.4°	2	●
132	1.80	3.00	1.70	50	2.16	9.00	11.82	0.900	3.3°	2	●
140	2.00	3.00	1.90	50	2.40	10.00	12.45	1.000	2.6°	2	●
152	2.30	3.00	2.10	50	2.76	11.50	13.57	1.150	1.7°	2	●
160	2.50	3.00	2.30	50	3.00	12.50	14.20	1.250	1.2°	2	●
172	2.80	3.00	2.60	50	3.36	14.00	15.14	1.400	0.5°	2	●
180	3.00	3.00	2.80	50	3.60	14.56	15.00	1.500	0.0°	2	●

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.50	2	32	0.018	0.030	0.100	0.24	42440	1530	4.6
0.60	2	34	0.022	0.030	0.120	0.26	41625	1830	6.6
0.80	2	46	0.028	0.040	0.160	0.35	41835	2345	15.0
1.00	2	58	0.036	0.050	0.200	0.44	41960	3020	30.2
1.20	2	69	0.042	0.060	0.240	0.52	42235	3550	51.1
1.50	2	88	0.054	0.080	0.300	0.67	41810	4515	108.4
2.00	2	115	0.072	0.100	0.400	0.87	42075	6060	242.4
2.50	2	146	0.090	0.130	0.500	1.11	41870	7535	489.9
3.00	2	173	0.108	0.150	0.600	1.31	42035	9080	817.2

0.50	2	32	0.016	0.030	0.100	0.24	42440	1360	4.1
0.60	2	34	0.020	0.030	0.120	0.26	41625	1665	6.0
0.80	2	46	0.026	0.040	0.160	0.35	41835	2175	13.9
1.00	2	58	0.032	0.050	0.200	0.44	41960	2685	26.9
1.20	2	69	0.038	0.060	0.240	0.52	42235	3210	46.2
1.50	2	88	0.048	0.080	0.300	0.67	41810	4015	96.3
2.00	2	115	0.064	0.100	0.400	0.87	42075	5385	215.4
2.50	2	146	0.082	0.130	0.500	1.11	41870	6865	446.3
3.00	2	160	0.098	0.150	0.600	1.31	38880	7620	685.8

0.50	2	32	0.016	0.030	0.100	0.24	42440	1360	4.1
0.60	2	34	0.020	0.030	0.120	0.26	41625	1665	6.0
0.80	2	46	0.026	0.040	0.160	0.35	41835	2175	13.9
1.00	2	58	0.032	0.050	0.200	0.44	41960	2685	26.9
1.20	2	69	0.038	0.060	0.240	0.52	42235	3210	46.2
1.50	2	80	0.048	0.080	0.300	0.67	38005	3650	87.6
2.00	2	80	0.064	0.100	0.400	0.87	29270	3745	149.9
2.50	2	80	0.082	0.130	0.500	1.11	22940	3760	244.6
3.00	2	80	0.098	0.150	0.600	1.31	19440	3810	342.9

0.50	2	32	0.012	0.030	0.100	0.24	42440	1020	3.1
0.60	2	34	0.016	0.030	0.120	0.26	41625	1330	4.8
0.80	2	46	0.020	0.040	0.160	0.35	41835	1675	10.7
1.00	2	58	0.026	0.050	0.200	0.44	41960	2180	21.8
1.20	2	60	0.030	0.060	0.240	0.52	36730	2205	31.7
1.50	2	60	0.038	0.080	0.300	0.67	28505	2165	52.0
2.00	2	60	0.050	0.100	0.400	0.87	21950	2195	87.8
2.50	2	60	0.064	0.130	0.500	1.11	17205	2200	143.2
3.00	2	60	0.076	0.150	0.600	1.31	14580	2215	199.4

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.50	2	61	0.014	0.020	0.020	0.46	42210	1180	45°
0.60	2	73	0.016	0.022	0.022	0.55	42250	1350	45°
0.80	2	98	0.018	0.030	0.030	0.74	42155	1520	45°
1.00	2	121	0.022	0.038	0.038	0.92	41865	1840	45°
1.20	2	146	0.024	0.046	0.046	1.11	41870	2010	45°
1.50	2	183	0.028	0.058	0.058	1.39	41905	2345	45°
2.00	2	244	0.030	0.076	0.076	1.85	41980	2520	45°
2.50	2	300	0.032	0.096	0.096	2.31	41340	2645	45°
3.00	2	300	0.036	0.114	0.114	2.77	34475	2480	45°

0.50	2	61	0.012	0.020	0.020	0.46	42210	1015	45°
0.60	2	73	0.014	0.022	0.022	0.55	42250	1185	45°
0.80	2	98	0.016	0.030	0.030	0.74	42155	1350	45°
1.00	2	121	0.020	0.038	0.038	0.92	41865	1675	45°
1.20	2	146	0.022	0.046	0.046	1.11	41870	1840	45°
1.50	2	183	0.026	0.058	0.058	1.39	41905	2180	45°
2.00	2	244	0.028	0.076	0.076	1.85	41980	2350	45°
2.50	2	250	0.028	0.096	0.096	2.31	34450	1930	45°
3.00	2	250	0.032	0.114	0.114	2.77	28730	1840	45°

0.50	2	61	0.012	0.020	0.020	0.46	42210	1015	45°
0.60	2	73	0.012	0.022	0.022	0.55	42250	1015	45°
0.80	2	98	0.014	0.030	0.030	0.74	42155	1180	45°
1.00	2	120	0.018	0.038	0.038	0.92	41520	1495	45°
1.20	2	120	0.020	0.046	0.046	1.11	34410	1375	45°
1.50	2	120	0.022	0.058	0.058	1.39	27480	1210	45°
2.00	2	120	0.024	0.076	0.076	1.85	20645	990	45°
2.50	2	120	0.026	0.096	0.096	2.31	16535	860	45°
3.00	2	120	0.028	0.114	0.114	2.77	13790	770	45°


0.50	2	61	0.010	0.020	0.020	0.46	42210	845	45°
0.60	2	73	0.012	0.022	0.022	0.55	42250	1015	45°
0.80	2	98	0.012	0.030	0.030	0.74	42155	1010	45°
1.00	2	100	0.016	0.038	0.038	0.92	34600	1105	45°
1.20	2	100	0.016	0.046	0.046	1.11	28675	920	45°
1.50	2	100	0.020	0.058	0.058	1.39	22900	915	45°
2.00	2	100	0.022	0.076	0.076	1.85	17205	755	45°
2.50	2	100	0.022	0.096	0.096	2.31	13780	605	45°
3.00	2	100	0.026	0.114	0.114	2.77	11490	600	45°

Ball nose end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 8xd




HM λ 30°
MG10 γ 5°

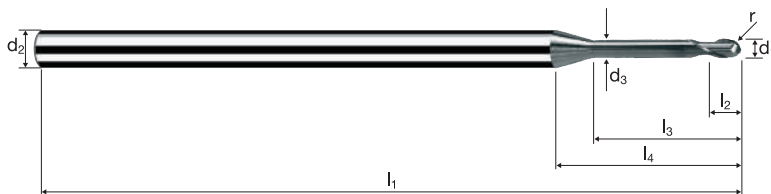

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
----------	-------------	--------------	--------------	--	--	--	----------------	-------------	--

											MICRO	
											M5786	
Example: Order-N°.	Coating M		Article-N°. 5786			ø-Code 050						
Ø Code	d ₁ ±0.01	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.01	α	z		
050	0.50	3.00	0.45	40	0.60	4.00	9.15	0.250	8.4°	2	●	
060	0.60	3.00	0.55	40	0.72	4.80	9.77	0.300	7.6°	2	●	
080	0.80	3.00	0.75	40	0.96	6.40	10.99	0.400	6.2°	2	●	
100	1.00	3.00	0.95	50	1.20	8.00	12.22	0.500	5.1°	2	●	
108	1.20	3.00	1.10	50	1.44	9.60	13.54	0.600	4.2°	2	●	
120	1.50	3.00	1.40	60	1.80	12.00	15.38	0.750	3.1°	2	●	
140	2.00	3.00	1.90	60	2.40	16.00	18.45	1.000	1.7°	2	●	
160	2.50	3.00	2.30	60	3.00	20.00	21.70	1.250	0.8°	2	●	
180	3.00	3.00	2.80	60	3.60	23.56	24.00	1.500	0.0°	2	●	

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ³ /min]
0.50	2	26	0.018	0.020	0.080	0.20	41380	1490	2.4
0.60	2	29	0.022	0.020	0.090	0.22	41960	1845	3.3
0.80	2	40	0.028	0.030	0.120	0.30	42440	2375	8.6
1.00	2	51	0.036	0.040	0.150	0.39	41625	2995	18.0
1.20	2	63	0.042	0.050	0.180	0.48	41780	3510	31.6
1.50	2	78	0.054	0.060	0.230	0.59	42080	4545	62.7
2.00	2	103	0.072	0.080	0.300	0.78	42035	6055	145.3
2.50	2	129	0.090	0.100	0.380	0.98	41900	7540	286.6
3.00	2	156	0.108	0.120	0.450	1.18	42080	9090	490.8

0.50	2	26	0.016	0.020	0.080	0.20	41380	1325	2.1
0.60	2	29	0.020	0.020	0.090	0.22	41960	1680	3.0
0.80	2	40	0.026	0.030	0.120	0.30	42440	2205	7.9
1.00	2	51	0.032	0.040	0.150	0.39	41625	2665	16.0
1.20	2	63	0.038	0.050	0.180	0.48	41780	3175	28.6
1.50	2	78	0.048	0.060	0.230	0.59	42080	4040	55.7
2.00	2	103	0.064	0.080	0.300	0.78	42035	5380	129.1
2.50	2	129	0.082	0.100	0.380	0.98	41900	6870	261.1
3.00	2	156	0.098	0.120	0.450	1.18	42080	8250	445.4

0.50	2	26	0.016	0.020	0.080	0.20	41380	1325	2.1
0.60	2	29	0.020	0.020	0.090	0.22	41960	1680	3.0
0.80	2	40	0.026	0.030	0.120	0.30	42440	2205	7.9
1.00	2	51	0.032	0.040	0.150	0.39	41625	2665	16.0
1.20	2	63	0.038	0.050	0.180	0.48	41780	3175	28.6
1.50	2	78	0.048	0.060	0.230	0.59	42080	4040	55.7
2.00	2	80	0.064	0.080	0.300	0.78	32645	4180	100.3
2.50	2	80	0.082	0.100	0.380	0.98	25985	4260	161.9
3.00	2	80	0.098	0.120	0.450	1.18	21580	4230	228.4

0.50	2	26	0.012	0.020	0.080	0.20	41380	995	1.6
0.60	2	29	0.016	0.020	0.090	0.22	41960	1345	2.4
0.80	2	40	0.020	0.030	0.120	0.30	42440	1700	6.1
1.00	2	51	0.026	0.040	0.150	0.39	41625	2165	13.0
1.20	2	60	0.030	0.050	0.180	0.48	39790	2385	21.5
1.50	2	60	0.038	0.060	0.230	0.59	32370	2460	34.0
2.00	2	60	0.050	0.080	0.300	0.78	24485	2450	58.8
2.50	2	60	0.064	0.100	0.380	0.98	19490	2495	94.8
3.00	2	60	0.076	0.120	0.450	1.18	16185	2460	132.8

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
0.50	2	61	0.012	0.018	0.018	0.46	42210	1015	45°
0.60	2	73	0.014	0.022	0.022	0.55	42250	1185	45°
0.80	2	96	0.016	0.028	0.028	0.73	41860	1340	45°
1.00	2	121	0.020	0.036	0.036	0.92	41865	1675	45°
1.20	2	145	0.022	0.042	0.042	1.10	41960	1845	45°
1.50	2	182	0.024	0.052	0.052	1.38	41980	2015	45°
2.00	2	243	0.026	0.070	0.070	1.84	42040	2185	45°
2.50	2	300	0.028	0.088	0.088	2.29	41700	2335	45°
3.00	2	300	0.032	0.106	0.106	2.75	34725	2220	45°

0.50	2	57	0.010	0.008	0.008	0.43	42195	845	45°
0.60	2	71	0.012	0.018	0.018	0.54	41850	1005	45°
0.80	2	96	0.014	0.028	0.028	0.73	41860	1170	45°
1.00	2	121	0.018	0.036	0.036	0.92	41865	1505	45°
1.20	2	145	0.020	0.042	0.042	1.10	41960	1680	45°
1.50	2	182	0.022	0.052	0.052	1.38	41980	1845	45°
2.00	2	243	0.024	0.070	0.070	1.84	42040	2020	45°
2.50	2	250	0.026	0.088	0.088	2.29	34750	1805	45°
3.00	2	250	0.028	0.106	0.106	2.75	28935	1620	45°

0.50	2	57	0.010	0.008	0.008	0.43	42195	845	45°
0.60	2	71	0.012	0.018	0.018	0.54	41850	1005	45°
0.80	2	96	0.012	0.028	0.028	0.73	41860	1005	45°
1.00	2	120	0.016	0.036	0.036	0.92	41520	1330	45°
1.20	2	120	0.018	0.042	0.042	1.10	34725	1250	45°
1.50	2	120	0.020	0.052	0.052	1.38	27680	1105	45°
2.00	2	120	0.020	0.070	0.070	1.84	20760	830	45°
2.50	2	120	0.022	0.088	0.088	2.29	16680	735	45°
3.00	2	120	0.026	0.106	0.106	2.75	13890	720	45°


0.50	2	57	0.008	0.008	0.008	0.43	42195	675	45°
0.60	2	71	0.010	0.018	0.018	0.54	41850	835	45°
0.80	2	96	0.012	0.028	0.028	0.73	41860	1005	45°
1.00	2	100	0.014	0.036	0.036	0.92	34600	970	45°
1.20	2	100	0.016	0.042	0.042	1.10	28935	925	45°
1.50	2	100	0.016	0.052	0.052	1.38	23065	740	45°
2.00	2	100	0.018	0.070	0.070	1.84	17300	625	45°
2.50	2	100	0.020	0.088	0.088	2.29	13900	555	45°
3.00	2	100	0.022	0.106	0.106	2.75	11575	510	45°

Ball nose end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 10xd



HM	λ 30°
MG10	γ 5°

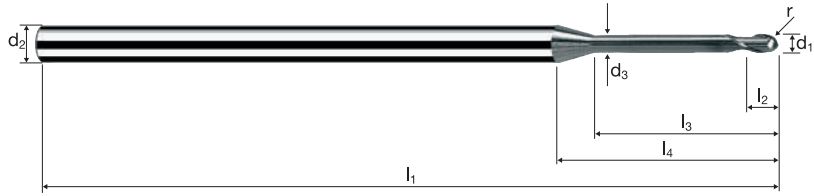


ToolSchool X6846
X6568
X6768

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500			Inox Stainless	Ti Titanium	Gold / Platinum Copper
----------	-------------	--------------	--------------	--	--	----------------	-------------	------------------------

Example: Order-N°.											MICRO	
											M5787	
\varnothing Code	d_1 ± 0.01	d_2 h6	d_3	l_1	l_2	l_3	l_4	r ± 0.01	α	z		
050	0.50	3.00	0.45	40	0.60	5.00	10.15	0.250	7.5°	2	●	
060	0.60	3.00	0.55	40	0.72	6.00	10.97	0.300	6.7°	2	●	
080	0.80	3.00	0.75	40	0.96	8.00	12.59	0.400	5.4°	2	●	
100	1.00	3.00	0.95	50	1.20	10.00	14.22	0.500	4.3°	2	●	
108	1.20	3.00	1.10	50	1.44	12.00	15.94	0.600	3.5°	2	●	
120	1.50	3.00	1.40	60	1.80	15.00	18.38	0.750	2.6°	2	●	
140	2.00	3.00	1.90	60	2.40	20.00	22.45	1.000	1.4°	2	●	
160	2.50	3.00	2.30	60	3.00	25.00	26.70	1.250	0.6°	2	●	
180	3.00	3.00	2.80	60	3.60	29.56	30.00	1.500	0.0°	2	●	

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ³ /min]
1.00	2	45	0.028	0.030	0.120	0.34	42130	2360	8.5
1.20	2	57	0.034	0.040	0.140	0.43	42195	2870	16.1
1.50	2	71	0.042	0.050	0.180	0.54	41850	3515	31.6
2.00	2	90	0.058	0.060	0.240	0.68	42130	4885	70.4
2.50	2	116	0.072	0.080	0.300	0.88	41960	6040	145.0
3.00	2	135	0.086	0.090	0.360	1.02	42130	7245	234.8

1.00	2	45	0.026	0.030	0.120	0.34	42130	2190	7.9
1.20	2	57	0.030	0.040	0.140	0.43	42195	2530	14.2
1.50	2	71	0.038	0.050	0.180	0.54	41850	3180	28.6
2.00	2	90	0.052	0.060	0.240	0.68	42130	4380	63.1
2.50	2	116	0.064	0.080	0.300	0.88	41960	5370	128.9
3.00	2	135	0.078	0.090	0.360	1.02	42130	6570	212.9

1.00	2	45	0.022	0.030	0.120	0.34	42130	1855	6.7
1.20	2	57	0.028	0.040	0.140	0.43	42195	2365	13.2
1.50	2	71	0.034	0.050	0.180	0.54	41850	2845	25.6
2.00	2	80	0.046	0.060	0.240	0.68	37450	3445	49.6
2.50	2	80	0.058	0.080	0.300	0.88	28935	3355	80.6
3.00	2	80	0.068	0.090	0.360	1.02	24965	3395	110.0

1.00	2	45	0.020	0.030	0.120	0.34	42130	1685	6.1
1.20	2	57	0.024	0.040	0.140	0.43	42195	2025	11.3
1.50	2	60	0.030	0.050	0.180	0.54	35370	2120	19.1
2.00	2	60	0.040	0.060	0.240	0.68	28085	2245	32.4
2.50	2	60	0.050	0.080	0.300	0.88	21705	2170	52.1
3.00	2	60	0.060	0.090	0.360	1.02	18725	2245	72.8

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
1.00	2	119	0.020	0.028	0.028	0.90	42090	1685	45°
1.20	2	143	0.022	0.034	0.034	1.08	42145	1855	45°
1.50	2	178	0.024	0.042	0.042	1.35	41970	2015	45°
2.00	2	238	0.026	0.056	0.056	1.80	42090	2190	45°
2.50	2	297	0.028	0.070	0.070	2.25	42015	2355	45°
3.00	2	300	0.032	0.084	0.084	2.70	35370	2265	45°

1.00	2	119	0.018	0.028	0.028	0.90	42090	1515	45°
1.20	2	143	0.020	0.034	0.034	1.08	42145	1685	45°
1.50	2	178	0.022	0.042	0.042	1.35	41970	1845	45°
2.00	2	238	0.024	0.056	0.056	1.80	42090	2020	45°
2.50	2	250	0.026	0.070	0.070	2.25	35370	1840	45°
3.00	2	250	0.028	0.084	0.084	2.70	29475	1650	45°

1.00	2	119	0.016	0.028	0.028	0.90	42090	1345	45°
1.20	2	120	0.018	0.034	0.034	1.08	35370	1275	45°
1.50	2	120	0.020	0.042	0.042	1.35	28295	1130	45°
2.00	2	120	0.020	0.056	0.056	1.80	21220	850	45°
2.50	2	120	0.022	0.070	0.070	2.25	16975	745	45°
3.00	2	120	0.026	0.084	0.084	2.70	14145	735	45°

1.00	2	100	0.014	0.028	0.028	0.90	35370	990	45°
1.20	2	100	0.016	0.034	0.034	1.08	29475	945	45°
1.50	2	100	0.016	0.042	0.042	1.35	23580	755	45°
2.00	2	100	0.018	0.056	0.056	1.80	17685	635	45°
2.50	2	100	0.020	0.070	0.070	2.25	14145	565	45°
3.00	2	100	0.022	0.084	0.084	2.70	11790	520	45°

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	Q [mm ³ /min]
1.00	2	45	0.028	0.030	0.100	0.34	42130	2360	7.1
1.20	2	57	0.034	0.040	0.120	0.43	42195	2870	13.8
1.50	2	71	0.042	0.050	0.150	0.54	41850	3515	26.4
2.00	2	90	0.058	0.060	0.200	0.68	42130	4885	58.6
2.50	2	116	0.072	0.080	0.250	0.88	41960	6040	120.8
3.00	2	135	0.086	0.090	0.300	1.02	42130	7245	195.6

1.00	2	45	0.026	0.030	0.100	0.34	42130	2190	6.6
1.20	2	57	0.030	0.040	0.120	0.43	42195	2530	12.2
1.50	2	71	0.038	0.050	0.150	0.54	41850	3180	23.9
2.00	2	90	0.052	0.060	0.200	0.68	42130	4380	52.6
2.50	2	116	0.064	0.080	0.250	0.88	41960	5370	107.4
3.00	2	120	0.078	0.090	0.300	1.02	37450	5840	157.7

1.00	2	45	0.022	0.030	0.100	0.34	42130	1855	5.6
1.20	2	57	0.028	0.040	0.120	0.43	42195	2365	11.3
1.50	2	70	0.034	0.050	0.150	0.54	41260	2805	21.0
2.00	2	70	0.046	0.060	0.200	0.68	32765	3015	36.2
2.50	2	70	0.058	0.080	0.250	0.88	25320	2935	58.7
3.00	2	70	0.068	0.090	0.300	1.02	21845	2970	80.2

1.00	2	45	0.020	0.030	0.100	0.34	42130	1685	5.1
1.20	2	50	0.024	0.040	0.120	0.43	37015	1775	8.5
1.50	2	50	0.030	0.050	0.150	0.54	29475	1770	13.3
2.00	2	50	0.040	0.060	0.200	0.68	23405	1870	22.5
2.50	2	50	0.050	0.080	0.250	0.88	18085	1810	36.2
3.00	2	50	0.060	0.090	0.300	1.02	15605	1870	50.6

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
1.00	2	119	0.020	0.026	0.026	0.90	42090	1685	45°
1.20	2	143	0.022	0.032	0.032	1.08	42145	1855	45°
1.50	2	178	0.024	0.040	0.040	1.35	41970	2015	45°
2.00	2	236	0.026	0.052	0.052	1.79	41965	2180	45°
2.50	2	250	0.028	0.066	0.066	2.24	35525	1990	45°
3.00	2	250	0.032	0.078	0.078	2.69	29585	1895	45°

1.00	2	119	0.018	0.026	0.026	0.90	42090	1515	45°
1.20	2	143	0.020	0.032	0.032	1.08	42145	1685	45°
1.50	2	178	0.022	0.040	0.040	1.35	41970	1845	45°
2.00	2	200	0.024	0.052	0.052	1.79	35565	1705	45°
2.50	2	200	0.026	0.066	0.066	2.24	28420	1480	45°
3.00	2	200	0.028	0.078	0.078	2.69	23665	1325	45°

1.00	2	100	0.016	0.026	0.026	0.90	35370	1130	45°
1.20	2	100	0.018	0.032	0.032	1.08	29475	1060	45°
1.50	2	100	0.020	0.040	0.040	1.35	23580	945	45°
2.00	2	100	0.020	0.052	0.052	1.79	17785	710	45°
2.50	2	100	0.022	0.066	0.066	2.24	14210	625	45°
3.00	2	100	0.026	0.078	0.078	2.69	11835	615	45°



1.00	2	80	0.014	0.026	0.026	0.90	28295	790	45°
1.20	2	80	0.016	0.032	0.032	1.08	23580	755	45°
1.50	2	80	0.016	0.040	0.040	1.35	18865	605	45°
2.00	2	80	0.018	0.052	0.052	1.79	14225	510	45°
2.50	2	80	0.020	0.066	0.066	2.24	11370	455	45°
3.00	2	80	0.022	0.078	0.078	2.69	9465	415	45°

Application







Material



Steel
< 850 N/mm²


Steel
850 - 1100 N/mm²

Unalloyed copper

Wrought aluminium
Construction aluminium





d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	Q [mm ³ /min]
0.50	2	32	0.014	0.030	0.100	0.24	42440	1190	3.6
0.60	2	40	0.020	0.040	0.140	0.30	42440	1700	9.5
0.80	2	51	0.022	0.050	0.160	0.39	41625	1830	14.7
1.00	2	62	0.028	0.060	0.200	0.47	41990	2350	28.2
1.20	2	74	0.034	0.070	0.240	0.56	42060	2860	48.1
1.50	2	94	0.042	0.090	0.300	0.71	42140	3540	95.6
2.00	2	120	0.058	0.120	0.400	0.95	40210	4665	223.9
2.50	2	120	0.072	0.150	0.500	1.19	32100	4620	346.7
3.00	2	120	0.086	0.180	0.600	1.42	26900	4625	499.7

0.50	2	32	0.012	0.030	0.100	0.24	42440	1020	3.1
0.60	2	40	0.016	0.040	0.120	0.30	42440	1360	6.5
0.80	2	51	0.020	0.050	0.160	0.39	41625	1665	13.3
1.00	2	62	0.026	0.060	0.200	0.47	41990	2185	26.2
1.20	2	74	0.030	0.070	0.240	0.56	42060	2525	42.4
1.50	2	80	0.038	0.090	0.300	0.71	35865	2725	73.6
2.00	2	80	0.052	0.120	0.400	0.95	26805	2790	133.8
2.50	2	80	0.064	0.150	0.500	1.19	21400	2740	205.4
3.00	2	80	0.078	0.180	0.600	1.42	17935	2800	302.1

0.50	2	32	0.016	0.030	0.100	0.24	42440	1360	4.1
0.60	2	40	0.020	0.040	0.120	0.30	42440	1700	8.1
0.80	2	51	0.024	0.050	0.160	0.39	41625	2000	16.0
1.00	2	62	0.030	0.060	0.200	0.47	41990	2520	30.2
1.20	2	74	0.038	0.070	0.240	0.56	42060	3195	53.7
1.50	2	94	0.046	0.090	0.300	0.71	42140	3875	104.7
2.00	2	125	0.064	0.120	0.400	0.95	41885	5360	257.3
2.50	2	157	0.080	0.150	0.500	1.19	41995	6720	503.9
3.00	2	187	0.094	0.180	0.600	1.42	41920	7880	851.1



0.50	2	32	0.016	0.030	0.100	0.24	42440	1360	4.1
0.60	2	40	0.020	0.040	0.120	0.30	42440	1700	8.1
0.80	2	51	0.024	0.050	0.160	0.39	41625	2000	16.0
1.00	2	62	0.030	0.060	0.200	0.47	41990	2520	30.2
1.20	2	74	0.038	0.070	0.240	0.56	42060	3195	53.7
1.50	2	94	0.046	0.090	0.300	0.71	42140	3875	104.7
2.00	2	125	0.064	0.120	0.400	0.95	41885	5360	257.3
2.50	2	157	0.080	0.150	0.500	1.19	41995	6720	503.9
3.00	2	187	0.094	0.180	0.600	1.42	41920	7880	851.1

Application






Material

Steel
< 850 N/mm²






Steel
850 - 1100 N/mm²




Unalloyed copper

Wrought aluminium
Construction aluminium




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.50	2	61	0.016	0.020	0.020	0.46	42210	1350	45°
0.60	2	74	0.018	0.028	0.028	0.56	42060	1515	45°
0.80	2	98	0.020	0.032	0.032	0.74	42155	1685	45°
1.00	2	123	0.022	0.040	0.040	0.93	42100	1850	45°
1.20	2	146	0.024	0.048	0.048	1.11	41870	2010	45°
1.50	2	183	0.028	0.060	0.060	1.39	41905	2345	45°
2.00	2	220	0.030	0.080	0.080	1.86	37650	2260	45°
2.50	2	220	0.032	0.100	0.100	2.32	30185	1930	45°
3.00	2	220	0.036	0.120	0.120	2.78	25190	1815	45°

0.50	2	61	0.014	0.020	0.020	0.46	42210	1180	45°
0.60	2	74	0.016	0.024	0.024	0.56	42060	1345	45°
0.80	2	98	0.018	0.032	0.032	0.74	42155	1520	45°
1.00	2	123	0.020	0.040	0.040	0.93	42100	1685	45°
1.20	2	146	0.022	0.048	0.048	1.11	41870	1840	45°
1.50	2	150	0.026	0.060	0.060	1.39	34350	1785	45°
2.00	2	150	0.028	0.080	0.080	1.86	25670	1440	45°
2.50	2	150	0.028	0.100	0.100	2.32	20580	1155	45°
3.00	2	150	0.032	0.120	0.120	2.78	17175	1100	45°

0.50	2	61	0.018	0.020	0.020	0.46	42210	1520	45°
0.60	2	74	0.020	0.024	0.024	0.56	42060	1680	45°
0.80	2	98	0.022	0.032	0.032	0.74	42155	1855	45°
1.00	2	123	0.024	0.040	0.040	0.93	42100	2020	45°
1.20	2	146	0.026	0.048	0.048	1.11	41870	2175	45°
1.50	2	183	0.030	0.060	0.060	1.39	41905	2515	45°
2.00	2	245	0.034	0.080	0.080	1.86	41930	2850	45°
2.50	2	306	0.036	0.100	0.100	2.32	41985	3025	45°
3.00	2	367	0.040	0.120	0.120	2.78	42020	3360	45°


0.50	2	61	0.018	0.020	0.020	0.46	42210	1520	45°
0.60	2	74	0.020	0.024	0.024	0.56	42060	1680	45°
0.80	2	98	0.022	0.032	0.032	0.74	42155	1855	45°
1.00	2	123	0.024	0.040	0.040	0.93	42100	2020	45°
1.20	2	146	0.026	0.048	0.048	1.11	41870	2175	45°
1.50	2	183	0.030	0.060	0.060	1.39	41905	2515	45°
2.00	2	245	0.034	0.080	0.080	1.86	41930	2850	45°
2.50	2	306	0.036	0.100	0.100	2.32	41985	3025	45°
3.00	2	367	0.040	0.120	0.120	2.78	42020	3360	45°

Ball nose end mills

Shank \varnothing 3mm, 3xd




HM	λ 30°
MG10	γ 10°

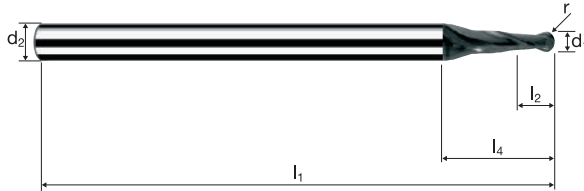

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	Copper Aluminium
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	---------------------

Example: Order-N°.										MICRO
										M45785
\varnothing Code	d_1 ± 0.01	d_2 h6	l_1	l_2	l_4	r ± 0.01	α	z		
030	0.30	3.00	40	1.00	9.00	0.150	9.0°	2		●
040	0.40	3.00	40	1.00	8.70	0.200	8.9°	2		●
050	0.50	3.00	40	1.50	8.90	0.250	8.4°	2		●
060	0.60	3.00	40	1.50	8.60	0.300	8.3°	2		●
070	0.70	3.00	40	2.00	8.80	0.350	7.8°	2		●
080	0.80	3.00	40	2.00	8.60	0.400	7.7°	2		●
090	0.90	3.00	40	2.50	8.80	0.450	7.2°	2		●
100	1.00	3.00	40	3.00	9.00	0.500	6.7°	2		●
108	1.20	3.00	40	4.00	9.50	0.600	5.7°	2		●
120	1.50	3.00	40	4.00	8.60	0.750	5.3°	2		●
130	1.80	3.00	40	5.00	7.30	0.900	5.2°	2		●
140	2.00	3.00	40	5.00	7.00	1.000	4.6°	2		●
160	2.50	3.00	40	7.00	8.30	1.250	2.0°	2		●
180	3.00	4.00	44	10.00	12.40	1.500	2.6°	2		●

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
0.20	2	22	0.004	0.016	0.040	0.17	41195	310	0.05
0.40	2	51	0.006	0.032	0.080	0.39	41625	525	0.05
0.50	2	65	0.006	0.032	0.080	0.49	42225	530	0.05
0.60	2	75	0.010	0.048	0.120	0.57	41885	845	0.10
0.80	2	104	0.013	0.065	0.160	0.79	41905	1055	0.10
1.00	2	132	0.016	0.081	0.200	1.00	42015	1375	0.10
1.50	2	140	0.024	0.121	0.300	1.47	30315	1450	0.20
2.00	2	140	0.032	0.162	0.400	1.99	22395	1410	0.20

Hardened tool steel
48 - 52 HRC



0.20	2	22	0.004	0.016	0.040	0.17	41195	295	0.05
0.40	2	51	0.006	0.032	0.080	0.39	41625	500	0.05
0.50	2	65	0.006	0.032	0.080	0.49	42225	505	0.05
0.60	2	75	0.010	0.048	0.120	0.57	41885	805	0.10
0.80	2	104	0.012	0.065	0.160	0.79	41905	1005	0.10
1.00	2	120	0.016	0.081	0.200	1.00	38195	1190	0.10
1.50	2	120	0.023	0.121	0.300	1.47	25985	1185	0.20
2.00	2	120	0.030	0.162	0.400	1.99	19195	1150	0.20

Hardened tool steel
52 - 56 HRC




0.20	2	22	0.003	0.016	0.040	0.17	41195	245	0.05
0.40	2	51	0.005	0.032	0.080	0.39	41625	415	0.05
0.50	2	65	0.005	0.032	0.080	0.49	42225	420	0.05
0.60	2	75	0.008	0.048	0.120	0.57	41885	670	0.10
0.80	2	100	0.010	0.065	0.160	0.79	40290	805	0.10
1.00	2	100	0.013	0.081	0.200	1.00	31830	830	0.10
1.50	2	100	0.019	0.121	0.300	1.47	21655	825	0.20
2.00	2	100	0.025	0.162	0.400	1.99	15995	800	0.20

Hardened tool steel
56 - 60 HRC



0.20	2	22	0.003	0.016	0.040	0.17	41195	220	0.05
0.40	2	51	0.004	0.032	0.080	0.39	41625	375	0.05
0.50	2	60	0.004	0.032	0.080	0.49	38975	350	0.05
0.60	2	60	0.007	0.048	0.120	0.57	33505	480	0.10
0.80	2	60	0.009	0.065	0.160	0.79	24175	435	0.10
1.00	2	60	0.012	0.081	0.200	1.00	19100	445	0.10
1.50	2	60	0.017	0.121	0.300	1.47	12990	445	0.20
2.00	2	60	0.023	0.162	0.400	1.99	9595	430	0.20

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.60	2	79	0.020	0.026	0.026	0.60	41910	1675	45°
0.80	2	106	0.022	0.034	0.034	0.80	42175	1855	45°
1.00	2	132	0.028	0.042	0.042	1.00	42015	2355	45°
1.50	2	198	0.034	0.064	0.064	1.50	42015	2855	45°
2.00	2	263	0.038	0.084	0.084	1.99	42070	3195	45°

Hardened tool steel
48 - 52 HRC



0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.60	2	79	0.020	0.026	0.026	0.60	41910	1675	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.032	0.064	0.064	1.50	42015	2690	45°
2.00	2	250	0.036	0.084	0.084	1.99	39990	2880	45°

Hardened tool steel
52 - 56 HRC



0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.014	0.016	0.016	0.40	42175	1180	45°
0.50	2	66	0.018	0.022	0.022	0.50	42015	1515	45°
0.60	2	79	0.018	0.026	0.026	0.60	41910	1510	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.030	0.064	0.064	1.50	42015	2520	45°
2.00	2	200	0.034	0.084	0.084	1.99	31990	2175	45°



Hardened tool steel
56 - 60 HRC



0.20	2	26	0.008	0.008	0.008	0.20	41380	660	45°
0.40	2	53	0.012	0.016	0.016	0.40	42175	1010	45°
0.50	2	66	0.016	0.022	0.022	0.50	42015	1345	45°
0.60	2	79	0.016	0.026	0.026	0.60	41910	1340	45°
0.80	2	106	0.018	0.034	0.034	0.80	42175	1520	45°
1.00	2	132	0.022	0.042	0.042	1.00	42015	1850	45°
1.50	2	150	0.028	0.064	0.064	1.50	31830	1785	45°
2.00	2	150	0.030	0.084	0.084	1.99	23995	1440	45°

Corner radius end mills MicroX


Shank \varnothing 6mm, cylindrical neck, 2xd

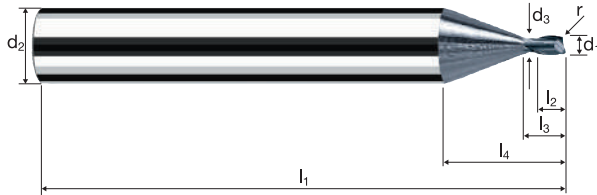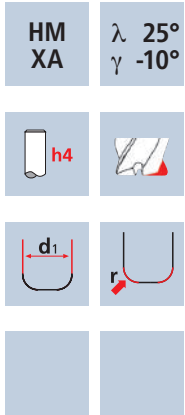

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL	
											X6531	
\varnothing Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.01	α	z		
	Coating: X			Article-N°: 6531			ø-Code: 020					
020	0.20	6.00	0.18	57	0.20	0.40	17.34	0.050	14.5°	2	●	
040	0.40	6.00	0.35	57	0.40	0.80	17.26	0.050	14.0°	2	●	
048	0.50	6.00	0.45	57	0.50	1.00	12.01	0.050	13.7°	2	●	
042	0.40	6.00	0.35	57	0.40	0.80	17.26	0.100	14.0°	2	●	
050	0.50	6.00	0.45	57	0.50	1.00	12.01	0.100	13.8°	2	●	
060	0.60	6.00	0.55	57	0.60	1.20	12.03	0.100	13.5°	2	●	
080	0.80	6.00	0.75	57	0.80	1.60	12.05	0.100	13.0°	2	●	
098	1.00	6.00	0.95	57	1.00	2.00	12.08	0.100	12.5°	2	●	
082	0.80	6.00	0.75	57	0.80	1.60	12.05	0.200	13.1°	2	●	
100	1.00	6.00	0.95	57	1.00	2.00	12.08	0.200	12.6°	2	●	
120	1.50	6.00	1.40	57	1.50	3.00	12.24	0.200	11.2°	2	●	
140	2.00	6.00	1.90	57	2.00	4.00	12.31	0.200	9.9°	2	●	
101	1.00	6.00	0.95	57	1.00	2.00	12.08	0.300	12.7°	2	●	
145	2.00	6.00	1.90	57	2.00	4.00	12.31	0.500	10.2°	2	●	

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _c [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
0.20	2	21	0.003	0.011	0.040	0.16	41780	210	0.05
0.40	2	50	0.005	0.021	0.080	0.38	41885	420	0.05
0.50	2	58	0.006	0.027	0.100	0.44	41960	530	0.10
0.80	2	100	0.011	0.043	0.160	0.76	41885	950	0.10
1.00	2	115	0.014	0.054	0.200	0.87	42075	1165	0.20
1.50	2	140	0.020	0.080	0.300	1.42	31385	1265	0.20
2.00	2	140	0.028	0.107	0.400	1.95	22855	1265	0.20
2.50	2	140	0.034	0.134	0.500	2.48	17970	1225	0.20
3.00	2	140	0.040	0.161	0.600	2.99	14905	1200	0.20

Hardened tool steel
48 - 52 HRC



0.20	2	21	0.002	0.011	0.040	0.16	41780	200	0.05
0.40	2	50	0.005	0.021	0.080	0.38	41885	400	0.05
0.50	2	58	0.006	0.027	0.100	0.44	41960	505	0.10
0.80	2	100	0.011	0.043	0.160	0.76	41885	905	0.10
1.00	2	115	0.013	0.054	0.200	0.87	42075	1110	0.20
1.50	2	120	0.019	0.080	0.300	1.42	26900	1035	0.20
2.00	2	120	0.026	0.107	0.400	1.95	19590	1035	0.20
2.50	2	120	0.032	0.134	0.500	2.48	15400	1000	0.20
3.00	2	120	0.038	0.161	0.600	2.99	12775	980	0.20

Hardened tool steel
52 - 56 HRC




0.20	2	21	0.002	0.011	0.040	0.16	41780	165	0.05
0.40	2	50	0.004	0.021	0.080	0.38	41885	335	0.05
0.50	2	58	0.005	0.027	0.100	0.44	41960	420	0.10
0.80	2	100	0.009	0.043	0.160	0.76	41885	755	0.10
1.00	2	100	0.011	0.054	0.200	0.87	36585	805	0.20
1.50	2	100	0.016	0.080	0.300	1.42	22415	715	0.20
2.00	2	100	0.022	0.107	0.400	1.95	16325	720	0.20
2.50	2	100	0.027	0.134	0.500	2.48	12835	695	0.20
3.00	2	100	0.032	0.161	0.600	2.99	10645	680	0.20

Hardened tool steel
56 - 60 HRC




0.20	2	21	0.002	0.011	0.040	0.16	41780	150	0.05
0.40	2	50	0.004	0.021	0.080	0.38	41885	300	0.05
0.50	2	58	0.004	0.027	0.100	0.44	41960	380	0.10
0.80	2	60	0.008	0.043	0.160	0.76	25130	405	0.10
1.00	2	60	0.010	0.054	0.200	0.87	21950	435	0.20
1.50	2	60	0.014	0.080	0.300	1.42	13450	385	0.20
2.00	2	60	0.020	0.107	0.400	1.95	9795	390	0.20
2.50	2	60	0.024	0.134	0.500	2.48	7700	375	0.20
3.00	2	60	0.029	0.161	0.600	2.99	6385	370	0.20

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _c [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.80	2	106	0.022	0.034	0.034	0.80	42175	1855	45°
1.00	2	132	0.028	0.042	0.042	1.00	42015	2355	45°
1.50	2	198	0.034	0.064	0.064	1.50	42015	2855	45°
2.00	2	263	0.038	0.084	0.084	1.99	42070	3195	45°
2.50	2	300	0.040	0.106	0.106	2.48	38505	3080	45°
3.00	2	300	0.046	0.126	0.126	2.97	32155	2960	45°

Hardened tool steel
48 - 52 HRC



0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.032	0.064	0.064	1.50	42015	2690	45°
2.00	2	250	0.036	0.084	0.084	1.99	39990	2880	45°
2.50	2	250	0.038	0.106	0.106	2.48	32090	2440	45°
3.00	2	250	0.044	0.126	0.126	2.97	26795	2360	45°

Hardened tool steel
52 - 56 HRC



0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.014	0.016	0.016	0.40	42175	1180	45°
0.50	2	66	0.018	0.022	0.022	0.50	42015	1515	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.030	0.064	0.064	1.50	42015	2520	45°
2.00	2	200	0.034	0.084	0.084	1.99	31990	2175	45°
2.50	2	200	0.036	0.106	0.106	2.48	25670	1850	45°
3.00	2	200	0.042	0.126	0.126	2.97	21435	1800	45°

Hardened tool steel
56 - 60 HRC




0.20	2	26	0.008	0.008	0.008	0.20	41380	660	45°
0.40	2	53	0.012	0.016	0.016	0.40	42175	1010	45°
0.50	2	66	0.016	0.022	0.022	0.50	42015	1345	45°
0.80	2	106	0.018	0.034	0.034	0.80	42175	1520	45°
1.00	2	132	0.022	0.042	0.042	1.00	42015	1850	45°
1.50	2	150	0.028	0.064	0.064	1.50	31830	1785	45°
2.00	2	150	0.030	0.084	0.084	1.99	23995	1440	45°
2.50	2	150	0.032	0.106	0.106	2.48	19255	1230	45°
3.00	2	150	0.036	0.126	0.126	2.97	16075	1155	45°

Corner radius end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 3xd




HM λ 25°
XA γ -10°

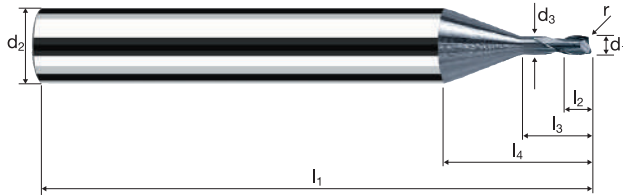

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------

Example: Order-N°.											X-AL	
											X6532	
\varnothing Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.01	α	z		
	Coating: X			Article-N°: 6532			ø-Code: 020					
020	0.20	6.00	0.18	57	0.20	0.60	17.54	0.050	14.3°	2	●	
040	0.40	6.00	0.35	57	0.40	1.20	17.66	0.050	13.5°	2	●	
048	0.50	6.00	0.45	57	0.50	1.50	12.51	0.050	13.2°	2	●	
042	0.40	6.00	0.35	57	0.40	1.20	17.66	0.100	13.6°	2	●	
050	0.50	6.00	0.45	57	0.50	1.50	12.51	0.100	13.2°	2	●	
060	0.60	6.00	0.55	57	0.60	1.80	12.63	0.100	12.9°	2	●	
080	0.80	6.00	0.75	57	0.80	2.40	12.85	0.100	12.2°	2	●	
098	1.00	6.00	0.95	57	1.00	3.00	13.08	0.100	11.5°	2	●	
082	0.80	6.00	0.75	57	0.80	2.40	12.85	0.200	12.3°	2	●	
100	1.00	6.00	0.95	57	1.00	3.00	13.08	0.200	11.6°	2	●	
108	1.20	6.00	1.10	57	1.20	3.60	13.40	0.200	10.9°	2	●	
120	1.50	6.00	1.40	57	1.50	4.50	13.74	0.200	10.0°	2	●	
140	2.00	6.00	1.90	57	2.00	6.00	14.31	0.200	8.6°	2	●	
160	2.50	6.00	2.30	57	2.50	7.50	15.06	0.200	7.2°	2	●	
180	3.00	6.00	2.80	57	3.00	9.00	15.63	0.200	6.0°	2	●	

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
1.00	2	98	0.014	0.054	0.200	0.74	42155	1170	0.30
2.00	2	140	0.028	0.107	0.400	1.62	27510	1525	0.50
2.50	2	140	0.034	0.134	0.500	2.18	20440	1390	0.50
3.00	2	140	0.040	0.161	0.600	2.74	16265	1310	0.50

1.00	2	98	0.013	0.054	0.200	0.74	42155	1115	0.30
2.00	2	120	0.026	0.107	0.400	1.62	23580	1245	0.50
2.50	2	120	0.032	0.134	0.500	2.18	17520	1135	0.50
3.00	2	120	0.038	0.161	0.600	2.74	13940	1070	0.50

1.00	2	98	0.011	0.054	0.200	0.74	42155	925	0.30
2.00	2	100	0.022	0.107	0.400	1.62	19650	865	0.50
2.50	2	100	0.027	0.134	0.500	2.18	14600	790	0.50
3.00	2	100	0.032	0.161	0.600	2.74	11615	745	0.50

1.00	2	60	0.010	0.054	0.200	0.74	25810	510	0.30
2.00	2	60	0.020	0.107	0.400	1.62	11790	465	0.50
2.50	2	60	0.024	0.134	0.500	2.18	8760	425	0.50
3.00	2	60	0.029	0.161	0.600	2.74	6970	400	0.50

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
1.00	2	129	0.028	0.042	0.042	0.98	41900	2345	45°
2.00	2	263	0.034	0.100	0.100	1.99	42070	2860	45°
2.50	2	300	0.036	0.126	0.126	2.50	38195	2750	45°
3.00	2	300	0.042	0.152	0.152	3.00	31830	2675	45°

1.00	2	129	0.026	0.042	0.042	0.98	41900	2180	45°
2.00	2	250	0.032	0.100	0.100	1.99	39990	2560	45°
2.50	2	250	0.034	0.126	0.126	2.50	31830	2165	45°
3.00	2	250	0.040	0.152	0.152	3.00	26525	2120	45°

1.00	2	129	0.026	0.042	0.042	0.98	41900	2180	45°
2.00	2	200	0.030	0.100	0.100	1.99	31990	1920	45°
2.50	2	200	0.032	0.126	0.126	2.50	25465	1630	45°
3.00	2	200	0.038	0.152	0.152	3.00	21220	1615	45°


1.00	2	129	0.022	0.042	0.042	0.98	41900	1845	45°
2.00	2	150	0.028	0.100	0.100	1.99	23995	1345	45°
2.50	2	150	0.028	0.126	0.126	2.50	19100	1070	45°
3.00	2	150	0.034	0.152	0.152	3.00	15915	1080	45°

Corner radius end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 3xd




HM XA	λ 25° γ -10°

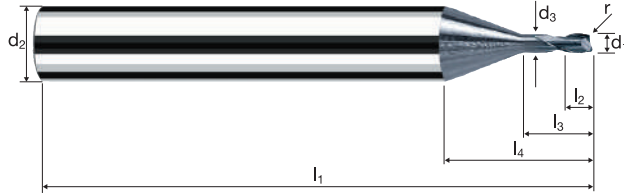

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--------------------	--------------------------	-----------------------	---------------------------------------

Ø Code	Example: Order-N°.											X-AL
	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.01	α	z	X6532	
101	1.00	6.00	0.95	57	1.00	3.00	13.08	0.300	11.7°	2	●	
145	2.00	6.00	1.90	57	2.00	6.00	14.31	0.500	8.7°	2	●	
165	2.50	6.00	2.30	57	2.50	7.50	15.06	0.500	7.3°	2	●	
185	3.00	6.00	2.80	57	3.00	9.00	15.63	0.500	6.1°	2	●	

Application



Material

Hardened tool steel
42 - 48 HRC

d1 [mm]	z	v _L [m/min]	f _L [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _L [mm/min]	r [mm]
0.20	2	20	0.003	0.008	0.040	0.15	42440	215	0.05
0.40	2	49	0.005	0.016	0.080	0.37	42155	425	0.05
0.50	2	62	0.005	0.016	0.080	0.47	41990	425	0.05
0.60	2	70	0.008	0.024	0.120	0.53	42040	635	0.10
0.80	2	99	0.010	0.032	0.160	0.75	42015	845	0.10
1.00	2	127	0.013	0.040	0.200	0.96	42110	1060	0.10
1.50	2	140	0.019	0.060	0.300	1.39	32060	1210	0.20
2.00	2	140	0.026	0.080	0.400	1.92	23210	1230	0.20

Hardened tool steel
48 - 52 HRC

0.20	2	20	0.002	0.008	0.040	0.15	42440	205	0.05
0.40	2	49	0.005	0.016	0.080	0.37	42155	405	0.05
0.50	2	62	0.005	0.016	0.080	0.47	41990	405	0.05
0.60	2	70	0.007	0.024	0.120	0.53	42040	605	0.10
0.80	2	99	0.010	0.032	0.160	0.75	42015	805	0.10
1.00	2	120	0.012	0.040	0.200	0.96	39790	955	0.10
1.50	2	120	0.018	0.060	0.300	1.39	27480	990	0.20
2.00	2	120	0.025	0.080	0.400	1.92	19895	1005	0.20


Hardened tool steel
52 - 56 HRC

0.20	2	20	0.002	0.008	0.040	0.15	42440	170	0.05
0.40	2	49	0.004	0.016	0.080	0.37	42155	335	0.05
0.50	2	62	0.004	0.016	0.080	0.47	41990	335	0.05
0.60	2	70	0.006	0.024	0.120	0.53	42040	505	0.10
0.80	2	99	0.008	0.032	0.160	0.75	42015	670	0.10
1.00	2	100	0.010	0.040	0.200	0.96	33155	665	0.10
1.50	2	100	0.015	0.060	0.300	1.39	22900	685	0.20
2.00	2	100	0.021	0.080	0.400	1.92	16580	695	0.20

Hardened tool steel
56 - 60 HRC

0.20	2	20	0.002	0.008	0.040	0.15	42440	155	0.05
0.40	2	49	0.004	0.016	0.080	0.37	42155	305	0.05
0.50	2	60	0.004	0.016	0.080	0.47	40635	295	0.05
0.60	2	60	0.005	0.024	0.120	0.53	36035	390	0.10
0.80	2	60	0.007	0.032	0.160	0.75	25465	365	0.10
1.00	2	60	0.009	0.040	0.200	0.96	19895	360	0.10
1.50	2	60	0.014	0.060	0.300	1.39	13740	370	0.20
2.00	2	60	0.019	0.080	0.400	1.92	9945	375	0.20

Application



Material

Hardened tool steel
42 - 48 HRC

d1 [mm]	z	v _L [m/min]	f _L [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _L [mm/min]	β [°]
0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.60	2	79	0.020	0.026	0.026	0.60	41910	1675	45°
0.80	2	106	0.022	0.034	0.034	0.80	42175	1855	45°
1.00	2	132	0.028	0.042	0.042	1.00	42015	2355	45°
1.50	2	198	0.034	0.064	0.064	1.50	42015	2855	45°
2.00	2	263	0.038	0.084	0.084	1.99	42070	3195	45°

Hardened tool steel
48 - 52 HRC

0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.60	2	79	0.020	0.026	0.026	0.60	41910	1675	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.032	0.064	0.064	1.50	42015	2690	45°
2.00	2	250	0.036	0.084	0.084	1.99	39990	2880	45°

Hardened tool steel
52 - 56 HRC

0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.014	0.016	0.016	0.40	42175	1180	45°
0.50	2	66	0.018	0.022	0.022	0.50	42015	1515	45°
0.60	2	79	0.018	0.026	0.026	0.60	41910	1510	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.030	0.064	0.064	1.50	42015	2520	45°
2.00	2	200	0.034	0.084	0.084	1.99	31990	2175	45°

Hardened tool steel
56 - 60 HRC



0.20	2	26	0.008	0.008	0.008	0.20	41380	660	45°
0.40	2	53	0.012	0.016	0.016	0.40	42175	1010	45°
0.50	2	66	0.016	0.022	0.022	0.50	42015	1345	45°
0.60	2	79	0.016	0.026	0.026	0.60	41910	1340	45°
0.80	2	106	0.018	0.034	0.034	0.80	42175	1520	45°
1.00	2	132	0.022	0.042	0.042	1.00	42015	1850	45°
1.50	2	150	0.028	0.064	0.064	1.50	31830	1785	45°
2.00	2	150	0.030	0.084	0.084	1.99	23995	1440	45°

Corner radius end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 4xd




HM λ 25°
XA γ -10°

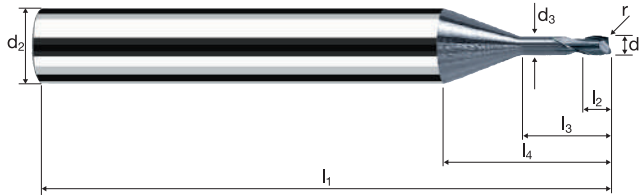

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL	
											X6533	
\varnothing Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.01	α	z		
	Coating		Article-N°.		ø-Code							
	X		6533		020							
020	0.20	6.00	0.18	57	0.20	0.80	17.74	0.050	14.1°	2	●	
040	0.40	6.00	0.35	57	0.40	1.60	18.06	0.050	13.1°	2	●	
048	0.50	6.00	0.45	57	0.50	2.00	13.01	0.050	12.6°	2	●	
042	0.40	6.00	0.35	57	0.40	1.60	18.06	0.100	13.1°	2	●	
050	0.50	6.00	0.45	57	0.50	2.00	13.01	0.100	12.7°	2	●	
060	0.60	6.00	0.55	57	0.60	2.40	13.23	0.100	12.3°	2	●	
080	0.80	6.00	0.75	57	0.80	3.20	13.65	0.100	11.4°	2	●	
098	1.00	6.00	0.95	57	1.00	4.00	14.08	0.100	10.7°	2	●	
082	0.80	6.00	0.75	57	0.80	3.20	13.65	0.200	11.5°	2	●	
100	1.00	6.00	0.95	57	1.00	4.00	14.08	0.200	10.7°	2	●	
120	1.50	6.00	1.40	57	1.50	6.00	15.24	0.200	8.9°	2	●	
140	2.00	6.00	1.90	61	2.00	8.00	16.31	0.200	7.4°	2	●	
101	1.00	6.00	0.95	57	1.00	4.00	14.08	0.300	10.8°	2	●	
145	2.00	6.00	1.90	61	2.00	8.00	16.31	0.500	7.5°	2	●	

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
0.20	2	20	0.003	0.006	0.040	0.15	42440	215	0.05
0.40	2	49	0.005	0.013	0.080	0.37	42155	425	0.05
0.50	2	54	0.006	0.016	0.100	0.41	41925	530	0.10
0.80	2	96	0.010	0.026	0.160	0.73	41860	845	0.10
1.00	2	108	0.013	0.032	0.200	0.82	41925	1055	0.20
1.50	2	140	0.019	0.048	0.300	1.36	32765	1240	0.20
2.00	2	140	0.025	0.064	0.400	1.89	23580	1190	0.20
2.50	2	140	0.032	0.080	0.500	2.42	18415	1160	0.20
3.00	2	140	0.039	0.096	0.600	2.94	15160	1185	0.20

0.20	2	20	0.002	0.006	0.040	0.15	42440	205	0.05
0.40	2	49	0.005	0.013	0.080	0.37	42155	405	0.05
0.50	2	54	0.006	0.016	0.100	0.41	41925	505	0.10
0.80	2	96	0.010	0.026	0.160	0.73	41860	805	0.10
1.00	2	108	0.012	0.032	0.200	0.82	41925	1005	0.20
1.50	2	120	0.018	0.048	0.300	1.36	28085	1010	0.20
2.00	2	120	0.024	0.064	0.400	1.89	20210	970	0.20
2.50	2	120	0.030	0.080	0.500	2.42	15785	945	0.20
3.00	2	120	0.037	0.096	0.600	2.94	12990	965	0.20

0.20	2	20	0.002	0.006	0.040	0.15	42440	170	0.05
0.40	2	49	0.004	0.013	0.080	0.37	42155	335	0.05
0.50	2	54	0.005	0.016	0.100	0.41	41925	420	0.10
0.80	2	96	0.008	0.026	0.160	0.73	41860	670	0.10
1.00	2	100	0.010	0.032	0.200	0.82	38820	775	0.20
1.50	2	100	0.015	0.048	0.300	1.36	23405	700	0.20
2.00	2	100	0.020	0.064	0.400	1.89	16840	675	0.20
2.50	2	100	0.025	0.080	0.500	2.42	13155	660	0.20
3.00	2	100	0.031	0.096	0.600	2.94	10825	670	0.20

0.20	2	20	0.002	0.006	0.040	0.15	42440	155	0.05
0.40	2	49	0.004	0.013	0.080	0.37	42155	305	0.05
0.50	2	54	0.004	0.016	0.100	0.41	41925	375	0.10
0.80	2	60	0.007	0.026	0.160	0.73	26160	375	0.10
1.00	2	60	0.009	0.032	0.200	0.82	23290	420	0.20
1.50	2	60	0.014	0.048	0.300	1.36	14045	380	0.20
2.00	2	60	0.018	0.064	0.400	1.89	10105	365	0.20
2.50	2	60	0.023	0.080	0.500	2.42	7890	355	0.20
3.00	2	60	0.028	0.096	0.600	2.94	6495	360	0.20

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.80	2	106	0.022	0.034	0.034	0.80	42175	1855	45°
1.00	2	132	0.028	0.042	0.042	1.00	42015	2355	45°
1.50	2	198	0.034	0.064	0.064	1.50	42015	2855	45°
2.00	2	263	0.038	0.084	0.084	1.99	42070	3195	45°
2.50	2	300	0.040	0.106	0.106	2.48	38505	3080	45°
3.00	2	300	0.046	0.126	0.126	2.97	32155	2960	45°

0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.032	0.064	0.064	1.50	42015	2690	45°
2.00	2	250	0.036	0.084	0.084	1.99	39990	2880	45°
2.50	2	250	0.038	0.106	0.106	2.48	32090	2440	45°
3.00	2	250	0.044	0.126	0.126	2.97	26795	2360	45°

0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.014	0.016	0.016	0.40	42175	1180	45°
0.50	2	66	0.018	0.022	0.022	0.50	42015	1515	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.030	0.064	0.064	1.50	42015	2520	45°
2.00	2	200	0.034	0.084	0.084	1.99	31990	2175	45°
2.50	2	200	0.036	0.106	0.106	2.48	25670	1850	45°
3.00	2	200	0.042	0.126	0.126	2.97	21435	1800	45°



0.20	2	26	0.008	0.008	0.008	0.20	41380	660	45°
0.40	2	53	0.012	0.016	0.016	0.40	42175	1010	45°
0.50	2	66	0.016	0.022	0.022	0.50	42015	1345	45°
0.80	2	106	0.018	0.034	0.034	0.80	42175	1520	45°
1.00	2	132	0.022	0.042	0.042	1.00	42015	1850	45°
1.50	2	150	0.028	0.064	0.064	1.50	31830	1785	45°
2.00	2	150	0.030	0.084	0.084	1.99	23995	1440	45°
2.50	2	150	0.032	0.106	0.106	2.48	19255	1230	45°
3.00	2	150	0.036	0.126	0.126	2.97	16075	1155	45°

Corner radius end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 5xd




HM λ 25°
XA γ -10°

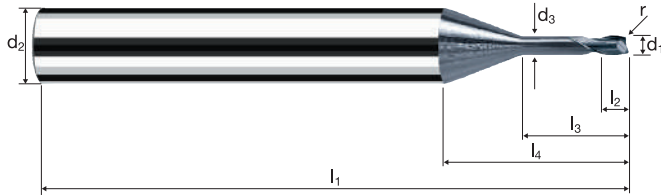

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL	
											X6534	
\varnothing Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.01	α	z		
	Coating		Article-N°.		ø-Code							
	X		6534		020							
020	0.20	6.00	0.18	57	0.20	1.00	17.94	0.050	13.8°	2	●	
040	0.40	6.00	0.35	57	0.40	2.00	18.46	0.050	12.7°	2	●	
048	0.50	6.00	0.45	57	0.50	2.50	13.51	0.050	12.2°	2	●	
042	0.40	6.00	0.35	57	0.40	2.00	18.46	0.100	12.7°	2	●	
050	0.50	6.00	0.45	57	0.50	2.50	13.51	0.100	12.2°	2	●	
060	0.60	6.00	0.55	57	0.60	3.00	13.83	0.100	11.7°	2	●	
080	0.80	6.00	0.75	57	0.80	4.00	14.45	0.100	10.8°	2	●	
098	1.00	6.00	0.95	57	1.00	5.00	15.08	0.100	9.9°	2	●	
082	0.80	6.00	0.75	57	0.80	4.00	14.45	0.200	10.9°	2	●	
100	1.00	6.00	0.95	57	1.00	5.00	15.08	0.200	9.9°	2	●	
108	1.20	6.00	1.10	57	1.20	6.00	15.80	0.200	9.2°	2	●	
120	1.50	6.00	1.40	61	1.50	7.50	16.74	0.200	8.1°	2	●	
140	2.00	6.00	1.90	61	2.00	10.00	18.31	0.200	6.6°	2	●	
160	2.50	6.00	2.30	61	2.50	12.50	20.06	0.200	5.3°	2	●	
180	3.00	6.00	2.80	66	3.00	15.00	21.63	0.200	4.2°	2	●	

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
0.20	2	20	0.003	0.006	0.040	0.15	42440	215	0.05
0.40	2	49	0.005	0.013	0.080	0.37	42155	425	0.05
0.50	2	62	0.006	0.016	0.100	0.47	41990	530	0.05
0.60	2	69	0.008	0.019	0.120	0.52	42235	640	0.10
0.80	2	96	0.010	0.026	0.160	0.73	41860	845	0.10
1.00	2	125	0.013	0.032	0.200	0.95	41885	1055	0.10
1.50	2	140	0.015	0.038	0.240	1.33	33505	1015	0.20
2.00	2	140	0.019	0.048	0.300	1.86	23960	905	0.20

Hardened tool steel
48 - 52 HRC



0.20	2	20	0.002	0.006	0.040	0.15	42440	205	0.05
0.40	2	49	0.005	0.013	0.080	0.37	42155	405	0.05
0.50	2	62	0.006	0.016	0.100	0.47	41990	505	0.05
0.60	2	69	0.007	0.019	0.120	0.52	42235	610	0.10
0.80	2	96	0.010	0.026	0.160	0.73	41860	805	0.10
1.00	2	120	0.012	0.032	0.200	0.95	40210	965	0.10
1.50	2	120	0.014	0.038	0.240	1.33	28720	825	0.20
2.00	2	120	0.018	0.048	0.300	1.86	20535	740	0.20

Hardened tool steel
52 - 56 HRC




0.20	2	20	0.002	0.006	0.040	0.15	42440	170	0.05
0.40	2	49	0.004	0.013	0.080	0.37	42155	335	0.05
0.50	2	62	0.005	0.016	0.100	0.47	41990	420	0.05
0.60	2	69	0.006	0.019	0.120	0.52	42235	505	0.10
0.80	2	96	0.008	0.026	0.160	0.73	41860	670	0.10
1.00	2	100	0.010	0.032	0.200	0.95	33505	670	0.10
1.50	2	100	0.012	0.038	0.240	1.33	23935	575	0.20
2.00	2	100	0.015	0.048	0.300	1.86	17115	515	0.20

Hardened tool steel
56 - 60 HRC



0.20	2	20	0.002	0.006	0.040	0.15	42440	155	0.05
0.40	2	49	0.004	0.013	0.080	0.37	42155	305	0.05
0.50	2	60	0.004	0.016	0.100	0.47	40635	365	0.05
0.60	2	60	0.005	0.019	0.120	0.52	36730	395	0.10
0.80	2	60	0.007	0.026	0.160	0.73	26160	375	0.10
1.00	2	60	0.009	0.032	0.200	0.95	20105	360	0.10
1.50	2	60	0.011	0.038	0.240	1.33	14360	310	0.20
2.00	2	60	0.014	0.048	0.300	1.86	10270	275	0.20

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.60	2	79	0.020	0.026	0.026	0.60	41910	1675	45°
0.80	2	106	0.022	0.034	0.034	0.80	42175	1855	45°
1.00	2	132	0.028	0.042	0.042	1.00	42015	2355	45°
1.50	2	198	0.034	0.064	0.064	1.50	42015	2855	45°
2.00	2	263	0.038	0.084	0.084	1.99	42070	3195	45°

Hardened tool steel
48 - 52 HRC



0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.60	2	79	0.020	0.026	0.026	0.60	41910	1675	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.032	0.064	0.064	1.50	42015	2690	45°
2.00	2	250	0.036	0.084	0.084	1.99	39990	2880	45°

Hardened tool steel
52 - 56 HRC



0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.014	0.016	0.016	0.40	42175	1180	45°
0.50	2	66	0.018	0.022	0.022	0.50	42015	1515	45°
0.60	2	79	0.018	0.026	0.026	0.60	41910	1510	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.030	0.064	0.064	1.50	42015	2520	45°
2.00	2	200	0.034	0.084	0.084	1.99	31990	2175	45°



Hardened tool steel
56 - 60 HRC



0.20	2	26	0.008	0.008	0.008	0.20	41380	660	45°
0.40	2	53	0.012	0.016	0.016	0.40	42175	1010	45°
0.50	2	66	0.016	0.022	0.022	0.50	42015	1345	45°
0.60	2	79	0.016	0.026	0.026	0.60	41910	1340	45°
0.80	2	106	0.018	0.034	0.034	0.80	42175	1520	45°
1.00	2	132	0.022	0.042	0.042	1.00	42015	1850	45°
1.50	2	150	0.028	0.064	0.064	1.50	31830	1785	45°
2.00	2	150	0.030	0.084	0.084	1.99	23995	1440	45°

Corner radius end mills MicroX


Shank \varnothing 6mm, cylindrical neck, 6xd

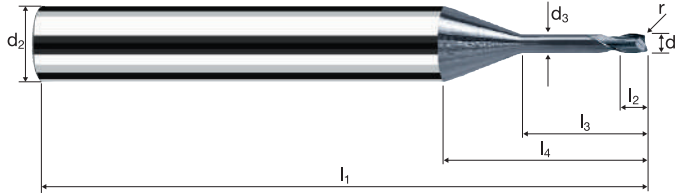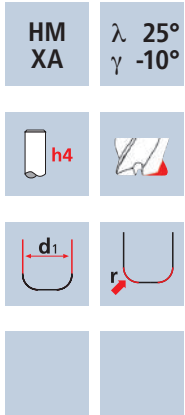

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL
Coating: X Article-N°: 6535 ø-Code: 020											X6535
Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.01	α	z	
020	0.20	6.00	0.18	57	0.20	1.20	18.14	0.050	13.6°	2	●
040	0.40	6.00	0.35	57	0.40	2.40	18.86	0.050	12.3°	2	●
048	0.50	6.00	0.45	57	0.50	3.00	14.01	0.050	11.7°	2	●
042	0.40	6.00	0.35	57	0.40	2.40	18.86	0.100	12.3°	2	●
050	0.50	6.00	0.45	57	0.50	3.00	14.01	0.100	11.8°	2	●
060	0.60	6.00	0.55	57	0.60	3.60	14.43	0.100	11.2°	2	●
080	0.80	6.00	0.75	57	0.80	4.80	15.25	0.100	10.2°	2	●
098	1.00	6.00	0.95	57	1.00	6.00	16.08	0.100	9.3°	2	●
082	0.80	6.00	0.75	57	0.80	4.80	15.25	0.200	10.3°	2	●
100	1.00	6.00	0.95	57	1.00	6.00	16.08	0.200	9.4°	2	●
120	1.50	6.00	1.40	61	1.50	9.00	18.24	0.200	7.4°	2	●
140	2.00	6.00	1.90	66	2.00	12.00	20.31	0.200	5.9°	2	●
101	1.00	6.00	0.95	57	1.00	6.00	16.08	0.300	9.4°	2	●
145	2.00	6.00	1.90	66	2.00	12.00	20.31	0.500	6.0°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
0.20	2	18	0.003	0.004	0.040	0.14	40925	205	0.05
0.40	2	46	0.005	0.008	0.080	0.35	41835	420	0.05
0.50	2	51	0.006	0.010	0.100	0.39	41625	525	0.10
0.80	2	94	0.010	0.016	0.160	0.71	42140	850	0.10
1.00	2	102	0.013	0.020	0.200	0.77	42165	1065	0.20
1.50	2	140	0.019	0.030	0.300	1.31	34020	1285	0.20
2.00	2	140	0.025	0.040	0.400	1.84	24220	1220	0.20
2.50	2	140	0.032	0.050	0.500	2.36	18885	1190	0.20
3.00	2	140	0.038	0.060	0.600	2.89	15420	1165	0.20

Hardened tool steel
48 - 52 HRC



0.20	2	18	0.002	0.004	0.040	0.14	40925	195	0.05
0.40	2	46	0.005	0.008	0.080	0.35	41835	400	0.05
0.50	2	51	0.006	0.010	0.100	0.39	41625	500	0.10
0.80	2	94	0.010	0.016	0.160	0.71	42140	810	0.10
1.00	2	102	0.012	0.020	0.200	0.77	42165	1010	0.20
1.50	2	120	0.018	0.030	0.300	1.31	29160	1050	0.20
2.00	2	120	0.024	0.040	0.400	1.84	20760	995	0.20
2.50	2	120	0.030	0.050	0.500	2.36	16185	970	0.20
3.00	2	120	0.036	0.060	0.600	2.89	13215	950	0.20

Hardened tool steel
52 - 56 HRC




0.20	2	18	0.002	0.004	0.040	0.14	40925	165	0.05
0.40	2	46	0.004	0.008	0.080	0.35	41835	335	0.05
0.50	2	51	0.005	0.010	0.100	0.39	41625	415	0.10
0.80	2	94	0.008	0.016	0.160	0.71	42140	675	0.10
1.00	2	100	0.010	0.020	0.200	0.77	41340	825	0.20
1.50	2	100	0.015	0.030	0.300	1.31	24300	730	0.20
2.00	2	100	0.020	0.040	0.400	1.84	17300	690	0.20
2.50	2	100	0.025	0.050	0.500	2.36	13490	675	0.20
3.00	2	100	0.030	0.060	0.600	2.89	11015	660	0.20

Hardened tool steel
56 - 60 HRC



0.20	2	18	0.002	0.004	0.040	0.14	40925	145	0.05
0.40	2	46	0.004	0.008	0.080	0.35	41835	300	0.05
0.50	2	51	0.004	0.010	0.100	0.39	41625	375	0.10
0.80	2	60	0.007	0.016	0.160	0.71	26900	385	0.10
1.00	2	60	0.009	0.020	0.200	0.77	24805	445	0.20
1.50	2	60	0.014	0.030	0.300	1.31	14580	395	0.20
2.00	2	60	0.018	0.040	0.400	1.84	10380	375	0.20
2.50	2	60	0.023	0.050	0.500	2.36	8095	365	0.20
3.00	2	60	0.027	0.060	0.600	2.89	6610	355	0.20

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.80	2	106	0.022	0.034	0.034	0.80	42175	1855	45°
1.00	2	132	0.028	0.042	0.042	1.00	42015	2355	45°
1.50	2	198	0.034	0.064	0.064	1.50	42015	2855	45°
2.00	2	263	0.038	0.084	0.084	1.99	42070	3195	45°
2.50	2	300	0.040	0.106	0.106	2.48	38505	3080	45°
3.00	2	300	0.046	0.126	0.126	2.97	32155	2960	45°

Hardened tool steel
48 - 52 HRC



0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.032	0.064	0.064	1.50	42015	2690	45°
2.00	2	250	0.036	0.084	0.084	1.99	39990	2880	45°
2.50	2	250	0.038	0.106	0.106	2.48	32090	2440	45°
3.00	2	250	0.044	0.126	0.126	2.97	26795	2360	45°

Hardened tool steel
52 - 56 HRC



0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.014	0.016	0.016	0.40	42175	1180	45°
0.50	2	66	0.018	0.022	0.022	0.50	42015	1515	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.030	0.064	0.064	1.50	42015	2520	45°
2.00	2	200	0.034	0.084	0.084	1.99	31990	2175	45°
2.50	2	200	0.036	0.106	0.106	2.48	25670	1850	45°
3.00	2	200	0.042	0.126	0.126	2.97	21435	1800	45°



Hardened tool steel
56 - 60 HRC



0.20	2	26	0.008	0.008	0.008	0.20	41380	660	45°
0.40	2	53	0.012	0.016	0.016	0.40	42175	1010	45°
0.50	2	66	0.016	0.022	0.022	0.50	42015	1345	45°
0.80	2	106	0.018	0.034	0.034	0.80	42175	1520	45°
1.00	2	132	0.022	0.042	0.042	1.00	42015	1850	45°
1.50	2	150	0.028	0.064	0.064	1.50	31830	1785	45°
2.00	2	150	0.030	0.084	0.084	1.99	23995	1440	45°
2.50	2	150	0.032	0.106	0.106	2.48	19255	1230	45°
3.00	2	150	0.036	0.126	0.126	2.97	16075	1155	45°

Corner radius end mills MicroX


Shank \varnothing 6mm, cylindrical neck, 8xd

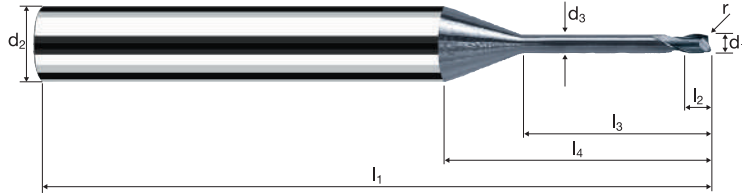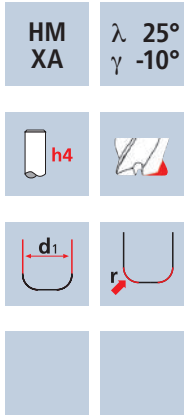

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL
Coating: X Article-N°: 6536 ø-Code: 020											X6536
Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.01	α	z	
020	0.20	6.00	0.18	57	0.20	1.60	18.22	0.050	13.2°	2	●
040	0.40	6.00	0.35	57	0.40	3.20	19.16	0.050	11.6°	2	●
048	0.50	6.00	0.45	57	0.50	4.00	15.01	0.050	11.0°	2	●
042	0.40	6.00	0.35	57	0.40	3.20	19.16	0.100	11.6°	2	●
050	0.50	6.00	0.45	57	0.50	4.00	15.01	0.100	11.1°	2	●
060	0.60	6.00	0.55	57	0.60	4.80	15.63	0.100	10.3°	2	●
080	0.80	6.00	0.75	57	0.80	6.40	16.85	0.100	9.2°	2	●
098	1.00	6.00	0.95	61	1.00	8.00	18.08	0.100	8.3°	2	●
082	0.80	6.00	0.75	57	0.80	6.40	16.85	0.200	9.3°	2	●
100	1.00	6.00	0.95	61	1.00	8.00	18.08	0.200	8.3°	2	●
108	1.20	6.00	1.10	61	1.20	9.60	19.40	0.200	7.3°	2	●
120	1.50	6.00	1.40	61	1.50	12.00	21.24	0.200	6.4°	2	●
140	2.00	6.00	1.90	66	2.00	16.00	24.31	0.200	4.9°	2	●
160	2.50	6.00	2.30	69	2.50	20.00	27.56	0.200	3.8°	2	●
180	3.00	6.00	2.80	75	3.00	24.00	30.63	0.200	2.9°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
1.00	2	82	0.013	0.020	0.200	0.62	42100	1060	0.30
2.00	2	140	0.025	0.040	0.400	1.39	32060	1615	0.50
2.50	2	140	0.032	0.050	0.500	1.94	22970	1445	0.50
3.00	2	140	0.038	0.060	0.600	2.47	18040	1365	0.50

1.00	2	82	0.012	0.020	0.200	0.62	42100	1010	0.30
2.00	2	120	0.024	0.040	0.400	1.39	27480	1320	0.50
2.50	2	120	0.030	0.050	0.500	1.94	19690	1180	0.50
3.00	2	120	0.036	0.060	0.600	2.47	15465	1115	0.50

1.00	2	82	0.010	0.020	0.200	0.62	42100	840	0.30
2.00	2	100	0.020	0.040	0.400	1.39	22900	915	0.50
2.50	2	100	0.025	0.050	0.500	1.94	16410	820	0.50
3.00	2	100	0.030	0.060	0.600	2.47	12885	775	0.50

1.00	2	60	0.009	0.020	0.200	0.62	30805	555	0.30
2.00	2	60	0.018	0.040	0.400	1.39	13740	495	0.50
2.50	2	60	0.023	0.050	0.500	1.94	9845	445	0.50
3.00	2	60	0.027	0.060	0.600	2.47	7730	420	0.50

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
1.00	2	129	0.028	0.042	0.042	0.98	41900	2345	45°
2.00	2	263	0.034	0.100	0.100	1.99	42070	2860	45°
2.50	2	300	0.036	0.126	0.126	2.50	38195	2750	45°
3.00	2	300	0.042	0.152	0.152	3.00	31830	2675	45°

1.00	2	129	0.026	0.042	0.042	0.98	41900	2180	45°
2.00	2	250	0.032	0.100	0.100	1.99	39990	2560	45°
2.50	2	250	0.034	0.126	0.126	2.50	31830	2165	45°
3.00	2	250	0.040	0.152	0.152	3.00	26525	2120	45°

1.00	2	129	0.026	0.042	0.042	0.98	41900	2180	45°
2.00	2	200	0.030	0.100	0.100	1.99	31990	1920	45°
2.50	2	200	0.032	0.126	0.126	2.50	25465	1630	45°
3.00	2	200	0.038	0.152	0.152	3.00	21220	1615	45°

1.00	2	129	0.022	0.042	0.042	0.98	41900	1845	45°
2.00	2	150	0.028	0.100	0.100	1.99	23995	1345	45°
2.50	2	150	0.028	0.126	0.126	2.50	19100	1070	45°
3.00	2	150	0.034	0.152	0.152	3.00	15915	1080	45°

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
0.20	2	17	0.003	0.003	0.040	0.13	41625	210	0.05
0.40	2	36	0.005	0.006	0.080	0.27	42440	430	0.10
0.50	2	50	0.006	0.008	0.100	0.38	41885	530	0.10
0.80	2	92	0.010	0.013	0.160	0.70	41835	845	0.10
1.00	2	100	0.013	0.016	0.200	0.76	41885	1055	0.20
1.50	2	140	0.019	0.024	0.300	1.29	34545	1305	0.20
2.00	2	140	0.025	0.032	0.400	1.82	24485	1235	0.20
2.50	2	140	0.032	0.040	0.500	2.34	19045	1200	0.20
3.00	2	140	0.038	0.048	0.600	2.86	15580	1180	0.20

0.20	2	17	0.002	0.003	0.040	0.13	41625	200	0.05
0.40	2	36	0.005	0.006	0.080	0.27	42440	405	0.10
0.50	2	50	0.006	0.008	0.100	0.38	41885	505	0.10
0.80	2	92	0.010	0.013	0.160	0.70	41835	805	0.10
1.00	2	100	0.012	0.016	0.200	0.76	41885	1005	0.20
1.50	2	120	0.018	0.024	0.300	1.29	29610	1065	0.20
2.00	2	120	0.024	0.032	0.400	1.82	20985	1005	0.20
2.50	2	120	0.030	0.040	0.500	2.34	16325	980	0.20
3.00	2	120	0.036	0.048	0.600	2.86	13355	960	0.20

0.20	2	17	0.002	0.003	0.040	0.13	41625	165	0.05
0.40	2	36	0.004	0.006	0.080	0.27	42440	340	0.10
0.50	2	50	0.005	0.008	0.100	0.38	41885	420	0.10
0.80	2	92	0.008	0.013	0.160	0.70	41835	670	0.10
1.00	2	100	0.010	0.016	0.200	0.76	41885	840	0.20
1.50	2	100	0.015	0.024	0.300	1.29	24675	740	0.20
2.00	2	100	0.020	0.032	0.400	1.82	17490	700	0.20
2.50	2	100	0.025	0.040	0.500	2.34	13605	680	0.20
3.00	2	100	0.030	0.048	0.600	2.86	11130	670	0.20

0.20	2	17	0.002	0.003	0.040	0.13	41625	150	0.05
0.40	2	36	0.004	0.006	0.080	0.27	42440	305	0.10
0.50	2	50	0.004	0.008	0.100	0.38	41885	375	0.10
0.80	2	60	0.007	0.013	0.160	0.70	27285	395	0.10
1.00	2	60	0.009	0.016	0.200	0.76	25130	450	0.20
1.50	2	60	0.014	0.024	0.300	1.29	14805	400	0.20
2.00	2	60	0.018	0.032	0.400	1.82	10495	380	0.20
2.50	2	60	0.023	0.040	0.500	2.34	8160	365	0.20
3.00	2	60	0.027	0.048	0.600	2.86	6680	360	0.20

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.80	2	106	0.022	0.034	0.034	0.80	42175	1855	45°
1.00	2	132	0.028	0.042	0.042	1.00	42015	2355	45°
1.50	2	198	0.030	0.050	0.050	1.50	42015	2520	45°
2.00	2	264	0.034	0.064	0.064	2.00	42015	2855	45°
2.50	2	300	0.038	0.084	0.084	2.49	38350	2915	45°
3.00	2	300	0.040	0.106	0.106	2.98	32045	2565	45°



0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.016	0.016	0.016	0.40	42175	1350	45°
0.50	2	66	0.020	0.022	0.022	0.50	42015	1680	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.028	0.050	0.050	1.50	42015	2355	45°
2.00	2	250	0.032	0.064	0.064	2.00	39790	2545	45°
2.50	2	250	0.036	0.084	0.084	2.49	31960	2300	45°
3.00	2	250	0.038	0.106	0.106	2.98	26705	2030	45°

0.20	2	26	0.010	0.008	0.008	0.20	41380	830	45°
0.40	2	53	0.014	0.016	0.016	0.40	42175	1180	45°
0.50	2	66	0.018	0.022	0.022	0.50	42015	1515	45°
0.80	2	106	0.020	0.034	0.034	0.80	42175	1685	45°
1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.50	2	198	0.028	0.050	0.050	1.50	42015	2355	45°
2.00	2	200	0.030	0.064	0.064	2.00	31830	1910	45°
2.50	2	200	0.034	0.084	0.084	2.49	25565	1740	45°
3.00	2	200	0.036	0.106	0.106	2.98	21365	1540	45°

0.20	2	26	0.008	0.008	0.008	0.20	41380	660	45°
0.40	2	53	0.012	0.016	0.016	0.40	42175	1010	45°
0.50	2	66	0.016	0.022	0.022	0.50	42015	1345	45°
0.80	2	106	0.018	0.034	0.034	0.80	42175	1520	45°
1.00	2	132	0.022	0.042	0.042	1.00	42015	1850	45°
1.50	2	150	0.024	0.050	0.050	1.50	31830	1530	45°
2.00	2	150	0.028	0.064	0.064	2.00	23875	1335	45°
2.50	2	150	0.030	0.084	0.084	2.49	19175	1150	45°
3.00	2	150	0.032	0.106	0.106	2.98	16020	1025	45°

Corner radius end mills MicroX


Shank \varnothing 6mm, cylindrical neck, 10xd

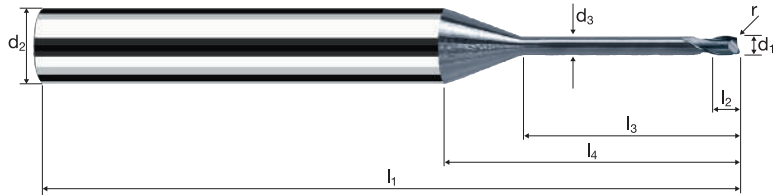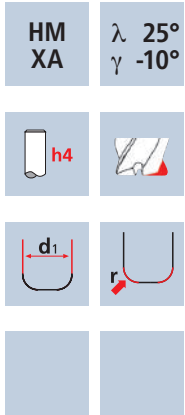

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.											X-AL
											X6538
\varnothing Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.01	α	z	
020	0.20	6.00	0.18	57	0.20	2.00	18.62	0.050	12.8°	2	●
040	0.40	6.00	0.35	57	0.40	4.00	19.96	0.050	11.0°	2	●
048	0.50	6.00	0.45	57	0.50	5.00	16.01	0.050	10.2°	2	●
042	0.40	6.00	0.35	57	0.40	4.00	19.96	0.100	11.0°	2	●
050	0.50	6.00	0.45	57	0.50	5.00	16.01	0.100	10.3°	2	●
060	0.60	6.00	0.55	57	0.60	6.00	16.83	0.100	9.6°	2	●
080	0.80	6.00	0.75	61	0.80	8.00	18.45	0.100	8.4°	2	●
098	1.00	6.00	0.95	61	1.00	10.00	20.08	0.100	7.4°	2	●
082	0.80	6.00	0.75	61	0.80	8.00	18.45	0.200	8.5°	2	●
100	1.00	6.00	0.95	61	1.00	10.00	20.08	0.200	7.4°	2	●
120	1.50	6.00	1.40	66	1.50	15.00	24.24	0.200	5.5°	2	●
140	2.00	6.00	1.90	69	2.00	20.00	28.31	0.200	4.2°	2	●
160	2.50	6.00	2.30	75	2.50	25.00	32.56	0.200	3.2°	2	●
180	3.00	6.00	2.80	80	3.00	30.00	36.63	0.200	2.4°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
1.00	2	78	0.013	0.016	0.200	0.59	42080	1060	0.30
2.00	2	140	0.025	0.032	0.400	1.35	33010	1665	0.50
2.50	2	140	0.032	0.040	0.500	1.89	23580	1485	0.50
3.00	2	140	0.038	0.048	0.600	2.43	18340	1385	0.50

1.00	2	78	0.012	0.016	0.200	0.59	42080	1010	0.30
2.00	2	120	0.024	0.032	0.400	1.35	28295	1360	0.50
2.50	2	120	0.030	0.040	0.500	1.89	20210	1215	0.50
3.00	2	120	0.036	0.048	0.600	2.43	15720	1130	0.50

1.00	2	78	0.010	0.016	0.200	0.59	42080	840	0.30
2.00	2	100	0.020	0.032	0.400	1.35	23580	945	0.50
2.50	2	100	0.025	0.040	0.500	1.89	16840	840	0.50
3.00	2	100	0.030	0.048	0.600	2.43	13100	785	0.50

1.00	2	60	0.009	0.016	0.200	0.59	32370	585	0.30
2.00	2	60	0.018	0.032	0.400	1.35	14145	510	0.50
2.50	2	60	0.023	0.040	0.500	1.89	10105	455	0.50
3.00	2	60	0.027	0.048	0.600	2.43	7860	425	0.50

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
1.00	2	131	0.046	0.126	0.126	0.99	42120	3875	45°
2.00	2	255	0.028	0.042	0.042	1.93	42055	2355	45°
2.50	2	300	0.034	0.100	0.100	2.49	38350	2610	45°
3.00	2	300	0.036	0.126	0.126	3.00	31830	2290	45°

1.00	2	131	0.044	0.126	0.126	0.99	42120	3705	45°
2.00	2	250	0.026	0.042	0.042	1.93	41230	2145	45°
2.50	2	250	0.032	0.100	0.100	2.49	31960	2045	45°
3.00	2	250	0.034	0.126	0.126	3.00	26525	1805	45°

1.00	2	131	0.042	0.126	0.126	0.99	42120	3540	45°
2.00	2	200	0.026	0.042	0.042	1.93	32985	1715	45°
2.50	2	200	0.030	0.100	0.100	2.49	25565	1535	45°
3.00	2	200	0.032	0.126	0.126	3.00	21220	1360	45°

1.00	2	131	0.036	0.126	0.126	0.99	42120	3035	45°
2.00	2	150	0.022	0.042	0.042	1.93	24740	1090	45°
2.50	2	150	0.028	0.100	0.100	2.49	19175	1075	45°
3.00	2	150	0.028	0.126	0.126	3.00	15915	890	45°

Application



Material


Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
0.50	2	53	0.008	0.013	0.100	0.40	42175	640	0.10
0.60	2	67	0.009	0.016	0.120	0.51	41815	740	0.10
0.80	2	95	0.013	0.021	0.160	0.72	42000	1060	0.10
1.00	2	106	0.015	0.027	0.200	0.80	42175	1275	0.20
1.50	2	140	0.023	0.040	0.300	1.34	33255	1510	0.20
2.00	2	140	0.030	0.053	0.400	1.87	23830	1440	0.20

0.50	2	53	0.007	0.013	0.100	0.40	42175	605	0.10
0.60	2	67	0.008	0.016	0.120	0.51	41815	705	0.10
0.80	2	95	0.012	0.021	0.160	0.72	42000	1010	0.10
1.00	2	106	0.014	0.027	0.200	0.80	42175	1215	0.20
1.50	2	120	0.022	0.040	0.300	1.34	28505	1230	0.20
2.00	2	120	0.029	0.053	0.400	1.87	20425	1175	0.20

0.50	2	53	0.006	0.013	0.100	0.40	42175	505	0.10
0.60	2	67	0.007	0.016	0.120	0.51	41815	585	0.10
0.80	2	95	0.010	0.021	0.160	0.72	42000	840	0.10
1.00	2	100	0.012	0.027	0.200	0.80	39790	955	0.20
1.50	2	100	0.018	0.040	0.300	1.34	23755	855	0.20
2.00	2	100	0.024	0.053	0.400	1.87	17020	815	0.20

0.50	2	53	0.005	0.013	0.100	0.40	42175	455	0.10
0.60	2	60	0.006	0.016	0.120	0.51	37450	470	0.10
0.80	2	60	0.009	0.021	0.160	0.72	26525	475	0.10
1.00	2	60	0.011	0.027	0.200	0.80	23875	515	0.20
1.50	2	60	0.016	0.040	0.300	1.34	14255	460	0.20
2.00	2	60	0.022	0.053	0.400	1.87	10215	440	0.20

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
0.50	2	66	0.022	0.016	0.016	0.50	42015	1850	45°
0.60	2	79	0.024	0.020	0.020	0.60	41910	2010	45°
0.80	2	106	0.028	0.032	0.032	0.80	42175	2360	45°
1.00	2	132	0.034	0.040	0.040	1.00	42015	2855	45°
1.50	2	198	0.040	0.060	0.060	1.50	42015	3360	45°
2.00	2	264	0.046	0.080	0.080	2.00	42015	3865	45°

0.50	2	66	0.020	0.016	0.016	0.50	42015	1680	45°
0.60	2	79	0.022	0.020	0.020	0.60	41910	1845	45°
0.80	2	106	0.026	0.032	0.032	0.80	42175	2195	45°
1.00	2	132	0.032	0.040	0.040	1.00	42015	2690	45°
1.50	2	198	0.038	0.060	0.060	1.50	42015	3195	45°
2.00	2	250	0.044	0.080	0.080	2.00	39790	3500	45°

0.50	2	66	0.020	0.016	0.016	0.50	42015	1680	45°
0.60	2	79	0.022	0.020	0.020	0.60	41910	1845	45°
0.80	2	106	0.026	0.032	0.032	0.80	42175	2195	45°
1.00	2	132	0.030	0.040	0.040	1.00	42015	2520	45°
1.50	2	198	0.036	0.060	0.060	1.50	42015	3025	45°
2.00	2	200	0.042	0.080	0.080	2.00	31830	2675	45°


0.50	2	66	0.018	0.016	0.016	0.50	42015	1515	45°
0.60	2	79	0.020	0.020	0.020	0.60	41910	1675	45°
0.80	2	106	0.022	0.032	0.032	0.80	42175	1855	45°
1.00	2	132	0.028	0.040	0.040	1.00	42015	2355	45°
1.50	2	150	0.032	0.060	0.060	1.50	31830	2035	45°
2.00	2	150	0.036	0.080	0.080	2.00	23875	1720	45°

Corner radius end mills MicroX

Shank \varnothing 6mm, conical neck 0.9°, 6xd




HM λ 25°
XA γ -10°

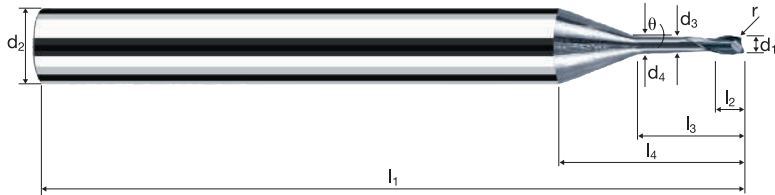

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Example: Order-N°.													X-AL
Coating: X Article-N°: 6735 ø-Code: 050													
Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	d ₄	l ₁	l ₂	l ₃	l ₄	θ	r 0/+0.01	α	z	X6735
050	0.50	6.00	0.45	0.53	57	0.40	3.00	13.87	0.9°	0.100	11.8°	2	●
060	0.60	6.00	0.55	0.65	57	0.50	3.60	14.24	0.9°	0.100	11.1°	2	●
080	0.80	6.00	0.75	0.88	57	0.65	4.80	15.01	0.9°	0.100	10.2°	2	●
100	1.00	6.00	0.95	1.11	57	0.80	6.00	15.78	0.9°	0.200	9.4°	2	●
120	1.50	6.00	1.40	1.65	61	1.20	9.00	17.78	0.9°	0.200	7.4°	2	●
140	2.00	6.00	1.90	2.23	66	1.60	12.00	19.69	0.9°	0.200	5.9°	2	●
145	2.00	6.00	1.90	2.23	66	1.60	12.00	19.69	0.9°	0.500	6.0°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC




d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
0.50	2	51	0.008	0.010	0.100	0.39	41625	630	0.10
0.60	2	65	0.009	0.012	0.120	0.49	42225	745	0.10
0.80	2	94	0.013	0.016	0.160	0.71	42140	1060	0.10
1.00	2	102	0.015	0.020	0.200	0.77	42165	1275	0.20
1.20	2	131	0.018	0.024	0.240	0.99	42120	1485	0.20
1.50	2	140	0.023	0.030	0.300	1.31	34020	1545	0.20
2.00	2	140	0.030	0.040	0.400	1.84	24220	1465	0.20
2.50	2	140	0.038	0.050	0.500	2.36	18885	1430	0.20
3.00	2	140	0.045	0.060	0.600	2.89	15420	1400	0.20

0.50	2	51	0.007	0.010	0.100	0.39	41625	600	0.10
0.60	2	65	0.008	0.012	0.120	0.49	42225	710	0.10
0.80	2	94	0.012	0.016	0.160	0.71	42140	1010	0.10
1.00	2	102	0.014	0.020	0.200	0.77	42165	1215	0.20
1.20	2	120	0.017	0.024	0.240	0.99	38585	1295	0.20
1.50	2	120	0.022	0.030	0.300	1.31	29160	1260	0.20
2.00	2	120	0.029	0.040	0.400	1.84	20760	1195	0.20
2.50	2	120	0.036	0.050	0.500	2.36	16185	1165	0.20
3.00	2	120	0.043	0.060	0.600	2.89	13215	1140	0.20

0.50	2	51	0.006	0.010	0.100	0.39	41625	500	0.10
0.60	2	65	0.007	0.012	0.120	0.49	42225	590	0.10
0.80	2	94	0.010	0.016	0.160	0.71	42140	845	0.10
1.00	2	100	0.012	0.020	0.200	0.77	41340	990	0.20
1.20	2	100	0.014	0.024	0.240	0.99	32155	900	0.20
1.50	2	100	0.018	0.030	0.300	1.31	24300	875	0.20
2.00	2	100	0.024	0.040	0.400	1.84	17300	830	0.20
2.50	2	100	0.030	0.050	0.500	2.36	13490	810	0.20
3.00	2	100	0.036	0.060	0.600	2.89	11015	795	0.20

0.50	2	51	0.005	0.010	0.100	0.39	41625	450	0.10
0.60	2	60	0.006	0.012	0.120	0.49	38975	490	0.10
0.80	2	60	0.009	0.016	0.160	0.71	26900	485	0.10
1.00	2	60	0.011	0.020	0.200	0.77	24805	535	0.20
1.20	2	60	0.013	0.024	0.240	0.99	19290	485	0.20
1.50	2	60	0.016	0.030	0.300	1.31	14580	470	0.20
2.00	2	60	0.022	0.040	0.400	1.84	10380	450	0.20
2.50	2	60	0.027	0.050	0.500	2.36	8095	435	0.20
3.00	2	60	0.032	0.060	0.600	2.89	6610	430	0.20

Application



Material

Hardened tool steel
42 - 48 HRC



Hardened tool steel
48 - 52 HRC



Hardened tool steel
52 - 56 HRC



Hardened tool steel
56 - 60 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.50	2	66	0.022	0.016	0.016	0.50	42015	1850	45°
0.60	2	79	0.024	0.020	0.020	0.60	41910	2010	45°
0.80	2	106	0.028	0.032	0.032	0.80	42175	2360	45°
1.00	2	132	0.034	0.040	0.040	1.00	42015	2855	45°
1.20	2	158	0.036	0.048	0.048	1.20	41910	3020	45°
1.50	2	198	0.040	0.060	0.060	1.50	42015	3360	45°
2.00	2	264	0.046	0.080	0.080	2.00	42015	3865	45°
2.50	2	300	0.048	0.100	0.100	2.49	38350	3680	45°
3.00	2	300	0.056	0.120	0.120	2.97	32155	3600	45°



0.50	2	66	0.020	0.016	0.016	0.50	42015	1680	45°
0.60	2	79	0.022	0.020	0.020	0.60	41910	1845	45°
0.80	2	106	0.026	0.032	0.032	0.80	42175	2195	45°
1.00	2	132	0.032	0.040	0.040	1.00	42015	2690	45°
1.20	2	158	0.034	0.048	0.048	1.20	41910	2850	45°
1.50	2	198	0.038	0.060	0.060	1.50	42015	3195	45°
2.00	2	250	0.044	0.080	0.080	2.00	39790	3500	45°
2.50	2	250	0.046	0.100	0.100	2.49	31960	2940	45°
3.00	2	250	0.054	0.120	0.120	2.97	26795	2895	45°

0.50	2	66	0.020	0.016	0.016	0.50	42015	1680	45°
0.60	2	79	0.022	0.020	0.020	0.60	41910	1845	45°
0.80	2	106	0.026	0.032	0.032	0.80	42175	2195	45°
1.00	2	132	0.030	0.040	0.040	1.00	42015	2520	45°
1.20	2	158	0.032	0.048	0.048	1.20	41910	2680	45°
1.50	2	198	0.036	0.060	0.060	1.50	42015	3025	45°
2.00	2	200	0.042	0.080	0.080	2.00	31830	2675	45°
2.50	2	200	0.044	0.100	0.100	2.49	25565	2250	45°
3.00	2	200	0.050	0.120	0.120	2.97	21435	2145	45°

0.50	2	66	0.018	0.016	0.016	0.50	42015	1515	45°
0.60	2	79	0.020	0.020	0.020	0.60	41910	1675	45°
0.80	2	106	0.022	0.032	0.032	0.80	42175	1855	45°
1.00	2	132	0.028	0.040	0.040	1.00	42015	2355	45°
1.20	2	150	0.028	0.048	0.048	1.20	39790	2230	45°
1.50	2	150	0.032	0.060	0.060	1.50	31830	2035	45°
2.00	2	150	0.036	0.080	0.080	2.00	23875	1720	45°
2.50	2	150	0.038	0.100	0.100	2.49	19175	1455	45°
3.00	2	150	0.044	0.120	0.120	2.97	16075	1415	45°

Corner radius end mills MicroX


Shank \varnothing 6mm, conical neck 0.9°, 8xd

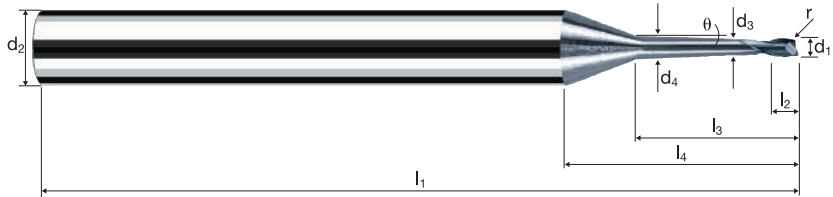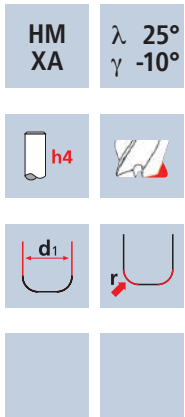

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------

Example: Order-N°.													X-AL
Coating Article-N° ø-Code													X6736
Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	d ₄	l ₁	l ₂	l ₃	l ₄	θ	r 0/+0.01	α	z	
050	0.50	6.00	0.45	0.56	57	0.40	4.00	14.81	0.9°	0.100	11.1°	2	●
060	0.60	6.00	0.55	0.69	57	0.50	4.80	15.37	0.9°	0.100	10.3°	2	●
080	0.80	6.00	0.75	0.93	57	0.65	6.40	16.52	0.9°	0.100	9.2°	2	●
100	1.00	6.00	0.95	1.18	61	0.80	8.00	17.65	0.9°	0.200	8.3°	2	●
108	1.20	6.00	1.10	1.37	61	1.00	9.60	18.90	0.9°	0.200	7.3°	2	●
120	1.50	6.00	1.40	1.74	61	1.20	12.00	20.61	0.9°	0.200	6.4°	2	●
140	2.00	6.00	1.90	2.35	66	1.60	16.00	23.47	0.9°	0.200	4.9°	2	●
160	2.50	6.00	2.30	2.87	69	2.00	20.00	26.50	0.9°	0.200	3.8°	2	●
180	3.00	6.00	2.80	3.48	75	2.40	24.00	29.36	0.9°	0.200	2.9°	2	●
145	2.00	6.00	1.90	2.35	66	1.60	16.00	23.47	0.9°	0.500	5.0°	2	●
165	2.50	6.00	2.30	2.87	69	2.00	20.00	26.50	0.9°	0.500	3.9°	2	●
185	3.00	6.00	2.80	3.48	75	2.40	24.00	29.36	0.9°	0.500	3.0°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
0.50	2	50	0.008	0.008	0.100	0.38	41885	635	0.10
0.60	2	65	0.009	0.010	0.120	0.49	42225	745	0.10
0.80	2	79	0.013	0.000	0.130	0.60	41910	1055	0.10
1.00	2	100	0.015	0.016	0.200	0.76	41885	1265	0.20
1.20	2	128	0.018	0.019	0.240	0.97	42005	1480	0.20
1.50	2	140	0.023	0.024	0.300	1.29	34545	1565	0.20
2.00	2	140	0.030	0.032	0.400	1.82	24485	1480	0.20
2.50	2	140	0.038	0.040	0.500	2.34	19045	1440	0.20
3.00	2	140	0.045	0.048	0.600	2.86	15580	1415	0.20

Hardened tool steel
48 - 52 HRC



0.50	2	50	0.007	0.008	0.100	0.38	41885	605	0.10
0.60	2	65	0.008	0.010	0.120	0.49	42225	710	0.10
0.80	2	79	0.012	0.000	0.130	0.60	41910	1005	0.10
1.00	2	100	0.014	0.016	0.200	0.76	41885	1205	0.20
1.20	2	120	0.017	0.019	0.240	0.97	39380	1325	0.20
1.50	2	120	0.022	0.024	0.300	1.29	29610	1280	0.20
2.00	2	120	0.029	0.032	0.400	1.82	20985	1210	0.20
2.50	2	120	0.036	0.040	0.500	2.34	16325	1175	0.20
3.00	2	120	0.043	0.048	0.600	2.86	13355	1155	0.20

Hardened tool steel
52 - 56 HRC




0.50	2	50	0.006	0.008	0.100	0.38	41885	505	0.10
0.60	2	65	0.007	0.010	0.120	0.49	42225	590	0.10
0.80	2	79	0.010	0.000	0.130	0.60	41910	840	0.10
1.00	2	100	0.012	0.016	0.200	0.76	41885	1005	0.20
1.20	2	100	0.014	0.019	0.240	0.97	32815	920	0.20
1.50	2	100	0.018	0.024	0.300	1.29	24675	890	0.20
2.00	2	100	0.024	0.032	0.400	1.82	17490	840	0.20
2.50	2	100	0.030	0.040	0.500	2.34	13605	815	0.20
3.00	2	100	0.036	0.048	0.600	2.86	11130	800	0.20

Hardened tool steel
56 - 60 HRC



0.50	2	50	0.005	0.008	0.100	0.38	41885	450	0.10
0.60	2	60	0.006	0.010	0.120	0.49	38975	490	0.10
0.80	2	60	0.009	0.000	0.130	0.60	31830	575	0.10
1.00	2	60	0.011	0.016	0.200	0.76	25130	545	0.20
1.20	2	60	0.013	0.019	0.240	0.97	19690	495	0.20
1.50	2	60	0.016	0.024	0.300	1.29	14805	480	0.20
2.00	2	60	0.022	0.032	0.400	1.82	10495	455	0.20
2.50	2	60	0.027	0.040	0.500	2.34	8160	440	0.20
3.00	2	60	0.032	0.048	0.600	2.86	6680	435	0.20

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.50	2	66	0.022	0.016	0.016	0.50	42015	1850	45°
0.60	2	79	0.024	0.020	0.020	0.60	41910	2010	45°
0.80	2	106	0.028	0.032	0.032	0.80	42175	2360	45°
1.00	2	132	0.034	0.040	0.040	1.00	42015	2855	45°
1.20	2	158	0.036	0.048	0.048	1.20	41910	3020	45°
1.50	2	198	0.040	0.060	0.060	1.50	42015	3360	45°
2.00	2	264	0.046	0.080	0.080	2.00	42015	3865	45°
2.50	2	300	0.048	0.100	0.100	2.49	38350	3680	45°
3.00	2	300	0.056	0.120	0.120	2.97	32155	3600	45°

Hardened tool steel
48 - 52 HRC



0.50	2	66	0.020	0.016	0.016	0.50	42015	1680	45°
0.60	2	79	0.022	0.020	0.020	0.60	41910	1845	45°
0.80	2	106	0.026	0.032	0.032	0.80	42175	2195	45°
1.00	2	132	0.032	0.040	0.040	1.00	42015	2690	45°
1.20	2	158	0.034	0.048	0.048	1.20	41910	2850	45°
1.50	2	198	0.038	0.060	0.060	1.50	42015	3195	45°
2.00	2	250	0.044	0.080	0.080	2.00	39790	3500	45°
2.50	2	250	0.046	0.100	0.100	2.49	31960	2940	45°
3.00	2	250	0.054	0.120	0.120	2.97	26795	2895	45°

Hardened tool steel
52 - 56 HRC



0.50	2	66	0.020	0.016	0.016	0.50	42015	1680	45°
0.60	2	79	0.022	0.020	0.020	0.60	41910	1845	45°
0.80	2	106	0.026	0.032	0.032	0.80	42175	2195	45°
1.00	2	132	0.030	0.040	0.040	1.00	42015	2520	45°
1.20	2	158	0.032	0.048	0.048	1.20	41910	2680	45°
1.50	2	198	0.036	0.060	0.060	1.50	42015	3025	45°
2.00	2	200	0.042	0.080	0.080	2.00	31830	2675	45°
2.50	2	200	0.044	0.100	0.100	2.49	25565	2250	45°
3.00	2	200	0.050	0.120	0.120	2.97	21435	2145	45°



Hardened tool steel
56 - 60 HRC



0.50	2	66	0.018	0.016	0.016	0.50	42015	1515	45°
0.60	2	79	0.020	0.020	0.020	0.60	41910	1675	45°
0.80	2	106	0.022	0.032	0.032	0.80	42175	1855	45°
1.00	2	132	0.028	0.040	0.040	1.00	42015	2355	45°
1.20	2	150	0.028	0.048	0.048	1.20	39790	2230	45°
1.50	2	150	0.032	0.060	0.060	1.50	31830	2035	45°
2.00	2	150	0.036	0.080	0.080	2.00	23875	1720	45°
2.50	2	150	0.038	0.100	0.100	2.49	19175	1455	45°
3.00	2	150	0.044	0.120	0.120	2.97	16075	1415	45°

Corner radius end mills MicroX


Shank \varnothing 6mm, conical neck 0.9°, 10xd

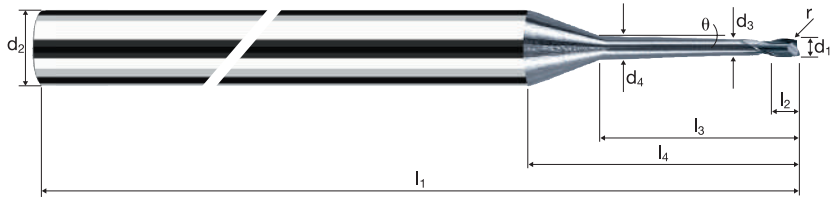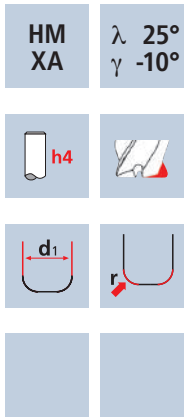

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------



Ø Code	Example: Order-N°.												X-AL
	d ₁ 0/-0.01	d ₂ h4	d ₃	d ₄	l ₁	l ₂	l ₃	l ₄	θ	r 0/+0.01	α	z	X6738
050	0.50	6.00	0.45	0.59	57	0.40	5.00	15.75	0.9°	0.100	10.4°	2	●
060	0.60	6.00	0.55	0.72	57	0.50	6.00	16.51	0.9°	0.100	9.6°	2	●
080	0.80	6.00	0.75	0.98	61	0.65	8.00	18.03	0.9°	0.100	8.6°	2	●
100	1.00	6.00	0.95	1.24	61	0.80	10.00	19.54	0.9°	0.200	7.6°	2	●
108	1.20	6.00	1.10	1.45	66	1.00	12.00	21.15	0.9°	0.200	6.8°	2	●
120	1.50	6.00	1.40	1.83	66	1.20	15.00	23.44	0.9°	0.200	5.8°	2	●
140	2.00	6.00	1.90	2.48	69	1.60	20.00	27.23	0.9°	0.200	4.4°	2	●
160	2.50	6.00	2.30	3.02	75	2.00	25.00	31.22	0.9°	0.200	3.4°	2	●
180	3.00	6.00	2.80	3.67	75	2.40	30.00	35.01	0.9°	0.200	2.6°	2	●
145	2.00	6.00	1.90	2.48	69	1.60	20.00	27.23	0.9°	0.500	4.4°	2	●
165	2.50	6.00	2.30	3.02	75	2.00	25.00	31.22	0.9°	0.500	3.4°	2	●
185	3.00	6.00	2.80	3.67	75	2.40	30.00	35.01	0.9°	0.500	2.6°	2	●

Application





Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
0.50	2	49	0.008	0.007	0.100	0.37	42155	635	0.10
0.60	2	63	0.009	0.008	0.120	0.48	41780	735	0.10
0.80	2	91	0.013	0.011	0.160	0.69	41980	1060	0.10
1.00	2	98	0.015	0.013	0.200	0.74	42155	1275	0.20
1.20	2	127	0.018	0.016	0.240	0.96	42110	1485	0.20
1.50	2	140	0.023	0.020	0.300	1.27	35090	1590	0.20
2.00	2	140	0.030	0.027	0.400	1.80	24755	1495	0.20
2.50	2	140	0.038	0.033	0.500	2.32	19210	1450	0.20
3.00	2	140	0.045	0.040	0.600	2.84	15690	1425	0.20

Hardened tool steel
48 - 52 HRC

0.50	2	49	0.007	0.007	0.100	0.37	42155	605	0.10
0.60	2	63	0.008	0.008	0.120	0.48	41780	700	0.10
0.80	2	91	0.012	0.011	0.160	0.69	41980	1010	0.10
1.00	2	98	0.014	0.013	0.200	0.74	42155	1215	0.20
1.20	2	120	0.017	0.016	0.240	0.96	39790	1335	0.20
1.50	2	120	0.022	0.020	0.300	1.27	30075	1300	0.20
2.00	2	120	0.029	0.027	0.400	1.80	21220	1220	0.20
2.50	2	120	0.036	0.033	0.500	2.32	16465	1185	0.20
3.00	2	120	0.043	0.040	0.600	2.84	13450	1160	0.20

Hardened tool steel
52 - 56 HRC


0.50	2	49	0.006	0.007	0.100	0.37	42155	505	0.10
0.60	2	63	0.007	0.008	0.120	0.48	41780	585	0.10
0.80	2	91	0.010	0.011	0.160	0.69	41980	840	0.10
1.00	2	98	0.012	0.013	0.200	0.74	42155	1010	0.20
1.20	2	100	0.014	0.016	0.240	0.96	33155	930	0.20
1.50	2	100	0.018	0.020	0.300	1.27	25065	900	0.20
2.00	2	100	0.024	0.027	0.400	1.80	17685	850	0.20
2.50	2	100	0.030	0.033	0.500	2.32	13720	825	0.20
3.00	2	100	0.036	0.040	0.600	2.84	11210	805	0.20

Hardened tool steel
56 - 60 HRC

0.50	2	49	0.005	0.007	0.100	0.37	42155	455	0.10
0.60	2	60	0.006	0.008	0.120	0.48	39790	500	0.10
0.80	2	60	0.009	0.011	0.160	0.69	27680	500	0.10
1.00	2	60	0.011	0.013	0.200	0.74	25810	555	0.20
1.20	2	60	0.013	0.016	0.240	0.96	19895	500	0.20
1.50	2	60	0.016	0.020	0.300	1.27	15040	485	0.20
2.00	2	60	0.022	0.027	0.400	1.80	10610	460	0.20
2.50	2	60	0.027	0.033	0.500	2.32	8230	445	0.20
3.00	2	60	0.032	0.040	0.600	2.84	6725	435	0.20

Application





Material

Hardened tool steel
42 - 48 HRC


d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.50	2	66	0.022	0.016	0.016	0.50	42015	1850	45°
0.60	2	79	0.024	0.020	0.020	0.60	41910	2010	45°
0.80	2	106	0.028	0.032	0.032	0.80	42175	2360	45°
1.00	2	132	0.034	0.040	0.040	1.00	42015	2855	45°
1.20	2	158	0.036	0.048	0.048	1.20	41910	3020	45°
1.50	2	198	0.040	0.060	0.060	1.50	42015	3360	45°
2.00	2	264	0.046	0.080	0.080	2.00	42015	3865	45°
2.50	2	300	0.048	0.100	0.100	2.49	38350	3680	45°
3.00	2	300	0.056	0.120	0.120	2.97	32155	3600	45°

Hardened tool steel
48 - 52 HRC

0.50	2	66	0.020	0.016	0.016	0.50	42015	1680	45°
0.60	2	79	0.022	0.020	0.020	0.60	41910	1845	45°
0.80	2	106	0.026	0.032	0.032	0.80	42175	2195	45°
1.00	2	132	0.032	0.040	0.040	1.00	42015	2690	45°
1.20	2	158	0.034	0.048	0.048	1.20	41910	2850	45°
1.50	2	198	0.038	0.060	0.060	1.50	42015	3195	45°
2.00	2	250	0.044	0.080	0.080	2.00	39790	3500	45°
2.50	2	250	0.046	0.100	0.100	2.49	31960	2940	45°
3.00	2	250	0.054	0.120	0.120	2.97	26795	2895	45°

Hardened tool steel
52 - 56 HRC

0.50	2	66	0.020	0.016	0.016	0.50	42015	1680	45°
0.60	2	79	0.022	0.020	0.020	0.60	41910	1845	45°
0.80	2	106	0.026	0.032	0.032	0.80	42175	2195	45°
1.00	2	132	0.030	0.040	0.040	1.00	42015	2520	45°
1.20	2	158	0.032	0.048	0.048	1.20	41910	2680	45°
1.50	2	198	0.036	0.060	0.060	1.50	42015	3025	45°
2.00	2	200	0.042	0.080	0.080	2.00	31830	2675	45°
2.50	2	200	0.044	0.100	0.100	2.49	25565	2250	45°
3.00	2	200	0.050	0.120	0.120	2.97	21435	2145	45°



Hardened tool steel
56 - 60 HRC

0.50	2	66	0.018	0.016	0.016	0.50	42015	1515	45°
0.60	2	79	0.020	0.020	0.020	0.60	41910	1675	45°
0.80	2	106	0.022	0.032	0.032	0.80	42175	1855	45°
1.00	2	132	0.028	0.040	0.040	1.00	42015	2355	45°
1.20	2	150	0.028	0.048	0.048	1.20	39790	2230	45°
1.50	2	150	0.032	0.060	0.060	1.50	31830	2035	45°
2.00	2	150	0.036	0.080	0.080	2.00	23875	1720	45°
2.50	2	150	0.038	0.100	0.100	2.49	19175	1455	45°
3.00	2	150	0.044	0.120	0.120	2.97	16075	1415	45°

Corner radius end mills MicroX


Shank \varnothing 6mm, conical neck 0.9°, 12xd

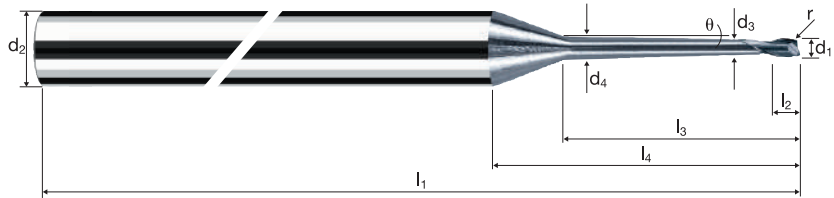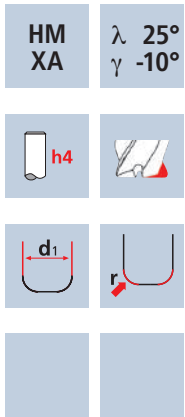

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------


Ø Code	Example: Order-N°.												X-AL
	d ₁ 0/-0.01	d ₂ h4	d ₃	d ₄	l ₁	l ₂	l ₃	l ₄	θ	r 0/+0.01	α	z	X6740
050	0.50	6.00	0.45	0.63	57	0.40	6.00	16.68	0.9°	0.100	9.9°	2	●
060	0.60	6.00	0.55	0.76	57	0.50	7.20	17.64	0.9°	0.100	8.9°	2	●
080	0.80	6.00	0.75	1.03	61	0.65	9.60	19.53	0.9°	0.100	7.9°	2	●
100	1.00	6.00	0.95	1.30	66	0.80	12.00	21.43	0.9°	0.200	7.0°	2	●
108	1.20	6.00	1.10	1.52	66	1.00	14.40	23.42	0.9°	0.200	6.2°	2	●
120	1.50	6.00	1.40	1.93	69	1.20	18.00	26.25	0.9°	0.200	5.1°	2	●
140	2.00	6.00	1.90	2.60	75	1.60	24.00	31.00	0.9°	0.200	3.9°	2	●
160	2.50	6.00	2.30	3.18	80	2.00	30.00	35.92	0.9°	0.200	2.9°	2	●
180	3.00	6.00	2.80	3.86	87	2.40	36.00	40.65	0.9°	0.200	2.2°	2	●
145	2.00	6.00	1.90	2.60	75	1.60	24.00	31.00	0.9°	0.500	3.9°	2	●
165	2.50	6.00	2.30	3.18	80	2.00	30.00	35.92	0.9°	0.500	2.9°	2	●
185	3.00	6.00	2.80	3.86	87	2.40	36.00	40.65	0.9°	0.500	2.2°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
0.50	2	48	0.008	0.005	0.100	0.36	42440	640	0.10
0.60	2	62	0.009	0.006	0.120	0.47	41990	740	0.10
0.80	2	90	0.013	0.009	0.160	0.68	42130	1060	0.10
1.00	2	96	0.015	0.011	0.200	0.73	41860	1265	0.20
1.20	2	124	0.018	0.013	0.240	0.94	41990	1480	0.20
1.50	2	140	0.023	0.016	0.300	1.26	35370	1605	0.20
2.00	2	140	0.030	0.021	0.400	1.78	25035	1515	0.20
2.50	2	140	0.038	0.027	0.500	2.30	19375	1465	0.20
3.00	2	140	0.045	0.032	0.600	2.82	15805	1435	0.20

Hardened tool steel
48 - 52 HRC



0.50	2	48	0.007	0.005	0.100	0.36	42440	610	0.10
0.60	2	62	0.008	0.006	0.120	0.47	41990	705	0.10
0.80	2	90	0.012	0.009	0.160	0.68	42130	1010	0.10
1.00	2	96	0.014	0.011	0.200	0.73	41860	1205	0.20
1.20	2	120	0.017	0.013	0.240	0.94	40635	1365	0.20
1.50	2	120	0.022	0.016	0.300	1.26	30315	1310	0.20
2.00	2	120	0.029	0.021	0.400	1.78	21460	1235	0.20
2.50	2	120	0.036	0.027	0.500	2.30	16605	1195	0.20
3.00	2	120	0.043	0.032	0.600	2.82	13545	1170	0.20

Hardened tool steel
52 - 56 HRC




0.50	2	48	0.006	0.005	0.100	0.36	42440	510	0.10
0.60	2	62	0.007	0.006	0.120	0.47	41990	590	0.10
0.80	2	90	0.010	0.009	0.160	0.68	42130	845	0.10
1.00	2	96	0.012	0.011	0.200	0.73	41860	1005	0.20
1.20	2	100	0.014	0.013	0.240	0.94	33865	950	0.20
1.50	2	100	0.018	0.016	0.300	1.26	25265	910	0.20
2.00	2	100	0.024	0.021	0.400	1.78	17885	860	0.20
2.50	2	100	0.030	0.027	0.500	2.30	13840	830	0.20
3.00	2	100	0.036	0.032	0.600	2.82	11290	815	0.20

Hardened tool steel
56 - 60 HRC



0.50	2	48	0.005	0.005	0.100	0.36	42440	460	0.10
0.60	2	60	0.006	0.006	0.120	0.47	40635	510	0.10
0.80	2	60	0.009	0.009	0.160	0.68	28085	505	0.10
1.00	2	60	0.011	0.011	0.200	0.73	26160	565	0.20
1.20	2	60	0.013	0.013	0.240	0.94	20320	510	0.20
1.50	2	60	0.016	0.016	0.300	1.26	15160	490	0.20
2.00	2	60	0.022	0.021	0.400	1.78	10730	465	0.20
2.50	2	60	0.027	0.027	0.500	2.30	8305	450	0.20
3.00	2	60	0.032	0.032	0.600	2.82	6775	440	0.20

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
0.50	2	65	0.018	0.012	0.012	0.49	42225	1520	45°
0.60	2	78	0.018	0.012	0.012	0.59	42080	1515	45°
0.80	2	106	0.020	0.020	0.020	0.80	42175	1685	45°
1.00	2	131	0.026	0.026	0.026	0.99	42120	2190	45°
1.20	2	157	0.028	0.030	0.030	1.19	41995	2350	45°
1.50	2	197	0.030	0.038	0.038	1.49	42085	2525	45°
2.00	2	264	0.034	0.050	0.050	2.00	42015	2855	45°
2.50	2	300	0.036	0.062	0.062	2.50	38195	2750	45°
3.00	2	300	0.042	0.076	0.076	3.00	31830	2675	45°

Hardened tool steel
48 - 52 HRC



0.50	2	65	0.018	0.012	0.012	0.49	42225	1520	45°
0.60	2	78	0.018	0.012	0.012	0.59	42080	1515	45°
0.80	2	106	0.020	0.020	0.020	0.80	42175	1685	45°
1.00	2	131	0.024	0.026	0.026	0.99	42120	2020	45°
1.20	2	157	0.026	0.030	0.030	1.19	41995	2185	45°
1.50	2	197	0.028	0.038	0.038	1.49	42085	2355	45°
2.00	2	250	0.032	0.050	0.050	2.00	39790	2545	45°
2.50	2	250	0.034	0.062	0.062	2.50	31830	2165	45°
3.00	2	250	0.040	0.076	0.076	3.00	26525	2120	45°

Hardened tool steel
52 - 56 HRC



0.50	2	65	0.016	0.012	0.012	0.49	42225	1350	45°
0.60	2	78	0.016	0.012	0.012	0.59	42080	1345	45°
0.80	2	106	0.018	0.020	0.020	0.80	42175	1520	45°
1.00	2	131	0.024	0.026	0.026	0.99	42120	2020	45°
1.20	2	157	0.026	0.030	0.030	1.19	41995	2185	45°
1.50	2	197	0.028	0.038	0.038	1.49	42085	2355	45°
2.00	2	200	0.030	0.050	0.050	2.00	31830	1910	45°
2.50	2	200	0.032	0.062	0.062	2.50	25465	1630	45°
3.00	2	200	0.038	0.076	0.076	3.00	21220	1615	45°



Hardened tool steel
56 - 60 HRC



0.50	2	65	0.014	0.012	0.012	0.49	42225	1180	45°
0.60	2	78	0.014	0.012	0.012	0.59	42080	1180	45°
0.80	2	106	0.016	0.020	0.020	0.80	42175	1350	45°
1.00	2	131	0.020	0.026	0.026	0.99	42120	1685	45°
1.20	2	150	0.022	0.030	0.030	1.19	40125	1765	45°
1.50	2	150	0.024	0.038	0.038	1.49	32045	1540	45°
2.00	2	150	0.028	0.050	0.050	2.00	23875	1335	45°
2.50	2	150	0.028	0.062	0.062	2.50	19100	1070	45°
3.00	2	150	0.034	0.076	0.076	3.00	15915	1080	45°

Corner radius end mills MicroX


Shank \varnothing 6mm, conical neck 0.9°, 15xd

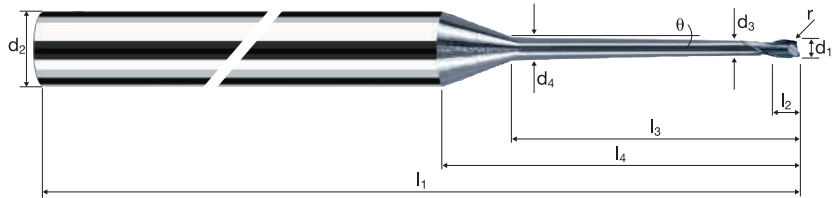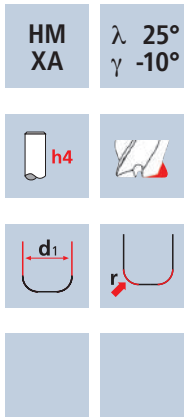

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
----------	-------------	--------------	--------------	-----------	-----------	----------	----------------	-------------	----------------------

Ø Code	Example: Order-N°: X 6742 050												X-AL
	d ₁ 0/-0.01	d ₂ h4	d ₃	d ₄	l ₁	l ₂	l ₃	l ₄	θ	r 0/+0.01	α	z	
050	0.50	6.00	0.45	0.67	61	0.40	7.50	18.10	0.9°	0.100	9.1°	2	●
060	0.60	6.00	0.55	0.82	61	0.50	9.00	19.32	0.9°	0.100	8.1°	2	●
080	0.80	6.00	0.75	1.11	66	0.65	12.00	21.78	0.9°	0.100	7.1°	2	●
100	1.00	6.00	0.95	1.40	66	0.80	15.00	24.24	0.9°	0.200	6.1°	2	●
108	1.20	6.00	1.10	1.63	69	1.00	18.00	26.81	0.9°	0.200	5.3°	2	●
120	1.50	6.00	1.40	2.07	75	1.20	22.50	30.49	0.9°	0.200	4.4°	2	●
140	2.00	6.00	1.90	2.79	80	1.60	30.00	36.65	0.9°	0.200	3.3°	2	●
160	2.50	6.00	2.30	3.42	87	2.00	37.50	42.97	0.9°	0.200	2.4°	2	●
180	3.00	6.00	2.80	4.14	100	2.40	45.00	49.13	0.9°	0.200	1.8°	2	●
145	2.00	6.00	1.90	2.79	80	1.60	30.00	36.65	0.9°	0.500	3.3°	2	●
165	2.50	6.00	2.30	3.42	87	2.00	37.50	42.97	0.9°	0.500	2.4°	2	●
185	3.00	6.00	2.80	4.14	100	2.40	45.00	49.13	0.9°	0.500	1.8°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
0.50	2	48	0.008	0.004	0.100	0.36	42440	640	0.10
0.60	2	61	0.009	0.005	0.120	0.46	42210	745	0.10
0.80	2	88	0.013	0.006	0.160	0.67	41810	1055	0.10
1.00	2	94	0.015	0.008	0.200	0.71	42140	1275	0.20
1.50	2	140	0.023	0.012	0.300	1.24	35940	1630	0.20
2.00	2	140	0.030	0.016	0.400	1.76	25320	1530	0.20
2.50	2	140	0.038	0.020	0.500	2.27	19630	1485	0.20
3.00	2	140	0.045	0.024	0.600	2.79	15975	1450	0.20

0.50	2	48	0.007	0.004	0.100	0.36	42440	610	0.10
0.60	2	61	0.008	0.005	0.120	0.46	42210	710	0.10
0.80	2	88	0.012	0.006	0.160	0.67	41810	1005	0.10
1.00	2	94	0.014	0.008	0.200	0.71	42140	1215	0.20
1.50	2	120	0.022	0.012	0.300	1.24	30805	1330	0.20
2.00	2	120	0.029	0.016	0.400	1.76	21705	1250	0.20
2.50	2	120	0.036	0.020	0.500	2.27	16825	1210	0.20
3.00	2	120	0.043	0.024	0.600	2.79	13690	1185	0.20

0.50	2	48	0.006	0.004	0.100	0.36	42440	510	0.10
0.60	2	61	0.007	0.005	0.120	0.46	42210	590	0.10
0.80	2	88	0.010	0.006	0.160	0.67	41810	835	0.10
1.00	2	94	0.012	0.008	0.200	0.71	42140	1010	0.20
1.50	2	100	0.018	0.012	0.300	1.24	25670	925	0.20
2.00	2	100	0.024	0.016	0.400	1.76	18085	870	0.20
2.50	2	100	0.030	0.020	0.500	2.27	14020	840	0.20
3.00	2	100	0.036	0.024	0.600	2.79	11410	820	0.20

0.50	2	48	0.005	0.004	0.100	0.36	42440	460	0.10
0.60	2	60	0.006	0.005	0.120	0.46	41520	525	0.10
0.80	2	60	0.009	0.006	0.160	0.67	28505	515	0.10
1.00	2	60	0.011	0.008	0.200	0.71	26900	580	0.20
1.50	2	60	0.016	0.012	0.300	1.24	15400	500	0.20
2.00	2	60	0.022	0.016	0.400	1.76	10850	470	0.20
2.50	2	60	0.027	0.020	0.500	2.27	8415	455	0.20
3.00	2	60	0.032	0.024	0.600	2.79	6845	445	0.20

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.50	2	65	0.018	0.012	0.012	0.49	42225	1520	45°
0.60	2	78	0.018	0.012	0.012	0.59	42080	1515	45°
0.80	2	106	0.020	0.020	0.020	0.80	42175	1685	45°
1.00	2	131	0.026	0.026	0.026	0.99	42120	2190	45°
1.50	2	197	0.030	0.038	0.038	1.49	42085	2525	45°
2.00	2	264	0.034	0.050	0.050	2.00	42015	2855	45°
2.50	2	300	0.036	0.062	0.062	2.50	38195	2750	45°
3.00	2	300	0.042	0.076	0.076	3.00	31830	2675	45°



0.50	2	65	0.018	0.012	0.012	0.49	42225	1520	45°
0.60	2	78	0.018	0.012	0.012	0.59	42080	1515	45°
0.80	2	106	0.020	0.020	0.020	0.80	42175	1685	45°
1.00	2	131	0.024	0.026	0.026	0.99	42120	2020	45°
1.50	2	197	0.028	0.038	0.038	1.49	42085	2355	45°
2.00	2	250	0.032	0.050	0.050	2.00	39790	2545	45°
2.50	2	250	0.034	0.062	0.062	2.50	31830	2165	45°
3.00	2	250	0.040	0.076	0.076	3.00	26525	2120	45°

0.50	2	65	0.016	0.012	0.012	0.49	42225	1350	45°
0.60	2	78	0.016	0.012	0.012	0.59	42080	1345	45°
0.80	2	106	0.018	0.020	0.020	0.80	42175	1520	45°
1.00	2	131	0.024	0.026	0.026	0.99	42120	2020	45°
1.50	2	197	0.028	0.038	0.038	1.49	42085	2355	45°
2.00	2	200	0.030	0.050	0.050	2.00	31830	1910	45°
2.50	2	200	0.032	0.062	0.062	2.50	25465	1630	45°
3.00	2	200	0.038	0.076	0.076	3.00	21220	1615	45°

0.50	2	65	0.014	0.012	0.012	0.49	42225	1180	45°
0.60	2	78	0.014	0.012	0.012	0.59	42080	1180	45°
0.80	2	106	0.016	0.020	0.020	0.80	42175	1350	45°
1.00	2	131	0.020	0.026	0.026	0.99	42120	1685	45°
1.50	2	150	0.024	0.038	0.038	1.49	32045	1540	45°
2.00	2	150	0.028	0.050	0.050	2.00	23875	1335	45°
2.50	2	150	0.028	0.062	0.062	2.50	19100	1070	45°
3.00	2	150	0.034	0.076	0.076	3.00	15915	1080	45°

Corner radius end mills MicroX


Shank \varnothing 6mm, conical neck 0.9°, 20xd

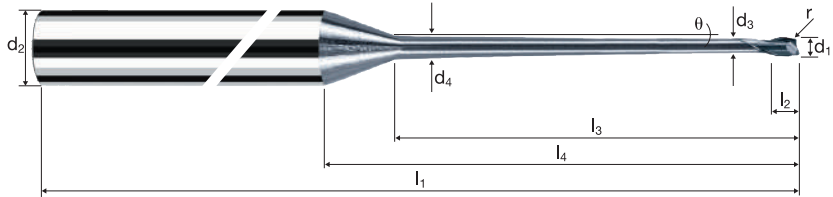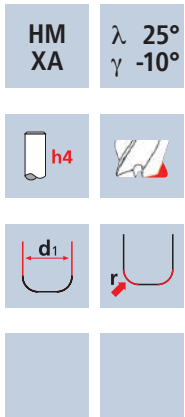

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	Cobalt-Chrome Copper
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	-------------------------

Ø Code	Example: Order-N°.												X-AL
	d ₁ 0/-0.01	d ₂ h4	d ₃	d ₄	l ₁	l ₂	l ₃	l ₄	θ	r 0/+0.01	α	z	X6744
050	0.50	6.00	0.45	0.75	61	0.40	10.00	20.45	0.9°	0.100	7.8°	2	●
060	0.60	6.00	0.55	0.91	66	0.50	12.00	22.16	0.9°	0.100	7.0°	2	●
080	0.80	6.00	0.75	1.23	69	0.65	16.00	25.56	0.9°	0.100	5.8°	2	●
100	1.00	6.00	0.95	1.55	69	0.80	20.00	28.96	0.9°	0.200	4.9°	2	●
120	1.50	6.00	1.40	2.30	80	1.20	30.00	37.56	0.9°	0.200	3.4°	2	●
140	2.00	6.00	1.90	3.11	87	1.60	40.00	46.05	0.9°	0.200	2.5°	2	●
160	2.50	6.00	2.30	3.81	100	2.00	50.00	54.74	0.9°	0.200	1.8°	2	●
180	3.00	6.00	2.80	4.61	100	2.40	60.00	63.25	0.9°	0.200	1.4°	2	●
145	2.00	6.00	1.90	3.11	87	1.60	40.00	46.05	0.9°	0.500	2.5°	2	●
165	2.50	6.00	2.30	3.81	100	2.00	50.00	54.74	0.9°	0.500	1.8°	2	●
185	3.00	6.00	2.80	4.61	100	2.40	60.00	63.25	0.9°	0.500	1.4°	2	●

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
0.50	4	58	0.016	0.030	0.100	0.44	41960	2685	0.10
0.80	4	102	0.026	0.050	0.160	0.77	42165	4385	0.10
1.00	4	117	0.034	0.060	0.200	0.89	41845	5690	0.20
1.20	4	140	0.040	0.070	0.240	1.10	40510	6480	0.20
1.50	4	140	0.050	0.090	0.300	1.43	31165	6235	0.20
2.00	4	140	0.066	0.120	0.400	1.97	22620	5970	0.20
2.50	4	140	0.084	0.150	0.500	2.49	17895	6015	0.20
3.00	4	140	0.100	0.180	0.600	3.00	14855	5940	0.20

Hardened tool steel
48 - 52 HRC



0.50	4	58	0.016	0.030	0.100	0.44	41960	2685	0.10
0.80	4	102	0.024	0.050	0.160	0.77	42165	4050	0.10
1.00	4	117	0.032	0.060	0.200	0.89	41845	5355	0.20
1.20	4	120	0.038	0.070	0.240	1.10	34725	5280	0.20
1.50	4	120	0.048	0.090	0.300	1.43	26710	5130	0.20
2.00	4	120	0.062	0.120	0.400	1.97	19390	4810	0.20
2.50	4	120	0.080	0.150	0.500	2.49	15340	4910	0.20
3.00	4	120	0.096	0.180	0.600	3.00	12730	4890	0.20

Hardened tool steel
52 - 56 HRC




0.50	4	58	0.014	0.030	0.100	0.44	41960	2350	0.10
0.80	4	100	0.022	0.050	0.160	0.77	41340	3640	0.10
1.00	4	100	0.030	0.060	0.200	0.89	35765	4290	0.20
1.20	4	100	0.036	0.070	0.240	1.10	28935	4165	0.20
1.50	4	100	0.044	0.090	0.300	1.43	22260	3920	0.20
2.00	4	100	0.058	0.120	0.400	1.97	16160	3750	0.20
2.50	4	100	0.074	0.150	0.500	2.49	12785	3785	0.20
3.00	4	100	0.088	0.180	0.600	3.00	10610	3735	0.20

Hardened tool steel
56 - 60 HRC



0.50	4	58	0.012	0.030	0.100	0.44	41960	2015	0.10
0.80	4	60	0.020	0.050	0.160	0.77	24805	1985	0.10
1.00	4	60	0.028	0.060	0.200	0.89	21460	2405	0.20
1.20	4	60	0.032	0.070	0.240	1.10	17360	2220	0.20
1.50	4	60	0.040	0.090	0.300	1.43	13355	2135	0.20
2.00	4	60	0.052	0.120	0.400	1.97	9695	2015	0.20
2.50	4	60	0.068	0.150	0.500	2.49	7670	2085	0.20
3.00	4	60	0.080	0.180	0.600	3.00	6365	2035	0.20

Application



Material

Hardened tool steel
42 - 48 HRC



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.50	4	66	0.020	0.022	0.022	0.50	42015	3360	45°
0.80	4	106	0.022	0.034	0.034	0.80	42175	3710	45°
1.00	4	132	0.028	0.042	0.042	1.00	42015	4705	45°
1.20	4	158	0.030	0.050	0.050	1.20	41910	5030	45°
1.50	4	198	0.034	0.064	0.064	1.50	42015	5715	45°
2.00	4	263	0.038	0.084	0.084	1.99	42070	6395	45°
2.50	4	300	0.040	0.106	0.106	2.48	38505	6160	45°
3.00	4	300	0.046	0.126	0.126	2.97	32155	5915	45°

Hardened tool steel
48 - 52 HRC



0.50	4	66	0.020	0.022	0.022	0.50	42015	3360	45°
0.80	4	106	0.020	0.034	0.034	0.80	42175	3375	45°
1.00	4	132	0.026	0.042	0.042	1.00	42015	4370	45°
1.20	4	158	0.028	0.050	0.050	1.20	41910	4695	45°
1.50	4	198	0.032	0.064	0.064	1.50	42015	5380	45°
2.00	4	250	0.036	0.084	0.084	1.99	39990	5760	45°
2.50	4	250	0.038	0.106	0.106	2.48	32090	4875	45°
3.00	4	250	0.044	0.126	0.126	2.97	26795	4715	45°

Hardened tool steel
52 - 56 HRC




0.50	4	66	0.018	0.022	0.022	0.50	42015	3025	45°
0.80	4	106	0.020	0.034	0.034	0.80	42175	3375	45°
1.00	4	132	0.026	0.042	0.042	1.00	42015	4370	45°
1.20	4	158	0.028	0.050	0.050	1.20	41910	4695	45°
1.50	4	198	0.030	0.064	0.064	1.50	42015	5040	45°
2.00	4	200	0.034	0.084	0.084	1.99	31990	4350	45°
2.50	4	200	0.036	0.106	0.106	2.48	25670	3695	45°
3.00	4	200	0.042	0.126	0.126	2.97	21435	3600	45°

Hardened tool steel
56 - 60 HRC



0.50	4	66	0.016	0.022	0.022	0.50	42015	2690	45°
0.80	4	106	0.018	0.034	0.034	0.80	42175	3035	45°
1.00	4	132	0.022	0.042	0.042	1.00	42015	3695	45°
1.20	4	150	0.024	0.050	0.050	1.20	39790	3820	45°
1.50	4	150	0.028	0.064	0.064	1.50	31830	3565	45°
2.00	4	150	0.030	0.084	0.084	1.99	23995	2880	45°
2.50	4	150	0.032	0.106	0.106	2.48	19255	2465	45°
3.00	4	150	0.036	0.126	0.126	2.97	16075	2315	45°

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC


d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
0.50	4	58	0.016	0.030	0.100	0.44	41960	2685	0.10
0.80	4	100	0.026	0.040	0.160	0.76	41885	4355	0.10
1.00	4	113	0.034	0.050	0.200	0.86	41825	5690	0.20
1.20	4	140	0.040	0.060	0.240	1.09	40885	6540	0.20
1.50	4	140	0.050	0.080	0.300	1.42	31385	6275	0.20
2.00	4	140	0.066	0.100	0.400	1.95	22855	6035	0.20
2.50	4	140	0.084	0.130	0.500	2.47	18040	6060	0.20
3.00	4	140	0.100	0.150	0.600	2.99	14905	5960	0.20

0.50	4	58	0.016	0.030	0.100	0.44	41960	2685	0.10
0.80	4	100	0.024	0.040	0.160	0.76	41885	4020	0.10
1.00	4	113	0.032	0.050	0.200	0.86	41825	5355	0.20
1.20	4	120	0.038	0.060	0.240	1.09	35045	5325	0.20
1.50	4	120	0.048	0.080	0.300	1.42	26900	5165	0.20
2.00	4	120	0.062	0.100	0.400	1.95	19590	4860	0.20
2.50	4	120	0.080	0.130	0.500	2.47	15465	4950	0.20
3.00	4	120	0.096	0.150	0.600	2.99	12775	4905	0.20

0.50	4	58	0.014	0.030	0.100	0.44	41960	2350	0.10
0.80	4	100	0.022	0.040	0.160	0.76	41885	3685	0.10
1.00	4	100	0.030	0.050	0.200	0.86	37015	4440	0.20
1.20	4	100	0.036	0.060	0.240	1.09	29205	4205	0.20
1.50	4	100	0.044	0.080	0.300	1.42	22415	3945	0.20
2.00	4	100	0.058	0.100	0.400	1.95	16325	3785	0.20
2.50	4	100	0.074	0.130	0.500	2.47	12885	3815	0.20
3.00	4	100	0.088	0.150	0.600	2.99	10645	3745	0.20

0.50	4	58	0.012	0.030	0.100	0.44	41960	2015	0.10
0.80	4	60	0.020	0.040	0.160	0.76	25130	2010	0.10
1.00	4	60	0.028	0.050	0.200	0.86	22210	2485	0.20
1.20	4	60	0.032	0.060	0.240	1.09	17520	2245	0.20
1.50	4	60	0.040	0.080	0.300	1.42	13450	2150	0.20
2.00	4	60	0.052	0.100	0.400	1.95	9795	2035	0.20
2.50	4	60	0.068	0.130	0.500	2.47	7730	2105	0.20
3.00	4	60	0.080	0.150	0.600	2.99	6385	2045	0.20

Application



Material

Hardened tool steel
42 - 48 HRC

Hardened tool steel
48 - 52 HRC

Hardened tool steel
52 - 56 HRC

Hardened tool steel
56 - 60 HRC

d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
0.50	4	66	0.020	0.020	0.020	0.50	42015	3360	45°
0.80	4	106	0.022	0.032	0.032	0.80	42175	3710	45°
1.00	4	132	0.028	0.042	0.042	1.00	42015	4705	45°
1.20	4	158	0.030	0.050	0.050	1.20	41910	5030	45°
1.50	4	198	0.034	0.062	0.062	1.50	42015	5715	45°
2.00	4	264	0.038	0.082	0.082	2.00	42015	6385	45°
2.50	4	300	0.040	0.102	0.102	2.49	38350	6135	45°
3.00	4	300	0.046	0.122	0.122	2.97	32155	5915	45°

0.50	4	66	0.020	0.020	0.020	0.50	42015	3360	45°
0.80	4	106	0.020	0.032	0.032	0.80	42175	3375	45°
1.00	4	132	0.026	0.042	0.042	1.00	42015	4370	45°
1.20	4	158	0.028	0.050	0.050	1.20	41910	4695	45°
1.50	4	198	0.032	0.062	0.062	1.50	42015	5380	45°
2.00	4	250	0.036	0.082	0.082	2.00	39790	5730	45°
2.50	4	250	0.038	0.102	0.102	2.49	31960	4860	45°
3.00	4	250	0.044	0.122	0.122	2.97	26795	4715	45°

0.50	4	66	0.018	0.020	0.020	0.50	42015	3025	45°
0.80	4	106	0.020	0.032	0.032	0.80	42175	3375	45°
1.00	4	132	0.026	0.042	0.042	1.00	42015	4370	45°
1.20	4	158	0.028	0.050	0.050	1.20	41910	4695	45°
1.50	4	198	0.030	0.062	0.062	1.50	42015	5040	45°
2.00	4	200	0.034	0.082	0.082	2.00	31830	4330	45°
2.50	4	200	0.036	0.102	0.102	2.49	25565	3680	45°
3.00	4	200	0.042	0.122	0.122	2.97	21435	3600	45°



0.50	4	66	0.016	0.020	0.020	0.50	42015	2690	45°
0.80	4	106	0.018	0.032	0.032	0.80	42175	3035	45°
1.00	4	132	0.022	0.042	0.042	1.00	42015	3695	45°
1.20	4	150	0.024	0.050	0.050	1.20	39790	3820	45°
1.50	4	150	0.028	0.062	0.062	1.50	31830	3565	45°
2.00	4	150	0.030	0.082	0.082	2.00	23875	2865	45°
2.50	4	150	0.032	0.102	0.102	2.49	19175	2455	45°
3.00	4	150	0.036	0.122	0.122	2.97	16075	2315	45°

Corner radius end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 5xd




HM XA	λ 30° γ -5°
----------	-------------------------------

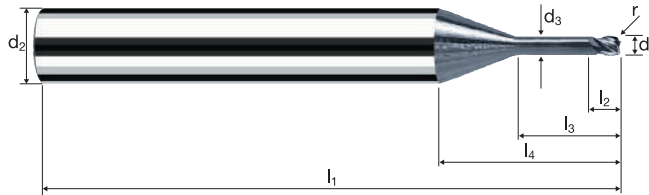

Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Ti Titanium	GG(G)
----------------	-----------------	-----------------	--------------	--------------	-------------	----------------	-------

Example: Order-N°.											X-AL
Coating: X											
Article-N°: 6634											
ø-Code: 050											
Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.01	α	z	X6634
050	0.50	6.00	0.45	57	0.50	2.50	13.51	0.100	12.2°	4	●
080	0.80	6.00	0.75	57	0.80	4.00	14.45	0.100	10.8°	4	●
100	1.00	6.00	0.95	57	1.00	5.00	15.08	0.200	9.9°	4	●
108	1.20	6.00	1.10	57	1.20	6.00	15.80	0.200	9.2°	4	●
120	1.50	6.00	1.40	61	1.50	7.50	16.74	0.200	8.1°	4	●
140	2.00	6.00	1.90	61	2.00	10.00	18.31	0.200	6.6°	4	●
160	2.50	6.00	2.30	61	2.50	12.50	20.06	0.200	5.3°	4	●
180	3.00	6.00	2.80	66	3.00	15.00	21.63	0.200	4.2°	4	●
145	2.00	6.00	1.90	61	2.00	10.00	18.31	0.500	6.7°	4	●
165	2.50	6.00	2.30	61	2.50	12.50	20.06	0.500	5.4°	4	●
185	3.00	6.00	2.80	66	3.00	15.00	21.63	0.500	4.3°	4	●

Application



Material

Steel
850 - 1100 N/mm²

d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
0.40	2	48	0.003	0.040	0.120	0.36	42441	246	0.10
0.50	2	63	0.004	0.060	0.210	0.48	41778	359	0.10
0.60	2	77	0.005	0.060	0.280	0.58	42258	440	0.10
0.80	2	103	0.007	0.060	0.420	0.78	42033	589	0.10
1.00	2	129	0.009	0.060	0.560	0.98	41900	737	0.10
1.00	2	128	0.009	0.120	0.420	0.97	42004	731	0.20
1.50	2	195	0.015	0.140	0.880	1.48	41939	1241	0.20
2.00	2	210	0.020	0.140	1.280	1.98	33760	1337	0.20

Hardened tool steel
52 - 56 HRC

0.40	2	48	0.003	0.040	0.120	0.36	42441	221	0.10
0.50	2	63	0.004	0.060	0.210	0.48	41778	326	0.10
0.60	2	77	0.005	0.060	0.280	0.58	42258	397	0.10
0.80	2	103	0.006	0.060	0.420	0.78	42033	530	0.10
1.00	2	129	0.008	0.060	0.560	0.98	41900	662	0.10
1.00	2	128	0.008	0.120	0.420	0.97	42004	664	0.20
1.50	2	130	0.013	0.140	0.880	1.48	27960	744	0.20
2.00	2	130	0.018	0.140	1.280	1.98	20899	744	0.20


Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

0.40	2	48	0.002	0.040	0.120	0.36	42441	195	0.10
0.50	2	63	0.004	0.060	0.210	0.48	41778	292	0.10
0.60	2	77	0.004	0.060	0.280	0.58	42258	355	0.10
0.80	2	103	0.006	0.060	0.420	0.78	42033	471	0.10
1.00	2	105	0.007	0.060	0.560	0.98	34105	484	0.10
1.00	2	105	0.007	0.120	0.420	0.97	34456	482	0.20
1.50	2	105	0.012	0.140	0.880	1.48	22583	533	0.20
2.00	2	105	0.016	0.140	1.280	1.98	16880	533	0.20

Titanium alloys
> 300 HB
[Ti6Al4V]

0.40	2	45	0.002	0.040	0.120	0.36	39789	183	0.10
0.50	2	45	0.004	0.060	0.210	0.48	29842	209	0.10
0.60	2	45	0.004	0.060	0.280	0.58	24696	207	0.10
0.80	2	45	0.006	0.060	0.420	0.78	18364	206	0.10
1.00	2	45	0.007	0.060	0.560	0.98	14616	208	0.10
1.00	2	45	0.007	0.120	0.420	0.97	14767	207	0.20
1.50	2	45	0.012	0.140	0.880	1.48	9678	228	0.20
2.00	2	45	0.016	0.140	1.280	1.98	7234	229	0.20

Application



Material

Steel
850 - 1100 N/mm²

d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
0.40	2	48	0.026	0.040	0.010	0.40	38197	1986	45°
0.50	2	49	0.026	0.040	0.020	0.50	31194	1622	45°
0.60	2	59	0.026	0.040	0.020	0.60	31300	1628	45°
0.80	2	79	0.026	0.040	0.020	0.80	31433	1635	45°
1.00	2	99	0.026	0.040	0.020	1.00	31513	1639	45°
1.00	2	99	0.037	0.057	0.020	1.00	31513	2338	45°
1.50	2	198	0.037	0.057	0.030	1.50	42017	3118	45°
2.00	2	255	0.037	0.057	0.030	2.00	40585	3011	45°

Hardened tool steel
52 - 56 HRC






0.40	2	48	0.026	0.040	0.010	0.40	38197	1986	45°
0.50	2	49	0.026	0.040	0.020	0.50	31194	1622	45°
0.60	2	59	0.026	0.040	0.020	0.60	31300	1628	45°
0.80	2	79	0.026	0.040	0.020	0.80	31433	1635	45°
1.00	2	99	0.026	0.040	0.020	1.00	31513	1639	45°
1.00	2	99	0.037	0.057	0.020	1.00	31513	2338	45°
1.50	2	160	0.037	0.057	0.030	1.50	33953	2519	45°
2.00	2	160	0.037	0.057	0.030	2.00	25465	1890	45°






Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

0.40	2	48	0.026	0.040	0.010	0.40	38197	1986	45°
0.50	2	49	0.026	0.040	0.020	0.50	31194	1622	45°
0.60	2	59	0.026	0.040	0.020	0.60	31300	1628	45°
0.80	2	79	0.026	0.040	0.020	0.80	31433	1635	45°
1.00	2	99	0.026	0.040	0.020	1.00	31513	1639	45°
1.00	2	99	0.037	0.057	0.020	1.00	31513	2338	45°
1.50	2	160	0.037	0.057	0.030	1.50	33953	2519	45°
2.00	2	160	0.037	0.057	0.030	2.00	25465	1890	45°

Titanium alloys
> 300 HB
[Ti6Al4V]

0.40	2	48	0.026	0.040	0.010	0.40	38197	1986	45°
0.50	2	49	0.026	0.040	0.020	0.50	31194	1622	45°
0.60	2	59	0.026	0.040	0.020	0.60	31300	1628	45°
0.80	2	79	0.026	0.040	0.020	0.80	31433	1635	45°
1.00	2	90	0.026	0.040	0.020	1.00	28648	1490	45°
1.00	2	90	0.037	0.057	0.020	1.00	28648	2126	45°
1.50	2	120	0.037	0.057	0.030	1.50	25465	1890	45°
2.00	2	120	0.037	0.057	0.030	2.00	19099	1417	45°

Application	Material	d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	r [mm]	
 R	Steel 850 - 1100 N/mm ² 	0.40	2	48	0.003	0.040	0.120	0.36	42441	246	0.10	
		0.50	2	63	0.004	0.060	0.210	0.48	41778	359	0.10	
		0.60	2	77	0.005	0.060	0.280	0.58	42258	440	0.10	
		0.80	2	103	0.007	0.060	0.420	0.78	42033	589	0.10	
		1.00	2	128	0.009	0.120	0.420	0.97	42004	731	0.20	
		1.50	2	195	0.015	0.140	0.880	1.48	41939	1241	0.20	
		2.00	2	210	0.020	0.140	1.280	1.98	33760	1337	0.20	
		2.50	2	210	0.025	0.140	1.680	2.48	26954	1337	0.20	
		3.00	2	210	0.030	0.140	2.080	2.98	22431	1337	0.20	
		Hardened tool steel 52 - 56 HRC 	0.40	2	48	0.003	0.040	0.120	0.36	42441	221	0.10
			0.50	2	63	0.004	0.060	0.210	0.48	41778	326	0.10
			0.60	2	77	0.005	0.060	0.280	0.58	42258	397	0.10
0.80	2		103	0.006	0.060	0.420	0.78	42033	530	0.10		
1.00	2		128	0.008	0.120	0.420	0.97	42004	664	0.20		
1.50	2		130	0.013	0.140	0.880	1.48	27960	744	0.20		
2.00	2		130	0.018	0.140	1.280	1.98	20899	744	0.20		
2.50	2		130	0.022	0.140	1.680	2.48	16686	744	0.20		
3.00	2		130	0.027	0.140	2.080	2.98	13886	744	0.20		
Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	0.40		2	48	0.002	0.040	0.120	0.36	42441	195	0.10	
	0.50		2	63	0.004	0.060	0.210	0.48	41778	292	0.10	
	0.60		2	77	0.004	0.060	0.280	0.58	42258	355	0.10	
	0.80	2	103	0.006	0.060	0.420	0.78	42033	471	0.10		
	1.00	2	105	0.007	0.120	0.420	0.97	34456	482	0.20		
	1.50	2	105	0.012	0.140	0.880	1.48	22583	533	0.20		
	2.00	2	105	0.016	0.140	1.280	1.98	16880	533	0.20		
	2.50	2	105	0.020	0.140	1.680	2.48	13477	534	0.20		
	3.00	2	105	0.024	0.140	2.080	2.98	11216	534	0.20		
	Titanium alloys > 300 HB [Ti6Al4V] 	0.40	2	45	0.002	0.040	0.120	0.36	39789	183	0.10	
0.50		2	45	0.004	0.060	0.210	0.48	29842	209	0.10		
0.60		2	45	0.004	0.060	0.280	0.58	24696	207	0.10		
0.80		2	45	0.006	0.060	0.420	0.78	18364	206	0.10		
1.00		2	45	0.007	0.120	0.420	0.97	14767	207	0.20		
1.50		2	45	0.012	0.140	0.880	1.48	9678	228	0.20		
2.00		2	45	0.016	0.140	1.280	1.98	7234	229	0.20		
2.50		2	45	0.020	0.140	1.680	2.48	5776	229	0.20		
3.00		2	45	0.024	0.140	2.080	2.98	4807	229	0.20		

Application	Material	d_1 [mm]	z	v_c [m/min]	f_z [mm]	a_p [mm]	a_e [mm]	d_{eff} [mm]	n [min ⁻¹]	v_f [mm/min]	β [°]	
 F	Steel 850 - 1100 N/mm ² 	0.40	2	43	0.026	0.040	0.010	0.40	34218	1779	45°	
		0.50	2	46	0.026	0.040	0.020	0.50	29285	1523	45°	
		0.60	2	56	0.026	0.040	0.020	0.60	29709	1545	45°	
		0.80	2	76	0.026	0.040	0.020	0.80	30239	1572	45°	
		1.00	2	88	0.037	0.057	0.020	1.00	28011	2078	45°	
		1.50	2	184	0.037	0.057	0.030	1.50	39046	2897	45°	
		2.00	2	235	0.037	0.057	0.030	2.00	37401	2775	45°	
		2.50	2	235	0.037	0.057	0.030	2.50	29921	2220	45°	
		3.00	2	235	0.037	0.057	0.030	3.00	24934	1850	45°	
		Hardened tool steel 52 - 56 HRC 	0.40	2	43	0.026	0.040	0.010	0.40	34218	1779	45°
			0.50	2	46	0.026	0.040	0.020	0.50	29285	1523	45°
			0.60	2	56	0.026	0.040	0.020	0.60	29709	1545	45°
0.80	2		76	0.026	0.040	0.020	0.80	30239	1572	45°		
1.00	2		88	0.037	0.057	0.020	1.00	28011	2078	45°		
1.50	2		140	0.037	0.057	0.030	1.50	29709	2204	45°		
2.00	2		140	0.037	0.057	0.030	2.00	22282	1653	45°		
2.50	2		140	0.037	0.057	0.030	2.50	17825	1323	45°		
3.00	2		140	0.037	0.057	0.030	3.00	14854	1102	45°		
Inox normal [Cr-Ni/1.4301] [Cr-Ni-Mo/1.4571] 	0.40		2	43	0.026	0.040	0.010	0.40	34218	1779	45°	
	0.50		2	46	0.026	0.040	0.020	0.50	29285	1523	45°	
	0.60		2	56	0.026	0.040	0.020	0.60	29709	1545	45°	
	0.80	2	76	0.026	0.040	0.020	0.80	30239	1572	45°		
	1.00	2	88	0.037	0.057	0.020	1.00	28011	2078	45°		
	1.50	2	140	0.037	0.057	0.030	1.50	29709	2204	45°		
	2.00	2	140	0.037	0.057	0.030	2.00	22282	1653	45°		
	2.50	2	140	0.037	0.057	0.030	2.50	17825	1323	45°		
	3.00	2	140	0.037	0.057	0.030	3.00	14854	1102	45°		
	Titanium alloys > 300 HB [Ti6Al4V] 	0.40	2	43	0.026	0.040	0.010	0.40	34218	1779	45°	
0.50		2	46	0.026	0.040	0.020	0.50	29285	1523	45°		
0.60		2	56	0.026	0.040	0.020	0.60	29709	1545	45°		
0.80		2	75	0.026	0.040	0.020	0.80	29842	1552	45°		
1.00		2	75	0.037	0.057	0.020	1.00	23873	1771	45°		
1.50		2	100	0.037	0.057	0.030	1.50	21221	1575	45°		
2.00		2	100	0.037	0.057	0.030	2.00	15915	1181	45°		
2.50		2	100	0.037	0.057	0.030	2.50	12732	945	45°		
3.00		2	100	0.037	0.057	0.030	3.00	10610	787	45°		


Corner radius end mills Microcut

Shank \varnothing 4mm, cylindrical neck, 3xd



HM XA	λ γ	0° 0°


new!

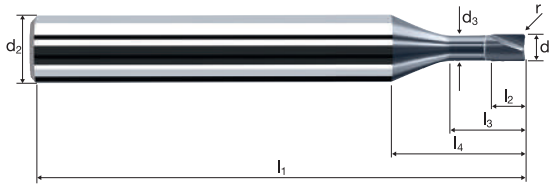

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--------------------------	-----------------------	---

Example: Order-N°											X-AL
Coating Article-N° \varnothing -Code											X6818
\varnothing Code	d_1 0/-0.01	d_2 h_4	d_3	l_1	l_2	l_3	l_4	r 0/+0.01	α	z	
042	0.40	4.00	0.35	50	0.32	1.20	11.49	0.100	9.1°	2	●
050	0.50	4.00	0.45	50	0.40	1.50	8.28	0.100	12.1°	2	●
060	0.60	4.00	0.55	50	0.48	1.80	8.40	0.100	11.6°	2	●
080	0.80	4.00	0.75	50	0.64	2.40	8.62	0.100	10.7°	2	●
098	1.00	4.00	0.95	50	1.20	3.00	8.85	0.100	9.8°	2	●
100	1.00	4.00	0.95	50	1.20	3.00	8.85	0.200	9.8°	2	●
108	1.20	4.00	1.10	50	1.44	3.60	8.96	0.200	9.1°	2	●
120	1.50	4.00	1.40	50	1.80	4.50	9.30	0.200	7.9°	2	●
140	2.00	4.00	1.90	50	2.40	6.00	9.87	0.200	6.0°	2	●
160	2.50	4.00	2.30	50	3.00	7.50	10.34	0.200	4.3°	2	●
180	3.00	4.00	2.80	50	3.60	9.00	10.91	0.200	2.8°	2	●

Application



Material

Steel
850 - 1100 N/mm²

Hardened tool steel
52 - 56 HRC

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
> 300 HB
[Ti6Al4V]


d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
0.40	2	45	0.002	0.030	0.100	0.34	42129	202	0.10
0.50	2	62	0.004	0.050	0.180	0.47	41990	319	0.10
0.60	2	75	0.005	0.050	0.240	0.57	41883	385	0.10
0.80	2	102	0.006	0.050	0.360	0.77	42166	523	0.10
1.00	2	125	0.008	0.100	0.360	0.95	41883	645	0.20
1.50	2	168	0.013	0.120	0.770	1.47	36378	960	0.20
2.00	2	168	0.018	0.120	1.120	1.97	27145	961	0.20
2.50	2	168	0.022	0.120	1.470	2.47	21650	961	0.20
3.00	2	168	0.027	0.120	1.820	2.97	18005	962	0.20

0.40	2	45	0.002	0.030	0.100	0.34	42129	185	0.10
0.50	2	62	0.003	0.050	0.180	0.47	41990	286	0.10
0.60	2	75	0.004	0.050	0.240	0.57	41883	352	0.10
0.80	2	102	0.006	0.050	0.360	0.77	42166	472	0.10
1.00	2	104	0.007	0.100	0.360	0.95	34847	481	0.20
1.50	2	104	0.012	0.120	0.770	1.47	22520	536	0.20
2.00	2	104	0.016	0.120	1.120	1.97	16804	538	0.20
2.50	2	104	0.020	0.120	1.470	2.47	13403	536	0.20
3.00	2	104	0.024	0.120	1.820	2.97	11146	537	0.20

0.40	2	45	0.002	0.030	0.100	0.34	42129	169	0.10
0.50	2	62	0.003	0.050	0.180	0.47	41990	252	0.10
0.60	2	75	0.004	0.050	0.240	0.57	41883	310	0.10
0.80	2	84	0.005	0.050	0.360	0.77	34725	347	0.10
1.00	2	84	0.006	0.100	0.360	0.95	28145	349	0.20
1.50	2	84	0.011	0.120	0.770	1.47	18189	386	0.20
2.00	2	84	0.014	0.120	1.120	1.97	13573	386	0.20
2.50	2	84	0.018	0.120	1.470	2.47	10825	385	0.20
3.00	2	84	0.021	0.120	1.820	2.97	9003	385	0.20

0.40	2	36	0.002	0.030	0.100	0.34	33703	135	0.10
0.50	2	36	0.003	0.050	0.180	0.47	24381	146	0.10
0.60	2	36	0.004	0.050	0.240	0.57	20104	149	0.10
0.80	2	36	0.005	0.050	0.360	0.77	14882	149	0.10
1.00	2	36	0.006	0.100	0.360	0.95	12062	150	0.20
1.50	2	36	0.011	0.120	0.770	1.47	7795	165	0.20
2.00	2	36	0.014	0.120	1.120	1.97	5817	165	0.20
2.50	2	36	0.018	0.120	1.470	2.47	4639	165	0.20
3.00	2	36	0.021	0.120	1.820	2.97	3858	165	0.20

Application



Material

Steel
850 - 1100 N/mm²

Hardened tool steel
52 - 56 HRC

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
> 300 HB
[Ti6Al4V]

d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
0.40	2	48	0.026	0.040	0.010	0.40	38197	1986	45°
0.50	2	49	0.026	0.040	0.020	0.50	31194	1622	45°
0.60	2	59	0.026	0.040	0.020	0.60	31300	1628	45°
0.80	2	79	0.026	0.040	0.020	0.80	31433	1635	45°
1.00	2	99	0.037	0.057	0.020	1.00	31513	2338	45°
1.50	2	188	0.037	0.057	0.030	1.50	39895	2960	45°
2.00	2	188	0.037	0.057	0.030	2.00	29921	2220	45°
2.50	2	188	0.037	0.057	0.030	2.50	23937	1776	45°
3.00	2	188	0.037	0.057	0.030	3.00	19947	1480	45°

0.40	2	48	0.026	0.040	0.010	0.40	38197	1986	45°
0.50	2	49	0.026	0.040	0.020	0.50	31194	1622	45°
0.60	2	59	0.026	0.040	0.020	0.60	31300	1628	45°
0.80	2	79	0.026	0.040	0.020	0.80	31433	1635	45°
1.00	2	84	0.037	0.057	0.020	1.00	26738	1984	45°
1.50	2	112	0.037	0.057	0.030	1.50	23767	1764	45°
2.00	2	112	0.037	0.057	0.030	2.00	17825	1323	45°
2.50	2	112	0.037	0.057	0.030	2.50	14260	1058	45°
3.00	2	112	0.037	0.057	0.030	3.00	11884	882	45°

0.40	2	48	0.026	0.040	0.010	0.40	38197	1986	45°
0.50	2	49	0.026	0.040	0.020	0.50	31194	1622	45°
0.60	2	59	0.026	0.040	0.020	0.60	31300	1628	45°
0.80	2	79	0.026	0.040	0.020	0.80	31433	1635	45°
1.00	2	84	0.037	0.057	0.020	1.00	26738	1984	45°
1.50	2	112	0.037	0.057	0.030	1.50	23767	1764	45°
2.00	2	112	0.037	0.057	0.030	2.00	17825	1323	45°
2.50	2	112	0.037	0.057	0.030	2.50	14260	1058	45°
3.00	2	112	0.037	0.057	0.030	3.00	11884	882	45°


0.40	2	48	0.026	0.040	0.010	0.40	38197	1986	45°
0.50	2	49	0.026	0.040	0.020	0.50	31194	1622	45°
0.60	2	59	0.026	0.040	0.020	0.60	31300	1628	45°
0.80	2	60	0.026	0.040	0.020	0.80	23873	1241	45°
1.00	2	60	0.037	0.057	0.020	1.00	19099	1417	45°
1.50	2	80	0.037	0.057	0.030	1.50	16977	1260	45°
2.00	2	80	0.037	0.057	0.030	2.00	12732	945	45°
2.50	2	80	0.037	0.057	0.030	2.50	10186	756	45°
3.00	2	80	0.037	0.057	0.030	3.00	8488	630	45°

Corner radius end mills Microcut

Shank \varnothing 4mm, cylindrical neck, 5xd




HM XA	λ γ	0° 0°

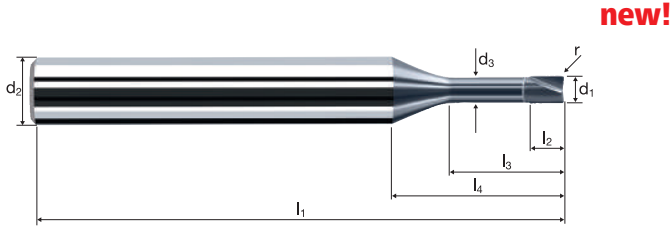

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--------------------------	-----------------------	---

Example: Order-N°											X-AL
											X6820
\varnothing Code	d_1 0/-0.01	d_2 h_4	d_3	l_1	l_2	l_3	l_4	r 0/+0.01	α	z	
042	0.40	4.00	0.35	50	0.32	2.00	12.29	0.100	8.5°	2	●
050	0.50	4.00	0.45	50	0.40	2.50	9.28	0.100	10.9°	2	●
060	0.60	4.00	0.55	50	0.48	3.00	9.60	0.100	10.2°	2	●
080	0.80	4.00	0.75	50	0.64	4.00	10.22	0.100	9.1°	2	●
098	1.00	4.00	0.95	50	1.20	5.00	10.85	0.100	8.1°	2	●
100	1.00	4.00	0.95	50	1.20	5.00	10.85	0.200	8.1°	2	●
108	1.20	4.00	1.10	50	1.44	6.00	11.36	0.200	7.2°	2	●
120	1.50	4.00	1.40	50	1.80	7.50	12.30	0.200	6.0°	2	●
140	2.00	4.00	1.90	50	2.40	10.00	13.87	0.200	4.3°	2	●
160	2.50	4.00	2.30	50	3.00	12.50	15.34	0.200	3.0°	2	●
180	3.00	4.00	2.80	50	3.60	15.00	16.91	0.200	1.9°	2	●

Application



Material

Steel
850 - 1100 N/mm²



d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
0.50	2	61	0.003	0.040	0.150	0.46	42211	287	0.10
0.60	2	74	0.004	0.040	0.200	0.56	42062	345	0.10
0.80	2	100	0.006	0.040	0.300	0.76	41883	461	0.10
1.00	2	121	0.007	0.080	0.300	0.92	41865	561	0.20
1.20	2	126	0.009	0.100	0.480	1.15	34876	649	0.20
1.50	2	126	0.012	0.100	0.660	1.45	27660	647	0.20
2.00	2	126	0.016	0.100	0.960	1.95	20568	650	0.20
2.50	2	126	0.020	0.100	1.260	2.45	16370	648	0.20
3.00	2	126	0.024	0.100	1.560	2.95	13596	650	0.20

Hardened tool steel
52 - 56 HRC



0.50	2	61	0.003	0.040	0.150	0.46	42211	253	0.10
0.60	2	74	0.004	0.040	0.200	0.56	42062	311	0.10
0.80	2	78	0.005	0.040	0.300	0.76	32669	327	0.10
1.00	2	78	0.006	0.080	0.300	0.92	26987	324	0.20
1.20	2	78	0.008	0.100	0.480	1.15	21590	363	0.20
1.50	2	78	0.011	0.100	0.660	1.45	17123	363	0.20
2.00	2	78	0.014	0.100	0.960	1.95	12732	362	0.20
2.50	2	78	0.018	0.100	1.260	2.45	10134	363	0.20
3.00	2	78	0.022	0.100	1.560	2.95	8416	362	0.20

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]




0.50	2	61	0.003	0.040	0.150	0.46	42211	228	0.10
0.60	2	63	0.003	0.040	0.200	0.56	35810	236	0.10
0.80	2	63	0.004	0.040	0.300	0.76	26386	232	0.10
1.00	2	63	0.005	0.080	0.300	0.92	21797	235	0.20
1.20	2	63	0.008	0.100	0.480	1.15	17438	262	0.20
1.50	2	63	0.009	0.100	0.660	1.45	13830	260	0.20
2.00	2	63	0.013	0.100	0.960	1.95	10284	259	0.20
2.50	2	63	0.016	0.100	1.260	2.45	8185	260	0.20
3.00	2	63	0.019	0.100	1.560	2.95	6798	260	0.20

Titanium alloys
> 300 HB
[Ti6Al4V]



0.50	2	27	0.003	0.040	0.150	0.46	18683	101	0.10
0.60	2	27	0.003	0.040	0.200	0.56	15347	101	0.10
0.80	2	27	0.004	0.040	0.300	0.76	11308	100	0.10
1.00	2	27	0.005	0.080	0.300	0.92	9342	101	0.20
1.20	2	27	0.008	0.100	0.480	1.15	7473	112	0.20
1.50	2	27	0.009	0.100	0.660	1.45	5927	111	0.20
2.00	2	27	0.013	0.100	0.960	1.95	4407	111	0.20
2.50	2	27	0.016	0.100	1.260	2.45	3508	112	0.20
3.00	2	27	0.019	0.100	1.560	2.95	2913	111	0.20

Application



Material

Steel
850 - 1100 N/mm²



d ₁ [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
0.50	2	49	0.026	0.040	0.020	0.50	31194	1622	45°
0.60	2	59	0.026	0.040	0.020	0.60	31300	1628	45°
0.80	2	79	0.026	0.040	0.020	0.80	31433	1635	45°
1.00	2	99	0.037	0.057	0.020	1.00	31513	2338	45°
1.20	2	141	0.037	0.057	0.030	1.20	37401	2775	45°
1.50	2	141	0.037	0.057	0.030	1.50	29921	2220	45°
2.00	2	141	0.037	0.057	0.030	2.00	22441	1665	45°
2.50	2	141	0.037	0.057	0.030	2.50	17953	1332	45°
3.00	2	141	0.037	0.057	0.030	3.00	14961	1110	45°

Hardened tool steel
52 - 56 HRC



0.50	2	49	0.026	0.040	0.020	0.50	31194	1622	45°
0.60	2	59	0.026	0.040	0.020	0.60	31300	1628	45°
0.80	2	63	0.026	0.040	0.020	0.80	25067	1304	45°
1.00	2	63	0.037	0.057	0.020	1.00	20054	1488	45°
1.20	2	84	0.037	0.057	0.030	1.20	22282	1653	45°
1.50	2	84	0.037	0.057	0.030	1.50	17825	1323	45°
2.00	2	84	0.037	0.057	0.030	2.00	13369	992	45°
2.50	2	84	0.037	0.057	0.030	2.50	10695	794	45°
3.00	2	84	0.037	0.057	0.030	3.00	8913	661	45°

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



0.50	2	49	0.026	0.040	0.020	0.50	31194	1622	45°
0.60	2	59	0.026	0.040	0.020	0.60	31300	1628	45°
0.80	2	63	0.026	0.040	0.020	0.80	25067	1304	45°
1.00	2	63	0.037	0.057	0.020	1.00	20054	1488	45°
1.20	2	84	0.037	0.057	0.030	1.20	22282	1653	45°
1.50	2	84	0.037	0.057	0.030	1.50	17825	1323	45°
2.00	2	84	0.037	0.057	0.030	2.00	13369	992	45°
2.50	2	84	0.037	0.057	0.030	2.50	10695	794	45°
3.00	2	84	0.037	0.057	0.030	3.00	8913	661	45°

Titanium alloys
> 300 HB
[Ti6Al4V]




0.50	2	45	0.026	0.040	0.020	0.50	28648	1490	45°
0.60	2	45	0.026	0.040	0.020	0.60	23873	1241	45°
0.80	2	45	0.026	0.040	0.020	0.80	17905	931	45°
1.00	2	45	0.037	0.057	0.020	1.00	14324	1063	45°
1.20	2	60	0.037	0.057	0.030	1.20	15915	1181	45°
1.50	2	60	0.037	0.057	0.030	1.50	12732	945	45°
2.00	2	60	0.037	0.057	0.030	2.00	9549	709	45°
2.50	2	60	0.037	0.057	0.030	2.50	7639	567	45°
3.00	2	60	0.037	0.057	0.030	3.00	6366	472	45°

Corner radius end mills Microcut

Shank \varnothing 4mm, cylindrical neck, 8xd




HM XA	λ 0° γ 0°

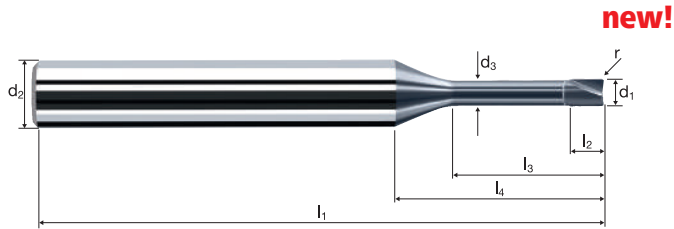

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	Inox Stainless	Ti Titanium	Cobalt-Chrome Gold / Platinum Copper
--------------------	-----------------------	------------------------	------------------------	---------------------	---------------------	--------------------------	-----------------------	---

Example: Order-N°											X-AL	
											X6823	
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	r 0/+0.01	α	z		
050	0.50	4.00	0.45	50	0.40	4.00	10.78	0.100	9.4°	2	●	
060	0.60	4.00	0.55	50	0.48	4.80	11.40	0.100	8.7°	2	●	
080	0.80	4.00	0.75	50	0.64	6.40	12.62	0.100	7.4°	2	●	
098	1.00	4.00	0.95	50	1.20	8.00	13.85	0.100	6.4°	2	●	
100	1.00	4.00	0.95	50	1.20	8.00	13.85	0.200	6.4°	2	●	
108	1.20	4.00	1.10	50	1.44	9.60	14.96	0.200	5.5°	2	●	
120	1.50	4.00	1.40	50	1.80	12.00	16.80	0.200	4.5°	2	●	
140	2.00	4.00	1.90	50	2.40	16.00	19.87	0.200	3.1°	2	●	
160	2.50	4.00	2.30	57	3.00	20.00	22.84	0.200	2.1°	2	●	
180	3.00	4.00	2.80	57	3.60	24.00	25.91	0.200	1.3°	2	●	

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
1.00	2	121	0.036	0.080	0.200	0.92	41865	3015	0.20
1.20	2	152	0.042	0.100	0.240	1.15	42070	3535	0.20
1.50	2	180	0.054	0.120	0.300	1.47	38975	4210	0.20
2.00	2	180	0.072	0.160	0.400	1.99	28790	4145	0.20
2.50	2	180	0.090	0.200	0.500	2.50	22920	4125	0.20
3.00	2	180	0.108	0.240	0.600	2.99	19160	4140	0.20

1.00	2	121	0.032	0.080	0.200	0.92	41865	2680	0.20
1.20	2	152	0.038	0.100	0.240	1.15	42070	3195	0.20
1.50	2	160	0.048	0.120	0.300	1.47	34645	3325	0.20
2.00	2	160	0.064	0.160	0.400	1.99	25595	3275	0.20
2.50	2	160	0.082	0.200	0.500	2.50	20370	3340	0.20
3.00	2	160	0.098	0.240	0.600	2.99	17035	3340	0.20

1.00	2	80	0.032	0.080	0.200	0.92	27680	1770	0.20
1.20	2	80	0.038	0.100	0.240	1.15	22145	1685	0.20
1.50	2	80	0.048	0.120	0.300	1.47	17325	1665	0.20
2.00	2	80	0.064	0.160	0.400	1.99	12795	1640	0.20
2.50	2	80	0.082	0.200	0.500	2.50	10185	1670	0.20
3.00	2	80	0.098	0.240	0.600	2.99	8515	1670	0.20

1.00	2	60	0.026	0.080	0.200	0.92	20760	1080	0.20
1.20	2	60	0.030	0.100	0.240	1.15	16605	995	0.20
1.50	2	60	0.038	0.120	0.300	1.47	12990	985	0.20
2.00	2	60	0.050	0.160	0.400	1.99	9595	960	0.20
2.50	2	60	0.064	0.200	0.500	2.50	7640	980	0.20
3.00	2	60	0.076	0.240	0.600	2.99	6385	970	0.20

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
1.00	2	132	0.028	0.042	0.042	1.00	42015	2355	45°
1.20	2	158	0.030	0.050	0.050	1.20	41910	2515	45°
1.50	2	198	0.034	0.064	0.064	1.50	42015	2855	45°
2.00	2	263	0.038	0.084	0.084	1.99	42070	3195	45°
2.50	2	300	0.040	0.106	0.106	2.48	38505	3080	45°
3.00	2	300	0.046	0.126	0.126	2.97	32155	2960	45°

1.00	2	132	0.026	0.042	0.042	1.00	42015	2185	45°
1.20	2	158	0.028	0.050	0.050	1.20	41910	2345	45°
1.50	2	198	0.030	0.064	0.064	1.50	42015	2520	45°
2.00	2	250	0.034	0.084	0.084	1.99	39990	2720	45°
2.50	2	250	0.036	0.106	0.106	2.48	32090	2310	45°
3.00	2	250	0.042	0.126	0.126	2.97	26795	2250	45°

1.00	2	120	0.022	0.042	0.042	1.00	38195	1680	45°
1.20	2	120	0.024	0.050	0.050	1.20	31830	1530	45°
1.50	2	120	0.028	0.064	0.064	1.50	25465	1425	45°
2.00	2	120	0.030	0.084	0.084	1.99	19195	1150	45°
2.50	2	120	0.032	0.106	0.106	2.48	15400	985	45°
3.00	2	120	0.036	0.126	0.126	2.97	12860	925	45°


1.00	2	100	0.020	0.042	0.042	1.00	31830	1275	45°
1.20	2	100	0.022	0.050	0.050	1.20	26525	1165	45°
1.50	2	100	0.024	0.064	0.064	1.50	21220	1020	45°
2.00	2	100	0.026	0.084	0.084	1.99	15995	830	45°
2.50	2	100	0.028	0.106	0.106	2.48	12835	720	45°
3.00	2	100	0.032	0.126	0.126	2.97	10720	685	45°

Application



Material

Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	r [mm]
1.00	2	119	0.036	0.070	0.200	0.90	42090	3030	0.20
1.20	2	148	0.042	0.080	0.240	1.12	42060	3535	0.20
1.50	2	180	0.054	0.110	0.300	1.46	39245	4240	0.20
2.00	2	180	0.072	0.140	0.400	1.98	28935	4165	0.20
2.50	2	180	0.090	0.180	0.500	2.50	22920	4125	0.20
3.00	2	180	0.108	0.210	0.600	3.00	19100	4125	0.20

1.00	2	119	0.032	0.070	0.200	0.90	42090	2695	0.20
1.20	2	148	0.038	0.080	0.240	1.12	42060	3195	0.20
1.50	2	160	0.048	0.110	0.300	1.46	34885	3350	0.20
2.00	2	160	0.064	0.140	0.400	1.98	25720	3290	0.20
2.50	2	160	0.082	0.180	0.500	2.50	20370	3340	0.20
3.00	2	160	0.098	0.210	0.600	3.00	16975	3325	0.20

1.00	2	80	0.032	0.070	0.200	0.90	28295	1810	0.20
1.20	2	80	0.038	0.080	0.240	1.12	22735	1730	0.20
1.50	2	80	0.048	0.110	0.300	1.46	17440	1675	0.20
2.00	2	80	0.064	0.140	0.400	1.98	12860	1645	0.20
2.50	2	80	0.082	0.180	0.500	2.50	10185	1670	0.20
3.00	2	80	0.098	0.210	0.600	3.00	8490	1665	0.20

1.00	2	60	0.026	0.070	0.200	0.90	21220	1105	0.20
1.20	2	60	0.030	0.080	0.240	1.12	17050	1025	0.20
1.50	2	60	0.038	0.110	0.300	1.46	13080	995	0.20
2.00	2	60	0.050	0.140	0.400	1.98	9645	965	0.20
2.50	2	60	0.064	0.180	0.500	2.50	7640	980	0.20
3.00	2	60	0.076	0.210	0.600	3.00	6365	970	0.20

Application



Material

Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]



Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _t [mm/min]	β [°]
1.00	2	132	0.022	0.040	0.040	1.00	42015	1850	45°
1.20	2	158	0.024	0.048	0.048	1.20	41910	2010	45°
1.50	2	198	0.028	0.060	0.060	1.50	42015	2355	45°
2.00	2	264	0.030	0.080	0.080	2.00	42015	2520	45°
2.50	2	300	0.032	0.100	0.100	2.49	38350	2455	45°
3.00	2	300	0.036	0.120	0.120	2.97	32155	2315	45°

1.00	2	132	0.020	0.040	0.040	1.00	42015	1680	45°
1.20	2	158	0.022	0.048	0.048	1.20	41910	1845	45°
1.50	2	198	0.026	0.060	0.060	1.50	42015	2185	45°
2.00	2	250	0.028	0.080	0.080	2.00	39790	2230	45°
2.50	2	250	0.028	0.100	0.100	2.49	31960	1790	45°
3.00	2	250	0.032	0.120	0.120	2.97	26795	1715	45°

1.00	2	120	0.018	0.040	0.040	1.00	38195	1375	45°
1.20	2	120	0.020	0.048	0.048	1.20	31830	1275	45°
1.50	2	120	0.022	0.060	0.060	1.50	25465	1120	45°
2.00	2	120	0.024	0.080	0.080	2.00	19100	915	45°
2.50	2	120	0.026	0.100	0.100	2.49	15340	800	45°
3.00	2	120	0.028	0.120	0.120	2.97	12860	720	45°

1.00	2	100	0.016	0.040	0.040	1.00	31830	1020	45°
1.20	2	100	0.016	0.048	0.048	1.20	26525	850	45°
1.50	2	100	0.020	0.060	0.060	1.50	21220	850	45°
2.00	2	100	0.022	0.080	0.080	2.00	15915	700	45°
2.50	2	100	0.022	0.100	0.100	2.49	12785	560	45°
3.00	2	100	0.026	0.120	0.120	2.97	10720	555	45°

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	r [mm]
1.00	2	113	0.036	0.050	0.200	0.86	41825	3010	0.20
1.20	2	144	0.042	0.060	0.240	1.09	42050	3530	0.20
1.50	2	180	0.054	0.080	0.300	1.42	40350	4360	0.20
2.00	2	180	0.072	0.100	0.400	1.95	29380	4230	0.20
2.50	2	180	0.090	0.130	0.500	2.47	23195	4175	0.20
3.00	2	180	0.108	0.150	0.600	2.99	19160	4140	0.20

1.00	2	113	0.032	0.050	0.200	0.86	41825	2675	0.20
1.20	2	144	0.038	0.060	0.240	1.09	42050	3195	0.20
1.50	2	160	0.048	0.080	0.300	1.42	35865	3445	0.20
2.00	2	160	0.064	0.100	0.400	1.95	26120	3345	0.20
2.50	2	160	0.082	0.130	0.500	2.47	20620	3380	0.20
3.00	2	160	0.098	0.150	0.600	2.99	17035	3340	0.20

1.00	2	80	0.032	0.050	0.200	0.86	29610	1895	0.20
1.20	2	80	0.038	0.060	0.240	1.09	23360	1775	0.20
1.50	2	80	0.048	0.080	0.300	1.42	17935	1720	0.20
2.00	2	80	0.064	0.100	0.400	1.95	13060	1670	0.20
2.50	2	80	0.082	0.130	0.500	2.47	10310	1690	0.20
3.00	2	80	0.098	0.150	0.600	2.99	8515	1670	0.20

1.00	2	60	0.026	0.050	0.200	0.86	22210	1155	0.20
1.20	2	60	0.030	0.060	0.240	1.09	17520	1050	0.20
1.50	2	60	0.038	0.080	0.300	1.42	13450	1020	0.20
2.00	2	60	0.050	0.100	0.400	1.95	9795	980	0.20
2.50	2	60	0.064	0.130	0.500	2.47	7730	990	0.20
3.00	2	60	0.076	0.150	0.600	2.99	6385	970	0.20

Application



Material

Steel
850 - 1100 N/mm²

Steel
1100 - 1300 N/mm²

Inox normal
[Cr-Ni/1.4301]
[Cr-Ni-Mo/1.4571]

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _s [mm]	a _e [mm]	d _{eff} [mm]	n [min ⁻¹]	v _f [mm/min]	β [°]
1.00	2	131	0.022	0.038	0.038	0.99	42120	1855	45°
1.20	2	158	0.024	0.046	0.046	1.20	41910	2010	45°
1.50	2	198	0.028	0.058	0.058	1.50	42015	2355	45°
2.00	2	264	0.030	0.076	0.076	2.00	42015	2520	45°
2.50	2	300	0.032	0.096	0.096	2.49	38350	2455	45°
3.00	2	300	0.036	0.114	0.114	2.98	32045	2305	45°

1.00	2	131	0.020	0.038	0.038	0.99	42120	1685	45°
1.20	2	158	0.022	0.046	0.046	1.20	41910	1845	45°
1.50	2	198	0.026	0.058	0.058	1.50	42015	2185	45°
2.00	2	250	0.028	0.076	0.076	2.00	39790	2230	45°
2.50	2	250	0.028	0.096	0.096	2.49	31960	1790	45°
3.00	2	250	0.032	0.114	0.114	2.98	26705	1710	45°

1.00	2	120	0.018	0.038	0.038	0.99	38585	1390	45°
1.20	2	120	0.020	0.046	0.046	1.20	31830	1275	45°
1.50	2	120	0.022	0.058	0.058	1.50	25465	1120	45°
2.00	2	120	0.024	0.076	0.076	2.00	19100	915	45°
2.50	2	120	0.026	0.096	0.096	2.49	15340	800	45°
3.00	2	120	0.028	0.114	0.114	2.98	12820	720	45°

1.00	2	100	0.016	0.038	0.038	0.99	32155	1030	45°
1.20	2	100	0.016	0.046	0.046	1.20	26525	850	45°
1.50	2	100	0.020	0.058	0.058	1.50	21220	850	45°
2.00	2	100	0.022	0.076	0.076	2.00	15915	700	45°
2.50	2	100	0.022	0.096	0.096	2.49	12785	560	45°
3.00	2	100	0.026	0.114	0.114	2.98	10680	555	45°



End milling tools for aluminium and copper

Smooth-edged, cylindrical

Normal version

N° 15520 / 15620



AX	X-Generation	X	Roughing	d, 2 – 20	Al Aluminium Alloy	Cu Copper	Plastic Thermoplast	597
			Finishing	90°				

N° 15525 / 15625



AX	X-Generation	X	Roughing	d, 6 – 20	Al Aluminium Alloy	Cu Copper	Plastic Thermoplast	599
			Finishing	90°				

N° 15530 / 15630



AX	X-Generation	X	Roughing	d, 3 – 20	Al Aluminium Alloy	Cu Copper	Plastic Thermoplast	601
			Finishing	90°				

N° 15535 / 15635



AX	X-Generation	X	Roughing	d, 6 – 20	Al Aluminium Alloy	Cu Copper	Plastic Thermoplast	603
			Finishing	90°				

N° 5272 / 5500



Favora®	F	Roughing	d, 2 – 20	Al Aluminium Alloy	Cu Copper	Plastic Thermoplast	605
		Finishing	45°				

Medium length version

N° 15550 / 15650



AX	X-Generation	X	Roughing	d, 3 – 20	Al Aluminium Alloy	Cu Copper	Plastic Thermoplast	607
			Finishing	90°				

N° 15557 / 15657



AX	X-Generation	X	Roughing	d, 3 – 20	Al Aluminium Alloy	Cu Copper	Plastic Thermoplast	609
			Finishing	90°				

N° 15560 / 15660



AX	X-Generation	X	Roughing	d, 3 – 20	Al Aluminium Alloy	Cu Copper	Plastic Thermoplast	611
			Finishing	90°				

Long version

N° 15559 / 15659



AX	X-Generation	X	Roughing	d, 6 – 20	Al Aluminium Alloy	Cu Copper	Plastic Thermoplast	613
			Finishing	90°				

N° 15561 / 15661



AX	X-Generation	X	Roughing	d, 6 – 20	Al Aluminium Alloy	Cu Copper	Plastic Thermoplast	615
			Finishing	90°				

III

End milling tools for aluminium and copper

Smooth-edged, with corner radius

2xd – 5xd version

N° 15573



AX	X-Generation X	Roughing	r 0.5, 1.0,	Al Aluminium Alloy			617
		Finishing	1.5, 2.0, 2.5, 4.0				

N° 15574



ToolSchool

AX	X-Generation X	Roughing	r 1.0, 1.5	Al Aluminium Alloy			621
		Finishing	2.0, 2.5, 4.0				

N° 15575



AX	X-Generation X	Roughing	r 1.0, 2.5,	Al Aluminium Alloy			625
		Finishing	4.0				

N° 15583



AX	X-Generation X	Roughing	r 0.5, 1.0,	Al Aluminium Alloy			627
		Finishing	1.5, 2.0, 2.5, 4.0				

N° 15584



ToolSchool

AX	X-Generation X	Roughing	r 1.0, 2.5,	Al Aluminium Alloy			631
		Finishing	4.0				

N° 15585



AX	X-Generation X	Roughing	r 1.0, 2.5,	Al Aluminium Alloy			633
		Finishing	4.0				

End milling tools for aluminium and copper


Profiled, cylindrical

Normal version

N° 15500 / 15600



AX-FPS



d, 6 – 25


Al
Aluminium
Alloy

635

N° 5297 / 5397



AX



d, 6 – 20

Al
Aluminium
Alloy

Cu
Copper

637

N° 0391



d, 6 – 25

Al
Aluminium
Alloy

Cu
Copper

639

Medium length version

N° 15506 / 15606



AX-FPS



d, 6 – 20


Al
Aluminium
Alloy

641

N° 15297 / 15397



AX



d, 6 – 20

Al
Aluminium
Alloy

Cu
Copper

643

N° 0393



d, 10 – 25

Al
Aluminium
Alloy

Cu
Copper


645

Medium length version with neck

N° 15505 / 15605



AX-FPS



d, 6 – 25


Al
Aluminium
Alloy

647

N° 15298 / 15398



AX



d, 6 – 25

Al
Aluminium
Alloy

Cu
Copper


649

5.2xd version

N° 15507 / 15607



AX-FPS



d, 6 – 20

Al
Aluminium
Alloy

651

End milling tools for aluminium and copper

Profiled, with corner radius

Normal version

N° 15502



AX-FPS



Roughing	r	1.0, 2.0,
Finishing		2.5, 3.0



Al
Aluminium
Alloy



653

End milling tools for aluminium and copper

Finishing, cylindrical

Normal version

N° 15589



MulticutXA



Roughing

d, 6 – 20



Finishing



r

Al
Aluminium
Alloy

655

Medium length version

N° 15590



MulticutXA



Roughing

d, 6 – 20



Finishing



r

Al
Aluminium
Alloy

657

5.2xd version

N° 15510



AX



Roughing

d, 6 – 20



Finishing



r

Al
Aluminium
Alloy

Cu
Copper

659

III



End milling tools for aluminium and copper

Finishing, with corner radius

5.2xd version

N° 15512



AX

X-Generation

X

Roughing



Finishing



r 1.0, 2.5



r


Al
Aluminium
Alloy

Cu
Copper

661



Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	2	396	0.055	4.500	1.800	42015	4620	37.4
4.00	2	528	0.075	6.000	2.400	42015	6305	90.8
5.00	2	550	0.090	7.500	3.000	35015	6305	141.8
6.00	2	550	0.120	9.000	3.600	29180	7005	226.9
8.00	2	550	0.160	12.000	4.800	21885	7005	403.4
10.00	2	550	0.200	15.000	6.000	17505	7005	630.3
12.00	2	550	0.220	18.000	7.200	14590	6420	831.9
16.00	2	550	0.245	24.000	9.600	10940	5360	1235.3
20.00	2	550	0.285	30.000	12.000	8755	4990	1796.2

Unalloyed copper



3.00	2	396	0.030	4.500	1.800	42015	2520	20.4
4.00	2	400	0.060	6.000	2.400	31830	3820	55.0
5.00	2	400	0.070	7.500	3.000	25465	3565	80.2
6.00	2	400	0.095	9.000	3.600	21220	4030	130.6
8.00	2	400	0.130	12.000	4.800	15915	4140	238.4
10.00	2	400	0.160	15.000	6.000	12730	4075	366.7
12.00	2	400	0.175	18.000	7.200	10610	3715	481.3
16.00	2	400	0.195	24.000	9.600	7960	3105	715.1
20.00	2	400	0.230	30.000	12.000	6365	2930	1054.2

Thermoplastics



3.00	2	396	0.035	4.500	1.800	42015	2940	23.8
4.00	2	528	0.075	6.000	2.400	42015	6305	90.8
5.00	2	660	0.090	7.500	3.000	42015	7565	170.2
6.00	2	792	0.120	9.000	3.600	42015	10085	326.7
8.00	2	1000	0.160	12.000	4.800	39790	12730	733.4
10.00	2	1000	0.200	15.000	6.000	31830	12730	1145.9
12.00	2	1000	0.220	18.000	7.200	26525	11670	1512.6
16.00	2	1000	0.245	24.000	9.600	19895	9750	2246.0
20.00	2	1000	0.285	30.000	12.000	15915	9070	3265.9

Cast aluminium



3.00	2	396	0.055	4.500	1.800	42015	4620	37.4
4.00	2	440	0.075	6.000	2.400	35015	5250	75.6
5.00	2	440	0.090	7.500	3.000	28010	5040	113.4
6.00	2	440	0.120	9.000	3.600	23345	5600	181.5
8.00	2	440	0.160	12.000	4.800	17505	5600	322.7
10.00	2	440	0.200	15.000	6.000	14005	5600	504.2
12.00	2	440	0.220	18.000	7.200	11670	5135	665.5
16.00	2	440	0.245	24.000	9.600	8755	4290	988.2
20.00	2	440	0.285	30.000	12.000	7005	3990	1437.0

Wrought aluminium
Construction aluminium



3.00	2	396	0.025	3.000	3.000	42015	2100	18.9
4.00	2	450	0.055	4.000	4.000	35810	3940	63.0
5.00	2	450	0.065	5.000	5.000	28650	3725	93.1
6.00	2	450	0.085	6.000	6.000	23875	4060	146.1
8.00	2	450	0.110	8.000	8.000	17905	3940	252.1
10.00	2	450	0.140	10.000	10.000	14325	4010	401.1
12.00	2	450	0.155	12.000	12.000	11935	3700	532.9
16.00	2	450	0.170	16.000	16.000	8950	3045	779.2
20.00	2	450	0.200	20.000	20.000	7160	2865	1145.9

Unalloyed copper



3.00	2	350	0.020	3.000	3.000	37135	1485	13.4
4.00	2	350	0.045	4.000	4.000	27850	2505	40.1
5.00	2	350	0.050	5.000	5.000	22280	2230	55.7
6.00	2	350	0.070	6.000	6.000	18570	2600	93.6
8.00	2	350	0.090	8.000	8.000	13925	2505	160.4
10.00	2	350	0.110	10.000	10.000	11140	2450	245.1
12.00	2	350	0.125	12.000	12.000	9285	2320	334.2
16.00	2	350	0.135	16.000	16.000	6965	1880	481.3
20.00	2	350	0.160	20.000	20.000	5570	1785	713.0

Thermoplastics




3.00	2	396	0.025	3.000	3.000	42015	2100	18.9
4.00	2	528	0.055	4.000	4.000	42015	4620	73.9
5.00	2	660	0.065	5.000	5.000	42015	5460	136.6
6.00	2	792	0.085	6.000	6.000	42015	7145	257.1
8.00	2	800	0.110	8.000	8.000	31830	7005	448.2
10.00	2	800	0.140	10.000	10.000	25465	7130	713.0
12.00	2	800	0.155	12.000	12.000	21220	6580	947.3
16.00	2	800	0.170	16.000	16.000	15915	5410	1385.3
20.00	2	800	0.200	20.000	20.000	12730	5095	2037.2

Cast aluminium



3.00	2	360	0.025	3.000	3.000	38195	1910	17.2
4.00	2	360	0.055	4.000	4.000	28650	3150	50.4
5.00	2	360	0.065	5.000	5.000	22920	2980	74.5
6.00	2	360	0.085	6.000	6.000	19100	3245	116.9
8.00	2	360	0.110	8.000	8.000	14325	3150	201.7
10.00	2	360	0.140	10.000	10.000	11460	3210	320.9
12.00	2	360	0.155	12.000	12.000	9550	2960	426.3
16.00	2	360	0.170	16.000	16.000	7160	2435	623.4
20.00	2	360	0.200	20.000	20.000	5730	2290	916.7

Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _r [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	2	650	0.065	9.000	3.300	34485	4485	133.1
8.00	2	650	0.090	12.000	4.400	25865	4655	245.8
10.00	2	650	0.110	15.000	5.500	20690	4550	375.5
12.00	2	650	0.120	18.000	6.600	17240	4140	491.6
16.00	2	650	0.135	24.000	8.800	12930	3490	737.4
20.00	2	650	0.155	30.000	11.000	10345	3205	1058.3

Unalloyed copper



6.00	2	500	0.050	9.000	3.300	26525	2655	78.8
8.00	2	500	0.070	12.000	4.400	19895	2785	147.1
10.00	2	500	0.090	15.000	5.500	15915	2865	236.3
12.00	2	500	0.095	18.000	6.600	13265	2520	299.4
16.00	2	500	0.105	24.000	8.800	9945	2090	441.2
20.00	2	500	0.125	30.000	11.000	7960	1990	656.5

Thermoplastics



6.00	2	792	0.065	9.000	3.300	42015	5460	162.2
8.00	2	1056	0.090	12.000	4.400	42015	7565	399.3
10.00	2	1200	0.110	15.000	5.500	38195	8405	693.3
12.00	2	1200	0.120	18.000	6.600	31830	7640	907.6
16.00	2	1200	0.135	24.000	8.800	23875	6445	1361.3
20.00	2	1200	0.155	30.000	11.000	19100	5920	1953.8

Cast aluminium



6.00	2	520	0.065	9.000	3.300	27585	3585	106.5
8.00	2	520	0.090	12.000	4.400	20690	3725	196.6
10.00	2	520	0.110	15.000	5.500	16550	3640	300.4
12.00	2	520	0.120	18.000	6.600	13795	3310	393.3
16.00	2	520	0.135	24.000	8.800	10345	2795	589.9
20.00	2	520	0.155	30.000	11.000	8275	2565	846.6



Wrought aluminium
Construction aluminium



6.00	2	550	0.045	5.400	6.000	29180	2625	85.1
8.00	2	550	0.060	7.200	8.000	21885	2625	151.3
10.00	2	550	0.075	9.000	10.000	17505	2625	236.3
12.00	2	550	0.085	10.800	12.000	14590	2480	321.4
16.00	2	550	0.095	14.400	16.000	10940	2080	479.0
20.00	2	550	0.110	18.000	20.000	8755	1925	693.3

Unalloyed copper



6.00	2	450	0.040	5.400	6.000	23875	1910	61.9
8.00	2	450	0.050	7.200	8.000	17905	1790	103.1
10.00	2	450	0.060	9.000	10.000	14325	1720	154.7
12.00	2	450	0.070	10.800	12.000	11935	1670	216.6
16.00	2	450	0.075	14.400	16.000	8950	1345	309.4
20.00	2	450	0.090	18.000	20.000	7160	1290	464.1

Thermoplastics




6.00	2	792	0.045	5.400	6.000	42015	3780	122.5
8.00	2	1000	0.060	7.200	8.000	39790	4775	275.0
10.00	2	1000	0.075	9.000	10.000	31830	4775	429.7
12.00	2	1000	0.085	10.800	12.000	26525	4510	584.4
16.00	2	1000	0.095	14.400	16.000	19895	3780	870.9
20.00	2	1000	0.110	18.000	20.000	15915	3500	1260.5

Cast aluminium



6.00	2	440	0.045	5.400	6.000	23345	2100	68.1
8.00	2	440	0.060	7.200	8.000	17505	2100	121.0
10.00	2	440	0.075	9.000	10.000	14005	2100	189.1
12.00	2	440	0.085	10.800	12.000	11670	1985	257.1
16.00	2	440	0.095	14.400	16.000	8755	1665	383.2
20.00	2	440	0.110	18.000	20.000	7005	1540	554.6

Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	3	396	0.050	4.500	1.400	42015	6305	39.7
4.00	3	528	0.065	6.000	1.800	42015	8195	88.5
5.00	3	550	0.085	7.500	2.300	35015	8930	154.0
6.00	3	550	0.110	9.000	2.700	29180	9630	234.0
8.00	3	550	0.135	12.000	3.600	21885	8865	382.9
10.00	3	550	0.165	15.000	4.500	17505	8665	585.0
12.00	3	550	0.200	18.000	5.400	14590	8755	850.8
16.00	3	550	0.215	24.000	7.200	10940	7060	1219.5
20.00	3	550	0.250	30.000	9.000	8755	6565	1772.6

Unalloyed copper



3.00	3	396	0.040	4.500	1.350	42015	5040	30.6
4.00	3	400	0.050	6.000	1.800	31830	4775	51.6
5.00	3	400	0.070	7.500	2.250	25465	5350	90.2
6.00	3	400	0.090	9.000	2.700	21220	5730	139.2
8.00	3	400	0.110	12.000	3.600	15915	5250	226.9
10.00	3	400	0.130	15.000	4.500	12730	4965	335.2
12.00	3	400	0.160	18.000	5.400	10610	5095	495.0
16.00	3	400	0.170	24.000	7.200	7960	4060	701.3
20.00	3	400	0.200	30.000	9.000	6365	3820	1031.3

Thermoplastics



3.00	3	396	0.050	4.500	1.350	42015	6305	38.3
4.00	3	528	0.065	6.000	1.800	42015	8195	88.5
5.00	3	660	0.085	7.500	2.250	42015	10715	180.8
6.00	3	792	0.110	9.000	2.700	42015	13865	336.9
8.00	3	1000	0.135	12.000	3.600	39790	16115	696.1
10.00	3	1000	0.165	15.000	4.500	31830	15755	1063.6
12.00	3	1000	0.200	18.000	5.400	26525	15915	1547.0
16.00	3	1000	0.215	24.000	7.200	19895	12830	2217.3
20.00	3	1000	0.250	30.000	9.000	15915	11935	3222.9

Cast aluminium



3.00	3	396	0.050	4.500	1.350	42015	6305	38.3
4.00	3	440	0.065	6.000	1.800	35015	6830	73.7
5.00	3	440	0.085	7.500	2.250	28010	7145	120.5
6.00	3	440	0.110	9.000	2.700	23345	7705	187.2
8.00	3	440	0.135	12.000	3.600	17505	7090	306.3
10.00	3	440	0.165	15.000	4.500	14005	6935	468.0
12.00	3	440	0.200	18.000	5.400	11670	7005	680.7
16.00	3	440	0.215	24.000	7.200	8755	5645	975.6
20.00	3	440	0.250	30.000	9.000	7005	5250	1418.1

Wrought aluminium
Construction aluminium



3.00	3	396	0.035	1.800	3.000	42015	4410	23.8
4.00	3	450	0.045	2.400	4.000	35810	4835	46.4
5.00	3	450	0.060	3.000	5.000	28650	5155	77.3
6.00	3	450	0.075	3.600	6.000	23875	5370	116.0
8.00	3	450	0.095	4.800	8.000	17905	5105	196.0
10.00	3	450	0.115	6.000	10.000	14325	4940	296.5
12.00	3	450	0.140	7.200	12.000	11935	5015	433.2
16.00	3	450	0.150	9.600	16.000	8950	4030	618.8
20.00	3	450	0.175	12.000	20.000	7160	3760	902.4

Unalloyed copper



3.00	3	350	0.030	1.800	3.000	37135	3340	18.0
4.00	3	350	0.035	2.400	4.000	27850	2925	28.1
5.00	3	350	0.050	3.000	5.000	22280	3340	50.1
6.00	3	350	0.060	3.600	6.000	18570	3340	72.2
8.00	3	350	0.075	4.800	8.000	13925	3135	120.3
10.00	3	350	0.090	6.000	10.000	11140	3010	180.5
12.00	3	350	0.110	7.200	12.000	9285	3065	264.7
16.00	3	350	0.120	9.600	16.000	6965	2505	385.0
20.00	3	350	0.140	12.000	20.000	5570	2340	561.5

Thermoplastics




3.00	3	396	0.035	1.800	3.000	42015	4410	23.8
4.00	3	528	0.045	2.400	4.000	42015	5670	54.5
5.00	3	660	0.060	3.000	5.000	42015	7565	113.4
6.00	3	792	0.075	3.600	6.000	42015	9455	204.2
8.00	3	800	0.095	4.800	8.000	31830	9070	348.4
10.00	3	800	0.115	6.000	10.000	25465	8785	527.1
12.00	3	800	0.140	7.200	12.000	21220	8915	770.1
16.00	3	800	0.150	9.600	16.000	15915	7160	1100.1
20.00	3	800	0.175	12.000	20.000	12730	6685	1604.3

Cast aluminium



3.00	3	360	0.035	1.800	3.000	38195	4010	21.7
4.00	3	360	0.045	2.400	4.000	28650	3865	37.1
5.00	3	360	0.060	3.000	5.000	22920	4125	61.9
6.00	3	360	0.075	3.600	6.000	19100	4295	92.8
8.00	3	360	0.095	4.800	8.000	14325	4080	156.8
10.00	3	360	0.115	6.000	10.000	11460	3955	237.2
12.00	3	360	0.140	7.200	12.000	9550	4010	346.5
16.00	3	360	0.150	9.600	16.000	7160	3225	495.0
20.00	3	360	0.175	12.000	20.000	5730	3010	721.9

Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	3	650	0.060	9.000	2.400	34485	6205	134.1
8.00	3	650	0.075	12.000	3.200	25865	5820	223.5
10.00	3	650	0.090	15.000	4.000	20690	5585	335.2
12.00	3	650	0.110	18.000	4.800	17240	5690	491.6
16.00	3	650	0.120	24.000	6.400	12930	4655	715.1
20.00	3	650	0.140	30.000	8.000	10345	4345	1042.8

Unalloyed copper



6.00	3	500	0.050	9.000	2.400	26525	3980	85.9
8.00	3	500	0.060	12.000	3.200	19895	3580	137.5
10.00	3	500	0.070	15.000	4.000	15915	3340	200.5
12.00	3	500	0.090	18.000	4.800	13265	3580	309.4
16.00	3	500	0.095	24.000	6.400	9945	2835	435.4
20.00	3	500	0.110	30.000	8.000	7960	2625	630.3

Thermoplastics



6.00	3	792	0.060	9.000	2.400	42015	7565	163.4
8.00	3	1056	0.075	12.000	3.200	42015	9455	363.0
10.00	3	1200	0.090	15.000	4.000	38195	10315	618.8
12.00	3	1200	0.110	18.000	4.800	31830	10505	907.6
16.00	3	1200	0.120	24.000	6.400	23875	8595	1320.1
20.00	3	1200	0.140	30.000	8.000	19100	8020	1925.1

Cast aluminium



6.00	3	520	0.060	9.000	2.400	27585	4965	107.3
8.00	3	520	0.075	12.000	3.200	20690	4655	178.8
10.00	3	520	0.090	15.000	4.000	16550	4470	268.1
12.00	3	520	0.110	18.000	4.800	13795	4550	393.3
16.00	3	520	0.120	24.000	6.400	10345	3725	572.0
20.00	3	520	0.140	30.000	8.000	8275	3475	834.2



Wrought aluminium
Construction aluminium



6.00	3	550	0.040	3.000	6.000	29180	3500	63.0
8.00	3	550	0.050	4.000	8.000	21885	3285	105.0
10.00	3	550	0.065	5.000	10.000	17505	3415	170.7
12.00	3	550	0.075	6.000	12.000	14590	3285	236.3
16.00	3	550	0.085	8.000	16.000	10940	2790	357.1
20.00	3	550	0.095	10.000	20.000	8755	2495	499.0

Unalloyed copper



6.00	3	450	0.035	3.000	6.000	23875	2505	45.1
8.00	3	450	0.040	4.000	8.000	17905	2150	68.8
10.00	3	450	0.050	5.000	10.000	14325	2150	107.4
12.00	3	450	0.060	6.000	12.000	11935	2150	154.7
16.00	3	450	0.065	8.000	16.000	8950	1745	223.5
20.00	3	450	0.075	10.000	20.000	7160	1610	322.3

Thermoplastics




6.00	3	792	0.040	3.000	6.000	42015	5040	90.8
8.00	3	1000	0.050	4.000	8.000	39790	5970	191.0
10.00	3	1000	0.065	5.000	10.000	31830	6205	310.4
12.00	3	1000	0.075	6.000	12.000	26525	5970	429.7
16.00	3	1000	0.085	8.000	16.000	19895	5075	649.4
20.00	3	1000	0.095	10.000	20.000	15915	4535	907.2

Cast aluminium



6.00	3	440	0.040	3.000	6.000	23345	2800	50.4
8.00	3	440	0.050	4.000	8.000	17505	2625	84.0
10.00	3	440	0.065	5.000	10.000	14005	2730	136.6
12.00	3	440	0.075	6.000	12.000	11670	2625	189.1
16.00	3	440	0.085	8.000	16.000	8755	2230	285.7
20.00	3	440	0.095	10.000	20.000	7005	1995	399.2

Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	2	396	0.040	4.500	1.400	42015	3360	21.2
4.00	2	528	0.055	6.000	1.800	42015	4620	49.9
5.00	2	550	0.070	7.500	2.300	35015	4900	84.6
6.00	2	550	0.090	9.000	2.700	29180	5250	127.6
8.00	2	550	0.120	12.000	3.600	21885	5250	226.9
10.00	2	550	0.150	15.000	4.500	17505	5250	354.5
12.00	2	550	0.165	18.000	5.400	14590	4815	468.0
16.00	2	550	0.185	24.000	7.200	10940	4050	699.6
20.00	2	550	0.215	30.000	9.000	8755	3765	1016.3

Unalloyed copper



3.00	2	396	0.030	4.500	1.350	42015	2520	15.3
4.00	2	400	0.045	6.000	1.800	31830	2865	30.9
5.00	2	400	0.055	7.500	2.250	25465	2800	47.3
6.00	2	400	0.070	9.000	2.700	21220	2970	72.2
8.00	2	400	0.095	12.000	3.600	15915	3025	130.6
10.00	2	400	0.120	15.000	4.500	12730	3055	206.3
12.00	2	400	0.130	18.000	5.400	10610	2760	268.1
16.00	2	400	0.150	24.000	7.200	7960	2385	412.5
20.00	2	400	0.170	30.000	9.000	6365	2165	584.4

Thermoplastics



3.00	2	396	0.040	4.500	1.350	42015	3360	20.4
4.00	2	528	0.055	6.000	1.800	42015	4620	49.9
5.00	2	660	0.070	7.500	2.250	42015	5880	99.3
6.00	2	792	0.090	9.000	2.700	42015	7565	183.8
8.00	2	1000	0.120	12.000	3.600	39790	9550	412.5
10.00	2	1000	0.150	15.000	4.500	31830	9550	644.6
12.00	2	1000	0.165	18.000	5.400	26525	8755	850.8
16.00	2	1000	0.185	24.000	7.200	19895	7360	1272.0
20.00	2	1000	0.215	30.000	9.000	15915	6845	1847.8

Cast aluminium



3.00	2	396	0.040	4.500	1.350	42015	3360	20.4
4.00	2	440	0.055	6.000	1.800	35015	3850	41.6
5.00	2	440	0.070	7.500	2.250	28010	3920	66.2
6.00	2	440	0.090	9.000	2.700	23345	4200	102.1
8.00	2	440	0.120	12.000	3.600	17505	4200	181.5
10.00	2	440	0.150	15.000	4.500	14005	4200	283.6
12.00	2	440	0.165	18.000	5.400	11670	3850	374.4
16.00	2	440	0.185	24.000	7.200	8755	3240	559.7
20.00	2	440	0.215	30.000	9.000	7005	3010	813.0



Wrought aluminium
Construction aluminium



3.00	2	396	0.030	1.500	3.000	42015	2520	11.3
4.00	2	450	0.040	2.000	4.000	35810	2865	22.9
5.00	2	450	0.050	2.500	5.000	28650	2865	35.8
6.00	2	450	0.065	3.000	6.000	23875	3105	55.9
8.00	2	450	0.085	4.000	8.000	17905	3045	97.4
10.00	2	450	0.105	5.000	10.000	14325	3010	150.4
12.00	2	450	0.115	6.000	12.000	11935	2745	197.7
16.00	2	450	0.130	8.000	16.000	8950	2330	297.9
20.00	2	450	0.150	10.000	20.000	7160	2150	429.7

Unalloyed copper



3.00	2	350	0.025	1.500	3.000	37135	1855	8.4
4.00	2	350	0.030	2.000	4.000	27850	1670	13.4
5.00	2	350	0.040	2.500	5.000	22280	1785	22.3
6.00	2	350	0.050	3.000	6.000	18570	1855	33.4
8.00	2	350	0.070	4.000	8.000	13925	1950	62.4
10.00	2	350	0.085	5.000	10.000	11140	1895	94.7
12.00	2	350	0.090	6.000	12.000	9285	1670	120.3
16.00	2	350	0.105	8.000	16.000	6965	1460	187.2
20.00	2	350	0.120	10.000	20.000	5570	1335	267.4

Thermoplastics




3.00	2	396	0.030	1.500	3.000	42015	2520	11.3
4.00	2	528	0.040	2.000	4.000	42015	3360	26.9
5.00	2	660	0.050	2.500	5.000	42015	4200	52.5
6.00	2	792	0.065	3.000	6.000	42015	5460	98.3
8.00	2	800	0.085	4.000	8.000	31830	5410	173.2
10.00	2	800	0.105	5.000	10.000	25465	5350	267.4
12.00	2	800	0.115	6.000	12.000	21220	4880	351.4
16.00	2	800	0.130	8.000	16.000	15915	4140	529.7
20.00	2	800	0.150	10.000	20.000	12730	3820	763.9

Cast aluminium



3.00	2	360	0.030	1.500	3.000	38195	2290	10.3
4.00	2	360	0.040	2.000	4.000	28650	2290	18.3
5.00	2	360	0.050	2.500	5.000	22920	2290	28.6
6.00	2	360	0.065	3.000	6.000	19100	2485	44.7
8.00	2	360	0.085	4.000	8.000	14325	2435	77.9
10.00	2	360	0.105	5.000	10.000	11460	2405	120.3
12.00	2	360	0.115	6.000	12.000	9550	2195	158.1
16.00	2	360	0.130	8.000	16.000	7160	1860	238.4
20.00	2	360	0.150	10.000	20.000	5730	1720	343.8

Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	2	396	0.050	4.500	1.200	42015	4200	22.7
4.00	2	528	0.065	6.000	1.600	42015	5460	52.4
5.00	2	550	0.080	7.500	2.000	35015	5600	84.0
6.00	2	550	0.110	9.000	2.400	29180	6420	138.7
8.00	2	550	0.145	12.000	3.200	21885	6345	243.7
10.00	2	550	0.180	15.000	4.000	17505	6305	378.2
12.00	2	550	0.195	18.000	4.800	14590	5690	491.6
16.00	2	550	0.220	24.000	6.400	10940	4815	739.5
20.00	2	550	0.255	30.000	8.000	8755	4465	1071.4

Unalloyed copper



3.00	2	396	0.040	4.500	1.200	42015	3360	18.2
4.00	2	400	0.050	6.000	1.600	31830	3185	30.6
5.00	2	400	0.065	7.500	2.000	25465	3310	49.7
6.00	2	400	0.090	9.000	2.400	21220	3820	82.5
8.00	2	400	0.115	12.000	3.200	15915	3660	140.6
10.00	2	400	0.145	15.000	4.000	12730	3690	221.5
12.00	2	400	0.155	18.000	4.800	10610	3290	284.2
16.00	2	400	0.175	24.000	6.400	7960	2785	427.8
20.00	2	400	0.205	30.000	8.000	6365	2610	626.4

Thermoplastics



3.00	2	396	0.050	4.500	1.200	42015	4200	22.7
4.00	2	528	0.065	6.000	1.600	42015	5460	52.4
5.00	2	660	0.080	7.500	2.000	42015	6725	100.8
6.00	2	792	0.110	9.000	2.400	42015	9245	199.7
8.00	2	1000	0.145	12.000	3.200	39790	11540	443.1
10.00	2	1000	0.180	15.000	4.000	31830	11460	687.5
12.00	2	1000	0.195	18.000	4.800	26525	10345	893.8
16.00	2	1000	0.220	24.000	6.400	19895	8755	1344.5
20.00	2	1000	0.255	30.000	8.000	15915	8115	1948.1

Cast aluminium



3.00	2	396	0.050	4.500	1.200	42015	4200	22.7
4.00	2	440	0.065	6.000	1.600	35015	4550	43.7
5.00	2	440	0.080	7.500	2.000	28010	4480	67.2
6.00	2	440	0.110	9.000	2.400	23345	5135	110.9
8.00	2	440	0.145	12.000	3.200	17505	5075	195.0
10.00	2	440	0.180	15.000	4.000	14005	5040	302.5
12.00	2	440	0.195	18.000	4.800	11670	4550	393.3
16.00	2	440	0.220	24.000	6.400	8755	3850	591.6
20.00	2	440	0.255	30.000	8.000	7005	3570	857.1

Wrought aluminium
Construction aluminium



3.00	2	396	0.035	2.100	3.000	42015	2940	18.5
4.00	2	450	0.045	2.800	4.000	35810	3225	36.1
5.00	2	450	0.055	3.500	5.000	28650	3150	55.1
6.00	2	450	0.075	4.200	6.000	23875	3580	90.2
8.00	2	450	0.100	5.600	8.000	17905	3580	160.4
10.00	2	450	0.125	7.000	10.000	14325	3580	250.7
12.00	2	450	0.135	8.400	12.000	11935	3225	324.9
16.00	2	450	0.155	11.200	16.000	8950	2775	497.3
20.00	2	450	0.180	14.000	20.000	7160	2580	721.9

Unalloyed copper



3.00	2	350	0.030	2.100	3.000	37135	2230	14.0
4.00	2	350	0.035	2.800	4.000	27850	1950	21.8
5.00	2	350	0.045	3.500	5.000	22280	2005	35.1
6.00	2	350	0.060	4.200	6.000	18570	2230	56.1
8.00	2	350	0.080	5.600	8.000	13925	2230	99.8
10.00	2	350	0.100	7.000	10.000	11140	2230	156.0
12.00	2	350	0.110	8.400	12.000	9285	2040	205.9
16.00	2	350	0.125	11.200	16.000	6965	1740	311.9
20.00	2	350	0.145	14.000	20.000	5570	1615	452.3

Thermoplastics




3.00	2	396	0.035	2.100	3.000	42015	2940	18.5
4.00	2	528	0.045	2.800	4.000	42015	3780	42.4
5.00	2	660	0.055	3.500	5.000	42015	4620	80.9
6.00	2	792	0.075	4.200	6.000	42015	6305	158.8
8.00	2	800	0.100	5.600	8.000	31830	6365	285.2
10.00	2	800	0.125	7.000	10.000	25465	6365	445.6
12.00	2	800	0.135	8.400	12.000	21220	5730	577.5
16.00	2	800	0.155	11.200	16.000	15915	4935	884.1
20.00	2	800	0.180	14.000	20.000	12730	4585	1283.4

Cast aluminium



3.00	2	360	0.035	2.100	3.000	38195	2675	16.8
4.00	2	360	0.045	2.800	4.000	28650	2580	28.9
5.00	2	360	0.055	3.500	5.000	22920	2520	44.1
6.00	2	360	0.075	4.200	6.000	19100	2865	72.2
8.00	2	360	0.100	5.600	8.000	14325	2865	128.3
10.00	2	360	0.125	7.000	10.000	11460	2865	200.5
12.00	2	360	0.135	8.400	12.000	9550	2580	259.9
16.00	2	360	0.155	11.200	16.000	7160	2220	397.9
20.00	2	360	0.180	14.000	20.000	5730	2065	577.5

Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	3	396	0.045	4.500	0.900	42015	5670	23.0
4.00	3	528	0.060	6.000	1.200	42015	7565	54.5
5.00	3	550	0.075	7.500	1.500	35015	7880	88.6
6.00	3	550	0.100	9.000	1.800	29180	8755	141.8
8.00	3	550	0.120	12.000	2.400	21885	7880	226.9
10.00	3	550	0.150	15.000	3.000	17505	7880	354.5
12.00	3	550	0.180	18.000	3.600	14590	7880	510.5
16.00	3	550	0.190	24.000	4.800	10940	6235	718.5
20.00	3	550	0.225	30.000	6.000	8755	5910	1063.6

Unalloyed copper



3.00	3	396	0.035	4.500	0.900	42015	4410	17.9
4.00	3	400	0.050	6.000	1.200	31830	4775	34.4
5.00	3	400	0.060	7.500	1.500	25465	4585	51.6
6.00	3	400	0.080	9.000	1.800	21220	5095	82.5
8.00	3	400	0.095	12.000	2.400	15915	4535	130.6
10.00	3	400	0.120	15.000	3.000	12730	4585	206.3
12.00	3	400	0.145	18.000	3.600	10610	4615	299.1
16.00	3	400	0.150	24.000	4.800	7960	3580	412.5
20.00	3	400	0.180	30.000	6.000	6365	3440	618.8

Thermoplastics



3.00	3	396	0.045	4.500	0.900	42015	5670	23.0
4.00	3	528	0.060	6.000	1.200	42015	7565	54.5
5.00	3	660	0.075	7.500	1.500	42015	9455	106.4
6.00	3	792	0.100	9.000	1.800	42015	12605	204.2
8.00	3	1000	0.120	12.000	2.400	39790	14325	412.5
10.00	3	1000	0.150	15.000	3.000	31830	14325	644.6
12.00	3	1000	0.180	18.000	3.600	26525	14325	928.2
16.00	3	1000	0.190	24.000	4.800	19895	11340	1306.3
20.00	3	1000	0.225	30.000	6.000	15915	10745	1933.7

Cast aluminium



3.00	3	396	0.045	4.500	0.900	42015	5670	23.0
4.00	3	440	0.060	6.000	1.200	35015	6305	45.4
5.00	3	440	0.075	7.500	1.500	28010	6305	70.9
6.00	3	440	0.100	9.000	1.800	23345	7005	113.4
8.00	3	440	0.120	12.000	2.400	17505	6305	181.5
10.00	3	440	0.150	15.000	3.000	14005	6305	283.6
12.00	3	440	0.180	18.000	3.600	11670	6305	408.4
16.00	3	440	0.190	24.000	4.800	8755	4990	574.8
20.00	3	440	0.225	30.000	6.000	7005	4725	858.0

Wrought aluminium
Construction aluminium



3.00	3	396	0.030	1.350	3.000	42015	3780	15.3
4.00	3	450	0.040	1.800	4.000	35810	4295	30.9
5.00	3	450	0.055	2.250	5.000	28650	4725	53.9
6.00	3	450	0.070	2.700	6.000	23875	5015	81.2
8.00	3	450	0.085	3.600	8.000	17905	4565	131.5
10.00	3	450	0.105	4.500	10.000	14325	4510	203.0
12.00	3	450	0.125	5.400	12.000	11935	4475	290.1
16.00	3	450	0.135	7.200	16.000	8950	3625	417.7
20.00	3	450	0.160	9.000	20.000	7160	3440	618.8

Unalloyed copper



3.00	3	350	0.025	1.350	3.000	37135	2785	11.3
4.00	3	350	0.030	1.800	4.000	27850	2505	18.0
5.00	3	350	0.045	2.250	5.000	22280	3010	33.8
6.00	3	350	0.055	2.700	6.000	18570	3065	49.6
8.00	3	350	0.070	3.600	8.000	13925	2925	84.2
10.00	3	350	0.085	4.500	10.000	11140	2840	127.8
12.00	3	350	0.100	5.400	12.000	9285	2785	180.5
16.00	3	350	0.110	7.200	16.000	6965	2300	264.7
20.00	3	350	0.130	9.000	20.000	5570	2170	391.0

Thermoplastics



3.00	3	396	0.030	1.350	3.000	42015	3780	15.3
4.00	3	528	0.040	1.800	4.000	42015	5040	36.3
5.00	3	660	0.055	2.250	5.000	42015	6935	78.0
6.00	3	792	0.070	2.700	6.000	42015	8825	142.9
8.00	3	800	0.085	3.600	8.000	31830	8115	233.8
10.00	3	800	0.105	4.500	10.000	25465	8020	361.0
12.00	3	800	0.125	5.400	12.000	21220	7960	515.7
16.00	3	800	0.135	7.200	16.000	15915	6445	742.6
20.00	3	800	0.160	9.000	20.000	12730	6110	1100.1

Cast aluminium






3.00	3	360	0.030	1.350	3.000	38195	3440	13.9
4.00	3	360	0.040	1.800	4.000	28650	3440	24.8
5.00	3	360	0.055	2.250	5.000	22920	3780	42.5
6.00	3	360	0.070	2.700	6.000	19100	4010	65.0
8.00	3	360	0.085	3.600	8.000	14325	3655	105.2
10.00	3	360	0.105	4.500	10.000	11460	3610	162.4
12.00	3	360	0.125	5.400	12.000	9550	3580	232.0
16.00	3	360	0.135	7.200	16.000	7160	2900	334.1
20.00	3	360	0.160	9.000	20.000	5730	2750	495.0

Cylindrical end mills AX

Smooth-edged, medium length version, neck



HM
MG10 λ 40°
 γ 20°

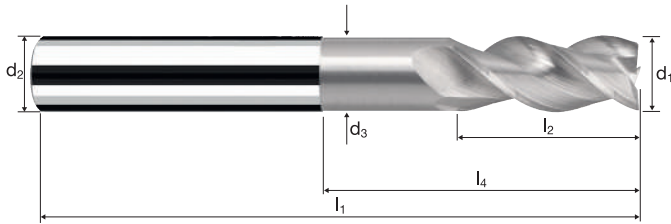

Roughing


Finishing



Rm < 850		Al Aluminium > 99%	Al Aluminium Alloy	Al Aluminium Cast		Cu Copper	Plastic Thermoplast	
-------------	--	--------------------------	--------------------------	-------------------------	--	--------------	------------------------	--

										CELERO	
Example: Order-N°.										15657	C15657
										15557	C15557
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	α	z		
180	3.00	6.00	2.80	63	8.00	20.00	26.63	3.5°	3	●	●
220	4.00	6.00	3.70	63	11.00	22.00	26.95	2.5°	3	●	●
260	5.00	6.00	4.60	63	13.00	24.00	27.27	1.5°	3	●	●
300	6.00	6.00	5.50	63	13.00	25.34	26.00	0.0°	3	●	●
391	8.00	8.00	7.40	72	19.00	34.29	35.00	0.0°	3	●	●
450	10.00	10.00	9.20	84	22.00	42.20	43.00	0.0°	3	●	●
501	12.00	12.00	11.00	97	26.00	50.13	51.00	0.0°	3	●	●
610	16.00	16.00	15.00	108	32.00	58.13	59.00	0.0°	3	●	●
682	20.00	20.00	19.00	122	38.00	70.13	71.00	0.0°	3	●	●

Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
3.00	3	396	0.035	7.500	0.600	42015	4410	19.9
4.00	3	528	0.045	10.000	0.800	42015	5670	45.4
5.00	3	550	0.060	12.500	1.000	35015	6305	78.8
6.00	3	550	0.075	15.000	1.200	29180	6565	118.2
8.00	3	550	0.095	20.000	1.600	21885	6235	199.6
10.00	3	550	0.115	25.000	2.000	17505	6040	302.0
12.00	3	550	0.140	30.000	2.400	14590	6125	441.2
16.00	3	550	0.150	40.000	3.200	10940	4925	630.3
20.00	3	550	0.175	50.000	4.000	8755	4595	919.1

Unalloyed copper



3.00	3	396	0.030	7.500	0.600	42015	3780	17.0
4.00	3	400	0.035	10.000	0.800	31830	3340	26.7
5.00	3	400	0.050	12.500	1.000	25465	3820	47.7
6.00	3	400	0.060	15.000	1.200	21220	3820	68.8
8.00	3	400	0.075	20.000	1.600	15915	3580	114.6
10.00	3	400	0.090	25.000	2.000	12730	3440	171.9
12.00	3	400	0.110	30.000	2.400	10610	3500	252.1
16.00	3	400	0.120	40.000	3.200	7960	2865	366.7
20.00	3	400	0.140	50.000	4.000	6365	2675	534.8

Thermoplastics



3.00	3	396	0.035	7.500	0.600	42015	4410	19.9
4.00	3	528	0.045	10.000	0.800	42015	5670	45.4
5.00	3	660	0.060	12.500	1.000	42015	7565	94.5
6.00	3	792	0.075	15.000	1.200	42015	9455	170.2
8.00	3	1000	0.095	20.000	1.600	39790	11340	362.9
10.00	3	1000	0.115	25.000	2.000	31830	10980	549.1
12.00	3	1000	0.140	30.000	2.400	26525	11140	802.1
16.00	3	1000	0.150	40.000	3.200	19895	8950	1145.9
20.00	3	1000	0.175	50.000	4.000	15915	8355	1671.1

Cast aluminium



3.00	3	396	0.035	7.500	0.600	42015	4410	19.9
4.00	3	440	0.045	10.000	0.800	35015	4725	37.8
5.00	3	440	0.060	12.500	1.000	28010	5040	63.0
6.00	3	440	0.075	15.000	1.200	23345	5250	94.5
8.00	3	440	0.095	20.000	1.600	17505	4990	159.7
10.00	3	440	0.115	25.000	2.000	14005	4830	241.6
12.00	3	440	0.140	30.000	2.400	11670	4900	352.9
16.00	3	440	0.150	40.000	3.200	8755	3940	504.2
20.00	3	440	0.175	50.000	4.000	7005	3675	735.3



Wrought aluminium
Construction aluminium



3.00	3	396	0.025	1.200	3.000	42015	3150	11.3
4.00	3	450	0.030	1.600	4.000	35810	3225	20.6
5.00	3	450	0.040	2.000	5.000	28650	3440	34.4
6.00	3	450	0.055	2.400	6.000	23875	3940	56.7
8.00	3	450	0.065	3.200	8.000	17905	3490	89.4
10.00	3	450	0.080	4.000	10.000	14325	3440	137.5
12.00	3	450	0.100	4.800	12.000	11935	3580	206.3
16.00	3	450	0.105	6.400	16.000	8950	2820	288.8
20.00	3	450	0.125	8.000	20.000	7160	2685	429.7

Unalloyed copper



3.00	3	350	0.020	1.200	3.000	37135	2230	8.0
4.00	3	350	0.025	1.600	4.000	27850	2090	13.4
5.00	3	350	0.030	2.000	5.000	22280	2005	20.1
6.00	3	350	0.045	2.400	6.000	18570	2505	36.1
8.00	3	350	0.050	3.200	8.000	13925	2090	53.5
10.00	3	350	0.065	4.000	10.000	11140	2170	86.9
12.00	3	350	0.080	4.800	12.000	9285	2230	128.3
16.00	3	350	0.085	6.400	16.000	6965	1775	181.8
20.00	3	350	0.100	8.000	20.000	5570	1670	267.4

Thermoplastics



3.00	3	396	0.025	1.200	3.000	42015	3150	11.3
4.00	3	528	0.030	1.600	4.000	42015	3780	24.2
5.00	3	660	0.040	2.000	5.000	42015	5040	50.4
6.00	3	792	0.055	2.400	6.000	42015	6935	99.8
8.00	3	800	0.065	3.200	8.000	31830	6205	158.9
10.00	3	800	0.080	4.000	10.000	25465	6110	244.5
12.00	3	800	0.100	4.800	12.000	21220	6365	366.7
16.00	3	800	0.105	6.400	16.000	15915	5015	513.4
20.00	3	800	0.125	8.000	20.000	12730	4775	763.9

Cast aluminium



3.00	3	360	0.025	1.200	3.000	38195	2865	10.3
4.00	3	360	0.030	1.600	4.000	28650	2580	16.5
5.00	3	360	0.040	2.000	5.000	22920	2750	27.5
6.00	3	360	0.055	2.400	6.000	19100	3150	45.4
8.00	3	360	0.065	3.200	8.000	14325	2795	71.5
10.00	3	360	0.080	4.000	10.000	11460	2750	110.0
12.00	3	360	0.100	4.800	12.000	9550	2865	165.0
16.00	3	360	0.105	6.400	16.000	7160	2255	231.0
20.00	3	360	0.125	8.000	20.000	5730	2150	343.8




Cylindrical end mills AX

Smooth-edged, medium length version, short neck



HM
MG10


λ 40°
 γ 20°

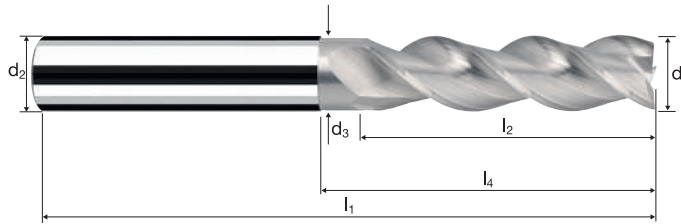

Rm < 850		Al Aluminium > 99%	Al Aluminium Alloy	Al Aluminium Cast		Cu Copper	Plastic Thermoplast
-------------	--	--------------------------	--------------------------	-------------------------	--	--------------	------------------------

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	α	z	CELERO	
										15660	C15660
180	3.00	6.00	2.80	63	14.00	20.00	26.63	3.5°	3	●	●
220	4.00	6.00	3.70	63	17.00	22.00	26.95	2.5°	3	●	●
260	5.00	6.00	4.60	63	19.00	24.00	27.27	1.5°	3	●	●
300	6.00	6.00	5.50	63	19.00	25.34	26.00	0.0°	3	●	●
391	8.00	8.00	7.40	72	28.00	34.29	35.00	0.0°	3	●	●
450	10.00	10.00	9.20	84	34.00	42.20	43.00	0.0°	3	●	●
501	12.00	12.00	11.00	97	40.00	50.13	51.00	0.0°	3	●	●
610	16.00	16.00	15.00	108	48.00	58.13	59.00	0.0°	3	●	●
682	20.00	20.00	19.00	122	56.00	70.13	71.00	0.0°	3	●	●

Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	3	550	0.085	9.000	1.500	29180	7440	100.4
8.00	3	550	0.105	12.000	2.000	21885	6895	165.4
10.00	3	550	0.135	15.000	2.500	17505	7090	265.9
12.00	3	550	0.160	18.000	3.000	14590	7005	378.2
16.00	3	550	0.170	24.000	4.000	10940	5580	535.7
20.00	3	550	0.200	30.000	5.000	8755	5250	787.8

Unalloyed copper



6.00	3	400	0.070	9.000	1.500	21220	4455	60.2
8.00	3	400	0.085	12.000	2.000	15915	4060	97.4
10.00	3	400	0.110	15.000	2.500	12730	4200	157.6
12.00	3	400	0.130	18.000	3.000	10610	4140	223.5
16.00	3	400	0.135	24.000	4.000	7960	3225	309.4
20.00	3	400	0.160	30.000	5.000	6365	3055	458.4

Thermoplastics



6.00	3	792	0.085	9.000	1.500	42015	10715	144.6
8.00	3	1000	0.105	12.000	2.000	39790	12535	300.8
10.00	3	1000	0.135	15.000	2.500	31830	12890	483.4
12.00	3	1000	0.160	18.000	3.000	26525	12730	687.5
16.00	3	1000	0.170	24.000	4.000	19895	10145	974.0
20.00	3	1000	0.200	30.000	5.000	15915	9550	1432.4

Cast aluminium



6.00	3	440	0.085	9.000	1.500	23345	5950	80.4
8.00	3	440	0.105	12.000	2.000	17505	5515	132.4
10.00	3	440	0.135	15.000	2.500	14005	5670	212.7
12.00	3	440	0.160	18.000	3.000	11670	5600	302.5
16.00	3	440	0.170	24.000	4.000	8755	4465	428.6
20.00	3	440	0.200	30.000	5.000	7005	4200	630.3



Wrought aluminium
Construction aluminium



6.00	3	450	0.060	2.100	6.000	23875	4295	54.1
8.00	3	450	0.075	2.800	8.000	17905	4030	90.2
10.00	3	450	0.095	3.500	10.000	14325	4080	142.9
12.00	3	450	0.110	4.200	12.000	11935	3940	198.5
16.00	3	450	0.120	5.600	16.000	8950	3225	288.8
20.00	3	450	0.140	7.000	20.000	7160	3010	421.1

Unalloyed copper



6.00	3	350	0.050	2.100	6.000	18570	2785	35.1
8.00	3	350	0.060	2.800	8.000	13925	2505	56.1
10.00	3	350	0.075	3.500	10.000	11140	2505	87.7
12.00	3	350	0.090	4.200	12.000	9285	2505	126.3
16.00	3	350	0.095	5.600	16.000	6965	1985	177.8
20.00	3	350	0.110	7.000	20.000	5570	1840	257.4

Thermoplastics




6.00	3	792	0.060	2.100	6.000	42015	7565	95.3
8.00	3	800	0.075	2.800	8.000	31830	7160	160.4
10.00	3	800	0.095	3.500	10.000	25465	7255	254.0
12.00	3	800	0.110	4.200	12.000	21220	7005	352.9
16.00	3	800	0.120	5.600	16.000	15915	5730	513.4
20.00	3	800	0.140	7.000	20.000	12730	5350	748.7

Cast aluminium



6.00	3	360	0.060	2.100	6.000	19100	3440	43.3
8.00	3	360	0.075	2.800	8.000	14325	3225	72.2
10.00	3	360	0.095	3.500	10.000	11460	3265	114.3
12.00	3	360	0.110	4.200	12.000	9550	3150	158.8
16.00	3	360	0.120	5.600	16.000	7160	2580	231.0
20.00	3	360	0.140	7.000	20.000	5730	2405	336.9

Application



Material

Wrought aluminium
Construction aluminium



Unalloyed copper



Thermoplastics



Cast aluminium



d1 [mm]	z	v _c [m/min]	f _i [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	3	350	0.065	18.000	0.900	18570	3620	58.7
8.00	3	350	0.080	24.000	1.200	13925	3340	96.3
10.00	3	350	0.100	30.000	1.500	11140	3340	150.4
12.00	3	350	0.120	36.000	1.800	9285	3340	216.6
16.00	3	350	0.130	48.000	2.400	6965	2715	312.8
20.00	3	350	0.150	60.000	3.000	5570	2505	451.2
6.00	3	220	0.050	18.000	0.900	11670	1750	28.4
8.00	3	220	0.065	24.000	1.200	8755	1705	49.2
10.00	3	220	0.080	30.000	1.500	7005	1680	75.6
12.00	3	220	0.095	36.000	1.800	5835	1665	107.8
16.00	3	220	0.105	48.000	2.400	4375	1380	158.8
20.00	3	220	0.120	60.000	3.000	3500	1260	226.9
6.00	3	600	0.065	18.000	0.900	31830	6205	100.6
8.00	3	600	0.080	24.000	1.200	23875	5730	165.0
10.00	3	600	0.100	30.000	1.500	19100	5730	257.8
12.00	3	600	0.120	36.000	1.800	15915	5730	371.3
16.00	3	600	0.130	48.000	2.400	11935	4655	536.3
20.00	3	600	0.150	60.000	3.000	9550	4295	773.5
6.00	3	280	0.065	18.000	0.900	14855	2895	46.9
8.00	3	280	0.080	24.000	1.200	11140	2675	77.0
10.00	3	280	0.100	30.000	1.500	8915	2675	120.3
12.00	3	280	0.120	36.000	1.800	7425	2675	173.3
16.00	3	280	0.130	48.000	2.400	5570	2170	250.3
20.00	3	280	0.150	60.000	3.000	4455	2005	361.0




Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
<p>(1)</p>	Wrought aluminium Construction aluminium 	3.00	2	0.050	2.000	3.000	1000	1500	2000	3000
		4.00	2	0.065	3.000	4.000	1300	1950	2600	3900
		6.00	2	0.100	4.000	6.000	2000	3000	4000	6000
		8.00	2	0.130	5.000	8.000	2600	3900	5200	7800
		10.00	2	0.165	5.500	10.000	3300	4950	6600	9900
		12.00	2	0.195	6.000	12.000	3900	5850	7800	11700
		16.00	2	0.210	6.500	16.000	4200	6300	8400	12600
		20.00	2	0.220	7.000	20.000	4400	6600	8800	13200
		25.00	2	0.230	7.000	25.000	4600	6900	9200	13800
		<p>(2)</p>	Wrought aluminium Construction aluminium 	3.00	2	0.050	2.000	2.400	1000	1500
4.00	2			0.065	3.000	3.200	1300	1950	2600	3900
6.00	2			0.100	4.000	4.800	2000	3000	4000	6000
8.00	2			0.130	5.000	6.400	2600	3900	5200	7800
10.00	2			0.165	5.500	8.000	3300	4950	6600	9900
12.00	2			0.195	6.000	9.600	3900	5850	7800	11700
16.00	2			0.210	6.500	12.800	4200	6300	8400	12600
20.00	2			0.220	7.000	16.000	4400	6600	8800	13200
25.00	2			0.230	7.000	20.000	4600	6900	9200	13800
<p>F</p>	Wrought aluminium Construction aluminium 			3.00	2	0.015	3.000	0.100	300	450
		4.00	2	0.020	4.500	0.100	400	600	800	1200
		6.00	2	0.030	6.000	0.200	600	900	1200	1800
		8.00	2	0.040	7.500	0.250	800	1200	1600	2400
		10.00	2	0.050	8.300	0.300	1000	1500	2000	3000
		12.00	2	0.060	9.000	0.350	1200	1800	2400	3600
		16.00	2	0.065	9.800	0.500	1300	1950	2600	3900
		20.00	2	0.065	10.500	0.600	1300	1950	2600	3900
		25.00	2	0.070	10.500	0.750	1400	2100	2800	4200
			Wrought aluminium Construction aluminium 	3.00	2	0.110	0.300	0.300	2200	3300
4.00	2			0.145	0.350	0.350	2900	4350	5800	8700
6.00	2			0.220	0.400	0.400	4400	6600	8800	13200
8.00	2			0.285	0.450	0.450	5700	8550	11400	17100
10.00	2			0.365	0.500	0.500	7300	10950	14600	21900
12.00	2			0.430	0.600	0.600	8600	12900	17200	25800
16.00	2			0.460	0.750	0.750	9200	13800	18400	27600
20.00	2			0.485	1.000	1.000	9700	14550	19400	29100
25.00	2			0.505	1.200	1.200	10100	15150	20200	30300

Corner radius end mills AX

Smooth-edged, version 3xd, neck












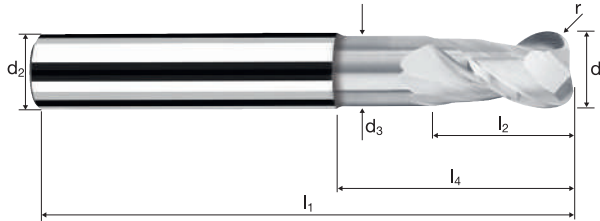


HM
MG10 λ 40°
 γ 20°



		Al Aluminium > 99%	Al Aluminium Alloy	Al Aluminium Cast		Cu Copper	Plastic Thermoplast	
--	--	--------------------------	--------------------------	-------------------------	--	--------------	------------------------	--

Example: Order-N°.												CELERO	
												15573	C15573
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	α	z			
180	3.00	6.00	2.80	54	4.00	9.00	15.37	0.500	5.9°	2	●	●	
220	4.00	6.00	3.70	54	5.00	12.00	16.82	0.500	3.7°	2	●	●	
260	5.00	6.00	4.60	54	6.00	15.00	18.27	0.500	1.7°	2	●	●	
300	6.00	6.00	5.50	54	7.00	16.15	18.00	0.500	0.0°	2	●	●	
302	6.00	6.00	5.50	54	7.00	16.15	18.00	1.000	0.0°	2	●	●	
391	8.00	8.00	7.40	63	9.00	21.63	24.00	1.000	0.0°	2	●	●	
450	10.00	10.00	9.20	72	11.00	26.99	30.00	1.000	0.0°	2	●	●	
501	12.00	12.00	11.00	83	13.00	32.29	36.00	1.000	0.0°	2	●	●	
608	16.00	16.00	15.00	97	18.00	43.73	48.00	1.000	0.0°	2	●	●	
680	20.00	20.00	19.00	111	22.00	55.23	60.00	1.000	0.0°	2	●	●	
770	25.00	25.00	24.00	132	27.00	69.68	75.00	1.000	0.0°	2	●	●	
453	10.00	10.00	9.20	72	11.00	26.99	30.00	1.500	0.0°	2	●	-	
503	12.00	12.00	11.00	83	13.00	32.29	36.00	1.500	0.0°	2	●	-	
611	16.00	16.00	15.00	97	18.00	43.73	48.00	2.000	0.0°	2	●	-	
683	20.00	20.00	19.00	111	22.00	55.23	60.00	2.000	0.0°	2	●	-	




Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
 <p>(1)</p>	Wrought aluminium Construction aluminium 	6.00	2	0.100	4.000	6.000	2000	3000	4000	6000
		8.00	2	0.130	5.000	8.000	2600	3900	5200	7800
		10.00	2	0.165	5.500	10.000	3300	4950	6600	9900
		12.00	2	0.195	6.000	12.000	3900	5850	7800	11700
		16.00	2	0.210	6.500	16.000	4200	6300	8400	12600
		20.00	2	0.220	7.000	20.000	4400	6600	8800	13200
 <p>(2)</p>	Wrought aluminium Construction aluminium 	6.00	2	0.100	4.000	4.800	2000	3000	4000	6000
		8.00	2	0.130	5.000	6.400	2600	3900	5200	7800
		10.00	2	0.165	5.500	8.000	3300	4950	6600	9900
		12.00	2	0.195	6.000	9.600	3900	5850	7800	11700
		16.00	2	0.210	6.500	12.800	4200	6300	8400	12600
		20.00	2	0.220	7.000	16.000	4400	6600	8800	13200
	Wrought aluminium Construction aluminium 	6.00	2	0.100	6.000	3.600	2000	3000	4000	6000
		8.00	2	0.130	7.500	4.800	2600	3900	5200	7800
		10.00	2	0.165	8.300	6.000	3300	4950	6600	9900
		12.00	2	0.195	9.000	7.200	3900	5850	7800	11700
		16.00	2	0.210	9.800	9.600	4200	6300	8400	12600
		20.00	2	0.220	10.500	12.000	4400	6600	8800	13200
 <p>F</p>	Wrought aluminium Construction aluminium 	6.00	2	0.030	6.000	0.200	600	900	1200	1800
		8.00	2	0.040	7.500	0.250	800	1200	1600	2400
		10.00	2	0.050	8.300	0.300	1000	1500	2000	3000
		12.00	2	0.060	9.000	0.350	1200	1800	2400	3600
		16.00	2	0.065	9.800	0.500	1300	1950	2600	3900
		20.00	2	0.065	10.500	0.600	1300	1950	2600	3900
	Wrought aluminium Construction aluminium 	6.00	2	0.220	0.400	0.400	4400	6600	8800	13200
		8.00	2	0.285	0.450	0.450	5700	8550	11400	17100
		10.00	2	0.365	0.500	0.500	7300	10950	14600	21900
		12.00	2	0.430	0.600	0.600	8600	12900	17200	25800
		16.00	2	0.460	0.750	0.750	9200	13800	18400	27600
		20.00	2	0.485	1.000	1.000	9700	14550	19400	29100
	Wrought aluminium Construction aluminium 	6.00	2	0.230	7.000	25.000	4600	6900	9200	13800
		8.00	2	0.130	5.000	8.000	2600	3900	5200	7800
		10.00	2	0.165	5.500	10.000	3300	4950	6600	9900
		12.00	2	0.195	6.000	12.000	3900	5850	7800	11700
		16.00	2	0.210	6.500	16.000	4200	6300	8400	12600
		20.00	2	0.220	7.000	20.000	4400	6600	8800	13200

Corner radius end mills AX

Smooth-edged, version 3xd, neck










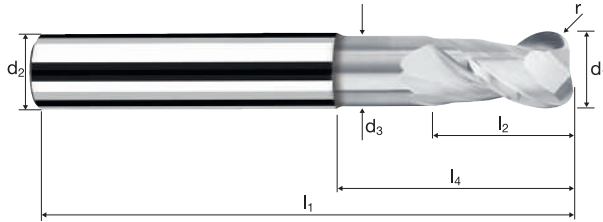


HM
MG10 λ 40°
 γ 20°



			Al Aluminium > 99%	Al Aluminium Alloy	Al Aluminium Cast		Cu Copper	Plastic Thermoplast	
--	--	--	--------------------------	--------------------------	-------------------------	--	--------------	------------------------	--

Example: Order-N°.											CELERO	
											15573	C15573
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	α	z		
307	6.00	6.00	5.50	54	7.00	16.15	18.00	2.500	0.0°	2	●	●
397	8.00	8.00	7.40	63	9.00	21.63	24.00	2.500	0.0°	2	●	●
457	10.00	10.00	9.20	72	11.00	26.99	30.00	2.500	0.0°	2	●	●
506	12.00	12.00	11.00	83	13.00	32.29	36.00	2.500	0.0°	2	●	●
612	16.00	16.00	15.00	97	18.00	43.73	48.00	2.500	0.0°	2	●	●
684	20.00	20.00	19.00	111	22.00	55.23	60.00	2.500	0.0°	2	●	●
774	25.00	25.00	24.00	132	27.00	69.68	75.00	2.500	0.0°	2	●	●
459	10.00	10.00	9.20	72	11.00	26.99	30.00	4.000	0.0°	2	●	●
508	12.00	12.00	11.00	83	13.00	32.29	36.00	4.000	0.0°	2	●	●
614	16.00	16.00	15.00	97	18.00	43.73	48.00	4.000	0.0°	2	●	●
686	20.00	20.00	19.00	111	22.00	55.23	60.00	4.000	0.0°	2	●	●
776	25.00	25.00	24.00	132	27.00	69.68	75.00	4.000	0.0°	2	●	●




Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
 <p>(1)</p>	Wrought aluminium Construction aluminium 	6.00	2	0.090	3.500	6.000	1800	2700	3600	5400
		8.00	2	0.120	4.500	8.000	2400	3600	4800	7200
		10.00	2	0.150	5.000	10.000	3000	4500	6000	9000
		12.00	2	0.180	5.500	12.000	3600	5400	7200	10800
		16.00	2	0.190	6.000	16.000	3800	5700	7600	11400
		20.00	2	0.205	6.500	20.000	4100	6150	8200	12300
		25.00	2	0.215	6.500	25.000	4300	6450	8600	12900
 <p>(2)</p>	Wrought aluminium Construction aluminium 	6.00	2	0.090	3.500	3.600	1800	2700	3600	5400
		8.00	2	0.120	4.500	4.800	2400	3600	4800	7200
		10.00	2	0.150	5.000	6.000	3000	4500	6000	9000
		12.00	2	0.180	5.500	7.200	3600	5400	7200	10800
		16.00	2	0.190	6.000	9.600	3800	5700	7600	11400
		20.00	2	0.205	6.500	12.000	4100	6150	8200	12300
		25.00	2	0.215	6.500	15.000	4300	6450	8600	12900
	Wrought aluminium Construction aluminium 	6.00	2	0.090	5.300	3.600	1800	2700	3600	5400
		8.00	2	0.120	6.800	4.800	2400	3600	4800	7200
		10.00	2	0.150	7.500	6.000	3000	4500	6000	9000
		12.00	2	0.180	8.300	7.200	3600	5400	7200	10800
		16.00	2	0.190	9.000	9.600	3800	5700	7600	11400
		20.00	2	0.205	9.800	12.000	4100	6150	8200	12300
		25.00	2	0.215	9.800	15.000	4300	6450	8600	12900
 <p>F</p>	Wrought aluminium Construction aluminium 	6.00	2	0.025	5.300	0.200	500	750	1000	1500
		8.00	2	0.035	6.800	0.250	700	1050	1400	2100
		10.00	2	0.045	7.500	0.300	900	1350	1800	2700
		12.00	2	0.055	8.300	0.350	1100	1650	2200	3300
		16.00	2	0.055	9.000	0.500	1100	1650	2200	3300
		20.00	2	0.060	9.800	0.600	1200	1800	2400	3600
		25.00	2	0.065	9.800	0.750	1300	1950	2600	3900
	Wrought aluminium Construction aluminium 	6.00	2	0.200	0.400	0.400	4000	6000	8000	12000
		8.00	2	0.265	0.450	0.450	5300	7950	10600	15900
		10.00	2	0.330	0.500	0.500	6600	9900	13200	19800
		12.00	2	0.395	0.600	0.600	7900	11850	15800	23700
		16.00	2	0.420	0.750	0.750	8400	12600	16800	25200
		20.00	2	0.450	1.000	1.000	9000	13500	18000	27000
		25.00	2	0.475	1.200	1.200	9500	14250	19000	28500

Corner radius end mills AX

Smooth-edged, version 4xd, neck



HM
MG10 λ 40°
 γ 20°

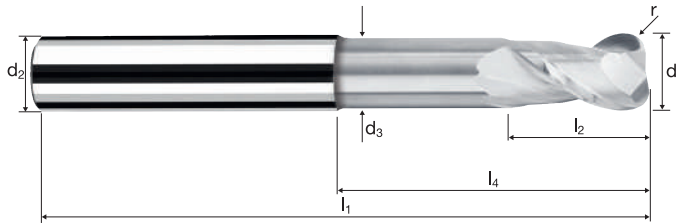

Roughing

Finishing























ToolSchool

15575 / C15575

		Al Aluminium > 99%	Al Aluminium Alloy	Al Aluminium Cast		Cu Copper	Plastic Thermoplast	
--	--	--------------------------	--------------------------	-------------------------	--	--------------	------------------------	--

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	z	CELERO	
										15574	C15574
Example: Order-N°: Coating: C Article-N°: 15574 ø-Code: 302											
302	6.00	6.00	5.50	60	7.00	22.15	24.00	1.000	2	●	●
391	8.00	8.00	7.40	68	9.00	29.63	32.00	1.000	2	●	●
450	10.00	10.00	9.20	84	11.00	36.99	40.00	1.000	2	●	●
501	12.00	12.00	11.00	97	13.00	44.29	48.00	1.000	2	●	●
608	16.00	16.00	15.00	115	18.00	59.73	64.00	1.000	2	●	●
680	20.00	20.00	19.00	130	22.00	75.23	80.00	1.000	2	●	●
770	25.00	25.00	24.00	157	27.00	94.68	100.00	1.000	2	●	●
453	10.00	10.00	9.20	84	11.00	36.99	40.00	1.500	2	●	-
503	12.00	12.00	11.00	97	13.00	44.29	48.00	1.500	2	●	-
611	16.00	16.00	15.00	115	18.00	59.73	64.00	2.000	2	●	-
683	20.00	20.00	19.00	130	22.00	75.23	80.00	2.000	2	●	-
307	6.00	6.00	5.50	60	7.00	22.15	24.00	2.500	2	●	●
397	8.00	8.00	7.40	68	9.00	29.63	32.00	2.500	2	●	●
457	10.00	10.00	9.20	84	11.00	36.99	40.00	2.500	2	●	●
506	12.00	12.00	11.00	97	13.00	44.29	48.00	2.500	2	●	●
612	16.00	16.00	15.00	115	18.00	59.73	64.00	2.500	2	●	●
684	20.00	20.00	19.00	130	22.00	75.23	80.00	2.500	2	●	●
774	25.00	25.00	24.00	157	27.00	94.68	100.00	2.500	2	●	●

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
 (1)	Wrought aluminium Construction aluminium 	10.00	2	0.150	5.000	10.000	3000	4500	6000	9000
		12.00	2	0.180	5.500	12.000	3600	5400	7200	10800
		16.00	2	0.190	6.000	16.000	3800	5700	7600	11400
		20.00	2	0.205	6.500	20.000	4100	6150	8200	12300
		25.00	2	0.215	6.500	25.000	4300	6450	8600	12900
 (2)	Wrought aluminium Construction aluminium 	10.00	2	0.150	5.000	6.000	3000	4500	6000	9000
		12.00	2	0.180	5.500	7.200	3600	5400	7200	10800
		16.00	2	0.190	6.000	9.600	3800	5700	7600	11400
		20.00	2	0.205	6.500	12.000	4100	6150	8200	12300
		25.00	2	0.215	6.500	15.000	4300	6450	8600	12900
	Wrought aluminium Construction aluminium 	10.00	2	0.150	7.500	6.000	3000	4500	6000	9000
		12.00	2	0.180	8.300	7.200	3600	5400	7200	10800
		16.00	2	0.190	9.000	9.600	3800	5700	7600	11400
		20.00	2	0.205	9.800	12.000	4100	6150	8200	12300
		25.00	2	0.215	9.800	15.000	4300	6450	8600	12900
 F	Wrought aluminium Construction aluminium 	10.00	2	0.045	7.500	0.300	900	1350	1800	2700
		12.00	2	0.055	8.300	0.350	1100	1650	2200	3300
		16.00	2	0.055	9.000	0.500	1100	1650	2200	3300
		20.00	2	0.060	9.800	0.600	1200	1800	2400	3600
		25.00	2	0.065	9.800	0.750	1300	1950	2600	3900
	Wrought aluminium Construction aluminium 	10.00	2	0.330	0.500	0.500	6600	9900	13200	19800
		12.00	2	0.395	0.600	0.600	7900	11850	15800	23700
		16.00	2	0.420	0.750	0.750	8400	12600	16800	25200
		20.00	2	0.450	1.000	1.000	9000	13500	18000	27000
		25.00	2	0.475	1.200	1.200	9500	14250	19000	28500




Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
 <p>(1)</p>	Wrought aluminium Construction aluminium 	6.00	2	0.065	4.000	6.000	1300	1950	2600	3900
		8.00	2	0.085	4.500	8.000	1700	2550	3400	5100
		10.00	2	0.110	5.000	10.000	2200	3300	4400	6600
		12.00	2	0.120	5.000	12.000	2400	3600	4800	7200
		16.00	2	0.150	5.000	16.000	3000	4500	6000	9000
		20.00	2	0.180	5.000	20.000	3600	5400	7200	10800
25.00	2	0.200	5.000	25.000	4000	6000	8000	12000		
 <p>(2)</p>	Wrought aluminium Construction aluminium 	6.00	2	0.065	4.000	3.600	1300	1950	2600	3900
		8.00	2	0.085	4.500	4.800	1700	2550	3400	5100
		10.00	2	0.110	5.000	6.000	2200	3300	4400	6600
		12.00	2	0.120	5.000	7.200	2400	3600	4800	7200
		16.00	2	0.150	5.000	9.600	3000	4500	6000	9000
		20.00	2	0.180	5.000	12.000	3600	5400	7200	10800
25.00	2	0.200	5.000	15.000	4000	6000	8000	12000		
	Wrought aluminium Construction aluminium 	6.00	2	0.065	6.000	3.600	1300	1950	2600	3900
		8.00	2	0.085	6.800	4.800	1700	2550	3400	5100
		10.00	2	0.110	7.500	6.000	2200	3300	4400	6600
		12.00	2	0.120	7.500	7.200	2400	3600	4800	7200
		16.00	2	0.150	7.500	9.600	3000	4500	6000	9000
		20.00	2	0.180	7.500	12.000	3600	5400	7200	10800
25.00	2	0.200	7.500	15.000	4000	6000	8000	12000		
 <p>F</p>	Wrought aluminium Construction aluminium 	6.00	2	0.020	6.000	0.200	400	600	800	1200
		8.00	2	0.025	6.800	0.250	500	750	1000	1500
		10.00	2	0.035	7.500	0.300	700	1050	1400	2100
		12.00	2	0.035	7.500	0.350	700	1050	1400	2100
		16.00	2	0.045	7.500	0.500	900	1350	1800	2700
		20.00	2	0.055	7.500	0.600	1100	1650	2200	3300
25.00	2	0.060	7.500	0.750	1200	1800	2400	3600		
	Wrought aluminium Construction aluminium 	6.00	2	0.145	0.350	0.350	2900	4350	5800	8700
		8.00	2	0.185	0.400	0.400	3700	5550	7400	11100
		10.00	2	0.240	0.450	0.450	4800	7200	9600	14400
		12.00	2	0.265	0.500	0.500	5300	7950	10600	15900
		16.00	2	0.330	0.600	0.600	6600	9900	13200	19800
		20.00	2	0.395	0.750	0.750	7900	11850	15800	23700
25.00	2	0.440	0.800	0.800	8800	13200	17600	26400		

Corner radius end mills AX

Smooth-edged, version 5xd, neck



HM
MG10 λ 40°
 γ 20°

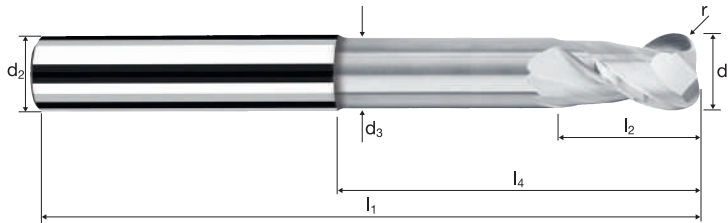

			Al Aluminium > 99%	Al Aluminium Alloy	Al Aluminium Cast		Cu Copper	Plastic Thermoplast	
--	--	--	--------------------------	--------------------------	-------------------------	--	--------------	------------------------	--

Example: Order-N°.											CELERO	
											15575	C15575
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	z			
302	6.00	6.00	5.50	66	7.00	28.15	30.00	1.000	2	●	●	-
391	8.00	8.00	7.40	76	9.00	37.63	40.00	1.000	2	●	●	-
450	10.00	10.00	9.20	91	11.00	46.99	50.00	1.000	2	●	●	●
501	12.00	12.00	11.00	106	13.00	56.29	60.00	1.000	2	●	●	●
608	16.00	16.00	15.00	129	18.00	75.73	80.00	1.000	2	●	●	●
680	20.00	20.00	19.00	151	22.00	95.23	100.00	1.000	2	●	●	●
770	25.00	25.00	24.00	182	27.00	119.68	125.00	1.000	2	●	●	●
307	6.00	6.00	5.50	66	7.00	28.15	30.00	2.500	2	●	●	●
397	8.00	8.00	7.40	76	9.00	37.63	40.00	2.500	2	●	●	●
457	10.00	10.00	9.20	91	11.00	46.99	50.00	2.500	2	●	●	●
506	12.00	12.00	11.00	106	13.00	56.29	60.00	2.500	2	●	●	●
612	16.00	16.00	15.00	129	18.00	75.73	80.00	2.500	2	●	●	●
684	20.00	20.00	19.00	151	22.00	95.23	100.00	2.500	2	●	●	●
774	25.00	25.00	24.00	182	27.00	119.68	125.00	2.500	2	●	●	●
459	10.00	10.00	9.20	91	11.00	46.99	50.00	4.000	2	●	●	●
508	12.00	12.00	11.00	106	13.00	56.29	60.00	4.000	2	●	●	●
614	16.00	16.00	15.00	129	18.00	75.73	80.00	4.000	2	●	●	●
686	20.00	20.00	19.00	151	22.00	95.23	100.00	4.000	2	●	●	●
776	25.00	25.00	24.00	182	27.00	119.68	125.00	4.000	2	●	●	●




Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
	Wrought aluminium Construction aluminium 	3.00	3	0.030	2.000	3.000	900	1350	1800	2700
		4.00	3	0.040	3.000	4.000	1200	1800	2400	3600
		6.00	3	0.060	4.000	6.000	1800	2700	3600	5400
		8.00	3	0.085	5.000	8.000	2550	3825	5100	7650
		10.00	3	0.105	5.500	10.000	3150	4725	6300	9450
		12.00	3	0.125	6.000	12.000	3750	5625	7500	11250
		16.00	3	0.135	6.500	16.000	4050	6075	8100	12150
		20.00	3	0.140	7.000	20.000	4200	6300	8400	12600
		25.00	3	0.150	7.000	25.000	4500	6750	9000	13500
			Wrought aluminium Construction aluminium 	3.00	3	0.030	2.000	2.400	900	1350
4.00	3			0.040	3.000	3.200	1200	1800	2400	3600
6.00	3			0.060	4.000	4.800	1800	2700	3600	5400
8.00	3			0.085	5.000	6.400	2550	3825	5100	7650
10.00	3			0.105	5.500	8.000	3150	4725	6300	9450
12.00	3			0.125	6.000	9.600	3750	5625	7500	11250
16.00	3			0.135	6.500	12.800	4050	6075	8100	12150
20.00	3			0.140	7.000	16.000	4200	6300	8400	12600
25.00	3			0.150	7.000	20.000	4500	6750	9000	13500
	Wrought aluminium Construction aluminium 			3.00	3	0.030	3.000	1.800	900	1350
		4.00	3	0.040	4.500	2.400	1200	1800	2400	3600
		6.00	3	0.060	6.000	3.600	1800	2700	3600	5400
		8.00	3	0.085	7.500	4.800	2550	3825	5100	7650
		10.00	3	0.105	8.300	6.000	3150	4725	6300	9450
		12.00	3	0.125	9.000	7.200	3750	5625	7500	11250
		16.00	3	0.135	9.800	9.600	4050	6075	8100	12150
		20.00	3	0.140	10.500	12.000	4200	6300	8400	12600
		25.00	3	0.150	10.500	15.000	4500	6750	9000	13500
			Wrought aluminium Construction aluminium 	3.00	3	0.010	3.000	0.100	300	450
4.00	3			0.010	4.500	0.100	300	450	600	900
6.00	3			0.020	6.000	0.200	600	900	1200	1800
8.00	3			0.025	7.500	0.250	750	1125	1500	2250
10.00	3			0.030	8.300	0.300	900	1350	1800	2700
12.00	3			0.040	9.000	0.350	1200	1800	2400	3600
16.00	3			0.040	9.800	0.500	1200	1800	2400	3600
20.00	3			0.040	10.500	0.600	1200	1800	2400	3600
25.00	3			0.045	10.500	0.750	1350	2025	2700	4050
	Wrought aluminium Construction aluminium 			3.00	3	0.065	0.400	0.400	1950	2925
		4.00	3	0.090	0.450	0.450	2700	4050	5400	8100
		6.00	3	0.130	0.400	0.400	3900	5850	7800	11700
		8.00	3	0.185	0.450	0.450	5550	8325	11100	16650
		10.00	3	0.230	0.500	0.500	6900	10350	13800	20700
		12.00	3	0.275	0.600	0.600	8250	12375	16500	24750
		16.00	3	0.295	0.750	0.750	8850	13275	17700	26550
		20.00	3	0.310	1.000	1.000	9300	13950	18600	27900
		25.00	3	0.330	1.200	1.200	9900	14850	19800	29700

Corner radius end mills AX

Smooth-edged, version 3xd, neck



HM
MG10 λ 40°
 γ 20°

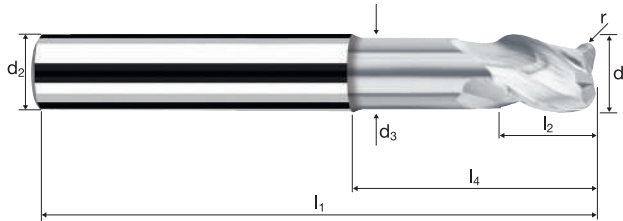


			Al Aluminium > 99%	Al Aluminium Alloy	Al Aluminium Cast		Cu Copper	Plastic Thermoplast	
--	--	--	--------------------------	--------------------------	-------------------------	--	--------------	------------------------	--

Example: Order-N°.												CELERO	
												15583	C15583
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	α	z			
180	3.00	6.00	2.80	54	4.00	9.00	15.37	0.500	5.9°	3	●	●	
220	4.00	6.00	3.70	54	5.00	12.00	16.82	0.500	3.7°	3	●	●	
260	5.00	6.00	4.60	54	6.00	15.00	18.27	0.500	1.7°	3	●	●	
300	6.00	6.00	5.50	54	7.00	16.15	18.00	0.500	0.0°	3	●	●	
302	6.00	6.00	5.50	54	7.00	16.15	18.00	1.000	0.0°	3	●	●	
391	8.00	8.00	7.40	63	9.00	21.63	24.00	1.000	0.0°	3	●	●	
450	10.00	10.00	9.20	72	11.00	26.99	30.00	1.000	0.0°	3	●	●	
501	12.00	12.00	11.00	83	13.00	32.29	36.00	1.000	0.0°	3	●	●	
608	16.00	16.00	15.00	97	18.00	43.73	48.00	1.000	0.0°	3	●	●	
680	20.00	20.00	19.00	111	22.00	55.23	60.00	1.000	0.0°	3	●	●	
770	25.00	25.00	24.00	132	27.00	69.68	75.00	1.000	0.0°	3	●	●	
453	10.00	10.00	9.20	72	11.00	26.99	30.00	1.500	0.0°	3	●	-	
503	12.00	12.00	11.00	83	13.00	32.29	36.00	1.500	0.0°	3	●	-	
611	16.00	16.00	15.00	97	18.00	43.73	48.00	2.000	0.0°	3	●	-	
683	20.00	20.00	19.00	111	22.00	55.23	60.00	2.000	0.0°	3	●	-	

Application


Material



Wrought aluminium
Construction aluminium




d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
6.00	3	0.060	4.000	6.000	1800	2700	3600	5400
8.00	3	0.085	5.000	8.000	2550	3825	5100	7650
10.00	3	0.105	5.500	10.000	3150	4725	6300	9450
12.00	3	0.125	6.000	12.000	3750	5625	7500	11250
16.00	3	0.135	6.500	16.000	4050	6075	8100	12150
20.00	3	0.140	7.000	20.000	4200	6300	8400	12600
25.00	3	0.150	7.000	25.000	4500	6750	9000	13500



Wrought aluminium
Construction aluminium




d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
6.00	3	0.060	4.000	4.800	1800	2700	3600	5400
8.00	3	0.085	5.000	6.400	2550	3825	5100	7650
10.00	3	0.105	5.500	8.000	3150	4725	6300	9450
12.00	3	0.125	6.000	9.600	3750	5625	7500	11250
16.00	3	0.135	6.500	12.800	4050	6075	8100	12150
20.00	3	0.140	7.000	16.000	4200	6300	8400	12600
25.00	3	0.150	7.000	20.000	4500	6750	9000	13500



Wrought aluminium
Construction aluminium




d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
6.00	3	0.060	6.000	3.600	1800	2700	3600	5400
8.00	3	0.085	7.500	4.800	2550	3825	5100	7650
10.00	3	0.105	8.300	6.000	3150	4725	6300	9450
12.00	3	0.125	9.000	7.200	3750	5625	7500	11250
16.00	3	0.135	9.800	9.600	4050	6075	8100	12150
20.00	3	0.140	10.500	12.000	4200	6300	8400	12600
25.00	3	0.150	10.500	15.000	4500	6750	9000	13500



Wrought aluminium
Construction aluminium



d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
6.00	3	0.020	6.000	0.200	600	900	1200	1800
8.00	3	0.025	7.500	0.250	750	1125	1500	2250
10.00	3	0.030	8.300	0.300	900	1350	1800	2700
12.00	3	0.040	9.000	0.350	1200	1800	2400	3600
16.00	3	0.040	9.800	0.500	1200	1800	2400	3600
20.00	3	0.040	10.500	0.600	1200	1800	2400	3600
25.00	3	0.045	10.500	0.750	1350	2025	2700	4050



Wrought aluminium
Construction aluminium






d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
6.00	3	0.130	0.400	0.400	3900	5850	7800	11700
8.00	3	0.185	0.450	0.450	5550	8325	11100	16650
10.00	3	0.230	0.500	0.500	6900	10350	13800	20700
12.00	3	0.275	0.600	0.600	8250	12375	16500	24750
16.00	3	0.295	0.750	0.750	8850	13275	17700	26550
20.00	3	0.310	1.000	1.000	9300	13950	18600	27900
25.00	3	0.330	1.200	1.200	9900	14850	19800	29700

Corner radius end mills AX

Smooth-edged, version 3xd, neck



HM
MG10 λ 40°
 γ 20°

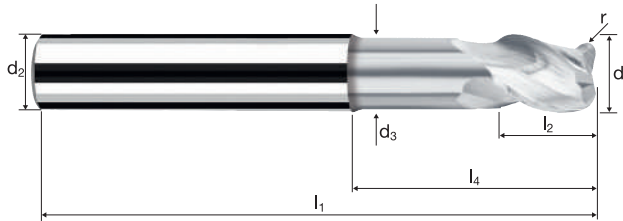

		Al Aluminium > 99%	Al Aluminium Alloy	Al Aluminium Cast		Cu Copper	Plastic Thermoplast	
--	--	--------------------------	--------------------------	-------------------------	--	--------------	------------------------	--

												CELERO			
Example: Order-N°.												15583	C15583		
												15583		C15583	
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	α	z					
307	6.00	6.00	5.50	54	7.00	16.15	18.00	2.500	0.0°	3	●	●	●	●	
397	8.00	8.00	7.40	63	9.00	21.63	24.00	2.500	0.0°	3	●	●	●	●	
457	10.00	10.00	9.20	72	11.00	26.99	30.00	2.500	0.0°	3	●	●	●	●	
506	12.00	12.00	11.00	83	13.00	32.29	36.00	2.500	0.0°	3	●	●	●	●	
612	16.00	16.00	15.00	97	18.00	43.73	48.00	2.500	0.0°	3	●	●	●	●	
684	20.00	20.00	19.00	111	22.00	55.23	60.00	2.500	0.0°	3	●	●	●	●	
774	25.00	25.00	24.00	132	27.00	69.68	75.00	2.500	0.0°	3	●	●	●	●	
459	10.00	10.00	9.20	72	11.00	26.99	30.00	4.000	0.0°	3	●	●	●	●	
508	12.00	12.00	11.00	83	13.00	32.29	36.00	4.000	0.0°	3	●	●	●	●	
614	16.00	16.00	15.00	97	18.00	43.73	48.00	4.000	0.0°	3	●	●	●	●	
686	20.00	20.00	19.00	111	22.00	55.23	60.00	4.000	0.0°	3	●	●	●	●	
776	25.00	25.00	24.00	132	27.00	69.68	75.00	4.000	0.0°	3	●	●	●	●	

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=1000 min ⁻¹ vf [mm/min]	n=1500 min ⁻¹ vf [mm/min]	n=2000 min ⁻¹ vf [mm/min]	n=3000 min ⁻¹ vf [mm/min]
<p>(1)</p>	Wrought aluminium Construction aluminium 	6.00	3	0.060	3.500	6.000	1800	2700	3600	5400
		8.00	3	0.075	4.500	8.000	2250	3375	4500	6750
		10.00	3	0.095	5.000	10.000	2850	4275	5700	8550
		12.00	3	0.115	5.500	12.000	3450	5175	6900	10350
		16.00	3	0.125	6.000	16.000	3750	5625	7500	11250
		20.00	3	0.130	6.500	20.000	3900	5850	7800	11700
		25.00	3	0.140	6.500	25.000	4200	6300	8400	12600
<p>(2)</p>	Wrought aluminium Construction aluminium 	6.00	3	0.060	3.500	3.600	1800	2700	3600	5400
		8.00	3	0.075	4.500	4.800	2250	3375	4500	6750
		10.00	3	0.095	5.000	6.000	2850	4275	5700	8550
		12.00	3	0.115	5.500	7.200	3450	5175	6900	10350
		16.00	3	0.125	6.000	9.600	3750	5625	7500	11250
		20.00	3	0.130	6.500	12.000	3900	5850	7800	11700
		25.00	3	0.140	6.500	15.000	4200	6300	8400	12600
	Wrought aluminium Construction aluminium 	6.00	3	0.060	5.300	3.600	1800	2700	3600	5400
		8.00	3	0.075	6.800	4.800	2250	3375	4500	6750
		10.00	3	0.095	7.500	6.000	2850	4275	5700	8550
		12.00	3	0.115	8.300	7.200	3450	5175	6900	10350
		16.00	3	0.125	9.000	9.600	3750	5625	7500	11250
		20.00	3	0.130	9.800	12.000	3900	5850	7800	11700
		25.00	3	0.140	9.800	15.000	4200	6300	8400	12600
<p>F</p>	Wrought aluminium Construction aluminium 	6.00	3	0.020	5.300	0.200	600	900	1200	1800
		8.00	3	0.025	6.800	0.250	750	1125	1500	2250
		10.00	3	0.030	7.500	0.300	900	1350	1800	2700
		12.00	3	0.035	8.300	0.350	1050	1575	2100	3150
		16.00	3	0.040	9.000	0.500	1200	1800	2400	3600
		20.00	3	0.040	9.800	0.600	1200	1800	2400	3600
		25.00	3	0.040	9.800	0.750	1200	1800	2400	3600
	Wrought aluminium Construction aluminium 	6.00	3	0.130	0.350	0.350	3900	5850	7800	11700
		8.00	3	0.165	0.400	0.400	4950	7425	9900	14850
		10.00	3	0.210	0.450	0.450	6300	9450	12600	18900
		12.00	3	0.255	0.500	0.500	7650	11475	15300	22950
		16.00	3	0.275	0.600	0.600	8250	12375	16500	24750
		20.00	3	0.285	0.750	0.750	8550	12825	17100	25650
		25.00	3	0.310	0.800	0.800	9300	13950	18600	27900

Corner radius end mills AX

Smooth-edged, version 4xd, neck




HM
MG10

λ 40°
 γ 20°

G2.5

Vario

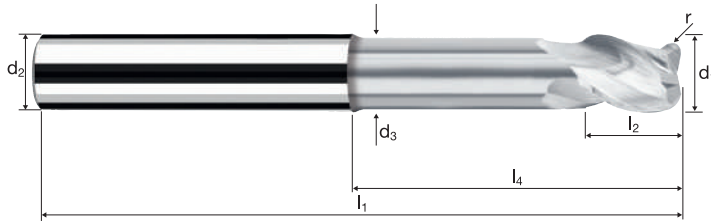

Roughing **Finishing**

ToolSchool 15585 / C15585

Aluminium > 99% Al Aluminium Alloy Al Aluminium Cast Cu Copper Plastic Thermoplast

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	z	CELERO	
										15584	C15584
Example: Order-N°: C Coating: C Article-N°: 15584 ø-Code: 302											
302	6.00	6.00	5.50	60	7.00	22.15	24.00	1.000	3	●	●
391	8.00	8.00	7.40	68	9.00	29.63	32.00	1.000	3	●	●
450	10.00	10.00	9.20	84	11.00	36.99	40.00	1.000	3	●	●
501	12.00	12.00	11.00	97	13.00	44.29	48.00	1.000	3	●	●
608	16.00	16.00	15.00	115	18.00	59.73	64.00	1.000	3	●	●
680	20.00	20.00	19.00	130	22.00	75.23	80.00	1.000	3	●	●
770	25.00	25.00	24.00	157	27.00	94.68	100.00	1.000	3	●	●
307	6.00	6.00	5.50	60	7.00	22.15	24.00	2.500	3	●	●
397	8.00	8.00	7.40	68	9.00	29.63	32.00	2.500	3	●	●
457	10.00	10.00	9.20	84	11.00	36.99	40.00	2.500	3	●	●
506	12.00	12.00	11.00	97	13.00	44.29	48.00	2.500	3	●	●
612	16.00	16.00	15.00	115	18.00	59.73	64.00	2.500	3	●	●
684	20.00	20.00	19.00	130	22.00	75.23	80.00	2.500	3	●	●
774	25.00	25.00	24.00	157	27.00	94.68	100.00	2.500	3	●	●
459	10.00	10.00	9.20	84	11.00	36.99	40.00	4.000	3	●	●
508	12.00	12.00	11.00	97	13.00	44.29	48.00	4.000	3	●	●
614	16.00	16.00	15.00	115	18.00	59.73	64.00	4.000	3	●	●
686	20.00	20.00	19.00	130	22.00	75.23	80.00	4.000	3	●	●
776	25.00	25.00	24.00	157	27.00	94.68	100.00	4.000	3	●	●

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
<p>(1)</p>	Wrought aluminium Construction aluminium 	6.00	3	0.040	4.000	6.000	1200	1800	2400	3600
		8.00	3	0.055	4.500	8.000	1650	2475	3300	4950
		10.00	3	0.070	5.000	10.000	2100	3150	4200	6300
		12.00	3	0.075	5.000	12.000	2250	3375	4500	6750
		16.00	3	0.095	5.000	16.000	2850	4275	5700	8550
		20.00	3	0.115	5.000	20.000	3450	5175	6900	10350
		25.00	3	0.130	5.000	25.000	3900	5850	7800	11700
<p>(2)</p>	Wrought aluminium Construction aluminium 	6.00	3	0.040	4.000	3.600	1200	1800	2400	3600
		8.00	3	0.055	4.500	4.800	1650	2475	3300	4950
		10.00	3	0.070	5.000	6.000	2100	3150	4200	6300
		12.00	3	0.075	5.000	7.200	2250	3375	4500	6750
		16.00	3	0.095	5.000	9.600	2850	4275	5700	8550
		20.00	3	0.115	5.000	12.000	3450	5175	6900	10350
		25.00	3	0.130	5.000	15.000	3900	5850	7800	11700
	Wrought aluminium Construction aluminium 	6.00	3	0.040	6.000	3.600	1200	1800	2400	3600
		8.00	3	0.055	6.800	4.800	1650	2475	3300	4950
		10.00	3	0.070	7.500	6.000	2100	3150	4200	6300
		12.00	3	0.075	7.500	7.200	2250	3375	4500	6750
		16.00	3	0.095	7.500	9.600	2850	4275	5700	8550
		20.00	3	0.115	7.500	12.000	3450	5175	6900	10350
		25.00	3	0.130	7.500	15.000	3900	5850	7800	11700
<p>F</p>	Wrought aluminium Construction aluminium 	6.00	3	0.010	6.000	0.200	300	450	600	900
		8.00	3	0.015	6.800	0.250	450	675	900	1350
		10.00	3	0.020	7.500	0.300	600	900	1200	1800
		12.00	3	0.025	7.500	0.350	750	1125	1500	2250
		16.00	3	0.030	7.500	0.500	900	1350	1800	2700
		20.00	3	0.035	7.500	0.600	1050	1575	2100	3150
		25.00	3	0.040	7.500	0.750	1200	1800	2400	3600
	Wrought aluminium Construction aluminium 	6.00	3	0.090	0.450	0.450	2700	4050	5400	8100
		8.00	3	0.120	0.500	0.500	3600	5400	7200	10800
		10.00	3	0.155	0.450	0.450	4650	6975	9300	13950
		12.00	3	0.165	0.500	0.500	4950	7425	9900	14850
		16.00	3	0.210	0.600	0.600	6300	9450	12600	18900
		20.00	3	0.255	0.750	0.750	7650	11475	15300	22950
		25.00	3	0.285	0.800	0.800	8550	12825	17100	25650

Corner radius end mills AX

Smooth-edged, version 5xd, neck




HM
MG10

λ 40°
 γ 20°

G2.5

Vario


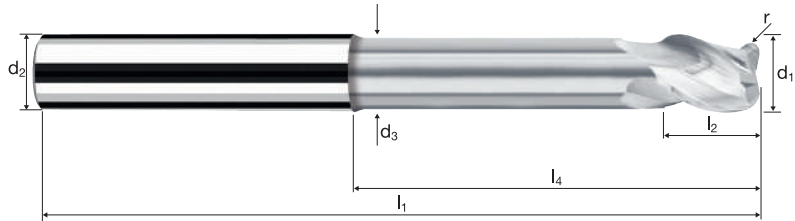


Roughing **Finishing**

Al Aluminium > 99% Al Aluminium Alloy Al Aluminium Cast Cu Copper Plastic Thermoplast

										CELERO	
Example: Order-N°.											
										15585	
										C15585	
Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	z		
450	10.00	10.00	9.20	91	11.00	46.99	50.00	1.000	3	●	●
501	12.00	12.00	11.00	106	13.00	56.29	60.00	1.000	3	●	●
608	16.00	16.00	15.00	129	18.00	75.73	80.00	1.000	3	●	●
680	20.00	20.00	19.00	151	22.00	95.23	100.00	1.000	3	●	●
770	25.00	25.00	24.00	182	27.00	119.68	125.00	1.000	3	●	●
307	6.00	6.00	5.50	66	7.00	28.15	30.00	2.500	3	●	●
397	8.00	8.00	7.40	76	9.00	37.63	40.00	2.500	3	●	●
457	10.00	10.00	9.20	91	11.00	46.99	50.00	2.500	3	●	●
506	12.00	12.00	11.00	106	13.00	56.29	60.00	2.500	3	●	●
612	16.00	16.00	15.00	129	18.00	75.73	80.00	2.500	3	●	●
684	20.00	20.00	19.00	151	22.00	95.23	100.00	2.500	3	●	●
774	25.00	25.00	24.00	182	27.00	119.68	125.00	2.500	3	●	●
459	10.00	10.00	9.20	91	11.00	46.99	50.00	4.000	3	●	●
508	12.00	12.00	11.00	106	13.00	56.29	60.00	4.000	3	●	●
614	16.00	16.00	15.00	129	18.00	75.73	80.00	4.000	3	●	●
686	20.00	20.00	19.00	151	22.00	95.23	100.00	4.000	3	●	●
776	25.00	25.00	24.00	182	27.00	119.68	125.00	4.000	3	●	●

Application



Material

Wrought aluminium
Construction aluminium



Cast aluminium



Unalloyed copper




d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
6.00	3	500	0.080	9.000	4.800	26525	6365	275.0	20°
8.00	3	500	0.100	12.000	6.400	19895	5970	458.4	20°
10.00	3	500	0.120	15.000	8.000	15915	5730	687.5	20°
12.00	3	500	0.140	18.000	9.600	13265	5570	962.6	20°
16.00	3	500	0.160	24.000	12.800	9945	4775	1466.8	20°
20.00	3	500	0.180	30.000	16.000	7960	4295	2062.6	20°
25.00	3	500	0.200	37.500	20.000	6365	3820	2864.8	20°

6.00	3	450	0.080	9.000	4.800	23875	5730	247.5	20°
8.00	3	450	0.100	12.000	6.400	17905	5370	412.5	20°
10.00	3	450	0.120	15.000	8.000	14325	5155	618.8	20°
12.00	3	450	0.140	18.000	9.600	11935	5015	866.3	20°
16.00	3	450	0.160	24.000	12.800	8950	4295	1320.1	20°
20.00	3	450	0.180	30.000	16.000	7160	3865	1856.4	20°
25.00	3	450	0.200	37.500	20.000	5730	3440	2578.3	20°

6.00	3	400	0.072	9.000	4.800	21220	4585	198.0	12°
8.00	3	400	0.090	12.000	6.400	15915	4295	330.0	12°
10.00	3	400	0.108	15.000	8.000	12730	4125	495.0	12°
12.00	3	400	0.126	18.000	9.600	10610	4010	693.0	12°
16.00	3	400	0.144	24.000	12.800	7960	3440	1056.1	12°
20.00	3	400	0.162	30.000	16.000	6365	3095	1485.1	12°
25.00	3	400	0.180	37.500	20.000	5095	2750	2062.6	12°

Application



Material

Wrought aluminium
Construction aluminium



Cast aluminium



Unalloyed copper



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _R [°]	LR [mm]
6.00	3	450	0.072	9.000	6.000	23875	5155	278.5	25°	19.3
8.00	3	450	0.090	12.000	8.000	17905	4835	464.1	25°	25.7
10.00	3	450	0.108	15.000	10.000	14325	4640	696.1	25°	32.2
12.00	3	450	0.126	18.000	12.000	11935	4510	974.6	25°	38.6
16.00	3	450	0.144	24.000	16.000	8950	3865	1485.1	25°	51.5
20.00	3	450	0.162	30.000	20.000	7160	3480	2088.4	25°	64.3
25.00	3	450	0.180	37.500	25.000	5730	3095	2900.6	25°	80.4


6.00	3	405	0.072	9.000	6.000	21485	4640	250.6	25°	19.3
8.00	3	405	0.090	12.000	8.000	16115	4350	417.7	25°	25.7
10.00	3	405	0.108	15.000	10.000	12890	4175	626.5	25°	32.2
12.00	3	405	0.126	18.000	12.000	10745	4060	877.1	25°	38.6
16.00	3	405	0.144	24.000	16.000	8055	3480	1336.6	25°	51.5
20.00	3	405	0.162	30.000	20.000	6445	3135	1879.6	25°	64.3
25.00	3	405	0.180	37.500	25.000	5155	2785	2610.5	25°	80.4

6.00	3	320	0.058	9.000	6.000	16975	2935	158.4	15°	33.6
8.00	3	320	0.072	12.000	8.000	12730	2750	264.0	15°	44.8
10.00	3	320	0.086	15.000	10.000	10185	2640	396.0	15°	56.0
12.00	3	320	0.101	18.000	12.000	8490	2565	554.4	15°	67.2
16.00	3	320	0.115	24.000	16.000	6365	2200	844.9	15°	89.6
20.00	3	320	0.130	30.000	20.000	5095	1980	1188.1	15°	112.0
25.00	3	320	0.144	37.500	25.000	4075	1760	1650.1	15°	140.0



Use
ToolExpert AX-FPS
to determine the best
possible cutting data
for your machining
environment!

Application



Material


Wrought aluminium
Construction aluminium



Unalloyed copper



Thermoplastics



Wrought aluminium
Construction aluminium



Unalloyed copper



Thermoplastics



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	3	207	0.055	9.000	2.400	10980	1810	39.1
8.00	3	207	0.070	12.000	3.200	8235	1730	66.4
10.00	3	207	0.090	15.000	4.000	6590	1780	106.7
12.00	3	207	0.125	18.000	4.800	5490	2060	177.9
16.00	3	207	0.170	24.000	6.400	4120	2100	322.6
20.00	3	207	0.210	30.000	8.000	3295	2075	498.1
25.00	3	207	0.265	37.500	10.000	2635	2095	785.7

6.00	3	88	0.055	9.000	2.400	4670	770	16.6
8.00	3	88	0.070	12.000	3.200	3500	735	28.2
10.00	3	88	0.090	15.000	4.000	2800	755	45.4
12.00	3	88	0.125	18.000	4.800	2335	875	75.6
16.00	3	88	0.170	24.000	6.400	1750	895	137.1
20.00	3	88	0.210	30.000	8.000	1400	880	211.8
25.00	3	88	0.265	37.500	10.000	1120	890	334.0



6.00	3	224	0.055	9.000	2.400	11885	1960	42.4
8.00	3	224	0.070	12.000	3.200	8915	1870	71.9
10.00	3	224	0.090	15.000	4.000	7130	1925	115.5
12.00	3	224	0.125	18.000	4.800	5940	2230	192.5
16.00	3	224	0.170	24.000	6.400	4455	2275	349.1
20.00	3	224	0.210	30.000	8.000	3565	2245	539.0
25.00	3	224	0.265	37.500	10.000	2850	2265	850.3

6.00	3	189	0.045	6.000	6.000	10025	1355	48.7
8.00	3	189	0.055	8.000	8.000	7520	1240	79.4
10.00	3	189	0.070	10.000	10.000	6015	1265	126.3
12.00	3	189	0.100	12.000	12.000	5015	1505	216.6
16.00	3	189	0.135	16.000	16.000	3760	1525	389.8
20.00	3	189	0.170	20.000	20.000	3010	1535	613.6
25.00	3	189	0.210	25.000	25.000	2405	1515	947.5

6.00	3	82	0.045	6.000	6.000	4350	585	21.1
8.00	3	82	0.055	8.000	8.000	3265	540	34.5
10.00	3	82	0.070	10.000	10.000	2610	550	54.8
12.00	3	82	0.100	12.000	12.000	2175	655	94.0
16.00	3	82	0.135	16.000	16.000	1630	660	169.1
20.00	3	82	0.170	20.000	20.000	1305	665	266.2
25.00	3	82	0.210	25.000	25.000	1045	660	411.1

6.00	3	224	0.045	6.000	6.000	11885	1605	57.8
8.00	3	224	0.055	8.000	8.000	8915	1470	94.1
10.00	3	224	0.070	10.000	10.000	7130	1495	149.7
12.00	3	224	0.100	12.000	12.000	5940	1785	256.7
16.00	3	224	0.135	16.000	16.000	4455	1805	462.0
20.00	3	224	0.170	20.000	20.000	3565	1820	727.3
25.00	3	224	0.210	25.000	25.000	2850	1795	1123.0

Application



Material

Wrought aluminium
Construction aluminium



Cast aluminium



Unalloyed copper




d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	q _Z [°]
6.00	3	450	0.064	9.000	3.600	23875	4585	148.5	15°
8.00	3	450	0.080	12.000	4.800	17905	4295	247.5	15°
10.00	3	450	0.096	15.000	6.000	14325	4125	371.3	15°
12.00	3	450	0.112	18.000	7.200	11935	4010	519.8	15°
16.00	3	450	0.128	24.000	9.600	8950	3440	792.1	15°
20.00	3	450	0.144	30.000	12.000	7160	3095	1113.8	15°

6.00	3	405	0.064	9.000	3.600	21485	4125	133.7	15°
8.00	3	405	0.080	12.000	4.800	16115	3865	222.8	15°
10.00	3	405	0.096	15.000	6.000	12890	3715	334.1	15°
12.00	3	405	0.112	18.000	7.200	10745	3610	467.8	15°
16.00	3	405	0.128	24.000	9.600	8055	3095	712.9	15°
20.00	3	405	0.144	30.000	12.000	6445	2785	1002.4	15°

6.00	3	360	0.058	9.000	3.600	19100	3300	106.9	9°
8.00	3	360	0.072	12.000	4.800	14325	3095	178.2	9°
10.00	3	360	0.086	15.000	6.000	11460	2970	267.3	9°
12.00	3	360	0.101	18.000	7.200	9550	2890	374.2	9°
16.00	3	360	0.115	24.000	9.600	7160	2475	570.3	9°
20.00	3	360	0.130	30.000	12.000	5730	2230	802.0	9°

Application



Material

Wrought aluminium
Construction aluminium



Cast aluminium



Unalloyed copper




d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	3	300	0.104	19.000	1.800	15915	4965	169.8
8.00	3	350	0.134	28.000	2.400	13925	5600	376.2
10.00	3	400	0.181	34.000	3.000	12730	6915	705.2
12.00	3	400	0.259	40.000	3.600	10610	8245	1187.2
16.00	3	500	0.300	48.000	4.800	9945	8950	2062.6
20.00	3	500	0.340	56.000	6.000	7960	8115	2727.3


6.00	3	270	0.104	19.000	1.800	14325	4470	152.8
8.00	3	315	0.134	28.000	2.400	12535	5040	338.6
10.00	3	360	0.181	34.000	3.000	11460	6220	634.7
12.00	3	360	0.259	40.000	3.600	9550	7420	1068.5
16.00	3	450	0.300	48.000	4.800	8950	8055	1856.4
20.00	3	450	0.340	56.000	6.000	7160	7305	2454.6

6.00	3	240	0.083	19.000	1.800	12730	3180	108.7
8.00	3	280	0.107	28.000	2.400	11140	3585	240.8
10.00	3	320	0.145	34.000	3.000	10185	4425	451.3
12.00	3	320	0.207	40.000	3.600	8490	5275	759.8
16.00	3	400	0.240	48.000	4.800	7960	5730	1320.1
20.00	3	400	0.272	56.000	6.000	6365	5195	1745.5

Use
ToolExpert AX-FPS
to determine the best
possible cutting data
for your machining
environment!



Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	3	600	0.065	12.000	1.800	31830	6205	134.1
8.00	3	600	0.090	16.000	2.400	23875	6445	247.5
10.00	3	600	0.110	20.000	3.000	19100	6305	378.2
12.00	3	600	0.135	24.000	3.600	15915	6445	556.9
16.00	3	600	0.180	32.000	4.800	11935	6445	990.1
20.00	3	600	0.220	40.000	6.000	9550	6305	1512.6

Unalloyed copper



6.00	3	400	0.065	12.000	1.800	21220	4140	89.4
8.00	3	400	0.090	16.000	2.400	15915	4295	165.0
10.00	3	400	0.110	20.000	3.000	12730	4200	252.1
12.00	3	400	0.135	24.000	3.600	10610	4295	371.3
16.00	3	400	0.180	32.000	4.800	7960	4295	660.0
20.00	3	400	0.220	40.000	6.000	6365	4200	1008.4

Thermoplastics



6.00	3	650	0.065	12.000	1.800	34485	6725	145.2
8.00	3	650	0.090	16.000	2.400	25865	6985	268.1
10.00	3	650	0.110	20.000	3.000	20690	6830	409.7
12.00	3	650	0.135	24.000	3.600	17240	6985	603.3
16.00	3	650	0.180	32.000	4.800	12930	6985	1072.6
20.00	3	650	0.220	40.000	6.000	10345	6830	1638.7



Wrought aluminium
Construction aluminium



6.00	3	500	0.060	4.200	6.000	26525	4775	120.3
8.00	3	500	0.080	5.600	8.000	19895	4775	213.9
10.00	3	500	0.100	7.000	10.000	15915	4775	334.2
12.00	3	500	0.120	8.400	12.000	13265	4775	481.3
16.00	3	500	0.160	11.200	16.000	9945	4775	855.6
20.00	3	500	0.200	14.000	20.000	7960	4775	1336.9

Unalloyed copper




6.00	3	270	0.060	4.200	6.000	14325	2580	65.0
8.00	3	270	0.080	5.600	8.000	10745	2580	115.5
10.00	3	270	0.100	7.000	10.000	8595	2580	180.5
12.00	3	270	0.120	8.400	12.000	7160	2580	259.9
16.00	3	270	0.160	11.200	16.000	5370	2580	462.0
20.00	3	270	0.200	14.000	20.000	4295	2580	721.9

Thermoplastics



6.00	3	650	0.060	4.200	6.000	34485	6205	156.4
8.00	3	650	0.080	5.600	8.000	25865	6205	278.1
10.00	3	650	0.100	7.000	10.000	20690	6205	434.5
12.00	3	650	0.120	8.400	12.000	17240	6205	625.7
16.00	3	650	0.160	11.200	16.000	12930	6205	1112.3
20.00	3	650	0.200	14.000	20.000	10345	6205	1738.0

Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
10.00	3	173	0.060	30.000	2.000	5505	990	59.5
12.00	3	173	0.090	36.000	2.400	4590	1240	107.1
16.00	3	173	0.120	48.000	3.200	3440	1240	190.3
20.00	3	173	0.145	60.000	4.000	2755	1200	287.5
25.00	3	173	0.185	75.000	5.000	2205	1225	458.4

Unalloyed copper



10.00	3	73	0.060	30.000	2.000	2325	420	25.1
12.00	3	73	0.090	36.000	2.400	1935	525	45.2
16.00	3	73	0.120	48.000	3.200	1450	525	80.3
20.00	3	73	0.145	60.000	4.000	1160	505	121.3
25.00	3	73	0.185	75.000	5.000	930	515	193.4

Thermoplastics



10.00	3	183	0.060	30.000	2.000	5825	1050	62.9
12.00	3	183	0.090	36.000	2.400	4855	1310	113.2
16.00	3	183	0.120	48.000	3.200	3640	1310	201.3
20.00	3	183	0.145	60.000	4.000	2915	1265	304.1
25.00	3	183	0.185	75.000	5.000	2330	1295	484.9



Wrought aluminium
Construction aluminium



10.00	3	157	0.050	5.000	10.000	4995	750	37.5
12.00	3	157	0.070	6.000	12.000	4165	875	63.0
16.00	3	157	0.095	8.000	16.000	3125	890	113.9
20.00	3	157	0.120	10.000	20.000	2500	900	179.9
25.00	3	157	0.145	12.500	25.000	2000	870	271.7

Unalloyed copper





10.00	3	68	0.050	5.000	10.000	2165	325	16.2
12.00	3	68	0.070	6.000	12.000	1805	380	27.3
16.00	3	68	0.095	8.000	16.000	1355	385	49.4
20.00	3	68	0.120	10.000	20.000	1080	390	77.9
25.00	3	68	0.145	12.500	25.000	865	375	117.7

Thermoplastics



10.00	3	168	0.050	5.000	10.000	5350	800	40.1
12.00	3	168	0.070	6.000	12.000	4455	935	67.4
16.00	3	168	0.095	8.000	16.000	3340	955	121.9
20.00	3	168	0.120	10.000	20.000	2675	965	192.5
25.00	3	168	0.145	12.500	25.000	2140	930	290.8

Application



Material

Wrought aluminium
Construction aluminium

Cast aluminium


Unalloyed copper

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	Z [°]
6.00	3	450	0.064	9.000	3.600	23875	4585	148.5	15°
8.00	3	450	0.080	12.000	4.800	17905	4295	247.5	15°
10.00	3	450	0.096	15.000	6.000	14325	4125	371.3	15°
12.00	3	450	0.112	18.000	7.200	11935	4010	519.8	15°
16.00	3	450	0.128	24.000	9.600	8950	3440	792.1	15°
20.00	3	450	0.144	30.000	12.000	7160	3095	1113.8	15°
25.00	3	450	0.160	37.500	15.000	5730	2750	1547.0	15°

6.00	3	405	0.064	9.000	3.600	21485	4125	133.7	15°
8.00	3	405	0.080	12.000	4.800	16115	3865	222.8	15°
10.00	3	405	0.096	15.000	6.000	12890	3715	334.1	15°
12.00	3	405	0.112	18.000	7.200	10745	3610	467.8	15°
16.00	3	405	0.128	24.000	9.600	8055	3095	712.9	15°
20.00	3	405	0.144	30.000	12.000	6445	2785	1002.4	15°
25.00	3	405	0.160	37.500	15.000	5155	2475	1392.3	15°

6.00	3	360	0.058	9.000	3.600	19100	3300	106.9	9°
8.00	3	360	0.072	12.000	4.800	14325	3095	178.2	9°
10.00	3	360	0.086	15.000	6.000	11460	2970	267.3	9°
12.00	3	360	0.101	18.000	7.200	9550	2890	374.2	9°
16.00	3	360	0.115	24.000	9.600	7160	2475	570.3	9°
20.00	3	360	0.130	30.000	12.000	5730	2230	802.0	9°
25.00	3	360	0.144	37.500	15.000	4585	1980	1113.8	9°

Application



Material

Wrought aluminium
Construction aluminium

Cast aluminium

Unalloyed copper


d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]	R [°]	LR [mm]
6.00	3	315	0.051	9.000	6.000	16710	2565	138.6	15°	33.6
8.00	3	315	0.064	12.000	8.000	12535	2405	231.0	15°	44.8
10.00	3	315	0.077	15.000	10.000	10025	2310	346.5	15°	56.0
12.00	3	315	0.090	18.000	12.000	8355	2245	485.1	15°	67.2
16.00	3	315	0.102	24.000	16.000	6265	1925	739.3	15°	89.6
20.00	3	315	0.115	30.000	20.000	5015	1735	1039.6	15°	112.0
25.00	3	315	0.128	37.500	25.000	4010	1540	1443.9	15°	140.0

6.00	3	285	0.051	9.000	6.000	15120	2320	125.4	15°	33.6
8.00	3	285	0.064	12.000	8.000	11340	2175	209.0	15°	44.8
10.00	3	285	0.077	15.000	10.000	9070	2090	313.5	15°	56.0
12.00	3	285	0.090	18.000	12.000	7560	2030	438.9	15°	67.2
16.00	3	285	0.102	24.000	16.000	5670	1740	668.8	15°	89.6
20.00	3	285	0.115	30.000	20.000	4535	1570	940.6	15°	112.0
25.00	3	285	0.128	37.500	25.000	3630	1395	1306.3	15°	140.0

6.00	3	216	0.040	9.000	6.000	11460	1385	74.8	9°	56.8
8.00	3	216	0.050	12.000	8.000	8595	1300	124.7	9°	75.8
10.00	3	216	0.060	15.000	10.000	6875	1245	187.1	9°	94.7
12.00	3	216	0.071	18.000	12.000	5730	1215	262.0	9°	113.6
16.00	3	216	0.081	24.000	16.000	4295	1040	399.2	9°	151.5
20.00	3	216	0.091	30.000	20.000	3440	935	561.4	9°	189.4
25.00	3	216	0.101	37.500	25.000	2750	830	779.7	9°	236.8

Use
ToolExpert AX-FPS
to determine the best
possible cutting data
for your machining
environment!

Application



Material


Wrought aluminium
Construction aluminium



Unalloyed copper



Thermoplastics



Wrought aluminium
Construction aluminium



Unalloyed copper



Thermoplastics




d1 [mm]	z	v _r [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	3	600	0.065	9.000	2.400	31830	6205	134.1
8.00	3	600	0.090	12.000	3.200	23875	6445	247.5
10.00	3	600	0.110	15.000	4.000	19100	6305	378.2
12.00	3	600	0.135	18.000	4.800	15915	6445	556.9
16.00	3	600	0.180	24.000	6.400	11935	6445	990.1
20.00	3	600	0.220	30.000	8.000	9550	6305	1512.6
25.00	3	600	0.280	37.500	10.000	7640	6415	2406.4
6.00	3	400	0.065	9.000	2.400	21220	4140	89.4
8.00	3	400	0.090	12.000	3.200	15915	4295	165.0
10.00	3	400	0.110	15.000	4.000	12730	4200	252.1
12.00	3	400	0.135	18.000	4.800	10610	4295	371.3
16.00	3	400	0.180	24.000	6.400	7960	4295	660.0
20.00	3	400	0.220	30.000	8.000	6365	4200	1008.4
25.00	3	400	0.280	37.500	10.000	5095	4280	1604.3
6.00	3	792	0.065	9.000	2.400	42015	8195	177.0
8.00	3	800	0.090	12.000	3.200	31830	8595	330.0
10.00	3	800	0.110	15.000	4.000	25465	8405	504.2
12.00	3	800	0.135	18.000	4.800	21220	8595	742.6
16.00	3	800	0.180	24.000	6.400	15915	8595	1320.1
20.00	3	800	0.220	30.000	8.000	12730	8405	2016.8
25.00	3	800	0.280	37.500	10.000	10185	8555	3208.6
6.00	3	500	0.060	4.800	6.000	26525	4775	137.5
8.00	3	500	0.080	6.400	8.000	19895	4775	244.5
10.00	3	500	0.100	8.000	10.000	15915	4775	382.0
12.00	3	500	0.120	9.600	12.000	13265	4775	550.0
16.00	3	500	0.160	12.800	16.000	9945	4775	977.8
20.00	3	500	0.200	16.000	20.000	7960	4775	1527.9
25.00	3	500	0.250	20.000	25.000	6365	4775	2387.3
6.00	3	270	0.060	4.800	6.000	14325	2580	74.3
8.00	3	270	0.080	6.400	8.000	10745	2580	132.0
10.00	3	270	0.100	8.000	10.000	8595	2580	206.3
12.00	3	270	0.120	9.600	12.000	7160	2580	297.0
16.00	3	270	0.160	12.800	16.000	5370	2580	528.0
20.00	3	270	0.200	16.000	20.000	4295	2580	825.1
25.00	3	270	0.250	20.000	25.000	3440	2580	1289.2
6.00	3	792	0.060	4.800	6.000	42015	7565	217.8
8.00	3	800	0.080	6.400	8.000	31830	7640	391.1
10.00	3	800	0.100	8.000	10.000	25465	7640	611.2
12.00	3	800	0.120	9.600	12.000	21220	7640	880.1
16.00	3	800	0.160	12.800	16.000	15915	7640	1564.6
20.00	3	800	0.200	16.000	20.000	12730	7640	2444.6
25.00	3	800	0.250	20.000	25.000	10185	7640	3819.7

Cylindrical end mills AX

Profiled, medium length version, neck



HM	λ 40°
MG10	γ 18°

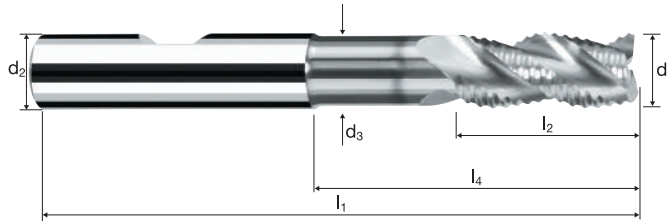


Roughing	Finishing

Rm < 850		Al Aluminium > 99%	Al Aluminium Alloy	Al Aluminium Cast		Cu Copper	Plastic Thermoplast	
-------------	--	--------------------------	--------------------------	-------------------------	--	--------------	------------------------	--

Ø Code	d ₁ e8	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	45°	z	Example: Order-N°.		CELERO
										Coating C	Article-N° 15398	ø-Code 300
300	6.00	6.00	5.50	63	13.00	25.34	26.00	0.40	3			●
391	8.00	8.00	7.40	72	19.00	34.29	35.00	0.40	3			●
450	10.00	10.00	9.20	84	22.00	42.20	43.00	0.40	3			●
501	12.00	12.00	11.00	97	26.00	50.13	51.00	0.40	3			●
610	16.00	16.00	15.00	108	32.00	58.13	59.00	0.50	3			●
682	20.00	20.00	19.00	122	38.00	70.13	71.00	0.50	3			●
772	25.00	25.00	24.00	144	45.00	86.13	87.00	0.70	3			●

Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _r [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	φ Z [°]
6.00	3	300	0.065	32.000	5.400	15915	3105	5°
8.00	3	300	0.080	42.000	7.200	11935	2865	5°
10.00	3	350	0.095	53.000	9.000	11140	3175	5°
12.00	3	350	0.110	63.000	10.800	9285	3065	5°
16.00	3	400	0.130	84.000	14.400	7960	3105	5°
20.00	3	400	0.145	105.000	18.000	6365	2770	5°

Cast aluminium




6.00	3	270	0.065	32.000	5.400	14325	2795	5°
8.00	3	270	0.080	42.000	7.200	10745	2580	5°
10.00	3	315	0.095	53.000	9.000	10025	2860	5°
12.00	3	315	0.110	63.000	10.800	8355	2755	5°
16.00	3	360	0.130	84.000	14.400	7160	2795	5°
20.00	3	360	0.145	105.000	18.000	5730	2490	5°

Unalloyed copper



6.00	3	240	0.052	32.000	5.400	12730	1985	4°
8.00	3	240	0.064	42.000	7.200	9550	1835	4°
10.00	3	280	0.076	53.000	9.000	8915	2030	4°
12.00	3	280	0.088	63.000	10.800	7425	1960	4°
16.00	3	320	0.104	84.000	14.400	6365	1985	4°
20.00	3	320	0.116	105.000	18.000	5095	1770	4°

Application



Material

Wrought aluminium
Construction aluminium



d1 [mm]	z	v _r [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
6.00	3	300	0.106	32.000	0.600	15915	5060	97.2
8.00	3	350	0.153	42.000	0.800	13925	6390	214.8
10.00	3	400	0.174	53.000	1.000	12730	6645	352.3
12.00	3	400	0.211	63.000	1.200	10610	6715	507.8
16.00	3	500	0.214	84.000	1.600	9945	6385	858.3
20.00	3	500	0.241	105.000	2.000	7960	5755	1208.2

Cast aluminium



6.00	3	270	0.106	32.000	0.600	14325	4555	87.5
8.00	3	315	0.153	42.000	0.800	12535	5755	193.3
10.00	3	360	0.174	53.000	1.000	11460	5980	317.0
12.00	3	360	0.211	63.000	1.200	9550	6045	457.0
16.00	3	450	0.214	84.000	1.600	8950	5745	772.5
20.00	3	450	0.241	105.000	2.000	7160	5180	1087.4

Unalloyed copper



6.00	3	240	0.085	32.000	0.600	12730	3240	62.2
8.00	3	280	0.122	42.000	0.800	11140	4090	137.5
10.00	3	320	0.139	53.000	1.000	10185	4255	225.4
12.00	3	320	0.169	63.000	1.200	8490	4300	325.0
16.00	3	400	0.171	84.000	1.600	7960	4085	549.3
20.00	3	400	0.193	105.000	2.000	6365	3680	773.3



Use




ToolExpert AX-FPS
to determine the best
possible cutting data
for your machining
environment!

Cylindrical end mills AX-FPS



Profiled, extra-long version 5.2xd
High-performance penetration edge, central cooling channel



HM
MG10 λ 30°
 γ 20°

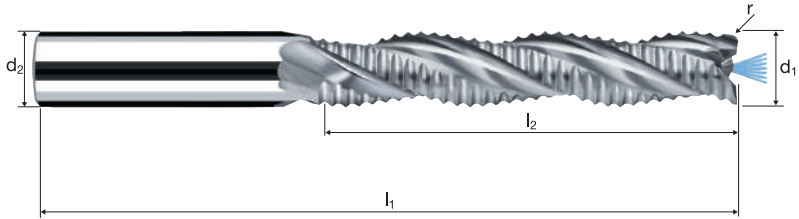

		Al Aluminium > 99%	Al Aluminium Alloy	Al Aluminium Cast		Cu Copper	Plastic Thermoplast	
--	--	--------------------------	--------------------------	-------------------------	--	--------------	------------------------	--

Ø Code	d ₁ e8	d ₂ h5	l ₁	l ₂	r	z	Example: Order-N°.	
							Coating	Article-N°.
							15507	300
							15607	
300	6.00	6.00	73	32.00	0.100	3	●	
391	8.00	8.00	84	42.00	0.150	3	●	
450	10.00	10.00	100	53.00	0.200	3	●	
501	12.00	12.00	117	63.00	0.200	3	●	
610	16.00	16.00	144	84.00	0.200	3	●	
682	20.00	20.00	169	105.00	0.200	3	●	

Application



Material

Wrought aluminium
Construction aluminium



Cast aluminium



Unalloyed copper





d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	φZ [°]
12.00	3	500	0.140	18.000	9.600	13265	5570	962.6	12°
16.00	3	500	0.160	24.000	12.800	9945	4775	1466.8	12°
20.00	3	500	0.180	30.000	16.000	7960	4295	2062.6	12°

12.00	3	450	0.140	18.000	9.600	11935	5015	866.3	12°
16.00	3	450	0.160	24.000	12.800	8950	4295	1320.1	12°
20.00	3	450	0.180	30.000	16.000	7160	3865	1856.4	12°

12.00	3	400	0.126	18.000	9.600	10610	4010	693.0	7°
16.00	3	400	0.144	24.000	12.800	7960	3440	1056.1	7°
20.00	3	400	0.162	30.000	16.000	6365	3095	1485.1	7°

Application



Material

Wrought aluminium
Construction aluminium



Cast aluminium



Unalloyed copper



d1 [mm]	z	v _c [m/min]	f _z [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	Q [cm ³ /min]	φR [°]	LR [mm]
12.00	3	450	0.126	18.000	12.000	11935	4510	974.6	15°	67.2
16.00	3	450	0.144	24.000	16.000	8950	3865	1485.1	15°	89.6
20.00	3	450	0.162	30.000	20.000	7160	3480	2088.4	15°	112.0

12.00	3	405	0.126	18.000	12.000	10745	4060	877.1	15°	67.2
16.00	3	405	0.144	24.000	16.000	8055	3480	1336.6	15°	89.6
20.00	3	405	0.162	30.000	20.000	6445	3135	1879.6	15°	112.0

12.00	3	320	0.101	18.000	12.000	8490	2565	554.4	9°	113.6
16.00	3	320	0.115	24.000	16.000	6365	2200	844.9	9°	151.5
20.00	3	320	0.130	30.000	20.000	5095	1980	1188.1	9°	189.4



Use
ToolExpert AX-FPS
to determine the best
possible cutting data
for your machining
environment!




Corner radius end mills AX-FPS



Profiled, normal version, neck
High-performance penetration edge, central cooling channel

HM
MG10 λ 30°
 γ 20°

h5 G2.5

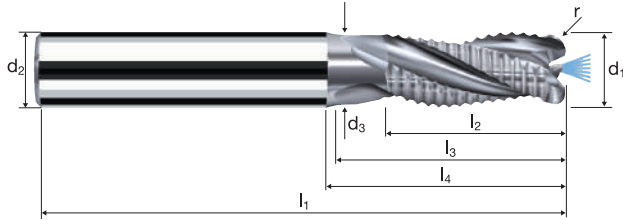


Roughing Finishing

Al Aluminium > 99% Al Aluminium Alloy Al Aluminium Cast Cu Copper Plastic Thermoplast

Ø Code	d ₁ e8	d ₂ h5	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.03	z	Example: Order-N°.	
										Coating	Article-N°
										15502	
501	12.00	12.00	11.00	83	26.00	33.29	37.00	1.000	3	●	
608	16.00	16.00	15.00	95	32.00	41.73	46.00	1.000	3	●	
611	16.00	16.00	15.00	95	32.00	41.73	46.00	2.000	3	●	
506	12.00	12.00	11.00	83	26.00	33.29	37.00	2.500	3	●	
612	16.00	16.00	15.00	95	32.00	41.73	46.00	2.500	3	●	
684	20.00	20.00	19.00	104	40.00	48.23	53.00	2.500	3	●	
613	16.00	16.00	15.00	95	32.00	41.73	46.00	3.000	3	●	

Application



Material

Wrought aluminium
Construction aluminium



Unalloyed copper



Thermoplastics




Cast aluminium



d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
6.00	6	0.020	12.000	0.100	1200	1800	2400	3600
8.00	6	0.020	16.000	0.100	1200	1800	2400	3600
10.00	6	0.025	20.000	0.150	1500	2250	3000	4500
12.00	6	0.025	24.000	0.200	1500	2250	3000	4500
16.00	6	0.030	32.000	0.250	1800	2700	3600	5400
20.00	6	0.030	40.000	0.300	1800	2700	3600	5400
6.00	6	0.020	12.000	0.100	1200	1800	2400	3600
8.00	6	0.020	16.000	0.100	1200	1800	2400	3600
10.00	6	0.025	20.000	0.150	1500	2250	3000	4500
12.00	6	0.025	24.000	0.200	1500	2250	3000	4500
16.00	6	0.030	32.000	0.250	1800	2700	3600	5400
20.00	6	0.030	40.000	0.300	1800	2700	3600	5400
6.00	6	0.020	12.000	0.100	1200	1800	2400	3600
8.00	6	0.020	16.000	0.100	1200	1800	2400	3600
10.00	6	0.025	20.000	0.150	1500	2250	3000	4500
12.00	6	0.025	24.000	0.200	1500	2250	3000	4500
16.00	6	0.030	32.000	0.250	1800	2700	3600	5400
20.00	6	0.030	40.000	0.300	1800	2700	3600	5400

Application



Material

Wrought aluminium
Construction aluminium



Unalloyed copper











Thermoplastics















Cast aluminium



d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
6.00	6	0.020	18.000	0.100	1200	1800	2400	3600
8.00	6	0.020	24.000	0.100	1200	1800	2400	3600
10.00	6	0.025	30.000	0.150	1500	2250	3000	4500
12.00	6	0.025	36.000	0.200	1500	2250	3000	4500
16.00	6	0.030	48.000	0.250	1800	2700	3600	5400
20.00	6	0.030	60.000	0.300	1800	2700	3600	5400
6.00	6	0.020	18.000	0.100	1200	1800	2400	3600
8.00	6	0.020	24.000	0.100	1200	1800	2400	3600
10.00	6	0.025	30.000	0.150	1500	2250	3000	4500
12.00	6	0.025	36.000	0.200	1500	2250	3000	4500
16.00	6	0.030	48.000	0.250	1800	2700	3600	5400
20.00	6	0.030	60.000	0.300	1800	2700	3600	5400
6.00	6	0.020	18.000	0.100	1200	1800	2400	3600
8.00	6	0.020	24.000	0.100	1200	1800	2400	3600
10.00	6	0.025	30.000	0.150	1500	2250	3000	4500
12.00	6	0.025	36.000	0.200	1500	2250	3000	4500
16.00	6	0.030	48.000	0.250	1800	2700	3600	5400
20.00	6	0.030	60.000	0.300	1800	2700	3600	5400

Application	Material	d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
	Wrought aluminium Construction aluminium 	6.00	3	300	0.025	32.000	0.080	15915	1195
		8.00	3	300	0.030	42.000	0.100	11935	1075
		10.00	3	350	0.030	53.000	0.120	11140	1005
		12.00	3	350	0.030	63.000	0.120	9285	835
		16.00	3	400	0.035	84.000	0.150	7960	835
		20.00	3	400	0.035	105.000	0.150	6365	670
	Wrought aluminium Construction aluminium 	6.00	3	200	0.020	32.000	0.030	10610	635
		8.00	3	200	0.025	42.000	0.050	7960	595
		10.00	3	250	0.025	53.000	0.050	7960	595
		12.00	3	250	0.025	63.000	0.050	6630	495
		16.00	3	300	0.030	84.000	0.050	5970	535
		20.00	3	300	0.030	105.000	0.050	4775	430
	Wrought aluminium Construction aluminium 	6.00	3	200	0.025	32.000	0.060	10610	795
		8.00	3	200	0.030	42.000	0.060	7960	715
		10.00	3	250	0.030	53.000	0.080	7960	715
		12.00	3	250	0.030	63.000	0.080	6630	595
		16.00	3	300	0.035	84.000	0.100	5970	625
		20.00	3	300	0.035	105.000	0.100	4775	500
	Wrought aluminium Construction aluminium 	6.00	3	150	0.020	32.000	0.030	7960	475
		8.00	3	150	0.025	42.000	0.030	5970	450
		10.00	3	200	0.025	53.000	0.040	6365	475
		12.00	3	200	0.025	63.000	0.040	5305	400
		16.00	3	250	0.030	84.000	0.050	4975	450
		20.00	3	250	0.030	105.000	0.050	3980	360
	Unalloyed copper 	6.00	3	90	0.020	32.000	0.030	4775	285
		8.00	3	90	0.025	42.000	0.030	3580	270
		10.00	3	120	0.025	53.000	0.040	3820	285
		12.00	3	120	0.025	63.000	0.040	3185	240
		16.00	3	150	0.030	84.000	0.050	2985	270
		20.00	3	150	0.030	105.000	0.050	2385	215

Application	Material	d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
	Wrought aluminium Construction aluminium 	6.00	3	300	0.025	32.000	0.080	15915	1195
		8.00	3	300	0.030	42.000	0.100	11935	1075
		10.00	3	350	0.030	53.000	0.120	11140	1005
		12.00	3	350	0.030	63.000	0.120	9285	835
		16.00	3	400	0.035	84.000	0.150	7960	835
		20.00	3	400	0.035	105.000	0.150	6365	670
	Cast aluminium 	6.00	3	270	0.025	32.000	0.080	14325	1075
		8.00	3	270	0.030	42.000	0.100	10745	965
		10.00	3	315	0.030	53.000	0.120	10025	900
		12.00	3	315	0.030	63.000	0.120	8355	750
		16.00	3	360	0.035	84.000	0.150	7160	750
		20.00	3	360	0.035	105.000	0.150	5730	600
	Wrought aluminium Construction aluminium 	6.00	3	200	0.020	32.000	0.030	10610	635
		8.00	3	200	0.025	42.000	0.050	7960	595
		10.00	3	250	0.025	53.000	0.050	7960	595
		12.00	3	250	0.025	63.000	0.050	6630	495
		16.00	3	300	0.030	84.000	0.050	5970	535
		20.00	3	300	0.030	105.000	0.050	4775	430
	Cast aluminium 	6.00	3	180	0.020	32.000	0.030	9550	575
		8.00	3	180	0.025	42.000	0.050	7160	535
		10.00	3	225	0.025	53.000	0.050	7160	535
		12.00	3	225	0.025	63.000	0.050	5970	450
		16.00	3	270	0.030	84.000	0.050	5370	485
		20.00	3	270	0.030	105.000	0.050	4295	385
	Wrought aluminium Construction aluminium 	6.00	3	200	0.025	32.000	0.060	10610	795
		8.00	3	200	0.030	42.000	0.060	7960	715
		10.00	3	250	0.030	53.000	0.080	7960	715
		12.00	3	250	0.030	63.000	0.080	6630	595
		16.00	3	300	0.035	84.000	0.100	5970	625
		20.00	3	300	0.035	105.000	0.100	4775	500
	Unalloyed copper 	6.00	3	120	0.025	32.000	0.060	6365	475
		8.00	3	120	0.030	42.000	0.060	4775	430
		10.00	3	150	0.030	53.000	0.080	4775	430
		12.00	3	150	0.030	63.000	0.080	3980	360
		16.00	3	180	0.035	84.000	0.100	3580	375
		20.00	3	180	0.035	105.000	0.100	2865	300
	Wrought aluminium Construction aluminium 	6.00	3	150	0.020	32.000	0.030	7960	475
		8.00	3	150	0.025	42.000	0.030	5970	450
		10.00	3	200	0.025	53.000	0.040	6365	475
		12.00	3	200	0.025	63.000	0.040	5305	400
		16.00	3	250	0.030	84.000	0.050	4975	450
		20.00	3	250	0.030	105.000	0.050	3980	360
	Unalloyed copper 	6.00	3	90	0.020	32.000	0.030	4775	285
		8.00	3	90	0.025	42.000	0.030	3580	270
		10.00	3	120	0.025	53.000	0.040	3820	285
		12.00	3	120	0.025	63.000	0.040	3185	240
		16.00	3	150	0.030	84.000	0.050	2985	270
		20.00	3	150	0.030	105.000	0.050	2385	215

Corner radius end mills AX


Finishing, extra-long version 5.2xd



HM
MG10 λ 40°
 γ 20°

G 2.5

Vario

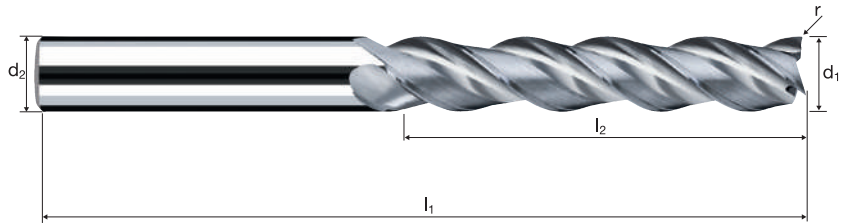

Roughing Finishing

Al Aluminium > 99% | Al Aluminium Alloy | Al Aluminium Cast | Cu Copper | Plastic Thermoplast








Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	r	z	Order-N°	
							Coating	Article-N°
							15512	
302	6.00	6.00	73	32.00	1.000	3	●	■
391	8.00	8.00	84	42.00	1.000	3	●	■
450	10.00	10.00	100	53.00	1.000	3	●	■
501	12.00	12.00	117	63.00	1.000	3	●	■
608	16.00	16.00	144	84.00	1.000	3	●	■
457	10.00	10.00	100	53.00	2.500	3	●	■
506	12.00	12.00	117	63.00	2.500	3	●	■
612	16.00	16.00	144	84.00	2.500	3	●	■
684	20.00	20.00	169	105.00	2.500	3	●	■








■ Availability and delivery dates on request.



End milling tools for graphite

Micro with ball nose








Shank \varnothing 6mm, tolerance $r \pm 0.005$									
N° 6062		MicroX	X-Generation X	3xd	d, 1.5 – 6.0	C Graphite			669
				R	F				
N° 6064		MicroX	X-Generation X	5xd	d, 0.1 – 6.0	C Graphite			671
				R	F				
N° 6066		MicroX	X-Generation X	8xd	d, 0.1 – 6.0	C Graphite			673
				R	F				
N° 6068		MicroX	X-Generation X	10xd	d, 0.2 – 6.0	C Graphite			675
				R	F				
N° 6070		MicroX	X-Generation X	12xd	d, 0.2 – 4.0	C Graphite			677
				R	F				
N° 6072		MicroX	X-Generation X	15xd	d, 0.3 – 4.0	C Graphite			679
				R	F				
N° 6074		MicroX	X-Generation X	20xd	d, 0.3 – 4.0	C Graphite			681
				R	F				

Shank \varnothing 3mm, tolerance $r \pm 0.01$									
N° 5782		Microcut	Base-X B	3xd	d, 0.2 – 3.0	C Graphite			683
				R	F				
N° 5784		Microcut	Base-X B	5xd	d, 0.5 – 3.0	C Graphite			685
				R	F				
N° 5786		Microcut	Base-X B	8xd	d, 0.5 – 3.0	C Graphite			687
				R	F				
N° 5787		Microcut	Base-X B	10xd	d, 0.5 – 3.0	C Graphite			689
				R	F				
N° 5791		Microcut	Base-X B	12xd	d, 1.0 – 3.0	C Graphite			691
				R	F				
N° 5793		Microcut	Base-X B	15xd	d, 1.0 – 3.0	C Graphite			693
				R	F				
N° 15795		Microcut	Base-X B	20xd	d, 1.0 – 3.0	C Graphite			695
				R	F				




End milling tools for graphite

Micro with corner radius

Shank \varnothing 6mm, tolerance $r \pm 0.005$





N° 6032		MicroX	X-Generation X	3xd	r 0.2, 0.5	C Graphite			697
				R					
N° 6034		MicroX	X-Generation X	5xd	r 0.05, 0.1, 0.2, 0.5	C Graphite			699
				R					
N° 6036		MicroX	X-Generation X	8xd	r 0.05, 0.1, 0.2, 0.5	C Graphite			703
				R					
N° 6038		MicroX	X-Generation X	10xd	r 0.05, 0.1, 0.2, 0.5	C Graphite			707
				R					
N° 6040		MicroX	X-Generation X	12xd	r 0.05, 0.1, 0.2, 0.5	C Graphite			711
				R					
N° 6042		MicroX	X-Generation X	15xd	r 0.05, 0.1, 0.2, 0.5	C Graphite			713
				R					
N° 6044		MicroX	X-Generation X	20xd	r 0.05, 0.1, 0.2, 0.5	C Graphite			715
				R					

Shank \varnothing 3mm, tolerance $r \pm 0.03$

N° 5752		Microcut	Base-X B	3xd	r 0.2	C Graphite			717
				R					
N° 5754		Microcut	Base-X B	5xd	r 0.2	C Graphite			719
				R					
N° 5756		Microcut	Base-X B	8xd	r 0.2	C Graphite			721
				R					

End milling tools for graphite

Micro, cylindrical

Shank \varnothing 3mm								
N° 5712		Microcut	Base-X B	3xd	d, 0.2 – 3.0	C Graphite		723
				R F	45°			
N° 5714		Microcut	Base-X B	5xd	d, 0.5 – 3.0	C Graphite		725
				R F	45°			
N° 5716		Microcut	Base-X B	8xd	d, 0.5 – 3.0	C Graphite		727
				R F	45°			
N° 5717		Microcut	Base-X B	10xd	d, 0.5 – 3.0	C Graphite		729
				R F	45°			

End milling tools for graphite

Ball nose

Tolerance $r \pm 0.005$

N° 7484



SpheroX

X-Generation

X

6xd

d, 6 - 12

R

F

C

Graphite

731

End milling tools for graphite

Corner radius

Tolerance r ± 0.005

N° 7284



ToroX

X Generation

X

6xd

r 0.5, 1.0

R

F

C

Graphite

733

Tolerance r 0/+0.03

N° 5640



Base-X

B

r 0.15, 0.2,
0.3, 0.5

R

F

C

Graphite

735

N° 5645



Base-X

B

r 0.15, 0.2,
0.3, 0.5

R

F

C

Graphite

737

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=1500 min ⁻¹ vf [mm/min]	n=2500 min ⁻¹ vf [mm/min]	n=3000 min ⁻¹ vf [mm/min]	n=4500 min ⁻¹ vf [mm/min]
	Graphite B B	1.50	2	0.018	0.750	0.900	540	900	1080	1620
		2.00	2	0.024	1.000	1.200	720	1200	1440	2160
		3.00	2	0.035	1.500	1.800	1050	1750	2100	3150
		4.00	2	0.047	2.000	2.400	1410	2350	2820	4230
		5.00	2	0.059	2.500	3.000	1770	2950	3540	5310
		6.00	2	0.071	3.000	3.600	2130	3550	4260	6390
	Graphite B B	1.50	2	0.014	0.750	1.500	420	700	840	1260
		2.00	2	0.018	1.000	2.000	540	900	1080	1620
		3.00	2	0.027	1.500	3.000	810	1350	1620	2430
		4.00	2	0.036	2.000	4.000	1080	1800	2160	3240
		5.00	2	0.045	2.500	5.000	1350	2250	2700	4050
		6.00	2	0.055	3.000	6.000	1650	2750	3300	4950
	Graphite B B	1.50	2	0.020	0.230	0.300	600	1000	1200	1800
		2.00	2	0.027	0.300	0.400	810	1350	1620	2430
		3.00	2	0.040	0.450	0.600	1200	2000	2400	3600
		4.00	2	0.053	0.600	0.800	1590	2650	3180	4770
		5.00	2	0.067	0.750	1.000	2010	3350	4020	6030
		6.00	2	0.080	0.900	1.200	2400	4000	4800	7200
	Graphite B B	1.50	2	0.020	0.300	0.300	600	1000	1200	1800
		2.00	2	0.027	0.400	0.400	810	1350	1620	2430
		3.00	2	0.040	0.600	0.600	1200	2000	2400	3600
		4.00	2	0.053	0.800	0.800	1590	2650	3180	4770
		5.00	2	0.067	1.000	1.000	2010	3350	4020	6030
		6.00	2	0.080	1.200	1.200	2400	4000	4800	7200



Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.20	2	0.002	0.100	0.100	60	100	120	180
		0.50	2	0.006	0.250	0.300	180	300	360	540
		0.80	2	0.009	0.350	0.500	270	450	540	810
		1.00	2	0.012	0.450	0.600	360	600	720	1080
		2.00	2	0.024	0.900	1.200	720	1200	1440	2160
		3.00	2	0.035	1.350	1.800	1050	1750	2100	3150
		4.00	2	0.047	1.800	2.400	1410	2350	2820	4230
		5.00	2	0.059	2.250	3.000	1770	2950	3540	5310
6.00	2	0.071	2.700	3.600	2130	3550	4260	6390		
	Graphite B B	0.20	2	0.002	0.100	0.200	60	100	120	180
		0.50	2	0.005	0.250	0.500	150	250	300	450
		0.80	2	0.007	0.350	0.800	210	350	420	630
		1.00	2	0.009	0.450	1.000	270	450	540	810
		2.00	2	0.018	0.900	2.000	540	900	1080	1620
		3.00	2	0.027	1.350	3.000	810	1350	1620	2430
		4.00	2	0.036	1.800	4.000	1080	1800	2160	3240
		5.00	2	0.045	2.250	5.000	1350	2250	2700	4050
6.00	2	0.055	2.700	6.000	1650	2750	3300	4950		
	Graphite B B	0.20	2	0.003	0.030	0.040	90	150	180	270
		0.50	2	0.007	0.070	0.100	210	350	420	630
		0.80	2	0.011	0.110	0.160	330	550	660	990
		1.00	2	0.013	0.140	0.200	390	650	780	1170
		2.00	2	0.027	0.280	0.400	810	1350	1620	2430
		3.00	2	0.040	0.420	0.600	1200	2000	2400	3600
		4.00	2	0.053	0.560	0.800	1590	2650	3180	4770
		5.00	2	0.067	0.700	1.000	2010	3350	4020	6030
6.00	2	0.080	0.840	1.200	2400	4000	4800	7200		
	Graphite B B	0.20	2	0.003	0.040	0.040	90	150	180	270
		0.50	2	0.007	0.090	0.090	210	350	420	630
		0.80	2	0.011	0.140	0.140	330	550	660	990
		1.00	2	0.013	0.180	0.180	390	650	780	1170
		2.00	2	0.027	0.360	0.360	810	1350	1620	2430
		3.00	2	0.040	0.540	0.540	1200	2000	2400	3600
		4.00	2	0.053	0.720	0.720	1590	2650	3180	4770
		5.00	2	0.067	0.900	0.900	2010	3350	4020	6030
6.00	2	0.080	1.080	1.080	2400	4000	4800	7200		

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 5xd






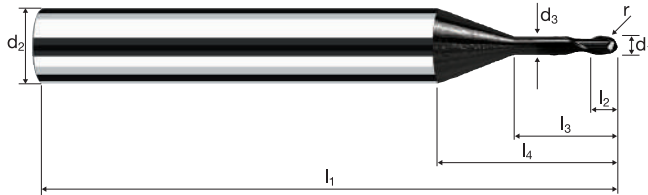








HM λ 30°
XA γ 15°



C Graphite CF/GF Fiber Reinforced Plastics

IV

Example: Order-N°.											DIAPLUS
Coating: B Article-N°: 6064 \varnothing -Code: 010											B6064
\varnothing Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	
010	0.10	6.00	0.09	57	0.10	0.50	17.70	0.050	14.5°	2	●
015	0.15	6.00	0.13	57	0.15	0.75	17.83	0.075	14.2°	2	●
020	0.20	6.00	0.18	57	0.20	1.00	17.94	0.100	13.9°	2	●
030	0.30	6.00	0.25	57	0.30	1.50	18.24	0.150	13.8°	2	●
040	0.40	6.00	0.35	57	0.40	2.00	18.46	0.200	12.8°	2	●
050	0.50	6.00	0.45	57	0.50	2.50	13.51	0.250	12.3°	2	●
060	0.60	6.00	0.55	57	0.60	3.00	13.83	0.300	11.9°	2	●
080	0.80	6.00	0.75	57	0.80	4.00	14.45	0.400	11.0°	2	●
100	1.00	6.00	0.95	57	1.00	5.00	15.08	0.500	10.2°	2	●
120	1.50	6.00	1.40	57	1.50	7.50	16.74	0.750	8.4°	2	●
140	2.00	6.00	1.90	57	2.00	10.00	18.31	1.000	6.9°	2	●
180	3.00	6.00	2.80	57	3.00	15.00	21.63	1.500	4.4°	2	●
182	3.00	6.00	2.80	61	3.00	18.00	24.63	1.500	3.9°	2	●
220	4.00	6.00	3.70	61	4.00	20.00	24.95	2.000	2.6°	2	●
222	4.00	6.00	3.70	66	4.00	25.00	29.95	2.000	2.2°	2	●
260	5.00	6.00	4.60	66	5.00	25.00	28.27	2.500	1.2°	2	●
300	6.00	6.00	5.50	69	6.00	29.34	30.00	3.000	0.0°	2	●



Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite  B  B	0.20	2	0.002	0.100	0.100	60	100	120	180
		0.50	2	0.006	0.200	0.300	180	300	360	540
		0.80	2	0.009	0.300	0.500	270	450	540	810
		1.00	2	0.012	0.400	0.600	360	600	720	1080
		2.00	2	0.024	0.800	1.200	720	1200	1440	2160
		3.00	2	0.035	1.200	1.800	1050	1750	2100	3150
		4.00	2	0.047	1.600	2.400	1410	2350	2820	4230
		5.00	2	0.059	2.000	3.000	1770	2950	3540	5310
6.00	2	0.071	2.400	3.600	2130	3550	4260	6390		
	Graphite  B  B	0.20	2	0.002	0.100	0.200	60	100	120	180
		0.50	2	0.005	0.200	0.500	150	250	300	450
		0.80	2	0.007	0.300	0.800	210	350	420	630
		1.00	2	0.009	0.400	1.000	270	450	540	810
		2.00	2	0.018	0.800	2.000	540	900	1080	1620
		3.00	2	0.027	1.200	3.000	810	1350	1620	2430
		4.00	2	0.036	1.600	4.000	1080	1800	2160	3240
		5.00	2	0.045	2.000	5.000	1350	2250	2700	4050
6.00	2	0.055	2.400	6.000	1650	2750	3300	4950		
	Graphite  B  B	0.20	2	0.003	0.020	0.040	90	150	180	270
		0.50	2	0.007	0.060	0.090	210	350	420	630
		0.80	2	0.011	0.100	0.140	330	550	660	990
		1.00	2	0.013	0.120	0.180	390	650	780	1170
		2.00	2	0.027	0.240	0.360	810	1350	1620	2430
		3.00	2	0.040	0.360	0.540	1200	2000	2400	3600
		4.00	2	0.053	0.480	0.720	1590	2650	3180	4770
		5.00	2	0.067	0.600	0.900	2010	3350	4020	6030
6.00	2	0.080	0.720	1.080	2400	4000	4800	7200		
	Graphite  B  B	0.20	2	0.003	0.030	0.030	90	150	180	270
		0.50	2	0.007	0.080	0.080	210	350	420	630
		0.80	2	0.011	0.130	0.130	330	550	660	990
		1.00	2	0.013	0.160	0.160	390	650	780	1170
		2.00	2	0.027	0.320	0.320	810	1350	1620	2430
		3.00	2	0.040	0.480	0.480	1200	2000	2400	3600
		4.00	2	0.053	0.640	0.640	1590	2650	3180	4770
		5.00	2	0.067	0.800	0.800	2010	3350	4020	6030
6.00	2	0.080	0.960	0.960	2400	4000	4800	7200		

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 8xd



HM
XA λ 30°
 γ 15°

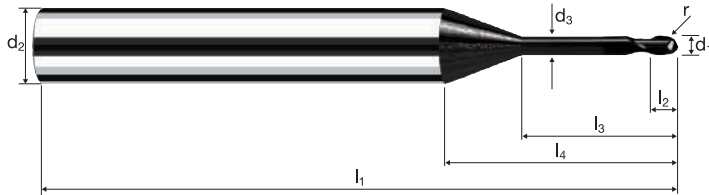

C Graphite CF/GF Fiber Reinforced Plastics

IV

Ø Code	Example: Order-N°.											DIAPLUS
	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z		B6066
010	0.10	6.00	0.09	57	0.10	0.80	18.00	0.050	14.1°	2		●
015	0.15	6.00	0.13	57	0.15	1.20	18.28	0.075	13.7°	2		●
020	0.20	6.00	0.18	57	0.20	1.60	18.54	0.100	13.2°	2		●
030	0.30	6.00	0.25	57	0.30	2.40	19.14	0.150	12.4°	2		●
040	0.40	6.00	0.35	57	0.40	3.20	19.66	0.200	11.7°	2		●
050	0.50	6.00	0.45	57	0.50	4.00	15.01	0.250	11.1°	2		●
060	0.60	6.00	0.55	57	0.60	4.80	15.63	0.300	10.5°	2		●
080	0.80	6.00	0.75	57	0.80	6.40	16.85	0.400	9.4°	2		●
100	1.00	6.00	0.95	57	1.00	8.00	18.08	0.500	8.4°	2		●
120	1.50	6.00	1.40	57	1.50	12.00	21.24	0.750	6.5°	2		●
140	2.00	6.00	1.90	61	2.00	16.00	24.31	1.000	5.1°	2		●
180	3.00	6.00	2.80	66	3.00	24.00	30.63	1.500	3.1°	2		●
220	4.00	6.00	3.70	75	4.00	32.00	36.95	2.000	1.7°	2		●
260	5.00	6.00	4.60	80	5.00	40.00	43.27	2.500	0.8°	2		●
300	6.00	6.00	5.50	87	6.00	47.34	48.00	3.000	0.0°	2		●



Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.20	2	0.002	0.080	0.080	60	100	120	180
		0.50	2	0.006	0.200	0.200	180	300	360	540
		0.80	2	0.009	0.300	0.300	270	450	540	810
		1.00	2	0.012	0.400	0.400	360	600	720	1080
		2.00	2	0.024	0.800	0.800	720	1200	1440	2160
		3.00	2	0.035	1.200	1.200	1050	1750	2100	3150
		4.00	2	0.047	1.600	1.600	1410	2350	2820	4230
		5.00	2	0.059	2.000	2.000	1770	2950	3540	5310
6.00	2	0.071	2.400	2.400	2130	3550	4260	6390		
	Graphite B B	0.20	2	0.001	0.060	0.200	30	50	60	90
		0.50	2	0.004	0.150	0.500	120	200	240	360
		0.80	2	0.006	0.250	0.800	180	300	360	540
		1.00	2	0.007	0.300	1.000	210	350	420	630
		2.00	2	0.015	0.600	2.000	450	750	900	1350
		3.00	2	0.022	0.900	3.000	660	1100	1320	1980
		4.00	2	0.029	1.200	4.000	870	1450	1740	2610
		5.00	2	0.036	1.500	5.000	1080	1800	2160	3240
6.00	2	0.044	1.800	6.000	1320	2200	2640	3960		
	Graphite B B	0.20	2	0.003	0.020	0.030	90	150	180	270
		0.50	2	0.007	0.050	0.080	210	350	420	630
		0.80	2	0.011	0.080	0.130	330	550	660	990
		1.00	2	0.013	0.100	0.160	390	650	780	1170
		2.00	2	0.027	0.200	0.320	810	1350	1620	2430
		3.00	2	0.040	0.300	0.480	1200	2000	2400	3600
		4.00	2	0.053	0.400	0.640	1590	2650	3180	4770
		5.00	2	0.067	0.500	0.800	2010	3350	4020	6030
6.00	2	0.080	0.600	0.960	2400	4000	4800	7200		
	Graphite B B	0.20	2	0.003	0.030	0.030	90	150	180	270
		0.50	2	0.007	0.070	0.070	210	350	420	630
		0.80	2	0.011	0.110	0.110	330	550	660	990
		1.00	2	0.013	0.140	0.140	390	650	780	1170
		2.00	2	0.027	0.280	0.280	810	1350	1620	2430
		3.00	2	0.040	0.420	0.420	1200	2000	2400	3600
		4.00	2	0.053	0.560	0.560	1590	2650	3180	4770
		5.00	2	0.067	0.700	0.700	2010	3350	4020	6030
6.00	2	0.080	0.840	0.840	2400	4000	4800	7200		

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 10xd



HM λ 30°
XA γ 15°

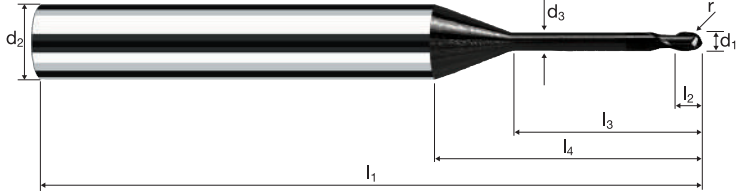

C Graphite CF/GF Fiber Reinforced Plastics

IV

Example: Order-N°.											DIAPLUS
											B6068
\varnothing Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ± 0.005	α	z	
020	0.20	6.00	0.18	57	0.20	2.00	18.94	0.100	12.8°	2	●
030	0.30	6.00	0.25	57	0.30	3.00	19.74	0.150	11.9°	2	●
040	0.40	6.00	0.35	57	0.40	4.00	20.46	0.200	11.1°	2	●
050	0.50	6.00	0.45	57	0.50	5.00	16.01	0.250	10.3°	2	●
060	0.60	6.00	0.55	57	0.60	6.00	16.83	0.300	9.7°	2	●
080	0.80	6.00	0.75	57	0.80	8.00	18.45	0.400	8.5°	2	●
100	1.00	6.00	0.95	57	1.00	10.00	20.08	0.500	7.5°	2	●
120	1.50	6.00	1.40	61	1.50	15.00	24.24	0.750	5.7°	2	●
140	2.00	6.00	1.90	66	2.00	20.00	28.31	1.000	4.3°	2	●
180	3.00	6.00	2.80	75	3.00	30.00	36.63	1.500	2.5°	2	●
220	4.00	6.00	3.70	80	4.00	40.00	44.95	2.000	1.4°	2	●
260	5.00	6.00	4.60	100	5.00	50.00	53.27	2.500	0.6°	2	●
300	6.00	6.00	5.50	100	6.00	59.34	60.00	3.000	0.0°	2	●

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.20	2	0.002	0.060	0.080	60	100	120	180
		0.50	2	0.005	0.150	0.200	150	250	300	450
		0.60	2	0.006	0.200	0.250	180	300	360	540
		0.80	2	0.008	0.250	0.300	240	400	480	720
		1.00	2	0.009	0.300	0.400	270	450	540	810
		1.50	2	0.014	0.450	0.600	420	700	840	1260
		2.00	2	0.019	0.600	0.800	570	950	1140	1710
		3.00	2	0.028	0.900	1.200	840	1400	1680	2520
		4.00	2	0.038	1.200	1.600	1140	1900	2280	3420
			Graphite B B	0.20	2	0.001	0.040	0.200	30	50
0.50	2			0.004	0.100	0.500	120	200	240	360
0.60	2			0.004	0.100	0.600	120	200	240	360
0.80	2			0.006	0.150	0.800	180	300	360	540
1.00	2			0.007	0.200	1.000	210	350	420	630
1.50	2			0.011	0.300	1.500	330	550	660	990
2.00	2			0.015	0.400	2.000	450	750	900	1350
3.00	2			0.022	0.600	3.000	660	1100	1320	1980
4.00	2			0.029	0.800	4.000	870	1450	1740	2610
	Graphite B B			0.20	2	0.002	0.020	0.030	60	100
		0.50	2	0.005	0.050	0.070	150	250	300	450
		0.60	2	0.006	0.060	0.080	180	300	360	540
		0.80	2	0.009	0.080	0.110	270	450	540	810
		1.00	2	0.011	0.100	0.140	330	550	660	990
		1.50	2	0.016	0.150	0.210	480	800	960	1440
		2.00	2	0.021	0.200	0.280	630	1050	1260	1890
		3.00	2	0.032	0.300	0.420	960	1600	1920	2880
		4.00	2	0.043	0.400	0.560	1290	2150	2580	3870
			Graphite B B	0.20	2	0.002	0.020	0.020	60	100
0.50	2			0.005	0.050	0.050	150	250	300	450
0.60	2			0.006	0.060	0.060	180	300	360	540
0.80	2			0.009	0.080	0.080	270	450	540	810
1.00	2			0.011	0.100	0.100	330	550	660	990
1.50	2			0.016	0.150	0.150	480	800	960	1440
2.00	2			0.021	0.200	0.200	630	1050	1260	1890
3.00	2			0.032	0.300	0.300	960	1600	1920	2880
4.00	2			0.043	0.400	0.400	1290	2150	2580	3870

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.30	2	0.002	0.060	0.090	60	100	120	180
		0.50	2	0.004	0.100	0.150	120	200	240	360
		0.60	2	0.005	0.100	0.200	150	250	300	450
		0.80	2	0.007	0.150	0.250	210	350	420	630
		1.00	2	0.008	0.200	0.300	240	400	480	720
		1.50	2	0.012	0.300	0.450	360	600	720	1080
		2.00	2	0.016	0.400	0.600	480	800	960	1440
		3.00	2	0.025	0.600	0.900	750	1250	1500	2250
		4.00	2	0.033	0.800	1.200	990	1650	1980	2970
			Graphite B B	0.30	2	0.002	0.030	0.300	60	100
0.50	2			0.003	0.050	0.500	90	150	180	270
0.60	2			0.004	0.060	0.600	120	200	240	360
0.80	2			0.005	0.080	0.800	150	250	300	450
1.00	2			0.006	0.100	1.000	180	300	360	540
1.50	2			0.010	0.150	1.500	300	500	600	900
2.00	2			0.013	0.200	2.000	390	650	780	1170
3.00	2			0.019	0.300	3.000	570	950	1140	1710
4.00	2			0.025	0.400	4.000	750	1250	1500	2250
	Graphite B B			0.30	2	0.003	0.020	0.030	90	150
		0.50	2	0.005	0.040	0.050	150	250	300	450
		0.60	2	0.006	0.050	0.060	180	300	360	540
		0.80	2	0.007	0.060	0.080	210	350	420	630
		1.00	2	0.009	0.080	0.100	270	450	540	810
		1.50	2	0.014	0.120	0.150	420	700	840	1260
		2.00	2	0.019	0.160	0.200	570	950	1140	1710
		3.00	2	0.028	0.240	0.300	840	1400	1680	2520
		4.00	2	0.037	0.320	0.400	1110	1850	2220	3330
			Graphite B B	0.30	2	0.003	0.020	0.020	90	150
0.50	2			0.005	0.040	0.040	150	250	300	450
0.60	2			0.006	0.050	0.050	180	300	360	540
0.80	2			0.007	0.060	0.060	210	350	420	630
1.00	2			0.009	0.080	0.080	270	450	540	810
1.50	2			0.014	0.120	0.120	420	700	840	1260
2.00	2			0.019	0.160	0.160	570	950	1140	1710
3.00	2			0.028	0.240	0.240	840	1400	1680	2520
4.00	2			0.037	0.320	0.320	1110	1850	2220	3330


Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.30	2	0.002	0.050	0.060	60	100	120	180
		0.50	2	0.004	0.080	0.100	120	200	240	360
		0.60	2	0.005	0.100	0.100	150	250	300	450
		0.80	2	0.007	0.100	0.150	210	350	420	630
		1.00	2	0.008	0.150	0.200	240	400	480	720
		1.50	2	0.012	0.250	0.300	360	600	720	1080
		2.00	2	0.016	0.300	0.400	480	800	960	1440
		3.00	2	0.025	0.450	0.600	750	1250	1500	2250
		4.00	2	0.033	0.600	0.800	990	1650	1980	2970
			Graphite B B	0.30	2	0.003	0.020	0.020	90	150
0.50	2			0.005	0.030	0.040	150	250	300	450
0.60	2			0.006	0.040	0.050	180	300	360	540
0.80	2			0.007	0.050	0.060	210	350	420	630
1.00	2			0.009	0.060	0.080	270	450	540	810
1.50	2			0.014	0.090	0.120	420	700	840	1260
2.00	2			0.019	0.120	0.160	570	950	1140	1710
3.00	2			0.028	0.180	0.240	840	1400	1680	2520
4.00	2			0.037	0.240	0.320	1110	1850	2220	3330
	Graphite B B			0.30	2	0.003	0.020	0.020	90	150
		0.50	2	0.005	0.030	0.030	150	250	300	450
		0.60	2	0.006	0.040	0.040	180	300	360	540
		0.80	2	0.007	0.050	0.050	210	350	420	630
		1.00	2	0.009	0.060	0.060	270	450	540	810
		1.50	2	0.014	0.090	0.090	420	700	840	1260
		2.00	2	0.019	0.120	0.120	570	950	1140	1710
		3.00	2	0.028	0.180	0.180	840	1400	1680	2520
		4.00	2	0.037	0.240	0.240	1110	1850	2220	3330

Ball nose end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 20xd



HM XA	λ 30° γ 15°

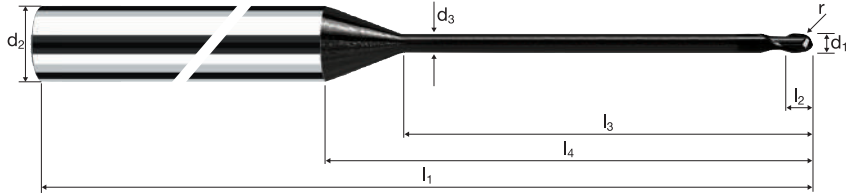

				C Graphite				CF/GF Fiber Reinforced Plastics
--	--	--	--	---------------	--	--	--	---------------------------------------

IV

Example: Order-N°.											DIAPLUS
Coating: B Article-N°: 6074 \varnothing -Code: 030											B6074
\varnothing Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ± 0.005	α	z	
030	0.30	6.00	0.25	61	0.30	6.00	17.39	0.150	9.8°	2	●
040	0.40	6.00	0.35	61	0.40	8.00	19.20	0.200	8.7°	2	●
050	0.50	6.00	0.45	61	0.50	10.00	21.01	0.250	7.8°	2	●
060	0.60	6.00	0.55	61	0.60	12.00	22.83	0.300	7.1°	2	●
080	0.80	6.00	0.75	66	0.80	16.00	26.45	0.400	5.9°	2	●
100	1.00	6.00	0.95	69	1.00	20.00	30.08	0.500	5.0°	2	●
120	1.50	6.00	1.40	80	1.50	30.00	39.24	0.750	3.4°	2	●
140	2.00	6.00	1.90	87	2.00	40.00	48.31	1.000	2.5°	2	●
180	3.00	6.00	2.80	105	3.00	60.00	66.63	1.500	1.4°	2	●
220	4.00	6.00	3.70	122	4.00	80.00	84.95	2.000	0.7°	2	●

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.30	2	0.003	0.150	0.200	90	150	180	270
		0.50	2	0.005	0.250	0.300	150	250	300	450
		0.80	2	0.008	0.400	0.500	240	400	480	720
		1.00	2	0.009	0.500	0.600	270	450	540	810
		1.20	2	0.011	0.600	0.700	330	550	660	990
		1.50	2	0.014	0.750	0.900	420	700	840	1260
		2.00	2	0.019	1.000	1.200	570	950	1140	1710
		2.50	2	0.024	1.250	1.500	720	1200	1440	2160
3.00	2	0.028	1.500	1.800	840	1400	1680	2520		
	Graphite B B	0.30	2	0.002	0.150	0.300	60	100	120	180
		0.50	2	0.004	0.250	0.500	120	200	240	360
		0.80	2	0.006	0.400	0.800	180	300	360	540
		1.00	2	0.007	0.500	1.000	210	350	420	630
		1.20	2	0.009	0.600	1.200	270	450	540	810
		1.50	2	0.011	0.750	1.500	330	550	660	990
		2.00	2	0.015	1.000	2.000	450	750	900	1350
		2.50	2	0.018	1.250	2.500	540	900	1080	1620
3.00	2	0.022	1.500	3.000	660	1100	1320	1980		
	Graphite B B	0.30	2	0.003	0.050	0.060	90	150	180	270
		0.50	2	0.005	0.080	0.100	150	250	300	450
		0.80	2	0.009	0.120	0.160	270	450	540	810
		1.00	2	0.011	0.150	0.200	330	550	660	990
		1.20	2	0.013	0.180	0.240	390	650	780	1170
		1.50	2	0.016	0.230	0.300	480	800	960	1440
		2.00	2	0.021	0.300	0.400	630	1050	1260	1890
		2.50	2	0.027	0.380	0.500	810	1350	1620	2430
3.00	2	0.032	0.450	0.600	960	1600	1920	2880		
	Graphite B B	0.30	2	0.003	0.060	0.060	90	150	180	270
		0.50	2	0.005	0.100	0.100	150	250	300	450
		0.80	2	0.009	0.160	0.160	270	450	540	810
		1.00	2	0.011	0.200	0.200	330	550	660	990
		1.20	2	0.013	0.240	0.240	390	650	780	1170
		1.50	2	0.016	0.300	0.300	480	800	960	1440
		2.00	2	0.021	0.400	0.400	630	1050	1260	1890
		2.50	2	0.027	0.500	0.500	810	1350	1620	2430
3.00	2	0.032	0.600	0.600	960	1600	1920	2880		

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.50	2	0.005	0.250	0.300	150	250	300	450
		0.60	2	0.006	0.250	0.350	180	300	360	540
		0.80	2	0.008	0.350	0.500	240	400	480	720
		1.00	2	0.009	0.450	0.600	270	450	540	810
		1.20	2	0.011	0.550	0.700	330	550	660	990
		1.50	2	0.014	0.700	0.900	420	700	840	1260
		2.00	2	0.019	0.900	1.200	570	950	1140	1710
		2.50	2	0.024	1.150	1.500	720	1200	1440	2160
		3.00	2	0.028	1.350	1.800	840	1400	1680	2520
			Graphite B B	0.50	2	0.004	0.250	0.500	120	200
0.60	2			0.004	0.250	0.600	120	200	240	360
0.80	2			0.006	0.350	0.800	180	300	360	540
1.00	2			0.007	0.450	1.000	210	350	420	630
1.20	2			0.009	0.550	1.200	270	450	540	810
1.50	2			0.011	0.700	1.500	330	550	660	990
2.00	2			0.015	0.900	2.000	450	750	900	1350
2.50	2			0.018	1.150	2.500	540	900	1080	1620
3.00	2			0.022	1.350	3.000	660	1100	1320	1980
	Graphite B B			0.50	2	0.005	0.070	0.100	150	250
		0.60	2	0.006	0.080	0.120	180	300	360	540
		0.80	2	0.009	0.110	0.160	270	450	540	810
		1.00	2	0.011	0.140	0.200	330	550	660	990
		1.20	2	0.013	0.170	0.240	390	650	780	1170
		1.50	2	0.016	0.210	0.300	480	800	960	1440
		2.00	2	0.021	0.280	0.400	630	1050	1260	1890
		2.50	2	0.027	0.350	0.500	810	1350	1620	2430
		3.00	2	0.032	0.420	0.600	960	1600	1920	2880
			Graphite B B	0.50	2	0.005	0.090	0.090	150	250
0.60	2			0.006	0.110	0.110	180	300	360	540
0.80	2			0.009	0.140	0.140	270	450	540	810
1.00	2			0.011	0.180	0.180	330	550	660	990
1.20	2			0.013	0.220	0.220	390	650	780	1170
1.50	2			0.016	0.270	0.270	480	800	960	1440
2.00	2			0.021	0.360	0.360	630	1050	1260	1890
2.50	2			0.027	0.450	0.450	810	1350	1620	2430
3.00	2			0.032	0.540	0.540	960	1600	1920	2880



Ball nose end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 5xd



HM
MG10

λ 30°
 γ 5°

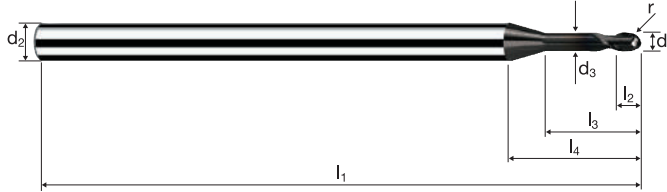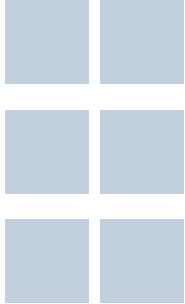

C
Graphite

CF / GF
Fiber Reinforced
Plastics

IV

Example: Order-N°.											DIAMANT	
											B5784	
\varnothing Code	d_1 ± 0.01	d_2 h6	d_3	l_1	l_2	l_3	l_4	r ± 0.01	α	z		
050	0.50	3.00	0.45	40	0.60	2.50	7.65	0.250	10.1°	2	●	
060	0.60	3.00	0.55	40	0.72	3.00	7.97	0.300	9.4°	2	●	
070	0.70	3.00	0.65	40	0.84	3.50	8.28	0.350	8.7°	2	●	
080	0.80	3.00	0.75	40	0.96	4.00	8.59	0.400	8.1°	2	●	
090	0.90	3.00	0.85	40	1.08	4.50	8.91	0.450	7.4°	2	●	
100	1.00	3.00	0.95	50	1.20	5.00	9.22	0.500	6.9°	2	●	
108	1.20	3.00	1.10	50	1.44	6.00	9.94	0.600	5.8°	2	●	
120	1.50	3.00	1.40	50	1.80	7.50	10.88	0.750	4.5°	2	●	
132	1.80	3.00	1.70	50	2.16	9.00	11.82	0.900	3.3°	2	●	
140	2.00	3.00	1.90	50	2.40	10.00	12.45	1.000	2.7°	2	●	
152	2.30	3.00	2.10	50	2.76	11.50	13.57	1.150	1.8°	2	●	
160	2.50	3.00	2.30	50	3.00	12.50	14.20	1.250	1.2°	2	●	
172	2.80	3.00	2.60	50	3.36	14.00	15.14	1.400	0.5°	2	●	
180	3.00	3.00	2.80	50	3.60	14.56	15.00	1.500	0.0°	2	●	

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.50	2	0.005	0.200	0.300	150	250	300	450
		0.60	2	0.006	0.250	0.350	180	300	360	540
		0.80	2	0.008	0.300	0.500	240	400	480	720
		1.00	2	0.009	0.400	0.600	270	450	540	810
		1.20	2	0.011	0.500	0.700	330	550	660	990
		1.50	2	0.014	0.600	0.900	420	700	840	1260
		2.00	2	0.019	0.800	1.200	570	950	1140	1710
		2.50	2	0.024	1.000	1.500	720	1200	1440	2160
3.00	2	0.028	1.200	1.800	840	1400	1680	2520		
	Graphite B B	0.50	2	0.004	0.200	0.500	120	200	240	360
		0.60	2	0.004	0.250	0.600	120	200	240	360
		0.80	2	0.006	0.300	0.800	180	300	360	540
		1.00	2	0.007	0.400	1.000	210	350	420	630
		1.20	2	0.009	0.500	1.200	270	450	540	810
		1.50	2	0.011	0.600	1.500	330	550	660	990
		2.00	2	0.015	0.800	2.000	450	750	900	1350
		2.50	2	0.018	1.000	2.500	540	900	1080	1620
3.00	2	0.022	1.200	3.000	660	1100	1320	1980		
	Graphite B B	0.50	2	0.005	0.060	0.090	150	250	300	450
		0.60	2	0.006	0.070	0.110	180	300	360	540
		0.80	2	0.009	0.100	0.140	270	450	540	810
		1.00	2	0.011	0.120	0.180	330	550	660	990
		1.20	2	0.013	0.140	0.220	390	650	780	1170
		1.50	2	0.016	0.180	0.270	480	800	960	1440
		2.00	2	0.021	0.240	0.360	630	1050	1260	1890
		2.50	2	0.027	0.300	0.450	810	1350	1620	2430
3.00	2	0.032	0.360	0.540	960	1600	1920	2880		
	Graphite B B	0.50	2	0.005	0.080	0.080	150	250	300	450
		0.60	2	0.006	0.100	0.100	180	300	360	540
		0.80	2	0.009	0.130	0.130	270	450	540	810
		1.00	2	0.011	0.160	0.160	330	550	660	990
		1.20	2	0.013	0.190	0.190	390	650	780	1170
		1.50	2	0.016	0.240	0.240	480	800	960	1440
		2.00	2	0.021	0.320	0.320	630	1050	1260	1890
		2.50	2	0.027	0.400	0.400	810	1350	1620	2430
3.00	2	0.032	0.480	0.480	960	1600	1920	2880		

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.50	2	0.005	0.200	0.200	150	250	300	450
		0.60	2	0.006	0.250	0.250	180	300	360	540
		0.80	2	0.008	0.300	0.300	240	400	480	720
		1.00	2	0.009	0.400	0.400	270	450	540	810
		1.20	2	0.011	0.500	0.500	330	550	660	990
		1.50	2	0.014	0.600	0.600	420	700	840	1260
		2.00	2	0.019	0.800	0.800	570	950	1140	1710
		2.50	2	0.024	1.000	1.000	720	1200	1440	2160
		3.00	2	0.028	1.200	1.200	840	1400	1680	2520
			Graphite B B	0.50	2	0.003	0.150	0.500	90	150
0.60	2			0.003	0.200	0.600	90	150	180	270
0.80	2			0.004	0.250	0.800	120	200	240	360
1.00	2			0.005	0.300	1.000	150	250	300	450
1.20	2			0.007	0.350	1.200	210	350	420	630
1.50	2			0.008	0.450	1.500	240	400	480	720
2.00	2			0.011	0.600	2.000	330	550	660	990
2.50	2			0.014	0.750	2.500	420	700	840	1260
3.00	2			0.016	0.900	3.000	480	800	960	1440
	Graphite B B			0.50	2	0.005	0.050	0.080	150	250
		0.60	2	0.006	0.060	0.100	180	300	360	540
		0.80	2	0.009	0.080	0.130	270	450	540	810
		1.00	2	0.011	0.100	0.160	330	550	660	990
		1.20	2	0.013	0.120	0.190	390	650	780	1170
		1.50	2	0.016	0.150	0.240	480	800	960	1440
		2.00	2	0.021	0.200	0.320	630	1050	1260	1890
		2.50	2	0.027	0.250	0.400	810	1350	1620	2430
		3.00	2	0.032	0.300	0.480	960	1600	1920	2880
			Graphite B B	0.50	2	0.005	0.070	0.070	150	250
0.60	2			0.006	0.080	0.080	180	300	360	540
0.80	2			0.009	0.110	0.110	270	450	540	810
1.00	2			0.011	0.140	0.140	330	550	660	990
1.20	2			0.013	0.170	0.170	390	650	780	1170
1.50	2			0.016	0.210	0.210	480	800	960	1440
2.00	2			0.021	0.280	0.280	630	1050	1260	1890
2.50	2			0.027	0.350	0.350	810	1350	1620	2430
3.00	2			0.032	0.420	0.420	960	1600	1920	2880

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	1.00	2	0.007	0.300	0.400	210	350	420	630
		1.20	2	0.008	0.350	0.500	240	400	480	720
		1.50	2	0.011	0.450	0.600	330	550	660	990
		2.00	2	0.014	0.600	0.800	420	700	840	1260
		2.50	2	0.018	0.750	1.000	540	900	1080	1620
		3.00	2	0.021	0.900	1.200	630	1050	1260	1890
	Graphite B B	1.00	2	0.005	0.200	1.000	150	250	300	450
		1.20	2	0.007	0.250	1.200	210	350	420	630
		1.50	2	0.008	0.300	1.500	240	400	480	720
		2.00	2	0.011	0.400	2.000	330	550	660	990
		2.50	2	0.014	0.500	2.500	420	700	840	1260
		3.00	2	0.016	0.600	3.000	480	800	960	1440
	Graphite B B	1.00	2	0.008	0.100	0.140	240	400	480	720
		1.20	2	0.010	0.120	0.170	300	500	600	900
		1.50	2	0.012	0.150	0.210	360	600	720	1080
		2.00	2	0.016	0.200	0.280	480	800	960	1440
		2.50	2	0.020	0.250	0.350	600	1000	1200	1800
		3.00	2	0.024	0.300	0.420	720	1200	1440	2160
	Graphite B B	1.00	2	0.008	0.100	0.100	240	400	480	720
		1.20	2	0.010	0.120	0.120	300	500	600	900
		1.50	2	0.012	0.150	0.150	360	600	720	1080
		2.00	2	0.016	0.200	0.200	480	800	960	1440
		2.50	2	0.020	0.250	0.250	600	1000	1200	1800
		3.00	2	0.024	0.300	0.300	720	1200	1440	2160


Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	1.00	2	0.007	0.200	0.300	210	350	420	630
		1.20	2	0.008	0.250	0.350	240	400	480	720
		1.50	2	0.011	0.300	0.450	330	550	660	990
		2.00	2	0.014	0.400	0.600	420	700	840	1260
		2.50	2	0.018	0.500	0.750	540	900	1080	1620
		3.00	2	0.021	0.600	0.900	630	1050	1260	1890
	Graphite B B	1.00	2	0.005	0.100	1.000	150	250	300	450
		1.20	2	0.007	0.100	1.200	210	350	420	630
		1.50	2	0.008	0.150	1.500	240	400	480	720
		2.00	2	0.011	0.200	2.000	330	550	660	990
		2.50	2	0.014	0.250	2.500	420	700	840	1260
		3.00	2	0.016	0.300	3.000	480	800	960	1440
	Graphite B B	1.00	2	0.008	0.080	0.100	240	400	480	720
		1.20	2	0.010	0.100	0.120	300	500	600	900
		1.50	2	0.012	0.120	0.150	360	600	720	1080
		2.00	2	0.016	0.160	0.200	480	800	960	1440
		2.50	2	0.020	0.200	0.250	600	1000	1200	1800
		3.00	2	0.024	0.240	0.300	720	1200	1440	2160
	Graphite B B	1.00	2	0.008	0.080	0.080	240	400	480	720
		1.20	2	0.010	0.100	0.100	300	500	600	900
		1.50	2	0.012	0.120	0.120	360	600	720	1080
		2.00	2	0.016	0.160	0.160	480	800	960	1440
		2.50	2	0.020	0.200	0.200	600	1000	1200	1800
		3.00	2	0.024	0.240	0.240	720	1200	1440	2160

Ball nose end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 15xd






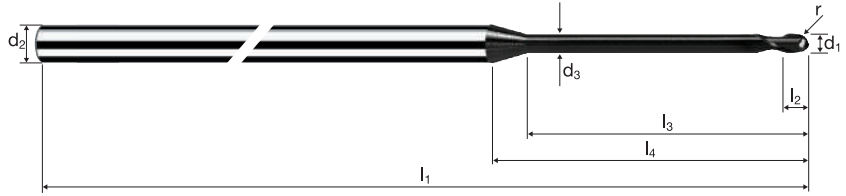





HM	λ 30°
MG10	γ 5°



				C Graphite						CF / GF Fiber Reinforced Plastics
--	--	--	--	---------------	--	--	--	--	--	---

IV

Ø Code	d ₁ ±0.01	d ₂ h6	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.01	α	z	DIAMANT	
Example: Order-N°.	Coating B		Article-N° 5793		ø-Code 100							B5793
											●	
100	1.00	3.00	0.95	60	1.20	15.00	19.22	0.500	3.2°	2	●	
108	1.20	3.00	1.10	60	1.44	18.00	21.94	0.600	2.5°	2	●	
120	1.50	3.00	1.40	70	1.80	22.50	25.88	0.750	1.8°	2	●	
140	2.00	3.00	1.90	70	2.40	30.00	32.45	1.000	1.0°	2	●	
160	2.50	3.00	2.30	70	3.00	37.50	39.20	1.250	0.4°	2	●	
180	3.00	3.00	2.80	80	3.60	44.56	45.00	1.500	0.0°	2	●	

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite  B  B	1.00	2	0.007	0.150	0.200	210	350	420	630
		1.20	2	0.008	0.200	0.250	240	400	480	720
		1.50	2	0.011	0.250	0.300	330	550	660	990
		2.00	2	0.014	0.300	0.400	420	700	840	1260
		2.50	2	0.018	0.400	0.500	540	900	1080	1620
		3.00	2	0.021	0.450	0.600	630	1050	1260	1890
	Graphite  B  B	1.00	2	0.008	0.060	0.080	240	400	480	720
		1.20	2	0.010	0.070	0.100	300	500	600	900
		1.50	2	0.012	0.090	0.120	360	600	720	1080
		2.00	2	0.016	0.120	0.160	480	800	960	1440
		2.50	2	0.020	0.150	0.200	600	1000	1200	1800
		3.00	2	0.024	0.180	0.240	720	1200	1440	2160
	Graphite  B  B	1.00	2	0.008	0.060	0.060	240	400	480	720
		1.20	2	0.010	0.070	0.070	300	500	600	900
		1.50	2	0.012	0.090	0.090	360	600	720	1080
		2.00	2	0.016	0.120	0.120	480	800	960	1440
		2.50	2	0.020	0.150	0.150	600	1000	1200	1800
		3.00	2	0.024	0.180	0.180	720	1200	1440	2160

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	1.50	2	0.018	0.750	0.900	540	900	1080	1620
		2.00	2	0.024	1.000	1.200	720	1200	1440	2160
		3.00	2	0.035	1.500	1.800	1050	1750	2100	3150
		4.00	2	0.047	2.000	2.400	1410	2350	2820	4230
		5.00	2	0.059	2.500	3.000	1770	2950	3540	5310
		6.00	2	0.071	3.000	3.600	2130	3550	4260	6390
	Graphite B B	1.50	2	0.014	0.750	1.500	420	700	840	1260
		2.00	2	0.018	1.000	2.000	540	900	1080	1620
		3.00	2	0.027	1.500	3.000	810	1350	1620	2430
		4.00	2	0.036	2.000	4.000	1080	1800	2160	3240
		5.00	2	0.045	2.500	5.000	1350	2250	2700	4050
		6.00	2	0.055	3.000	6.000	1650	2750	3300	4950
	Graphite B B	1.50	2	0.020	0.230	0.300	600	1000	1200	1800
		2.00	2	0.027	0.300	0.400	810	1350	1620	2430
		3.00	2	0.040	0.450	0.600	1200	2000	2400	3600
		4.00	2	0.053	0.600	0.800	1590	2650	3180	4770
		5.00	2	0.067	0.750	1.000	2010	3350	4020	6030
		6.00	2	0.080	0.900	1.200	2400	4000	4800	7200
	Graphite B B	1.50	2	0.020	0.300	0.300	600	1000	1200	1800
		2.00	2	0.027	0.400	0.400	810	1350	1620	2430
		3.00	2	0.040	0.600	0.600	1200	2000	2400	3600
		4.00	2	0.053	0.800	0.800	1590	2650	3180	4770
		5.00	2	0.067	1.000	1.000	2010	3350	4020	6030
		6.00	2	0.080	1.200	1.200	2400	4000	4800	7200



Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.20	2	0.002	0.100	0.100	60	100	120	180
		0.30	2	0.004	0.150	0.200	120	200	240	360
		0.40	2	0.005	0.200	0.250	150	250	300	450
		0.50	2	0.006	0.250	0.300	180	300	360	540
		0.60	2	0.007	0.250	0.350	210	350	420	630
		0.80	2	0.009	0.350	0.500	270	450	540	810
		1.00	2	0.012	0.450	0.600	360	600	720	1080
		2.00	2	0.024	0.900	1.200	720	1200	1440	2160
			Graphite B B	0.20	2	0.002	0.100	0.200	60	100
0.30	2			0.003	0.150	0.300	90	150	180	270
0.40	2			0.004	0.200	0.400	120	200	240	360
0.50	2			0.005	0.250	0.500	150	250	300	450
0.60	2			0.005	0.250	0.600	150	250	300	450
0.80	2			0.007	0.350	0.800	210	350	420	630
1.00	2			0.009	0.450	1.000	270	450	540	810
2.00	2			0.018	0.900	2.000	540	900	1080	1620
	Graphite B B			0.20	2	0.003	0.030	0.040	90	150
		0.30	2	0.004	0.040	0.060	120	200	240	360
		0.40	2	0.005	0.060	0.080	150	250	300	450
		0.50	2	0.007	0.070	0.100	210	350	420	630
		0.60	2	0.008	0.080	0.120	240	400	480	720
		0.80	2	0.011	0.110	0.160	330	550	660	990
		1.00	2	0.013	0.140	0.200	390	650	780	1170
		2.00	2	0.027	0.280	0.400	810	1350	1620	2430
			Graphite B B	0.20	2	0.003	0.040	0.040	90	150
0.30	2			0.004	0.050	0.050	120	200	240	360
0.40	2			0.005	0.070	0.070	150	250	300	450
0.50	2			0.007	0.090	0.090	210	350	420	630
0.60	2			0.008	0.110	0.110	240	400	480	720
0.80	2			0.011	0.140	0.140	330	550	660	990
1.00	2			0.013	0.180	0.180	390	650	780	1170
2.00	2			0.027	0.360	0.360	810	1350	1620	2430

Corner radius end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 5xd






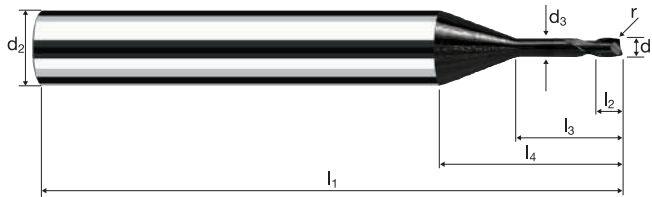








HM λ 30°
XA γ 15°



C Graphite CF / GF Fiber Reinforced Plastics

IV

Example: Order-N°.											DIAPLUS
Coating Article-N° ø-Code											
B 6034 020											
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z	
020	0.20	6.00	0.18	57	0.20	1.00	17.94	-	13.8°	2	●
030	0.30	6.00	0.25	57	0.30	1.50	18.24	-	13.2°	2	●
018	0.20	6.00	0.18	57	0.20	1.00	17.94	0.050	13.8°	2	●
028	0.30	6.00	0.25	57	0.30	1.50	18.24	0.050	13.2°	2	●
040	0.40	6.00	0.35	57	0.40	2.00	18.46	0.050	12.7°	2	●
048	0.50	6.00	0.45	57	0.50	2.50	13.51	0.050	12.2°	2	●
058	0.60	6.00	0.55	57	0.60	3.00	13.83	0.050	11.7°	2	●
078	0.80	6.00	0.75	57	0.80	4.00	14.45	0.050	10.8°	2	●
096	1.00	6.00	0.95	57	1.00	5.00	15.08	0.050	9.9°	2	●
050	0.50	6.00	0.45	57	0.50	2.50	13.51	0.100	12.2°	2	●
060	0.60	6.00	0.55	57	0.60	3.00	13.83	0.100	11.7°	2	●
080	0.80	6.00	0.75	57	0.80	4.00	14.45	0.100	10.8°	2	●
098	1.00	6.00	0.95	57	1.00	5.00	15.08	0.100	9.9°	2	●
138	2.00	6.00	1.90	57	2.00	10.00	18.31	0.100	6.5°	2	●



Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite  	0.80	2	0.009	0.350	0.500	270	450	540	810
		1.00	2	0.012	0.450	0.600	360	600	720	1080
		1.50	2	0.018	0.700	0.900	540	900	1080	1620
		2.00	2	0.024	0.900	1.200	720	1200	1440	2160
		3.00	2	0.035	1.350	1.800	1050	1750	2100	3150
		4.00	2	0.047	1.800	2.400	1410	2350	2820	4230
		5.00	2	0.059	2.250	3.000	1770	2950	3540	5310
6.00	2	0.071	2.700	3.600	2130	3550	4260	6390		
	Graphite  	0.80	2	0.007	0.350	0.800	210	350	420	630
		1.00	2	0.009	0.450	1.000	270	450	540	810
		1.50	2	0.014	0.700	1.500	420	700	840	1260
		2.00	2	0.018	0.900	2.000	540	900	1080	1620
		3.00	2	0.027	1.350	3.000	810	1350	1620	2430
		4.00	2	0.036	1.800	4.000	1080	1800	2160	3240
		5.00	2	0.045	2.250	5.000	1350	2250	2700	4050
6.00	2	0.055	2.700	6.000	1650	2750	3300	4950		
	Graphite  	0.80	2	0.011	0.110	0.160	330	550	660	990
		1.00	2	0.013	0.140	0.200	390	650	780	1170
		1.50	2	0.020	0.210	0.300	600	1000	1200	1800
		2.00	2	0.027	0.280	0.400	810	1350	1620	2430
		3.00	2	0.040	0.420	0.600	1200	2000	2400	3600
		4.00	2	0.053	0.560	0.800	1590	2650	3180	4770
		5.00	2	0.067	0.700	1.000	2010	3350	4020	6030
6.00	2	0.080	0.840	1.200	2400	4000	4800	7200		
	Graphite  	0.80	2	0.011	0.140	0.140	330	550	660	990
		1.00	2	0.013	0.180	0.180	390	650	780	1170
		1.50	2	0.020	0.270	0.270	600	1000	1200	1800
		2.00	2	0.027	0.360	0.360	810	1350	1620	2430
		3.00	2	0.040	0.540	0.540	1200	2000	2400	3600
		4.00	2	0.053	0.720	0.720	1590	2650	3180	4770
		5.00	2	0.067	0.900	0.900	2010	3350	4020	6030
6.00	2	0.080	1.080	1.080	2400	4000	4800	7200		

Corner radius end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 5xd



HM λ 30°
XA γ 15°

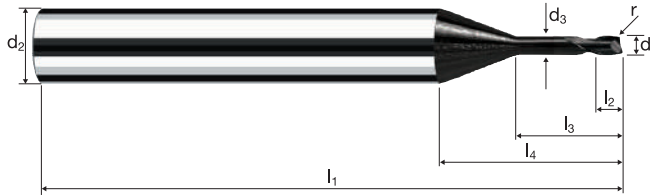

C Graphite CF/GF Fiber Reinforced Plastics

IV

Example: Order-N°.											DIAPLUS
Coating Article-N° ø-Code											
B 6034 082											
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z	
082	0.80	6.00	0.75	57	0.80	4.00	14.45	0.200	10.9°	2	●
100	1.00	6.00	0.95	57	1.00	5.00	15.08	0.200	9.9°	2	●
120	1.50	6.00	1.40	57	1.50	7.50	16.74	0.200	8.1°	2	●
140	2.00	6.00	1.90	57	2.00	10.00	18.31	0.200	6.6°	2	●
180	3.00	6.00	2.80	57	3.00	15.00	21.63	0.200	4.2°	2	●
182	3.00	6.00	2.80	61	3.00	18.00	24.63	0.200	3.7°	2	●
215	4.00	6.00	3.70	61	4.00	20.00	24.95	0.200	2.5°	2	●
217	4.00	6.00	3.70	66	4.00	25.00	29.95	0.200	2.0°	2	●
255	5.00	6.00	4.60	66	5.00	25.00	28.27	0.200	1.1°	2	●
295	6.00	6.00	5.50	69	6.00	29.34	30.00	0.200	0.0°	2	●
185	3.00	6.00	2.80	61	3.00	15.00	21.63	0.500	4.2°	2	●
220	4.00	6.00	3.70	61	4.00	20.00	24.95	0.500	2.6°	2	●
222	4.00	6.00	3.70	66	4.00	25.00	29.95	0.500	2.1°	2	●
260	5.00	6.00	4.60	66	5.00	25.00	28.27	0.500	1.1°	2	●
300	6.00	6.00	5.50	69	6.00	29.34	30.00	0.500	0.0°	2	●



Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.20	2	0.002	0.100	0.100	60	100	120	180
		0.30	2	0.004	0.100	0.200	120	200	240	360
		0.40	2	0.005	0.150	0.250	150	250	300	450
		0.50	2	0.006	0.200	0.300	180	300	360	540
		0.60	2	0.007	0.250	0.350	210	350	420	630
		0.80	2	0.009	0.300	0.500	270	450	540	810
		1.00	2	0.012	0.400	0.600	360	600	720	1080
		2.00	2	0.024	0.800	1.200	720	1200	1440	2160
	Graphite B B	0.20	2	0.002	0.100	0.200	60	100	120	180
		0.30	2	0.003	0.100	0.300	90	150	180	270
		0.40	2	0.004	0.150	0.400	120	200	240	360
		0.50	2	0.005	0.200	0.500	150	250	300	450
		0.60	2	0.005	0.250	0.600	150	250	300	450
		0.80	2	0.007	0.300	0.800	210	350	420	630
		1.00	2	0.009	0.400	1.000	270	450	540	810
		2.00	2	0.018	0.800	2.000	540	900	1080	1620
	Graphite B B	0.20	2	0.003	0.020	0.040	90	150	180	270
		0.30	2	0.004	0.040	0.050	120	200	240	360
		0.40	2	0.005	0.050	0.070	150	250	300	450
		0.50	2	0.007	0.060	0.090	210	350	420	630
		0.60	2	0.008	0.070	0.110	240	400	480	720
		0.80	2	0.011	0.100	0.140	330	550	660	990
		1.00	2	0.013	0.120	0.180	390	650	780	1170
		2.00	2	0.027	0.240	0.360	810	1350	1620	2430
	Graphite B B	0.20	2	0.003	0.030	0.030	90	150	180	270
		0.30	2	0.004	0.050	0.050	120	200	240	360
		0.40	2	0.005	0.060	0.060	150	250	300	450
		0.50	2	0.007	0.080	0.080	210	350	420	630
		0.60	2	0.008	0.100	0.100	240	400	480	720
		0.80	2	0.011	0.130	0.130	330	550	660	990
		1.00	2	0.013	0.160	0.160	390	650	780	1170
		2.00	2	0.027	0.320	0.320	810	1350	1620	2430

Corner radius end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 8xd



HM	λ 30°
XA	γ 15°

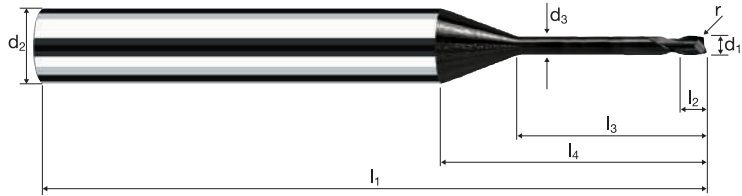

				C Graphite							CF / GF Fiber Reinforced Plastics
--	--	--	--	---------------	--	--	--	--	--	--	---

IV

Example: Order-N°.											DIAPLUS	
											B6036	
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z		
	Coating: B			Article-N°: 6036			ø-Code: 020					
020	0.20	6.00	0.18	57	0.20	1.60	18.54	-	13.2°	2	●	
030	0.30	6.00	0.25	57	0.30	2.40	19.14	-	12.5°	2	●	
018	0.20	6.00	0.18	57	0.20	1.60	18.54	0.050	13.2°	2	●	
028	0.30	6.00	0.25	57	0.30	2.40	19.14	0.050	12.3°	2	●	
040	0.40	6.00	0.35	57	0.40	3.20	19.66	0.050	11.6°	2	●	
048	0.50	6.00	0.45	57	0.50	4.00	15.01	0.050	11.0°	2	●	
058	0.60	6.00	0.55	57	0.60	4.80	15.63	0.050	10.3°	2	●	
078	0.80	6.00	0.75	57	0.80	6.40	16.85	0.050	9.2°	2	●	
096	1.00	6.00	0.95	57	1.00	8.00	18.08	0.050	8.2°	2	●	
050	0.50	6.00	0.45	57	0.50	4.00	15.01	0.100	11.0°	2	●	
060	0.60	6.00	0.55	57	0.60	4.80	15.63	0.100	10.3°	2	●	
080	0.80	6.00	0.75	57	0.80	6.40	16.85	0.100	9.2°	2	●	
098	1.00	6.00	0.95	57	1.00	8.00	18.08	0.100	8.2°	2	●	
138	2.00	6.00	1.90	61	2.00	16.00	24.31	0.100	4.9°	2	●	



Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite 	0.80	2	0.009	0.300	0.500	270	450	540	810
		1.00	2	0.012	0.400	0.600	360	600	720	1080
		1.50	2	0.018	0.600	0.900	540	900	1080	1620
		2.00	2	0.024	0.800	1.200	720	1200	1440	2160
		3.00	2	0.035	1.200	1.800	1050	1750	2100	3150
		4.00	2	0.047	1.600	2.400	1410	2350	2820	4230
		5.00	2	0.059	2.000	3.000	1770	2950	3540	5310
		6.00	2	0.071	2.400	3.600	2130	3550	4260	6390
	Graphite 	0.80	2	0.007	0.300	0.800	210	350	420	630
		1.00	2	0.009	0.400	1.000	270	450	540	810
		1.50	2	0.014	0.600	1.500	420	700	840	1260
		2.00	2	0.018	0.800	2.000	540	900	1080	1620
		3.00	2	0.027	1.200	3.000	810	1350	1620	2430
		4.00	2	0.036	1.600	4.000	1080	1800	2160	3240
		5.00	2	0.045	2.000	5.000	1350	2250	2700	4050
		6.00	2	0.055	2.400	6.000	1650	2750	3300	4950
	Graphite 	0.80	2	0.011	0.100	0.140	330	550	660	990
		1.00	2	0.013	0.120	0.180	390	650	780	1170
		1.50	2	0.020	0.180	0.270	600	1000	1200	1800
		2.00	2	0.027	0.240	0.360	810	1350	1620	2430
		3.00	2	0.040	0.360	0.540	1200	2000	2400	3600
		4.00	2	0.053	0.480	0.720	1590	2650	3180	4770
		5.00	2	0.067	0.600	0.900	2010	3350	4020	6030
		6.00	2	0.080	0.720	1.080	2400	4000	4800	7200
	Graphite 	0.80	2	0.011	0.130	0.130	330	550	660	990
		1.00	2	0.013	0.160	0.160	390	650	780	1170
		1.50	2	0.020	0.240	0.240	600	1000	1200	1800
		2.00	2	0.027	0.320	0.320	810	1350	1620	2430
		3.00	2	0.040	0.480	0.480	1200	2000	2400	3600
		4.00	2	0.053	0.640	0.640	1590	2650	3180	4770
		5.00	2	0.067	0.800	0.800	2010	3350	4020	6030
		6.00	2	0.080	0.960	0.960	2400	4000	4800	7200

Corner radius end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 8xd



HM	λ 30°
XA	γ 15°

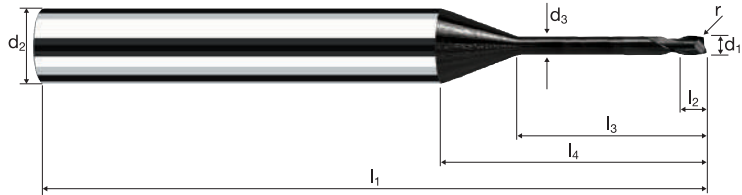

				C Graphite							CF/GF Fiber Reinforced Plastics
--	--	--	--	---------------	--	--	--	--	--	--	---------------------------------------

IV

Example: Order-N°.											DIAPLUS	
											B6036	
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z		
	Coating B		Article-N° 6036		ø-Code 082							
082	0.80	6.00	0.75	57	0.80	6.40	16.85	0.200	9.3°	2	●	
100	1.00	6.00	0.95	57	1.00	8.00	18.08	0.200	8.3°	2	●	
120	1.50	6.00	1.40	57	1.50	12.00	21.24	0.200	6.4°	2	●	
140	2.00	6.00	1.90	61	2.00	16.00	24.31	0.200	4.9°	2	●	
180	3.00	6.00	2.80	66	3.00	24.00	30.63	0.200	2.9°	2	●	
215	4.00	6.00	3.70	75	4.00	32.00	36.95	0.200	1.7°	2	●	
255	5.00	6.00	4.60	80	5.00	40.00	43.27	0.200	0.7°	2	●	
295	6.00	6.00	5.50	87	6.00	47.34	48.00	0.200	0.0°	2	●	
185	3.00	6.00	2.80	69	3.00	24.00	30.63	0.500	3.0°	2	●	
220	4.00	6.00	3.70	75	4.00	32.00	36.95	0.500	1.7°	2	●	
260	5.00	6.00	4.60	80	5.00	40.00	43.27	0.500	0.7°	2	●	
300	6.00	6.00	5.50	87	6.00	47.34	48.00	0.500	0.0°	2	●	

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.20	2	0.002	0.100	0.100	60	100	120	180
		0.30	2	0.004	0.100	0.100	120	200	240	360
		0.40	2	0.005	0.150	0.150	150	250	300	450
		0.50	2	0.006	0.200	0.200	180	300	360	540
		0.60	2	0.007	0.250	0.250	210	350	420	630
		0.80	2	0.009	0.300	0.300	270	450	540	810
		1.00	2	0.012	0.400	0.400	360	600	720	1080
		2.00	2	0.024	0.800	0.800	720	1200	1440	2160
	Graphite B B	0.20	2	0.002	0.050	0.200	60	100	120	180
		0.30	2	0.003	0.100	0.300	90	150	180	270
		0.40	2	0.004	0.100	0.400	120	200	240	360
		0.50	2	0.005	0.150	0.500	150	250	300	450
		0.60	2	0.005	0.200	0.600	150	250	300	450
		0.80	2	0.007	0.250	0.800	210	350	420	630
		1.00	2	0.009	0.300	1.000	270	450	540	810
		2.00	2	0.018	0.600	2.000	540	900	1080	1620
	Graphite B B	0.20	2	0.003	0.020	0.030	90	150	180	270
		0.30	2	0.004	0.030	0.050	120	200	240	360
		0.40	2	0.005	0.040	0.060	150	250	300	450
		0.50	2	0.007	0.050	0.080	210	350	420	630
		0.60	2	0.008	0.060	0.100	240	400	480	720
		0.80	2	0.011	0.080	0.130	330	550	660	990
		1.00	2	0.013	0.100	0.160	390	650	780	1170
		2.00	2	0.027	0.200	0.320	810	1350	1620	2430
	Graphite B B	0.20	2	0.003	0.030	0.030	90	150	180	270
		0.30	2	0.004	0.040	0.040	120	200	240	360
		0.40	2	0.005	0.060	0.060	150	250	300	450
		0.50	2	0.007	0.070	0.070	210	350	420	630
		0.60	2	0.008	0.080	0.080	240	400	480	720
		0.80	2	0.011	0.110	0.110	330	550	660	990
		1.00	2	0.013	0.140	0.140	390	650	780	1170
		2.00	2	0.027	0.280	0.280	810	1350	1620	2430



Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.80	2	0.009	0.300	0.300	270	450	540	810
		1.00	2	0.012	0.400	0.400	360	600	720	1080
		1.50	2	0.018	0.600	0.600	540	900	1080	1620
		2.00	2	0.024	0.800	0.800	720	1200	1440	2160
		3.00	2	0.035	1.200	1.200	1050	1750	2100	3150
		4.00	2	0.047	1.600	1.600	1410	2350	2820	4230
		5.00	2	0.059	2.000	2.000	1770	2950	3540	5310
		6.00	2	0.071	2.400	2.400	2130	3550	4260	6390
	Graphite B B	0.80	2	0.007	0.250	0.800	210	350	420	630
		1.00	2	0.009	0.300	1.000	270	450	540	810
		1.50	2	0.014	0.450	1.500	420	700	840	1260
		2.00	2	0.018	0.600	2.000	540	900	1080	1620
		3.00	2	0.027	0.900	3.000	810	1350	1620	2430
		4.00	2	0.036	1.200	4.000	1080	1800	2160	3240
		5.00	2	0.045	1.500	5.000	1350	2250	2700	4050
		6.00	2	0.055	1.800	6.000	1650	2750	3300	4950
	Graphite B B	0.80	2	0.011	0.080	0.130	330	550	660	990
		1.00	2	0.013	0.100	0.160	390	650	780	1170
		1.50	2	0.020	0.150	0.240	600	1000	1200	1800
		2.00	2	0.027	0.200	0.320	810	1350	1620	2430
		3.00	2	0.040	0.300	0.480	1200	2000	2400	3600
		4.00	2	0.053	0.400	0.640	1590	2650	3180	4770
		5.00	2	0.067	0.500	0.800	2010	3350	4020	6030
		6.00	2	0.080	0.600	0.960	2400	4000	4800	7200
	Graphite B B	0.80	2	0.011	0.110	0.110	330	550	660	990
		1.00	2	0.013	0.140	0.140	390	650	780	1170
		1.50	2	0.020	0.210	0.210	600	1000	1200	1800
		2.00	2	0.027	0.280	0.280	810	1350	1620	2430
		3.00	2	0.040	0.420	0.420	1200	2000	2400	3600
		4.00	2	0.053	0.560	0.560	1590	2650	3180	4770
		5.00	2	0.067	0.700	0.700	2010	3350	4020	6030
		6.00	2	0.080	0.840	0.840	2400	4000	4800	7200

Corner radius end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 10xd



HM λ 30°
XA γ 15°

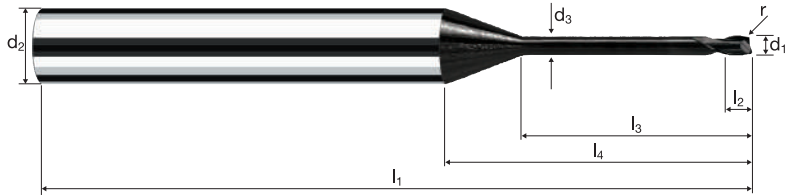

C Graphite CF/GF Fiber Reinforced Plastics

IV

Example: Order-N°.											DIAPLUS
Coating Article-N° ø-Code											
B 6038 082											
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z	
082	0.80	6.00	0.75	57	0.80	8.00	18.45	0.200	8.4°	2	●
100	1.00	6.00	0.95	57	1.00	10.00	20.08	0.200	7.4°	2	●
120	1.50	6.00	1.40	61	1.50	15.00	24.24	0.200	5.5°	2	●
140	2.00	6.00	1.90	66	2.00	20.00	28.31	0.200	4.2°	2	●
180	3.00	6.00	2.80	75	3.00	30.00	36.63	0.200	2.5°	2	●
215	4.00	6.00	3.70	80	4.00	40.00	44.95	0.200	1.4°	2	●
255	5.00	6.00	4.60	100	5.00	50.00	53.27	0.200	0.6°	2	●
295	6.00	6.00	5.50	100	6.00	59.34	60.00	0.200	0.0°	2	●
185	3.00	6.00	2.80	75	3.00	30.00	36.63	0.500	2.5°	2	●
220	4.00	6.00	3.70	80	4.00	40.00	44.95	0.500	1.4°	2	●
260	5.00	6.00	4.60	100	5.00	50.00	53.27	0.500	0.6°	2	●
300	6.00	6.00	5.50	100	6.00	59.34	60.00	0.500	0.0°	2	●



Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.30	2	0.003	0.100	0.100	90	150	180	270
		0.40	2	0.004	0.100	0.150	120	200	240	360
		0.50	2	0.005	0.150	0.200	150	250	300	450
		0.60	2	0.006	0.200	0.250	180	300	360	540
		0.80	2	0.008	0.250	0.300	240	400	480	720
		1.00	2	0.009	0.300	0.400	270	450	540	810
		1.50	2	0.014	0.450	0.600	420	700	840	1260
		2.00	2	0.019	0.600	0.800	570	950	1140	1710
		3.00	2	0.028	0.900	1.200	840	1400	1680	2520
			Graphite B B	0.30	2	0.002	0.050	0.300	60	100
0.40	2			0.003	0.100	0.400	90	150	180	270
0.50	2			0.004	0.100	0.500	120	200	240	360
0.60	2			0.004	0.100	0.600	120	200	240	360
0.80	2			0.006	0.150	0.800	180	300	360	540
1.00	2			0.007	0.200	1.000	210	350	420	630
1.50	2			0.011	0.300	1.500	330	550	660	990
2.00	2			0.015	0.400	2.000	450	750	900	1350
3.00	2			0.022	0.600	3.000	660	1100	1320	1980
	Graphite B B			0.30	2	0.003	0.030	0.040	90	150
		0.40	2	0.004	0.040	0.060	120	200	240	360
		0.50	2	0.005	0.050	0.070	150	250	300	450
		0.60	2	0.006	0.060	0.080	180	300	360	540
		0.80	2	0.009	0.080	0.110	270	450	540	810
		1.00	2	0.011	0.100	0.140	330	550	660	990
		1.50	2	0.016	0.150	0.210	480	800	960	1440
		2.00	2	0.021	0.200	0.280	630	1050	1260	1890
		3.00	2	0.032	0.300	0.420	960	1600	1920	2880
			Graphite B B	0.30	2	0.003	0.030	0.030	90	150
0.40	2			0.004	0.040	0.040	120	200	240	360
0.50	2			0.005	0.050	0.050	150	250	300	450
0.60	2			0.006	0.060	0.060	180	300	360	540
0.80	2			0.009	0.080	0.080	270	450	540	810
1.00	2			0.011	0.100	0.100	330	550	660	990
1.50	2			0.016	0.150	0.150	480	800	960	1440
2.00	2			0.021	0.200	0.200	630	1050	1260	1890
3.00	2			0.032	0.300	0.300	960	1600	1920	2880

Corner radius end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 12xd



HM	λ 30°
XA	γ 15°

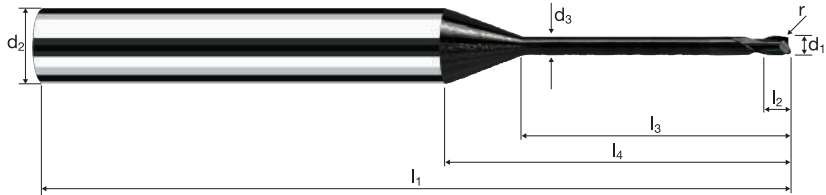

				C Graphite								CF/GF Fiber Reinforced Plastics
--	--	--	--	----------------------	--	--	--	--	--	--	--	---------------------------------------

IV

Example: Order-N°.											DIAPLUS	
											B6040	
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z		
028	0.30	6.00	0.25	57	0.30	3.60	20.34	0.050	11.3°	2	●	
040	0.40	6.00	0.35	57	0.40	4.80	21.26	0.050	7.8°	2	●	
048	0.50	6.00	0.45	57	0.50	6.00	17.01	0.050	9.6°	2	●	
058	0.60	6.00	0.55	57	0.60	7.20	18.03	0.050	8.9°	2	●	
078	0.80	6.00	0.75	57	0.80	9.60	20.05	0.050	7.7°	2	●	
096	1.00	6.00	0.95	61	1.00	12.00	22.08	0.050	6.7°	2	●	
050	0.50	6.00	0.45	57	0.50	6.00	17.01	0.100	9.7°	2	●	
060	0.60	6.00	0.55	57	0.60	7.20	18.03	0.100	8.9°	2	●	
080	0.80	6.00	0.75	57	0.80	9.60	20.05	0.100	7.7°	2	●	
098	1.00	6.00	0.95	61	1.00	12.00	22.08	0.100	6.7°	2	●	
138	2.00	6.00	1.90	69	2.00	24.00	32.31	0.100	3.7°	2	●	
082	0.80	6.00	0.75	57	0.80	9.60	20.05	0.200	7.8°	2	●	
100	1.00	6.00	0.95	61	1.00	12.00	22.08	0.200	6.7°	2	●	
120	1.50	6.00	1.40	66	1.50	18.00	27.24	0.200	4.9°	2	●	
140	2.00	6.00	1.90	69	2.00	24.00	32.31	0.200	3.7°	2	●	
180	3.00	6.00	2.80	80	3.00	36.00	42.63	0.200	2.1°	2	●	
185	3.00	6.00	2.80	80	3.00	36.00	42.63	0.500	2.1°	2	●	



Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.40	2	0.003	0.080	0.100	90	150	180	270
		0.50	2	0.004	0.100	0.150	120	200	240	360
		0.60	2	0.005	0.100	0.200	150	250	300	450
		0.80	2	0.007	0.150	0.250	210	350	420	630
		1.00	2	0.008	0.200	0.300	240	400	480	720
		1.50	2	0.012	0.300	0.450	360	600	720	1080
		2.00	2	0.016	0.400	0.600	480	800	960	1440
		3.00	2	0.025	0.600	0.900	750	1250	1500	2250
			Graphite B B	0.40	2	0.003	0.040	0.400	90	150
0.50	2			0.003	0.050	0.500	90	150	180	270
0.60	2			0.004	0.060	0.600	120	200	240	360
0.80	2			0.005	0.080	0.800	150	250	300	450
1.00	2			0.006	0.100	1.000	180	300	360	540
1.50	2			0.010	0.150	1.500	300	500	600	900
2.00	2			0.013	0.200	2.000	390	650	780	1170
3.00	2			0.019	0.300	3.000	570	950	1140	1710
	Graphite B B			0.40	2	0.004	0.030	0.040	120	200
		0.50	2	0.005	0.040	0.050	150	250	300	450
		0.60	2	0.006	0.050	0.060	180	300	360	540
		0.80	2	0.007	0.060	0.080	210	350	420	630
		1.00	2	0.009	0.080	0.100	270	450	540	810
		1.50	2	0.014	0.120	0.150	420	700	840	1260
		2.00	2	0.019	0.160	0.200	570	950	1140	1710
		3.00	2	0.028	0.240	0.300	840	1400	1680	2520
			Graphite B B	0.40	2	0.004	0.030	0.030	120	200
0.50	2			0.005	0.040	0.040	150	250	300	450
0.60	2			0.006	0.050	0.050	180	300	360	540
0.80	2			0.007	0.060	0.060	210	350	420	630
1.00	2			0.009	0.080	0.080	270	450	540	810
1.50	2			0.014	0.120	0.120	420	700	840	1260
2.00	2			0.019	0.160	0.160	570	950	1140	1710
3.00	2			0.028	0.240	0.240	840	1400	1680	2520

Corner radius end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 15xd



HM	λ 30°
XA	γ 15°

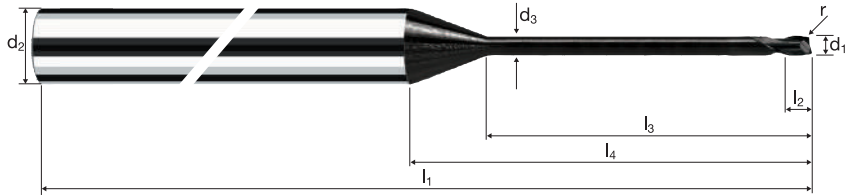

				C							CF/GF Fiber Reinforced Plastics
				Graphite							

IV

Example: Order-N°.											DIAPLUS	
											B6042	
\varnothing Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	α	z		
040	0.40	6.00	0.35	61	0.40	6.00	22.46	0.050	9.7°	2	●	
048	0.50	6.00	0.45	57	0.50	7.50	18.51	0.050	8.8°	2	●	
058	0.60	6.00	0.55	57	0.60	9.00	19.83	0.050	8.1°	2	●	
078	0.80	6.00	0.75	61	0.80	12.00	22.45	0.050	6.9°	2	●	
096	1.00	6.00	0.95	66	1.00	15.00	25.08	0.050	5.9°	2	●	
050	0.50	6.00	0.45	57	0.50	7.50	18.51	0.100	8.8°	2	●	
060	0.60	6.00	0.55	57	0.60	9.00	19.83	0.100	8.1°	2	●	
080	0.80	6.00	0.75	61	0.80	12.00	22.45	0.100	6.9°	2	●	
098	1.00	6.00	0.95	66	1.00	15.00	25.08	0.100	5.9°	2	●	
138	2.00	6.00	1.90	75	2.00	30.00	38.31	0.100	3.1°	2	●	
082	0.80	6.00	0.75	61	0.80	12.00	22.45	0.200	6.9°	2	●	
100	1.00	6.00	0.95	66	1.00	15.00	25.08	0.200	5.9°	2	●	
120	1.50	6.00	1.40	69	1.50	22.50	31.74	0.200	4.2°	2	●	
140	2.00	6.00	1.90	75	2.00	30.00	38.31	0.200	3.1°	2	●	
180	3.00	6.00	2.80	100	3.00	45.00	51.63	0.200	1.7°	2	●	
185	3.00	6.00	2.80	100	3.00	45.00	51.63	0.500	1.7°	2	●	


Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.40	2	0.003	0.060	0.100	90	150	180	270
		0.50	2	0.004	0.080	0.100	120	200	240	360
		0.60	2	0.005	0.100	0.100	150	250	300	450
		0.80	2	0.007	0.100	0.150	210	350	420	630
		1.00	2	0.008	0.150	0.200	240	400	480	720
		1.50	2	0.012	0.250	0.300	360	600	720	1080
		2.00	2	0.016	0.300	0.400	480	800	960	1440
		3.00	2	0.025	0.450	0.600	750	1250	1500	2250
	Graphite B B	0.40	2	0.004	0.020	0.030	120	200	240	360
		0.50	2	0.005	0.030	0.040	150	250	300	450
		0.60	2	0.006	0.040	0.050	180	300	360	540
		0.80	2	0.007	0.050	0.060	210	350	420	630
		1.00	2	0.009	0.060	0.080	270	450	540	810
		1.50	2	0.014	0.090	0.120	420	700	840	1260
		2.00	2	0.019	0.120	0.160	570	950	1140	1710
		3.00	2	0.028	0.180	0.240	840	1400	1680	2520
	Graphite B B	0.40	2	0.004	0.020	0.020	120	200	240	360
		0.50	2	0.005	0.030	0.030	150	250	300	450
		0.60	2	0.006	0.040	0.040	180	300	360	540
		0.80	2	0.007	0.050	0.050	210	350	420	630
		1.00	2	0.009	0.060	0.060	270	450	540	810
		1.50	2	0.014	0.090	0.090	420	700	840	1260
		2.00	2	0.019	0.120	0.120	570	950	1140	1710
		3.00	2	0.028	0.180	0.180	840	1400	1680	2520

Corner radius end mills MicroX

Shank \varnothing 6mm, cylindrical neck, 20xd






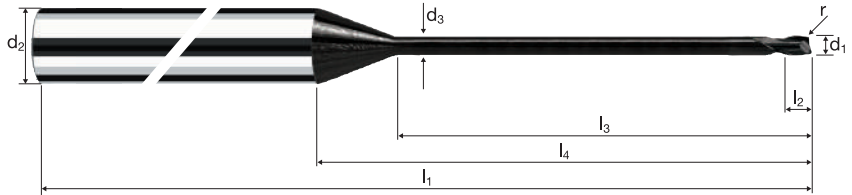








HM λ 30°
XA γ 15°



C Graphite CF/GF Fiber Reinforced Plastics

IV

Example: Order-N°.											DIAPLUS
Coating: B Article-N°: 6044 ø-Code: 040											B6044
Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	α	z	
040	0.40	6.00	0.35	61	0.40	8.00	19.20	0.050	8.7°	2	●
048	0.50	6.00	0.45	61	0.50	10.00	21.01	0.050	7.8°	2	●
058	0.60	6.00	0.55	61	0.60	12.00	22.83	0.050	7.0°	2	●
078	0.80	6.00	0.75	66	0.80	16.00	26.45	0.050	5.8°	2	●
096	1.00	6.00	0.95	69	1.00	20.00	30.08	0.050	4.9°	2	●
050	0.50	6.00	0.45	61	0.50	10.00	21.01	0.100	7.8°	2	●
060	0.60	6.00	0.55	61	0.60	12.00	22.83	0.100	7.0°	2	●
080	0.80	6.00	0.75	66	0.80	16.00	26.45	0.100	5.8°	2	●
098	1.00	6.00	0.95	69	1.00	20.00	30.08	0.100	4.9°	2	●
138	2.00	6.00	1.90	87	2.00	40.00	48.31	0.100	2.5°	2	●
082	0.80	6.00	0.75	66	0.80	16.00	26.45	0.200	5.8°	2	●
100	1.00	6.00	0.95	69	1.00	20.00	30.08	0.200	4.9°	2	●
120	1.50	6.00	1.40	80	1.50	30.00	39.24	0.200	3.4°	2	●
140	2.00	6.00	1.90	87	2.00	40.00	48.31	0.200	2.5°	2	●
180	3.00	6.00	2.80	105	3.00	60.00	66.63	0.200	1.4°	2	●
185	3.00	6.00	2.80	105	3.00	60.00	66.63	0.500	1.4°	2	●

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite  B  B	1.00	2	0.009	0.500	0.600	270	450	540	810
		1.20	2	0.011	0.600	0.700	330	550	660	990
		1.50	2	0.014	0.750	0.900	420	700	840	1260
		2.00	2	0.019	1.000	1.200	570	950	1140	1710
		2.50	2	0.024	1.250	1.500	720	1200	1440	2160
		3.00	2	0.028	1.500	1.800	840	1400	1680	2520
	Graphite  B  B	1.00	2	0.007	0.500	1.000	210	350	420	630
		1.20	2	0.009	0.600	1.200	270	450	540	810
		1.50	2	0.011	0.750	1.500	330	550	660	990
		2.00	2	0.015	1.000	2.000	450	750	900	1350
		2.50	2	0.018	1.250	2.500	540	900	1080	1620
		3.00	2	0.022	1.500	3.000	660	1100	1320	1980
	Graphite  B  B	1.00	2	0.011	0.150	0.200	330	550	660	990
		1.20	2	0.013	0.180	0.240	390	650	780	1170
		1.50	2	0.016	0.230	0.300	480	800	960	1440
		2.00	2	0.021	0.300	0.400	630	1050	1260	1890
		2.50	2	0.027	0.380	0.500	810	1350	1620	2430
		3.00	2	0.032	0.450	0.600	960	1600	1920	2880
	Graphite  B  B	1.00	2	0.011	0.200	0.200	330	550	660	990
		1.20	2	0.013	0.240	0.240	390	650	780	1170
		1.50	2	0.016	0.300	0.300	480	800	960	1440
		2.00	2	0.021	0.400	0.400	630	1050	1260	1890
		2.50	2	0.027	0.500	0.500	810	1350	1620	2430
		3.00	2	0.032	0.600	0.600	960	1600	1920	2880



Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	1.00	2	0.009	0.450	0.600	270	450	540	810
		1.20	2	0.011	0.550	0.700	330	550	660	990
		1.50	2	0.014	0.700	0.900	420	700	840	1260
		2.00	2	0.019	0.900	1.200	570	950	1140	1710
		2.50	2	0.024	1.150	1.500	720	1200	1440	2160
		3.00	2	0.028	1.350	1.800	840	1400	1680	2520
	Graphite B B	1.00	2	0.007	0.450	1.000	210	350	420	630
		1.20	2	0.009	0.550	1.200	270	450	540	810
		1.50	2	0.011	0.700	1.500	330	550	660	990
		2.00	2	0.015	0.900	2.000	450	750	900	1350
		2.50	2	0.018	1.150	2.500	540	900	1080	1620
		3.00	2	0.022	1.350	3.000	660	1100	1320	1980
	Graphite B B	1.00	2	0.011	0.140	0.200	330	550	660	990
		1.20	2	0.013	0.170	0.240	390	650	780	1170
		1.50	2	0.016	0.210	0.300	480	800	960	1440
		2.00	2	0.021	0.280	0.400	630	1050	1260	1890
		2.50	2	0.027	0.350	0.500	810	1350	1620	2430
		3.00	2	0.032	0.420	0.600	960	1600	1920	2880
	Graphite B B	1.00	2	0.011	0.180	0.180	330	550	660	990
		1.20	2	0.013	0.220	0.220	390	650	780	1170
		1.50	2	0.016	0.270	0.270	480	800	960	1440
		2.00	2	0.021	0.360	0.360	630	1050	1260	1890
		2.50	2	0.027	0.450	0.450	810	1350	1620	2430
		3.00	2	0.032	0.540	0.540	960	1600	1920	2880

Corner radius end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 5xd



HM λ 25°
MG10 γ 6°

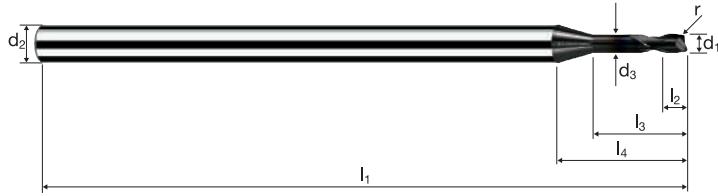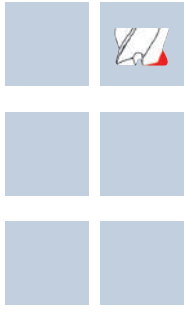

C Graphite CF / GF Fiber Reinforced Plastics

IV

											DIAMANT
Example: Order-N°: B 5754 100											B5754
\varnothing Code	d_1 ± 0.01	d_2 h6	d_3	l_1	l_2	l_3	l_4	r 0/+0.03	α	z	
100	1.00	3.00	0.95	50	1.20	5.00	9.22	0.200	6.6°	2	●
108	1.20	3.00	1.10	50	1.44	6.00	9.94	0.200	5.5°	2	●
120	1.50	3.00	1.40	50	1.80	7.50	10.88	0.200	4.2°	2	●
140	2.00	3.00	1.90	50	2.40	10.00	12.45	0.200	2.5°	2	●
160	2.50	3.00	2.30	50	3.00	12.50	14.20	0.200	1.1°	2	●
180	3.00	3.00	2.80	50	3.60	14.56	15.00	0.200	0.0°	2	●



Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	1.00	2	0.009	0.400	0.600	270	450	540	810
		1.20	2	0.011	0.500	0.700	330	550	660	990
		1.50	2	0.014	0.600	0.900	420	700	840	1260
		2.00	2	0.019	0.800	1.200	570	950	1140	1710
		2.50	2	0.024	1.000	1.500	720	1200	1440	2160
		3.00	2	0.028	1.200	1.800	840	1400	1680	2520
	Graphite B B	1.00	2	0.007	0.400	1.000	210	350	420	630
		1.20	2	0.009	0.500	1.200	270	450	540	810
		1.50	2	0.011	0.600	1.500	330	550	660	990
		2.00	2	0.015	0.800	2.000	450	750	900	1350
		2.50	2	0.018	1.000	2.500	540	900	1080	1620
		3.00	2	0.022	1.200	3.000	660	1100	1320	1980
	Graphite B B	1.00	2	0.011	0.120	0.180	330	550	660	990
		1.20	2	0.013	0.140	0.220	390	650	780	1170
		1.50	2	0.016	0.180	0.270	480	800	960	1440
		2.00	2	0.021	0.240	0.360	630	1050	1260	1890
		2.50	2	0.027	0.300	0.450	810	1350	1620	2430
		3.00	2	0.032	0.360	0.540	960	1600	1920	2880
	Graphite B B	1.00	2	0.011	0.160	0.160	330	550	660	990
		1.20	2	0.013	0.190	0.190	390	650	780	1170
		1.50	2	0.016	0.240	0.240	480	800	960	1440
		2.00	2	0.021	0.320	0.320	630	1050	1260	1890
		2.50	2	0.027	0.400	0.400	810	1350	1620	2430
		3.00	2	0.032	0.480	0.480	960	1600	1920	2880

Corner radius end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 8xd



HM
MG10 λ 25°
 γ 6°

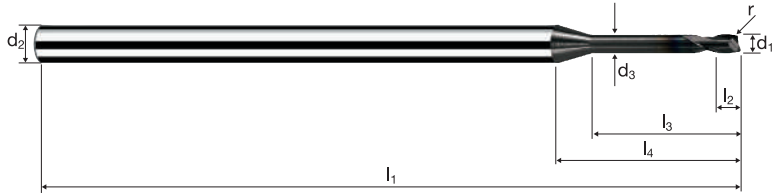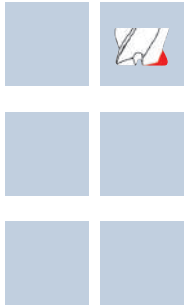

C Graphite CF / GF Fiber Reinforced Plastics

IV

											DIAMANT
Example: Order-N°.											B5756
											B5756
\varnothing Code	d_1 ± 0.01	d_2 h6	d_3	l_1	l_2	l_3	l_4	r 0/+0.03	α	z	
100	1.00	3.00	0.95	50	1.20	8.00	12.22	0.200	4.9°	2	●
108	1.20	3.00	1.10	50	1.44	9.60	13.54	0.200	4.0°	2	●
120	1.50	3.00	1.40	60	1.80	12.00	15.38	0.200	3.0°	2	●
140	2.00	3.00	1.90	60	2.40	16.00	18.45	0.200	1.7°	2	●
160	2.50	3.00	2.30	60	3.00	20.00	21.70	0.200	0.7°	2	●
180	3.00	3.00	2.80	60	3.60	23.56	24.00	0.200	0.0°	2	●

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.20	2	0.002	0.100	0.100	60	100	120	180
		0.50	2	0.005	0.250	0.300	150	250	300	450
		0.80	2	0.008	0.350	0.500	240	400	480	720
		1.00	2	0.009	0.450	0.600	270	450	540	810
		1.20	2	0.011	0.550	0.700	330	550	660	990
		1.50	2	0.014	0.700	0.900	420	700	840	1260
		2.00	2	0.019	0.900	1.200	570	950	1140	1710
		2.50	2	0.024	1.150	1.500	720	1200	1440	2160
3.00	2	0.028	1.350	1.800	840	1400	1680	2520		
	Graphite B B	0.20	2	0.001	0.100	0.200	30	50	60	90
		0.50	2	0.004	0.250	0.500	120	200	240	360
		0.80	2	0.006	0.350	0.800	180	300	360	540
		1.00	2	0.007	0.450	1.000	210	350	420	630
		1.20	2	0.009	0.550	1.200	270	450	540	810
		1.50	2	0.011	0.700	1.500	330	550	660	990
		2.00	2	0.015	0.900	2.000	450	750	900	1350
		2.50	2	0.018	1.150	2.500	540	900	1080	1620
3.00	2	0.022	1.350	3.000	660	1100	1320	1980		
	Graphite B B	0.20	2	0.002	0.030	0.040	60	100	120	180
		0.50	2	0.005	0.070	0.100	150	250	300	450
		0.80	2	0.009	0.110	0.160	270	450	540	810
		1.00	2	0.011	0.140	0.200	330	550	660	990
		1.20	2	0.013	0.170	0.240	390	650	780	1170
		1.50	2	0.016	0.210	0.300	480	800	960	1440
		2.00	2	0.021	0.280	0.400	630	1050	1260	1890
		2.50	2	0.027	0.350	0.500	810	1350	1620	2430
3.00	2	0.032	0.420	0.600	960	1600	1920	2880		
	Graphite B B	0.20	2	0.002	0.040	0.040	60	100	120	180
		0.50	2	0.005	0.090	0.090	150	250	300	450
		0.80	2	0.009	0.140	0.140	270	450	540	810
		1.00	2	0.011	0.180	0.180	330	550	660	990
		1.20	2	0.013	0.220	0.220	390	650	780	1170
		1.50	2	0.016	0.270	0.270	480	800	960	1440
		2.00	2	0.021	0.360	0.360	630	1050	1260	1890
		2.50	2	0.027	0.450	0.450	810	1350	1620	2430
3.00	2	0.032	0.540	0.540	960	1600	1920	2880		



Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.50	2	0.005	0.250	0.300	150	250	300	450
		0.60	2	0.006	0.250	0.350	180	300	360	540
		0.80	2	0.008	0.350	0.500	240	400	480	720
		1.00	2	0.009	0.450	0.600	270	450	540	810
		1.20	2	0.011	0.550	0.700	330	550	660	990
		1.50	2	0.014	0.700	0.900	420	700	840	1260
		2.00	2	0.019	0.900	1.200	570	950	1140	1710
		2.50	2	0.024	1.150	1.500	720	1200	1440	2160
		3.00	2	0.028	1.350	1.800	840	1400	1680	2520
			Graphite B B	0.50	2	0.004	0.250	0.500	120	200
0.60	2			0.004	0.250	0.600	120	200	240	360
0.80	2			0.006	0.350	0.800	180	300	360	540
1.00	2			0.007	0.450	1.000	210	350	420	630
1.20	2			0.009	0.550	1.200	270	450	540	810
1.50	2			0.011	0.700	1.500	330	550	660	990
2.00	2			0.015	0.900	2.000	450	750	900	1350
2.50	2			0.018	1.150	2.500	540	900	1080	1620
3.00	2			0.022	1.350	3.000	660	1100	1320	1980
	Graphite B B			0.50	2	0.005	0.070	0.100	150	250
		0.60	2	0.006	0.080	0.120	180	300	360	540
		0.80	2	0.009	0.110	0.160	270	450	540	810
		1.00	2	0.011	0.140	0.200	330	550	660	990
		1.20	2	0.013	0.170	0.240	390	650	780	1170
		1.50	2	0.016	0.210	0.300	480	800	960	1440
		2.00	2	0.021	0.280	0.400	630	1050	1260	1890
		2.50	2	0.027	0.350	0.500	810	1350	1620	2430
		3.00	2	0.032	0.420	0.600	960	1600	1920	2880
			Graphite B B	0.50	2	0.005	0.090	0.090	150	250
0.60	2			0.006	0.110	0.110	180	300	360	540
0.80	2			0.009	0.140	0.140	270	450	540	810
1.00	2			0.011	0.180	0.180	330	550	660	990
1.20	2			0.013	0.220	0.220	390	650	780	1170
1.50	2			0.016	0.270	0.270	480	800	960	1440
2.00	2			0.021	0.360	0.360	630	1050	1260	1890
2.50	2			0.027	0.450	0.450	810	1350	1620	2430
3.00	2			0.032	0.540	0.540	960	1600	1920	2880

Cylindrical end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 5xd



HM
MG10 λ 25°
 γ 6°

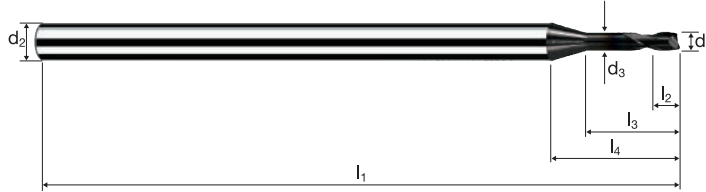

C Graphite CF / GF Fiber Reinforced Plastics

IV

Example: Order-N°.											DIAMANT	
											B5714	
\varnothing Code	d_1 ± 0.01	d_2 h6	d_3	l_1	l_2	l_3	l_4	45°	α	z		
050	0.50	3.00	0.45	40	0.60	2.50	7.65	-	9.9°	2	●	
060	0.60	3.00	0.55	40	0.72	3.00	7.97	-	9.2°	2	●	
070	0.70	3.00	0.65	40	0.84	3.50	8.28	-	8.4°	2	●	
080	0.80	3.00	0.75	40	0.96	4.00	8.59	-	7.8°	2	●	
090	0.90	3.00	0.85	40	1.08	4.50	8.91	-	7.2°	2	●	
100	1.00	3.00	0.95	50	1.20	5.00	9.22	0.07	6.6°	2	●	
108	1.20	3.00	1.10	50	1.44	6.00	9.94	0.07	5.5°	2	●	
120	1.50	3.00	1.40	50	1.80	7.50	10.88	0.07	4.2°	2	●	
132	1.80	3.00	1.70	50	2.16	9.00	11.82	0.07	3.1°	2	●	
140	2.00	3.00	1.90	50	2.40	10.00	12.45	0.10	2.4°	2	●	
152	2.30	3.00	2.10	50	2.76	11.50	13.57	0.10	1.6°	2	●	
160	2.50	3.00	2.30	50	3.00	12.50	14.20	0.10	1.1°	2	●	
172	2.80	3.00	2.60	50	3.36	14.00	15.14	0.10	0.5°	2	●	
180	3.00	3.00	2.80	50	3.60	14.56	15.00	0.10	0.0°	2	●	


Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.50	2	0.005	0.200	0.300	150	250	300	450
		0.60	2	0.006	0.250	0.350	180	300	360	540
		0.80	2	0.008	0.300	0.500	240	400	480	720
		1.00	2	0.009	0.400	0.600	270	450	540	810
		1.20	2	0.011	0.500	0.700	330	550	660	990
		1.50	2	0.014	0.600	0.900	420	700	840	1260
		2.00	2	0.019	0.800	1.200	570	950	1140	1710
		2.50	2	0.024	1.000	1.500	720	1200	1440	2160
		3.00	2	0.028	1.200	1.800	840	1400	1680	2520
			Graphite B B	0.50	2	0.004	0.200	0.500	120	200
0.60	2			0.004	0.250	0.600	120	200	240	360
0.80	2			0.006	0.300	0.800	180	300	360	540
1.00	2			0.007	0.400	1.000	210	350	420	630
1.20	2			0.009	0.500	1.200	270	450	540	810
1.50	2			0.011	0.600	1.500	330	550	660	990
2.00	2			0.015	0.800	2.000	450	750	900	1350
2.50	2			0.018	1.000	2.500	540	900	1080	1620
3.00	2			0.022	1.200	3.000	660	1100	1320	1980
	Graphite B B			0.50	2	0.005	0.060	0.090	150	250
		0.60	2	0.006	0.070	0.110	180	300	360	540
		0.80	2	0.009	0.100	0.140	270	450	540	810
		1.00	2	0.011	0.120	0.180	330	550	660	990
		1.20	2	0.013	0.140	0.220	390	650	780	1170
		1.50	2	0.016	0.180	0.270	480	800	960	1440
		2.00	2	0.021	0.240	0.360	630	1050	1260	1890
		2.50	2	0.027	0.300	0.450	810	1350	1620	2430
		3.00	2	0.032	0.360	0.540	960	1600	1920	2880
			Graphite B B	0.50	2	0.005	0.080	0.080	150	250
0.60	2			0.006	0.100	0.100	180	300	360	540
0.80	2			0.009	0.130	0.130	270	450	540	810
1.00	2			0.011	0.160	0.160	330	550	660	990
1.20	2			0.013	0.190	0.190	390	650	780	1170
1.50	2			0.016	0.240	0.240	480	800	960	1440
2.00	2			0.021	0.320	0.320	630	1050	1260	1890
2.50	2			0.027	0.400	0.400	810	1350	1620	2430
3.00	2			0.032	0.480	0.480	960	1600	1920	2880

Cylindrical end mills Microcut

Shank \varnothing 3mm, cylindrical neck, 8xd



HM λ 25°
MG10 γ 6°

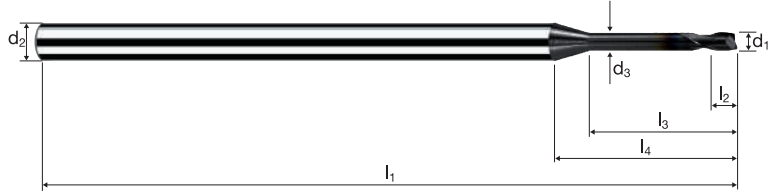













C
Graphite

CF / GF
Fiber Reinforced
Plastics

IV

											DIAMANT
Example: Order-N°.											B5716
	Coating		Article-N°.	ø-Code							
	B		5716	050							
\varnothing Code	d_1 ± 0.01	d_2 h6	d_3	l_1	l_2	l_3	l_4	45°	α	z	
050	0.50	3.00	0.45	40	0.60	4.00	9.15	-	8.3°	2	●
060	0.60	3.00	0.55	40	0.72	4.80	9.77	-	7.4°	2	●
080	0.80	3.00	0.75	40	0.96	6.40	10.99	-	6.0°	2	●
100	1.00	3.00	0.95	50	1.20	8.00	12.22	0.07	4.9°	2	●
108	1.20	3.00	1.10	50	1.44	9.60	13.54	0.07	4.0°	2	●
120	1.50	3.00	1.40	60	1.80	12.00	15.38	0.07	3.0°	2	●
140	2.00	3.00	1.90	60	2.40	16.00	18.45	0.10	1.7°	2	●
160	2.50	3.00	2.30	60	3.00	20.00	21.70	0.10	0.7°	2	●
180	3.00	3.00	2.80	60	3.60	23.56	24.00	0.10	0.0°	2	●

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=15000 min ⁻¹ vf [mm/min]	n=25000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]	n=45000 min ⁻¹ vf [mm/min]
	Graphite B B	0.50	2	0.005	0.200	0.200	150	250	300	450
		0.60	2	0.006	0.250	0.250	180	300	360	540
		0.80	2	0.008	0.300	0.300	240	400	480	720
		1.00	2	0.009	0.400	0.400	270	450	540	810
		1.20	2	0.011	0.500	0.500	330	550	660	990
		1.50	2	0.014	0.600	0.600	420	700	840	1260
		2.00	2	0.019	0.800	0.800	570	950	1140	1710
		2.50	2	0.024	1.000	1.000	720	1200	1440	2160
		3.00	2	0.028	1.200	1.200	840	1400	1680	2520
			Graphite B B	0.50	2	0.003	0.150	0.500	90	150
0.60	2			0.003	0.200	0.600	90	150	180	270
0.80	2			0.004	0.250	0.800	120	200	240	360
1.00	2			0.005	0.300	1.000	150	250	300	450
1.20	2			0.007	0.350	1.200	210	350	420	630
1.50	2			0.008	0.450	1.500	240	400	480	720
2.00	2			0.011	0.600	2.000	330	550	660	990
2.50	2			0.014	0.750	2.500	420	700	840	1260
3.00	2			0.016	0.900	3.000	480	800	960	1440
	Graphite B B			0.50	2	0.005	0.050	0.080	150	250
		0.60	2	0.006	0.060	0.090	180	300	360	540
		0.80	2	0.009	0.080	0.120	270	450	540	810
		1.00	2	0.011	0.100	0.150	330	550	660	990
		1.20	2	0.013	0.120	0.180	390	650	780	1170
		1.50	2	0.016	0.150	0.230	480	800	960	1440
		2.00	2	0.021	0.200	0.300	630	1050	1260	1890
		2.50	2	0.027	0.250	0.380	810	1350	1620	2430
		3.00	2	0.032	0.300	0.450	960	1600	1920	2880
			Graphite B B	0.50	2	0.005	0.070	0.070	150	250
0.60	2			0.006	0.080	0.080	180	300	360	540
0.80	2			0.009	0.110	0.110	270	450	540	810
1.00	2			0.011	0.140	0.140	330	550	660	990
1.20	2			0.013	0.170	0.170	390	650	780	1170
1.50	2			0.016	0.210	0.210	480	800	960	1440
2.00	2			0.021	0.280	0.280	630	1050	1260	1890
2.50	2			0.027	0.350	0.350	810	1350	1620	2430
3.00	2			0.032	0.420	0.420	960	1600	1920	2880


Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
	Graphite	6.00	2	0.071	2.700	3.600	1420	2130	2840	4260
		8.00	2	0.094	3.600	4.800	1880	2820	3760	5640
		10.00	2	0.118	4.500	6.000	2360	3540	4720	7080
		12.00	2	0.141	5.400	7.200	2820	4230	5640	8460
	 B  B									
	Graphite	6.00	2	0.055	2.700	6.000	1100	1650	2200	3300
		8.00	2	0.073	3.600	8.000	1460	2190	2920	4380
		10.00	2	0.091	4.500	10.000	1820	2730	3640	5460
		12.00	2	0.109	5.400	12.000	2180	3270	4360	6540
	 B  B									
	Graphite	6.00	2	0.080	0.850	1.200	1600	2400	3200	4800
		8.00	2	0.107	1.100	1.600	2140	3210	4280	6420
		10.00	2	0.133	1.400	2.000	2660	3990	5320	7980
		12.00	2	0.160	1.700	2.400	3200	4800	6400	9600
	 B  B									
	Graphite	6.00	2	0.080	1.100	0.350	1600	2400	3200	4800
		8.00	2	0.107	1.450	0.350	2140	3210	4280	6420
		10.00	2	0.133	1.800	0.350	2660	3990	5320	7980
		12.00	2	0.160	2.150	0.350	3200	4800	6400	9600
	 B  B									

Ball nose end mills SpheroX

Tolerance $r \pm 0.005$, 6xd



HM XA	λ 30° γ 15°

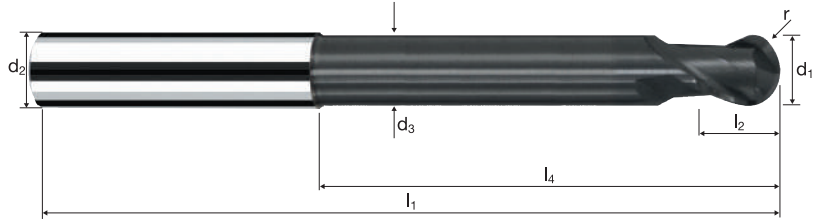

				C Graphite				CF / GF Fiber Reinforced Plastics
--	--	--	--	---------------	--	--	--	---

IV

										DIAPLUS	
Example: Order-N°.											
Coating: B Article-N°: 7484 ø-Code: 300											
Ø Code	d ₁	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r ±0.005	z		B7484
300	6.00	6.00	5.50	80	7.00	42.34	43.00	3.000	2		●
391	8.00	8.00	7.40	90	9.00	52.29	53.00	4.000	2		●
450	10.00	10.00	9.20	105	11.00	63.20	64.00	5.000	2		●
501	12.00	12.00	11.00	120	13.00	73.13	74.00	6.000	2		●


Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
	Graphite	6.00	2	0.056	4.800	2.400	1120	1680	2240	3360
		8.00	2	0.075	6.400	3.200	1500	2250	3000	4500
		10.00	2	0.094	8.000	4.000	1880	2820	3760	5640
		12.00	2	0.113	9.600	4.800	2260	3390	4520	6780
	Graphite	6.00	2	0.044	3.000	6.000	880	1320	1760	2640
		8.00	2	0.058	4.000	8.000	1160	1740	2320	3480
		10.00	2	0.073	5.000	10.000	1460	2190	2920	4380
		12.00	2	0.087	6.000	12.000	1740	2610	3480	5220
	Graphite	6.00	2	0.080	0.480	2.700	1600	2400	3200	4800
		8.00	2	0.107	0.640	3.600	2140	3210	4280	6420
		10.00	2	0.133	0.800	4.500	2660	3990	5320	7980
		12.00	2	0.160	0.960	5.400	3200	4800	6400	9600
	Graphite	6.00	2	0.080	0.900	0.900	1600	2400	3200	4800
		8.00	2	0.107	1.200	1.200	2140	3210	4280	6420
		10.00	2	0.133	1.500	1.500	2660	3990	5320	7980
		12.00	2	0.160	1.800	1.800	3200	4800	6400	9600

Corner radius end mills ToroX

Tolerance $r \pm 0.005$, 6xd






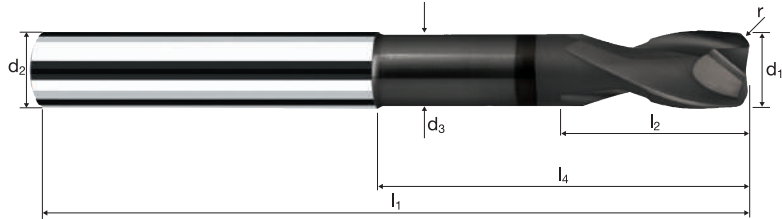








HM XA	λ 30° γ 15°



				C Graphite				CF / GF Fiber Reinforced Plastics
--	--	--	--	---------------	--	--	--	---

IV

Example: Order-N°.										DIAPLUS	
										B7284	
\emptyset Code	d_1 0/-0.01	d_2 h4	d_3	l_1	l_2	l_3	l_4	r ± 0.005	z		
300	6.00	6.00	5.50	80	7.00	42.34	43.00	0.500	2	●	
391	8.00	8.00	7.40	90	9.00	52.29	53.00	0.500	2	●	
450	10.00	10.00	9.20	105	11.00	63.20	64.00	0.500	2	●	
501	12.00	12.00	11.00	120	13.00	73.13	74.00	0.500	2	●	
297	6.00	6.00	5.50	80	7.00	42.34	43.00	1.000	2	●	
388	8.00	8.00	7.40	90	9.00	52.29	53.00	1.000	2	●	
445	10.00	10.00	9.20	105	11.00	63.20	64.00	1.000	2	●	
496	12.00	12.00	11.00	120	13.00	73.13	74.00	1.000	2	●	


Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]
 R	Graphite  B  B	2.00	3	0.024	4.000	0.500	720	1080	1440	2160
		3.00	3	0.035	6.000	0.750	1050	1575	2100	3150
		4.00	3	0.047	8.000	1.000	1410	2115	2820	4230
		5.00	3	0.059	10.000	1.250	1770	2655	3540	5310
		6.00	3	0.071	12.000	1.500	2130	3195	4260	6390
		8.00	3	0.094	16.000	2.000	2820	4230	5640	8460
		10.00	3	0.118	20.000	2.500	3540	5310	7080	10620
		12.00	3	0.141	24.000	3.000	4230	6345	8460	12690
 R	Graphite  B  B	2.00	3	0.018	0.600	2.000	540	810	1080	1620
		3.00	3	0.027	0.900	3.000	810	1215	1620	2430
		4.00	3	0.036	1.200	4.000	1080	1620	2160	3240
		5.00	3	0.045	1.500	5.000	1350	2025	2700	4050
		6.00	3	0.055	1.800	6.000	1650	2475	3300	4950
		8.00	3	0.073	2.400	8.000	2190	3285	4380	6570
		10.00	3	0.091	3.000	10.000	2730	4095	5460	8190
		12.00	3	0.109	3.600	12.000	3270	4905	6540	9810
 F	Graphite  B  B	2.00	3	0.027	0.200	0.800	810	1215	1620	2430
		3.00	3	0.040	0.300	1.200	1200	1800	2400	3600
		4.00	3	0.053	0.400	1.600	1590	2385	3180	4770
		5.00	3	0.067	0.500	2.000	2010	3015	4020	6030
		6.00	3	0.080	0.600	2.400	2400	3600	4800	7200
		8.00	3	0.107	0.800	3.200	3210	4815	6420	9630
		10.00	3	0.133	1.000	4.000	3990	5985	7980	11970
		12.00	3	0.160	1.200	4.800	4800	7200	9600	14400
 F	Graphite  B  B	2.00	3	0.027	4.000	0.300	810	1215	1620	2430
		3.00	3	0.040	6.000	0.450	1200	1800	2400	3600
		4.00	3	0.053	8.000	0.600	1590	2385	3180	4770
		5.00	3	0.067	10.000	0.750	2010	3015	4020	6030
		6.00	3	0.080	12.000	0.900	2400	3600	4800	7200
		8.00	3	0.107	16.000	1.200	3210	4815	6420	9630
		10.00	3	0.133	20.000	1.500	3990	5985	7980	11970
		12.00	3	0.160	24.000	1.800	4800	7200	9600	14400

Corner radius end mills

Tolerance r 0/+0.03






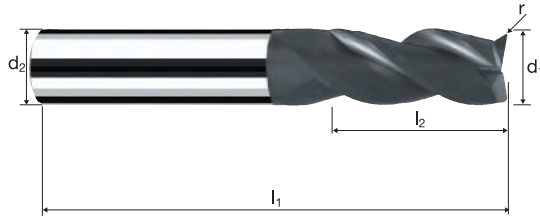





HM	λ 40°
XA	γ 15°



				C Graphite						CF / GF Fiber Reinforced Plastics
--	--	--	--	---------------	--	--	--	--	--	---

IV

Example: Order-N°.										DIAMANT
Coating: B Article-N°: 5640 ø-Code: 140										B5640
Ø Code	d ₁ e8	d ₂ h6	l ₁	l ₂	l ₄	r 0/+0.03	α	z		
140	2.00	3.00	40	6.00	9.06	0.150	3.4°	3		●
180	3.00	3.00	40	12.00	-	0.150	0.0°	3		●
220	4.00	4.00	50	14.00	-	0.200	0.0°	3		●
260	5.00	5.00	50	16.00	-	0.300	0.0°	3		●
300	6.00	6.00	63	19.00	-	0.300	0.0°	3		●
391	8.00	8.00	63	19.00	-	0.500	0.0°	3		●
450	10.00	10.00	72	22.00	-	0.500	0.0°	3		●
501	12.00	12.00	75	25.00	-	0.500	0.0°	3		●

Application	Material	d1 [mm]	z	f _z [mm]	a _p [mm]	a _e [mm]	n=10000 min ⁻¹ vf [mm/min]	n=15000 min ⁻¹ vf [mm/min]	n=20000 min ⁻¹ vf [mm/min]	n=30000 min ⁻¹ vf [mm/min]		
	Graphite  	2.00	3	0.019	6.000	0.400	570	855	1140	1710		
		3.00	3	0.028	9.000	0.600	840	1260	1680	2520		
		4.00	3	0.038	12.000	0.800	1140	1710	2280	3420		
		5.00	3	0.047	15.000	1.000	1410	2115	2820	4230		
		6.00	3	0.056	18.000	1.200	1680	2520	3360	5040		
		8.00	3	0.075	24.000	1.600	2250	3375	4500	6750		
		10.00	3	0.094	30.000	2.000	2820	4230	5640	8460		
		12.00	3	0.113	36.000	2.400	3390	5085	6780	10170		
			Graphite  	2.00	3	0.021	0.200	0.700	630	945	1260	1890
				3.00	3	0.032	0.300	1.050	960	1440	1920	2880
4.00	3			0.043	0.400	1.400	1290	1935	2580	3870		
5.00	3			0.053	0.500	1.750	1590	2385	3180	4770		
6.00	3			0.064	0.600	2.100	1920	2880	3840	5760		
8.00	3			0.085	0.800	2.800	2550	3825	5100	7650		
10.00	3			0.107	1.000	3.500	3210	4815	6420	9630		
12.00	3			0.128	1.200	4.200	3840	5760	7680	11520		
	Graphite  			2.00	3	0.021	6.000	0.300	630	945	1260	1890
				3.00	3	0.032	9.000	0.450	960	1440	1920	2880
		4.00	3	0.043	12.000	0.600	1290	1935	2580	3870		
		5.00	3	0.053	15.000	0.750	1590	2385	3180	4770		
		6.00	3	0.064	18.000	0.900	1920	2880	3840	5760		
		8.00	3	0.085	24.000	1.200	2550	3825	5100	7650		
		10.00	3	0.107	30.000	1.500	3210	4815	6420	9630		
		12.00	3	0.128	36.000	1.800	3840	5760	7680	11520		



End milling tools with special forms

Forming end mills

N° 7920



Base-X	B		Rm <850-1300			743
	HSS		Rm <850-1100			745
	HSS		Rm <850-1100			747
	HSS		Rm <850-1100			749
	HSS		Rm <850-1100			751
	HSS		Rm <850-1100			755

N° 0920



N° 0915



N° 0910



N° 0905



N° 0890



End milling tools with special forms

Deburring end mills

N° 7930



Base-X	B		Rm <850-1100			757
--------	----------	--	------------------------	--	--	-----

N° 7940



Base-X	B		Rm <850-1100			759
--------	----------	--	------------------------	--	--	-----

N° 7942



Base-X	B		Rm <850-1100			761
--------	----------	--	------------------------	--	--	-----

Universal end mills

N° 7960



Base-X	B		Rm <850-1100			763
--------	----------	--	------------------------	--	--	-----


Shell end mills

N° 3490



HSS			Rm <850-1100			765
-----	--	--	------------------------	--	--	-----

N° 3209



HSS			Rm <850-1300			767
-----	--	--	------------------------	--	--	-----

End milling tools for CFC

Cylindrical carbide

N° 20020



N° 20025




N° 20030



Base-X	B	Wear resistance d, 4 – 12 45°	CFK GFK I	CFK GFK II		769
Base-X	B	Wear resistance d, 4 – 12 45°	CFK GFK I	CFK GFK II		771
Base-X	B	Wear resistance d, 4 – 12 45°	CFK GFK I	CFK GFK II		773

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _c [mm]	n [min ⁻¹]	v _r [mm/min]
6.00	4	120	0.025	0.500	0.500	6365	635
8.00	4	120	0.030	1.000	1.000	4775	575
10.00	4	120	0.040	2.000	2.000	3820	610
12.00	4	120	0.050	3.000	3.000	3185	635

Steel
850 - 1100 N/mm²



6.00	4	100	0.020	0.500	0.500	5305	425
8.00	4	100	0.025	1.000	1.000	3980	400
10.00	4	100	0.035	2.000	2.000	3185	445
12.00	4	100	0.040	3.000	3.000	2655	425

Steel
1100 - 1300 N/mm²



6.00	4	60	0.015	0.500	0.500	3185	190
8.00	4	60	0.025	1.000	1.000	2385	240
10.00	4	60	0.030	2.000	2.000	1910	230
12.00	4	60	0.035	3.000	3.000	1590	225

Stainless steel
[Cr-Ni/1.4301]



6.00	4	50	0.015	0.500	0.500	2655	160
8.00	4	50	0.025	1.000	1.000	1990	200
10.00	4	50	0.030	2.000	2.000	1590	190
12.00	4	50	0.035	3.000	3.000	1325	185

Cast iron
(lamellar / spheroidal)



6.00	4	140	0.025	0.500	0.500	7425	745
8.00	4	140	0.030	1.000	1.000	5570	670
10.00	4	140	0.040	2.000	2.000	4455	715
12.00	4	140	0.050	3.000	3.000	3715	745

Unalloyed copper



6.00	4	160	0.020	0.500	0.500	8490	680
8.00	4	160	0.025	1.000	1.000	6365	635
10.00	4	160	0.035	2.000	2.000	5095	715
12.00	4	160	0.040	3.000	3.000	4245	680

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



6.00	4	60	0.015	0.500	0.500	3185	190
8.00	4	60	0.025	1.000	1.000	2385	240
10.00	4	60	0.030	2.000	2.000	1910	230
12.00	4	60	0.035	3.000	3.000	1590	225

Wrought aluminium
Si < 6%




6.00	4	180	0.025	0.500	0.500	9550	955
8.00	4	180	0.030	1.000	1.000	7160	860
10.00	4	180	0.040	2.000	2.000	5730	915
12.00	4	180	0.050	3.000	3.000	4775	955

Quarter radius end mills



HM	λ	0°
MG10	γ	0°

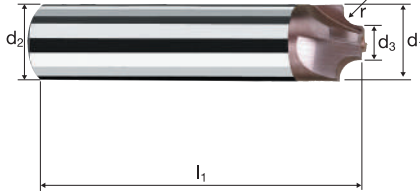


Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500			Inox Stainless	Ti Titanium	GG(G) Aluminium Copper
-------------	----------------	-----------------	-----------------	--	--	-------------------	----------------	------------------------------

Ø Code	d ₁	d ₂ h6	d ₃ ±0.1	l ₁	r J510	z	UNICUT-4X
							U7920
Order-N°:	Coating U		Article-N° 7920		ø-Code 300		
300	6.00	6.00	4.50	57	0.500	4	●
303	6.00	6.00	4.00	57	0.750	4	●
391	8.00	8.00	5.50	63	1.000	4	●
394	8.00	8.00	5.00	63	1.250	4	●
397	8.00	8.00	4.50	63	1.500	4	●
450	10.00	10.00	5.00	72	2.000	4	●
453	10.00	10.00	4.50	72	2.500	4	●
501	12.00	12.00	5.00	83	3.000	4	●



Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _c [mm]	n [min ⁻¹]	v _r [mm/min]
10.00	4	55	0.010	2.000	2.000	1750	70
12.00	4	55	0.010	2.500	2.500	1460	60
16.00	4	55	0.025	4.000	4.000	1095	110
20.00	4	55	0.030	5.000	5.000	875	105
22.00	4	55	0.035	6.000	6.000	795	110
24.00	5	55	0.040	7.000	7.000	730	145
28.00	5	55	0.045	8.000	8.000	625	140
32.00	5	55	0.050	10.000	10.000	545	135
38.00	6	55	0.060	12.000	12.000	460	165

Steel
850 - 1100 N/mm²



10.00	4	45	0.010	2.000	2.000	1430	55
12.00	4	45	0.010	2.500	2.500	1195	50
16.00	4	45	0.025	4.000	4.000	895	90
20.00	4	45	0.030	5.000	5.000	715	85
22.00	4	45	0.035	6.000	6.000	650	90
24.00	5	45	0.040	7.000	7.000	595	120
28.00	5	45	0.045	8.000	8.000	510	115
32.00	5	45	0.050	10.000	10.000	450	110
38.00	6	45	0.060	12.000	12.000	375	135

Steel
1100 - 1300 N/mm²



10.00	4	34	0.010	2.000	2.000	1080	45
12.00	4	34	0.010	2.500	2.500	900	35
16.00	4	34	0.025	4.000	4.000	675	70
20.00	4	34	0.030	5.000	5.000	540	65
22.00	4	34	0.035	6.000	6.000	490	70
24.00	5	34	0.040	7.000	7.000	450	90
28.00	5	34	0.045	8.000	8.000	385	85
32.00	5	34	0.050	10.000	10.000	340	85
38.00	6	34	0.060	12.000	12.000	285	105

Stainless steel
[Cr-Ni/1.4301]



10.00	4	21	0.010	2.000	2.000	670	25
12.00	4	21	0.010	2.500	2.500	555	20
16.00	4	21	0.025	4.000	4.000	420	40
20.00	4	21	0.030	5.000	5.000	335	40
22.00	4	21	0.035	6.000	6.000	305	45
24.00	5	21	0.040	7.000	7.000	280	55
28.00	5	21	0.045	8.000	8.000	240	55
32.00	5	21	0.050	10.000	10.000	210	50
38.00	6	21	0.060	12.000	12.000	175	65

Cast iron
(lamellar / spheroidal)



10.00	4	42	0.010	2.000	2.000	1335	55
12.00	4	42	0.010	2.500	2.500	1115	45
16.00	4	42	0.025	4.000	4.000	835	85
20.00	4	42	0.030	5.000	5.000	670	80
22.00	4	42	0.035	6.000	6.000	610	85
24.00	5	42	0.040	7.000	7.000	555	110
28.00	5	42	0.045	8.000	8.000	475	105
32.00	5	42	0.050	10.000	10.000	420	105
38.00	6	42	0.060	12.000	12.000	350	125

Unalloyed copper



10.00	4	65	0.010	2.000	2.000	2070	85
12.00	4	65	0.010	2.500	2.500	1725	70
16.00	4	65	0.025	4.000	4.000	1295	130
20.00	4	65	0.030	5.000	5.000	1035	125
22.00	4	65	0.035	6.000	6.000	940	130
24.00	5	65	0.040	7.000	7.000	860	170
28.00	5	65	0.045	8.000	8.000	740	165
32.00	5	65	0.050	10.000	10.000	645	160
38.00	6	65	0.060	12.000	12.000	545	195

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



10.00	4	23	0.010	2.000	2.000	730	30
12.00	4	23	0.010	2.500	2.500	610	25
16.00	4	23	0.025	4.000	4.000	460	45
20.00	4	23	0.030	5.000	5.000	365	45
22.00	4	23	0.035	6.000	6.000	335	45
24.00	5	23	0.040	7.000	7.000	305	60
28.00	5	23	0.045	8.000	8.000	260	60
32.00	5	23	0.050	10.000	10.000	230	55
38.00	6	23	0.060	12.000	12.000	195	70

Wrought aluminium
Si < 6%




10.00	4	80	0.010	2.000	2.000	2545	100
12.00	4	80	0.010	2.500	2.500	2120	85
16.00	4	80	0.025	4.000	4.000	1590	160
20.00	4	80	0.030	5.000	5.000	1275	155
22.00	4	80	0.035	6.000	6.000	1155	160
24.00	5	80	0.040	7.000	7.000	1060	210
28.00	5	80	0.045	8.000	8.000	910	205
32.00	5	80	0.050	10.000	10.000	795	200
38.00	6	80	0.060	12.000	12.000	670	240

Quarter radius end mills

HSS


HSS-E λ 8°
Co8 γ 0°

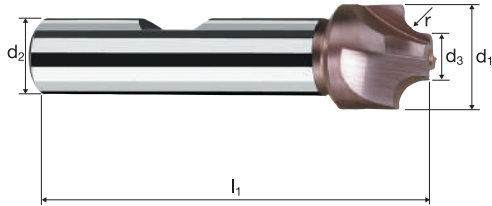

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Aluminium Copper
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	------------------------------

Example: Order-N°.								UNICUT-4X	
								U0920	
Ø Code	d ₁	d ₂ h6	d ₃ 0/+0.1	l ₁	r H11	z			
080	8.00	10.00	5.30	56	1.000	4			●
090	9.00	10.00	5.30	56	1.500	4			●
100	10.00	10.00	5.10	56	2.000	4			●
120	12.00	12.00	6.10	63	2.500	4			●
140	14.00	12.00	7.10	63	3.000	4			●
160	16.00	12.00	7.10	63	4.000	4			●
200	20.00	16.00	8.70	70	5.000	4			●
220	22.00	16.00	8.70	70	6.000	4			●
240	24.00	16.00	8.70	70	7.000	5			●
280	28.00	16.00	10.20	70	8.000	5			●
320	32.00	16.00	10.20	75	10.000	5			●
380	38.00	20.00	11.70	80	12.000	6			●
460	46.00	25.00	14.00	94	15.000	6			●
580	58.00	25.00	15.00	100	20.000	6			●

Application



Material

Steel
< 850 N/mm²



Steel
850 - 1100 N/mm²



Steel
1100 - 1300 N/mm²



Stainless steel
[Cr-Ni/1.4301]



Cast iron
(lamellar / spheroidal)



Unalloyed copper



Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



Wrought aluminium
Si < 6%




d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
16.00	6	55	0.020	8.000	16.000	1095	130
18.00	6	55	0.020	8.000	18.000	975	115
21.00	6	55	0.030	9.000	21.000	835	150
25.00	6	55	0.040	11.000	25.000	700	170
28.00	6	55	0.040	12.000	28.000	625	150
32.00	6	55	0.050	14.000	32.000	545	165
40.00	8	55	0.060	18.000	40.000	440	210
16.00	6	45	0.020	8.000	16.000	895	105
18.00	6	45	0.020	8.000	18.000	795	95
21.00	6	45	0.030	9.000	21.000	680	125
25.00	6	45	0.040	11.000	25.000	575	140
28.00	6	45	0.040	12.000	28.000	510	125
32.00	6	45	0.050	14.000	32.000	450	135
40.00	8	45	0.060	18.000	40.000	360	170
16.00	6	34	0.020	8.000	16.000	675	80
18.00	6	34	0.020	8.000	18.000	600	70
21.00	6	34	0.030	9.000	21.000	515	95
25.00	6	34	0.040	11.000	25.000	435	105
28.00	6	34	0.040	12.000	28.000	385	95
32.00	6	34	0.050	14.000	32.000	340	100
40.00	8	34	0.060	18.000	40.000	270	130
16.00	6	21	0.020	8.000	16.000	420	50
18.00	6	21	0.020	8.000	18.000	370	45
21.00	6	21	0.030	9.000	21.000	320	55
25.00	6	21	0.040	11.000	25.000	265	65
28.00	6	21	0.040	12.000	28.000	240	55
32.00	6	21	0.050	14.000	32.000	210	65
40.00	8	21	0.060	18.000	40.000	165	80
16.00	6	42	0.020	8.000	16.000	835	100
18.00	6	42	0.020	8.000	18.000	745	90
21.00	6	42	0.030	9.000	21.000	635	115
25.00	6	42	0.040	11.000	25.000	535	130
28.00	6	42	0.040	12.000	28.000	475	115
32.00	6	42	0.050	14.000	32.000	420	125
40.00	8	42	0.060	18.000	40.000	335	160
16.00	6	65	0.020	8.000	16.000	1295	155
18.00	6	65	0.020	8.000	18.000	1150	140
21.00	6	65	0.030	9.000	21.000	985	175
25.00	6	65	0.040	11.000	25.000	830	200
28.00	6	65	0.040	12.000	28.000	740	175
32.00	6	65	0.050	14.000	32.000	645	195
40.00	8	65	0.060	18.000	40.000	515	250
16.00	6	23	0.020	8.000	16.000	460	55
18.00	6	23	0.020	8.000	18.000	405	50
21.00	6	23	0.030	9.000	21.000	350	65
25.00	6	23	0.040	11.000	25.000	295	70
28.00	6	23	0.040	12.000	28.000	260	65
32.00	6	23	0.050	14.000	32.000	230	70
40.00	8	23	0.060	18.000	40.000	185	90
16.00	6	80	0.020	8.000	16.000	1590	190
18.00	6	80	0.020	8.000	18.000	1415	170
21.00	6	80	0.030	9.000	21.000	1215	220
25.00	6	80	0.040	11.000	25.000	1020	245
28.00	6	80	0.040	12.000	28.000	910	220
32.00	6	80	0.050	14.000	32.000	795	240
40.00	8	80	0.060	18.000	40.000	635	305

T-groove end mills

HSS

HSS-E λ 7°
Co8 γ 10°

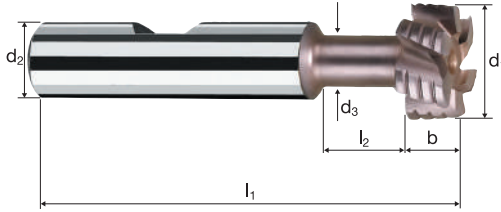


Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Aluminium Copper
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	------------------------------

Example: Order-N°.									UNICUT-4X
Coating Article-N° ø-Code									U0915
U 0915 140									
Ø Code	d ₁ d11	d ₂ h6	d ₃ h12	l ₁	l ₂	b d11	z		
140	16.00	10.00	7.00	62	12.00	8.0	6	●	
160	18.00	12.00	8.00	70	14.00	8.0	6	●	
180	21.00	12.00	10.00	74	18.00	9.0	6	●	
200	25.00	16.00	12.00	82	20.00	11.0	6	●	
220	28.00	16.00	12.00	83	21.00	12.0	6	●	
240	32.00	16.00	15.00	90	27.00	14.0	6	●	
260	40.00	25.00	19.00	108	31.00	18.0	8	●	



Application

Material



Material	U
Steel < 850 N/mm ²	U

d1 [mm]	z	v _c [m/min]	f _s [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
11.00	4	55	0.010	4.000	1.100	1590	65
12.50	4	55	0.010	6.000	1.250	1400	55
16.00	4	55	0.025	8.000	1.600	1095	110
18.00	6	55	0.025	8.000	1.800	975	145
21.00	6	55	0.040	9.000	2.100	835	200
25.00	6	55	0.045	11.000	2.500	700	190
32.00	6	55	0.060	14.000	3.200	545	195
40.00	8	55	0.070	18.000	4.000	440	245
50.00	8	55	0.090	22.000	5.000	350	250

Material	U
Steel 850 - 1100 N/mm ²	U

11.00	4	45	0.010	4.000	1.100	1300	50
12.50	4	45	0.010	6.000	1.250	1145	45
16.00	4	45	0.025	8.000	1.600	895	90
18.00	6	45	0.025	8.000	1.800	795	120
21.00	6	45	0.040	9.000	2.100	680	165
25.00	6	45	0.045	11.000	2.500	575	155
32.00	6	45	0.060	14.000	3.200	450	160
40.00	8	45	0.070	18.000	4.000	360	200
50.00	8	45	0.090	22.000	5.000	285	205

Material	U
Steel 1100 - 1300 N/mm ²	U

11.00	4	34	0.010	4.000	1.100	985	40
12.50	4	34	0.010	6.000	1.250	865	35
16.00	4	34	0.025	8.000	1.600	675	70
18.00	6	34	0.025	8.000	1.800	600	90
21.00	6	34	0.040	9.000	2.100	515	125
25.00	6	34	0.045	11.000	2.500	435	115
32.00	6	34	0.060	14.000	3.200	340	120
40.00	8	34	0.070	18.000	4.000	270	150
50.00	8	34	0.090	22.000	5.000	215	155

Material	U
Stainless steel [Cr-Ni/1.4301]	U

11.00	4	21	0.010	4.000	1.100	610	25
12.50	4	21	0.010	6.000	1.250	535	20
16.00	4	21	0.025	8.000	1.600	420	40
18.00	6	21	0.025	8.000	1.800	370	55
21.00	6	21	0.040	9.000	2.100	320	75
25.00	6	21	0.045	11.000	2.500	265	70
32.00	6	21	0.060	14.000	3.200	210	75
40.00	8	21	0.070	18.000	4.000	165	95
50.00	8	21	0.090	22.000	5.000	135	95

Material	U
Cast iron (lamellar / spheroidal)	U

11.00	4	42	0.010	4.000	1.100	1215	50
12.50	4	42	0.010	6.000	1.250	1070	45
16.00	4	42	0.025	8.000	1.600	835	85
18.00	6	42	0.025	8.000	1.800	745	110
21.00	6	42	0.040	9.000	2.100	635	155
25.00	6	42	0.045	11.000	2.500	535	145
32.00	6	42	0.060	14.000	3.200	420	150
40.00	8	42	0.070	18.000	4.000	335	185
50.00	8	42	0.090	22.000	5.000	265	195

Material	U
Unalloyed copper	U

11.00	4	65	0.010	4.000	1.100	1880	75
12.50	4	65	0.010	6.000	1.250	1655	65
16.00	4	65	0.025	8.000	1.600	1295	130
18.00	6	65	0.025	8.000	1.800	1150	170
21.00	6	65	0.040	9.000	2.100	985	235
25.00	6	65	0.045	11.000	2.500	830	225
32.00	6	65	0.060	14.000	3.200	645	235
40.00	8	65	0.070	18.000	4.000	515	290
50.00	8	65	0.090	22.000	5.000	415	300

Material	U
Titanium alloys up to 300 HB [Ti5Al2.5Sn]	U

11.00	4	23	0.010	4.000	1.100	665	25
12.50	4	23	0.010	6.000	1.250	585	25
16.00	4	23	0.025	8.000	1.600	460	45
18.00	6	23	0.025	8.000	1.800	405	60
21.00	6	23	0.040	9.000	2.100	350	85
25.00	6	23	0.045	11.000	2.500	295	80
32.00	6	23	0.060	14.000	3.200	230	80
40.00	8	23	0.070	18.000	4.000	185	100
50.00	8	23	0.090	22.000	5.000	145	105

Material	U
Wrought aluminium Si < 6%	U


11.00	4	80	0.010	4.000	1.100	2315	95
12.50	4	80	0.010	6.000	1.250	2035	80
16.00	4	80	0.025	8.000	1.600	1590	160
18.00	6	80	0.025	8.000	1.800	1415	210
21.00	6	80	0.040	9.000	2.100	1215	290
25.00	6	80	0.045	11.000	2.500	1020	275
32.00	6	80	0.060	14.000	3.200	795	285
40.00	8	80	0.070	18.000	4.000	635	355
50.00	8	80	0.090	22.000	5.000	510	365

T-groove end mills

HSS


HSS-E
Co8

λ 12°
 γ 12°

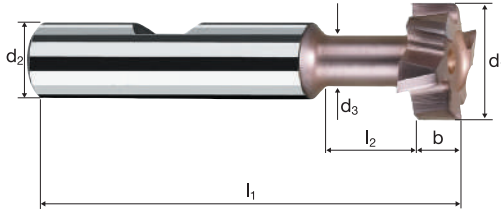

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Aluminium Copper
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	------------------------------

Ø Code	d ₁ d11	d ₂ h6	d ₃	l ₁	l ₂	b k11	z	UNICUT-4X
Example: Order-N°. Coating: U Article-N°: 0910 ø-Code: 100								
100	11.00	10.00	4.00	54	8.00	4.0	4	●
120	12.50	10.00	5.00	57	9.00	6.0	4	●
140	16.00	10.00	7.00	62	12.00	8.0	4	●
160	18.00	12.00	8.00	70	15.00	8.0	6	●
180	21.00	12.00	10.00	74	19.00	9.0	6	●
200	25.00	16.00	12.00	82	21.00	11.0	6	●
220	32.00	16.00	15.00	90	27.00	14.0	6	●
240	40.00	25.00	19.00	108	30.00	18.0	8	●
260	50.00	32.00	25.00	124	40.00	22.0	8	●
500*	12.00	8.00	5.00	54	14.00	2.5	8	●
520*	16.00	8.00	6.00	56	16.00	3.0	8	●
540*	20.00	10.00	8.00	62	17.00	4.0	8	●
560*	25.00	10.00	9.00	65	19.00	5.0	10	●
580*	32.00	12.00	10.00	73	21.00	6.0	12	●
600*	40.00	12.00	11.00	77	23.00	8.0	12	●
620*	50.00	16.00	14.00	84	25.00	10.0	14	●
* Conical neck								



Material

Steel
< 850 N/mm²

d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
7.50	8	55	0.005	2.000	2.000	2335	95
10.50	8	55	0.010	2.900	3.000	1665	135
13.50	8	55	0.010	3.800	4.000	1295	105
16.50	8	55	0.025	5.000	5.000	1060	210
19.50	10	55	0.035	5.500	6.000	900	315
22.50	10	55	0.040	6.600	8.000	780	310

Steel
850 - 1100 N/mm²

7.50	8	45	0.005	2.000	2.000	1910	75
10.50	8	45	0.010	2.900	3.000	1365	110
13.50	8	45	0.010	3.800	4.000	1060	85
16.50	8	45	0.025	5.000	5.000	870	175
19.50	10	45	0.035	5.500	6.000	735	255
22.50	10	45	0.040	6.600	8.000	635	255

Steel
1100 - 1300 N/mm²

7.50	8	34	0.005	2.000	2.000	1445	60
10.50	8	34	0.010	2.900	3.000	1030	80
13.50	8	34	0.010	3.800	4.000	800	65
16.50	8	34	0.025	5.000	5.000	655	130
19.50	10	34	0.035	5.500	6.000	555	195
22.50	10	34	0.040	6.600	8.000	480	190

Stainless steel
[Cr-Ni/1.4301]

7.50	8	21	0.005	2.000	2.000	890	35
10.50	8	21	0.010	2.900	3.000	635	50
13.50	8	21	0.010	3.800	4.000	495	40
16.50	8	21	0.025	5.000	5.000	405	80
19.50	10	21	0.035	5.500	6.000	345	120
22.50	10	21	0.040	6.600	8.000	295	120

Cast iron
(lamellar / spheroidal)

7.50	8	21	0.005	2.000	2.000	890	35
10.50	8	21	0.010	2.900	3.000	635	50
13.50	8	21	0.010	3.800	4.000	495	40
16.50	8	21	0.025	5.000	5.000	405	80
19.50	10	21	0.035	5.500	6.000	345	120
22.50	10	21	0.040	6.600	8.000	295	120

Unalloyed copper

7.50	8	65	0.005	2.000	2.000	2760	110
10.50	8	65	0.010	2.900	3.000	1970	160
13.50	8	65	0.010	3.800	4.000	1535	125
16.50	8	65	0.025	5.000	5.000	1255	250
19.50	10	65	0.035	5.500	6.000	1060	370
22.50	10	65	0.040	6.600	8.000	920	370

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

7.50	8	23	0.005	2.000	2.000	975	40
10.50	8	23	0.010	2.900	3.000	695	55
13.50	8	23	0.010	3.800	4.000	540	45
16.50	8	23	0.025	5.000	5.000	445	90
19.50	10	23	0.035	5.500	6.000	375	130
22.50	10	23	0.040	6.600	8.000	325	130


Wrought aluminium
Si < 6%

7.50	8	80	0.005	2.000	2.000	3395	135
10.50	8	80	0.010	2.900	3.000	2425	195
13.50	8	80	0.010	3.800	4.000	1885	150
16.50	8	80	0.025	5.000	5.000	1545	310
19.50	10	80	0.035	5.500	6.000	1305	455
22.50	10	80	0.040	6.600	8.000	1130	455

Slotting end mills

HSS


HSS-E λ 10°
Co8 γ 8°

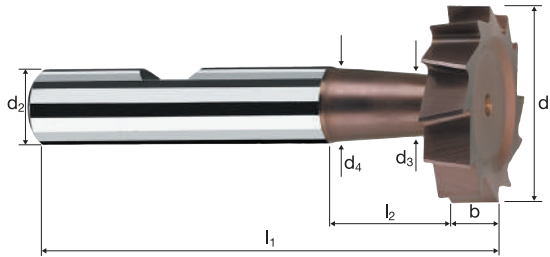

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Aluminium Copper
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	------------------------------

Example: Order-N°.										UNICUT-4X	
										U0905	
\emptyset Code	d_1 h11	d_2 h6	d_3	d_4	l_1	l_2	b e8	z			
100	4.50	6.00	1.80	5.50	50	12.00	1.0	8		●	
150	7.50	6.00	2.80	5.50	50	11.00	1.5	8		●	
160	7.50	6.00	3.20	5.50	50	10.00	2.0	8		●	
200	10.50	6.00	4.00	5.50	50	11.00	2.0	8		●	
210	10.50	6.00	4.00	5.50	50	10.00	2.5	8		●	
220	10.50	6.00	4.20	5.50	50	9.00	3.0	8		●	
310	13.50	10.00	4.60	9.50	56	13.00	2.5	8		●	
320	13.50	10.00	4.60	9.50	56	12.00	3.0	8		●	
330	13.50	10.00	4.60	9.50	56	11.00	4.0	8		●	
360	16.50	10.00	4.60	9.50	56	12.00	3.0	8		●	
370	16.50	10.00	4.60	9.50	56	11.00	4.0	8		●	
380	16.50	10.00	5.00	9.50	56	10.00	5.0	8		●	
410	19.50	10.00	5.60	9.50	63	18.00	3.0	10		●	
420	19.50	10.00	5.60	9.50	63	17.00	4.0	10		●	
430	19.50	10.00	6.00	9.50	63	16.00	5.0	10		●	
440	19.50	10.00	6.50	9.50	63	15.00	6.0	10		●	
500	22.50	10.00	6.00	9.50	63	17.00	4.0	10		●	
510	22.50	10.00	6.00	9.50	63	16.00	5.0	10		●	
520	22.50	10.00	6.50	9.50	63	15.00	6.0	10		●	
540	22.50	10.00	6.50	9.50	63	14.00	8.0	10		●	

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _c [mm]	n [min ⁻¹]	v _r [mm/min]
25.50	12	55	0.045	7.000	6.000	685	370
28.50	12	55	0.050	8.200	10.000	615	370
32.50	12	55	0.060	9.800	10.000	540	390
45.50	14	55	0.080	12.000	10.000	385	430

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _c [mm]	n [min ⁻¹]	v _r [mm/min]
25.50	12	45	0.045	7.000	6.000	560	305
28.50	12	45	0.050	8.200	10.000	505	300
32.50	12	45	0.060	9.800	10.000	440	315
45.50	14	45	0.080	12.000	10.000	315	355

Steel
1100 - 1300 N/mm²



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _c [mm]	n [min ⁻¹]	v _r [mm/min]
25.50	12	34	0.045	7.000	6.000	425	230
28.50	12	34	0.050	8.200	10.000	380	230
32.50	12	34	0.060	9.800	10.000	335	240
45.50	14	34	0.080	12.000	10.000	240	265

Stainless steel
[Cr-Ni/1.4301]



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _c [mm]	n [min ⁻¹]	v _r [mm/min]
25.50	12	21	0.045	7.000	6.000	260	140
28.50	12	21	0.050	8.200	10.000	235	140
32.50	12	21	0.060	9.800	10.000	205	150
45.50	14	21	0.080	12.000	10.000	145	165

Cast iron
(lamellar / spheroidal)



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _c [mm]	n [min ⁻¹]	v _r [mm/min]
25.50	12	21	0.045	7.000	6.000	260	140
28.50	12	21	0.050	8.200	10.000	235	140
32.50	12	21	0.060	9.800	10.000	205	150
45.50	14	21	0.080	12.000	10.000	145	165

Unalloyed copper



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _c [mm]	n [min ⁻¹]	v _r [mm/min]
25.50	12	65	0.045	7.000	6.000	810	440
28.50	12	65	0.050	8.200	10.000	725	435
32.50	12	65	0.060	9.800	10.000	635	460
45.50	14	65	0.080	12.000	10.000	455	510

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]




d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _c [mm]	n [min ⁻¹]	v _r [mm/min]
25.50	12	23	0.045	7.000	6.000	285	155
28.50	12	23	0.050	8.200	10.000	255	155
32.50	12	23	0.060	9.800	10.000	225	160
45.50	14	23	0.080	12.000	10.000	160	180

Wrought aluminium
Si < 6%



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _c [mm]	n [min ⁻¹]	v _r [mm/min]
25.50	12	80	0.045	7.000	6.000	1000	540
28.50	12	80	0.050	8.200	10.000	895	535
32.50	12	80	0.060	9.800	10.000	785	565
45.50	14	80	0.080	12.000	10.000	560	625

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _c [mm]	n [min ⁻¹]	v _r [mm/min]
8.00	7	55	0.005	2.500	1.500	2190	75
12.00	8	55	0.010	3.000	2.000	1460	115
16.00	10	55	0.015	4.000	2.200	1095	165
20.00	12	55	0.018	6.000	2.400	875	190
25.00	14	55	0.020	8.000	2.600	700	195
32.00	16	55	0.025	10.000	3.000	545	220

Steel
850 - 1100 N/mm²



8.00	7	45	0.005	2.500	1.500	1790	65
12.00	8	45	0.010	3.000	2.000	1195	95
16.00	10	45	0.015	4.000	2.200	895	135
20.00	12	45	0.018	6.000	2.400	715	155
25.00	14	45	0.020	8.000	2.600	575	160
32.00	16	45	0.025	10.000	3.000	450	180

Steel
1100 - 1300 N/mm²



8.00	7	34	0.005	2.500	1.500	1355	45
12.00	8	34	0.010	3.000	2.000	900	70
16.00	10	34	0.015	4.000	2.200	675	100
20.00	12	34	0.018	6.000	2.400	540	115
25.00	14	34	0.020	8.000	2.600	435	120
32.00	16	34	0.025	10.000	3.000	340	135

Stainless steel
[Cr-Ni/1.4301]



8.00	7	21	0.005	2.500	1.500	835	30
12.00	8	21	0.010	3.000	2.000	555	45
16.00	10	21	0.015	4.000	2.200	420	65
20.00	12	21	0.018	6.000	2.400	335	70
25.00	14	21	0.020	8.000	2.600	265	75
32.00	16	21	0.025	10.000	3.000	210	85

Cast iron
(lamellar / spheroidal)



8.00	7	42	0.005	2.500	1.500	1670	60
12.00	8	42	0.010	3.000	2.000	1115	90
16.00	10	42	0.015	4.000	2.200	835	125
20.00	12	42	0.018	6.000	2.400	670	145
25.00	14	42	0.020	8.000	2.600	535	150
32.00	16	42	0.025	10.000	3.000	420	165

Unalloyed copper



8.00	7	65	0.005	2.500	1.500	2585	90
12.00	8	65	0.010	3.000	2.000	1725	140
16.00	10	65	0.015	4.000	2.200	1295	195
20.00	12	65	0.018	6.000	2.400	1035	225
25.00	14	65	0.020	8.000	2.600	830	230
32.00	16	65	0.025	10.000	3.000	645	260

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]



8.00	7	23	0.005	2.500	1.500	915	30
12.00	8	23	0.010	3.000	2.000	610	50
16.00	10	23	0.015	4.000	2.200	460	70
20.00	12	23	0.018	6.000	2.400	365	80
25.00	14	23	0.020	8.000	2.600	295	80
32.00	16	23	0.025	10.000	3.000	230	90

Wrought aluminium
Si < 6%




8.00	7	80	0.005	2.500	1.500	3185	110
12.00	8	80	0.010	3.000	2.000	2120	170
16.00	10	80	0.015	4.000	2.200	1590	240
20.00	12	80	0.018	6.000	2.400	1275	275
25.00	14	80	0.020	8.000	2.600	1020	285
32.00	16	80	0.025	10.000	3.000	795	320

Angular end mills

HSS


HSS-E λ 0°
Co8 γ 0°

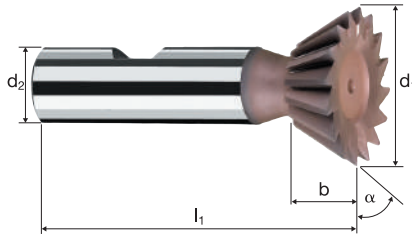

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Aluminium Copper
----------	-------------	--------------	--	--	--	--	----------------	-------------	------------------------

Example: Order-N°.								UNICUT-4X
								U0890
Ø Code	d ₁ js12	d ₂ h6	l ₁	b	α	z		
100	12.00	10.00	54	3.0	45.0°	8	●	
120	16.00	12.00	60	4.0	45.0°	10	●	
140	20.00	12.00	63	5.0	45.0°	12	●	
160	25.00	12.00	67	6.3	45.0°	14	●	
180	32.00	16.00	71	8.0	45.0°	16	●	
300	8.00	6.00	49	3.0	60.0°	7	●	
320	12.00	10.00	54	4.0	60.0°	8	●	
340	16.00	12.00	60	6.3	60.0°	10	●	
360	20.00	12.00	63	8.0	60.0°	12	●	
380	25.00	12.00	67	10.0	60.0°	14	●	
400	32.00	16.00	71	12.5	60.0°	16	●	

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _e [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
3.00	4	150	0.008	0.150	15915	510
4.00	4	150	0.012	0.200	11935	575
5.00	4	150	0.014	0.250	9550	535
6.00	4	150	0.018	0.250	7960	575
8.00	4	150	0.022	0.300	5970	525
10.00	4	150	0.028	0.400	4775	535
12.00	4	150	0.034	0.500	3980	540

Steel
850 - 1100 N/mm²



3.00	4	120	0.008	0.150	12730	405
4.00	4	120	0.012	0.200	9550	460
5.00	4	120	0.014	0.250	7640	430
6.00	4	120	0.018	0.250	6365	460
8.00	4	120	0.022	0.300	4775	420
10.00	4	120	0.028	0.400	3820	430
12.00	4	120	0.034	0.500	3185	435

Stainless steel
[Cr-Ni/1.4301]




3.00	4	50	0.008	0.150	5305	170
4.00	4	50	0.012	0.200	3980	190
5.00	4	50	0.014	0.250	3185	180
6.00	4	50	0.018	0.250	2655	190
8.00	4	50	0.022	0.300	1990	175
10.00	4	50	0.028	0.400	1590	180
12.00	4	50	0.034	0.500	1325	180

Cast iron
(lamellar / spheroidal)



3.00	4	180	0.008	0.150	19100	610
4.00	4	180	0.012	0.200	14325	690
5.00	4	180	0.014	0.250	11460	640
6.00	4	180	0.018	0.250	9550	690
8.00	4	180	0.022	0.300	7160	630
10.00	4	180	0.028	0.400	5730	640
12.00	4	180	0.034	0.500	4775	650



Steel
< 850 N/mm²



3.00	4	150	0.008	0.150	15915	510
4.00	4	150	0.012	0.200	11935	575
5.00	4	150	0.014	0.250	9550	535
6.00	4	150	0.018	0.250	7960	575
8.00	4	150	0.022	0.300	5970	525
10.00	4	150	0.028	0.400	4775	535
12.00	4	150	0.034	0.500	3980	540

Steel
850 - 1100 N/mm²



3.00	4	120	0.008	0.150	12730	405
4.00	4	120	0.012	0.200	9550	460
5.00	4	120	0.014	0.250	7640	430
6.00	4	120	0.018	0.250	6365	460
8.00	4	120	0.022	0.300	4775	420
10.00	4	120	0.028	0.400	3820	430
12.00	4	120	0.034	0.500	3185	435

Stainless steel
[Cr-Ni/1.4301]




3.00	4	50	0.008	0.150	5305	170
4.00	4	50	0.012	0.200	3980	190
5.00	4	50	0.014	0.250	3185	180
6.00	4	50	0.018	0.250	2655	190
8.00	4	50	0.022	0.300	1990	175
10.00	4	50	0.028	0.400	1590	180
12.00	4	50	0.034	0.500	1325	180

Cast iron
(lamellar / spheroidal)





3.00	4	180	0.008	0.150	19100	610
4.00	4	180	0.012	0.200	14325	690
5.00	4	180	0.014	0.250	11460	640
6.00	4	180	0.018	0.250	9550	690
8.00	4	180	0.022	0.300	7160	630
10.00	4	180	0.028	0.400	5730	640
12.00	4	180	0.034	0.500	4775	650







Material

Steel
< 850 N/mm²





d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
6.00	4	150	0.020	0.200	0.200	7960	635
8.00	4	150	0.025	0.250	0.250	5970	595
10.00	4	150	0.030	0.300	0.300	4775	575
12.00	4	150	0.035	0.400	0.400	3980	555

Steel
850 - 1100 N/mm²



6.00	4	120	0.020	0.200	0.200	6365	510
8.00	4	120	0.025	0.250	0.250	4775	475
10.00	4	120	0.030	0.300	0.300	3820	460
12.00	4	120	0.035	0.400	0.400	3185	445

Steel
1100 - 1300 N/mm²





6.00	4	55	0.020	0.200	0.200	2920	235
8.00	4	55	0.025	0.250	0.250	2190	220
10.00	4	55	0.030	0.300	0.300	1750	210
12.00	4	55	0.035	0.400	0.400	1460	205

Stainless steel
[Cr-Ni/1.4301]



6.00	4	60	0.020	0.200	0.200	3185	255
8.00	4	60	0.025	0.250	0.250	2385	240
10.00	4	60	0.030	0.300	0.300	1910	230
12.00	4	60	0.035	0.400	0.400	1590	225

Cast iron
(lamellar / spheroidal)



6.00	4	160	0.020	0.200	0.200	8490	680
8.00	4	160	0.025	0.250	0.250	6365	635
10.00	4	160	0.030	0.300	0.300	5095	610
12.00	4	160	0.035	0.400	0.400	4245	595

Unalloyed copper



6.00	4	200	0.020	0.200	0.200	10610	850
8.00	4	200	0.025	0.250	0.250	7960	795
10.00	4	200	0.030	0.300	0.300	6365	765
12.00	4	200	0.035	0.400	0.400	5305	745

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]

6.00	4	70	0.020	0.200	0.200	3715	295
8.00	4	70	0.025	0.250	0.250	2785	280
10.00	4	70	0.030	0.300	0.300	2230	265
12.00	4	70	0.035	0.400	0.400	1855	260

Wrought aluminium
Si < 6%






6.00	4	300	0.020	0.200	0.200	15915	1275
8.00	4	300	0.025	0.250	0.250	11935	1195
10.00	4	300	0.030	0.300	0.300	9550	1145
12.00	4	300	0.035	0.400	0.400	7960	1115







Material

Steel
< 850 N/mm²





d1 [mm]	z	v _c [m/min]	f _c [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
2.00	3	150	0.005	0.050	0.050	23875	360
3.00	3	150	0.010	0.100	0.100	15915	475
4.00	3	150	0.015	0.150	0.150	11935	535
6.00	3	150	0.020	0.200	0.200	7960	475

Steel
850 - 1100 N/mm²



2.00	3	120	0.005	0.050	0.050	19100	285
3.00	3	120	0.010	0.100	0.100	12730	380
4.00	3	120	0.015	0.150	0.150	9550	430
6.00	3	120	0.020	0.200	0.200	6365	380

Steel
1100 - 1300 N/mm²





2.00	3	70	0.005	0.050	0.050	11140	165
3.00	3	70	0.010	0.100	0.100	7425	225
4.00	3	70	0.015	0.150	0.150	5570	250
6.00	3	70	0.020	0.200	0.200	3715	225

Stainless steel
[Cr-Ni/1.4301]



2.00	3	60	0.005	0.050	0.050	9550	145
3.00	3	60	0.010	0.100	0.100	6365	190
4.00	3	60	0.015	0.150	0.150	4775	215
6.00	3	60	0.020	0.200	0.200	3185	190

Cast iron
(lamellar / spheroidal)



2.00	3	160	0.005	0.050	0.050	25465	380
3.00	3	160	0.010	0.100	0.100	16975	510
4.00	3	160	0.015	0.150	0.150	12730	575
6.00	3	160	0.020	0.200	0.200	8490	510

Unalloyed copper



2.00	3	180	0.005	0.050	0.050	28650	430
3.00	3	180	0.010	0.100	0.100	19100	575
4.00	3	180	0.015	0.150	0.150	14325	645
6.00	3	180	0.020	0.200	0.200	9550	575

Titanium alloys
up to 300 HB
[Ti5Al2.5Sn]


2.00	3	70	0.005	0.050	0.050	11140	165
3.00	3	70	0.010	0.100	0.100	7425	225
4.00	3	70	0.015	0.150	0.150	5570	250
6.00	3	70	0.020	0.200	0.200	3715	225

Wrought aluminium
Si < 6%

2.00	3	200	0.005	0.050	0.050	31830	475
3.00	3	200	0.010	0.100	0.100	21220	635
4.00	3	200	0.015	0.150	0.150	15915	715
6.00	3	200	0.020	0.200	0.200	10610	635

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
2.00	2	120	0.006	0.050	0.050	19100	230
3.00	2	120	0.008	0.100	0.100	12730	205
4.00	2	120	0.012	0.150	0.150	9550	230
5.00	2	120	0.014	0.200	0.200	7640	215
6.00	2	120	0.018	0.200	0.200	6365	230
8.00	2	120	0.022	0.250	0.250	4775	210
10.00	2	120	0.028	0.350	0.350	3820	215
12.00	2	120	0.034	0.450	0.450	3185	215
16.00	2	120	0.046	0.500	0.500	2385	220

Steel
850 - 1100 N/mm²



2.00	2	100	0.006	0.050	0.050	15915	190
3.00	2	100	0.008	0.100	0.100	10610	170
4.00	2	100	0.012	0.150	0.150	7960	190
5.00	2	100	0.014	0.200	0.200	6365	180
6.00	2	100	0.018	0.200	0.200	5305	190
8.00	2	100	0.022	0.250	0.250	3980	175
10.00	2	100	0.028	0.350	0.350	3185	180
12.00	2	100	0.034	0.450	0.450	2655	180
16.00	2	100	0.046	0.500	0.500	1990	185

Stainless steel
[Cr-Ni/1.4301]




2.00	2	50	0.006	0.050	0.050	7960	95
3.00	2	50	0.008	0.100	0.100	5305	85
4.00	2	50	0.012	0.150	0.150	3980	95
5.00	2	50	0.014	0.200	0.200	3185	90
6.00	2	50	0.018	0.200	0.200	2655	95
8.00	2	50	0.022	0.250	0.250	1990	90
10.00	2	50	0.028	0.350	0.350	1590	90
12.00	2	50	0.034	0.450	0.450	1325	90
16.00	2	50	0.046	0.500	0.500	995	90

Cast iron
(lamellar / spheroidal)



2.00	2	140	0.006	0.050	0.050	22280	265
3.00	2	140	0.008	0.100	0.100	14855	240
4.00	2	140	0.012	0.150	0.150	11140	265
5.00	2	140	0.014	0.200	0.200	8915	250
6.00	2	140	0.018	0.200	0.200	7425	265
8.00	2	140	0.022	0.250	0.250	5570	245
10.00	2	140	0.028	0.350	0.350	4455	250
12.00	2	140	0.034	0.450	0.450	3715	255
16.00	2	140	0.046	0.500	0.500	2785	255



Steel
< 850 N/mm²



2.00	2	100	0.006	2.000	0.100	15915	190
3.00	2	100	0.008	3.000	0.150	10610	170
4.00	2	100	0.012	4.000	0.150	7960	190
5.00	2	100	0.014	5.000	0.200	6365	180
6.00	2	100	0.018	6.000	0.200	5305	190
8.00	2	100	0.022	8.000	0.250	3980	175
10.00	2	100	0.028	10.000	0.250	3185	180
12.00	2	100	0.034	12.000	0.300	2655	180
16.00	2	100	0.046	16.000	0.400	1990	185

Steel
850 - 1100 N/mm²



2.00	2	80	0.006	2.000	0.100	12730	155
3.00	2	80	0.008	3.000	0.150	8490	135
4.00	2	80	0.012	4.000	0.150	6365	155
5.00	2	80	0.014	5.000	0.200	5095	145
6.00	2	80	0.018	6.000	0.200	4245	155
8.00	2	80	0.022	8.000	0.250	3185	140
10.00	2	80	0.028	10.000	0.250	2545	145
12.00	2	80	0.034	12.000	0.300	2120	145
16.00	2	80	0.046	16.000	0.400	1590	145

Stainless steel
[Cr-Ni/1.4301]



2.00	2	45	0.006	2.000	0.100	7160	85
3.00	2	45	0.008	3.000	0.150	4775	75
4.00	2	45	0.012	4.000	0.150	3580	85
5.00	2	45	0.014	5.000	0.200	2865	80
6.00	2	45	0.018	6.000	0.200	2385	85
8.00	2	45	0.022	8.000	0.250	1790	80
10.00	2	45	0.028	10.000	0.250	1430	80
12.00	2	45	0.034	12.000	0.300	1195	80
16.00	2	45	0.046	16.000	0.400	895	80

Cast iron
(lamellar / spheroidal)




2.00	2	120	0.006	2.000	0.100	19100	230
3.00	2	120	0.008	3.000	0.150	12730	205
4.00	2	120	0.012	4.000	0.150	9550	230
5.00	2	120	0.014	5.000	0.200	7640	215
6.00	2	120	0.018	6.000	0.200	6365	230
8.00	2	120	0.022	8.000	0.250	4775	210
10.00	2	120	0.028	10.000	0.250	3820	215
12.00	2	120	0.034	12.000	0.300	3185	215
16.00	2	120	0.046	16.000	0.400	2385	220

Universal end mills

Milling, chamfering, centering, drilling




HM	λ 30° γ 12°

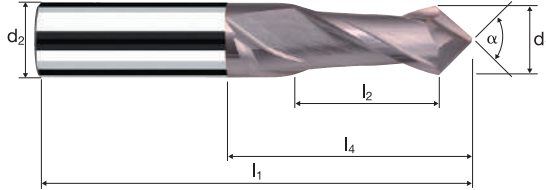

Rm < 850	Rm 850-1100	Rm 1100-1300					Inox Stainless	Ti Titanium	GG(G) Aluminium Copper
-------------	----------------	-----------------	--	--	--	--	-------------------	----------------	------------------------------

Example: Order-N°.									UNICUT-4X	
									U7960	
Ø Code	d ₁ h9	d ₂ h6	l ₁	l ₂	l ₄	α	z			
050	0.50	3.00	39	1.00	5.65	90.0°	2		●	
100	1.00	3.00	39	2.00	7.15	90.0°	2		●	
120	1.50	3.00	39	3.00	8.92	90.0°	2		●	
140	2.00	3.00	39	4.00	9.15	90.0°	2		●	
160	2.50	3.00	39	5.00	8.98	90.0°	2		●	
180	3.00	4.00	50	6.00	11.20	90.0°	2		●	
220	4.00	5.00	50	8.00	13.70	90.0°	2		●	
260	5.00	6.00	50	10.00	16.70	90.0°	2		●	
300	6.00	8.00	60	12.00	21.07	90.0°	2		●	
391	8.00	10.00	70	16.00	26.07	90.0°	2		●	
450	10.00	12.00	70	18.00	31.07	90.0°	2		●	
501	12.00	12.00	70	20.00	35.00	90.0°	2		●	
610	16.00	16.00	80	26.00	49.00	90.0°	2		●	
682	20.00	20.00	100	32.00	57.00	90.0°	2		●	

Application



Material

Steel
< 850 N/mm²



d1 [mm]	z	v _r [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
32.00	6	65	0.060	6.400	24.000	645	235	35.8
40.00	8	65	0.080	8.000	30.000	515	330	79.5
50.00	8	65	0.100	10.000	37.500	415	330	124.1
63.00	10	65	0.120	12.600	47.250	330	395	234.6
80.00	10	65	0.120	16.000	60.000	260	310	297.9

Steel
850 - 1100 N/mm²



32.00	6	48	0.060	6.400	24.000	475	170	26.4
40.00	8	48	0.080	8.000	30.000	380	245	58.7
50.00	8	48	0.100	10.000	37.500	305	245	91.7
63.00	10	48	0.120	12.600	47.250	245	290	173.3
80.00	10	48	0.120	16.000	60.000	190	230	220.0

Steel
1100 - 1300 N/mm²




32.00	6	35	0.060	6.400	24.000	350	125	19.3
40.00	8	35	0.080	8.000	30.000	280	180	42.8
50.00	8	35	0.100	10.000	37.500	225	180	66.8
63.00	10	35	0.120	12.600	47.250	175	210	126.3
80.00	10	35	0.120	16.000	60.000	140	165	160.4

Stainless steel
[Cr-Ni/1.4301]



32.00	6	26	0.060	6.400	24.000	260	95	14.3
40.00	8	26	0.080	8.000	30.000	205	130	31.8
50.00	8	26	0.100	10.000	37.500	165	130	49.7
63.00	10	26	0.120	12.600	47.250	130	160	93.9
80.00	10	26	0.120	16.000	60.000	105	125	119.2



Steel
< 850 N/mm²



32.00	6	68	0.070	6.400	9.600	675	285	17.5
40.00	8	68	0.090	8.000	12.000	540	390	37.4
50.00	8	68	0.110	10.000	15.000	435	380	57.1
63.00	10	68	0.125	12.600	18.900	345	430	102.3
80.00	10	68	0.145	16.000	24.000	270	390	150.6

Steel
850 - 1100 N/mm²



32.00	6	55	0.070	6.400	9.600	545	230	14.1
40.00	8	55	0.090	8.000	12.000	440	315	30.3
50.00	8	55	0.110	10.000	15.000	350	310	46.2
63.00	10	55	0.125	12.600	18.900	280	345	82.7
80.00	10	55	0.145	16.000	24.000	220	315	121.8

Steel
1100 - 1300 N/mm²




32.00	6	40	0.070	6.400	9.600	400	165	10.3
40.00	8	40	0.090	8.000	12.000	320	230	22.0
50.00	8	40	0.110	10.000	15.000	255	225	33.6
63.00	10	40	0.125	12.600	18.900	200	255	60.2
80.00	10	40	0.145	16.000	24.000	160	230	88.6

Stainless steel
[Cr-Ni/1.4301]



32.00	6	29	0.070	6.400	9.600	290	120	7.4
40.00	8	29	0.090	8.000	12.000	230	165	16.0
50.00	8	29	0.110	10.000	15.000	185	160	24.4
63.00	10	29	0.125	12.600	18.900	145	185	43.6
80.00	10	29	0.145	16.000	24.000	115	165	64.2

Application



Material

Steel
850 - 1100 N/mm²



d1 [mm]	z	v _c [m/min]	f _t [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]	Q [cm ³ /min]
40.00	8	45	0.065	2.000	30.000	360	185	11.2
50.00	8	45	0.080	2.500	37.500	285	185	17.2
63.00	10	45	0.080	3.150	47.250	225	180	27.1
80.00	12	45	0.100	4.000	60.000	180	215	51.6

Steel
1100 - 1300 N/mm²



40.00	8	30	0.065	2.000	30.000	240	125	7.4
50.00	8	30	0.080	2.500	37.500	190	120	11.5
63.00	10	30	0.080	3.150	47.250	150	120	18.0
80.00	12	30	0.100	4.000	60.000	120	145	34.4

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]




40.00	8	20	0.065	2.000	30.000	160	85	5.0
50.00	8	20	0.080	2.500	37.500	125	80	7.6
63.00	10	20	0.080	3.150	47.250	100	80	12.0
80.00	12	20	0.100	4.000	60.000	80	95	22.9

Cast iron
(lamellar / spheroidal)



40.00	8	42	0.065	2.000	30.000	335	175	10.4
50.00	8	42	0.080	2.500	37.500	265	170	16.0
63.00	10	42	0.080	3.150	47.250	210	170	25.3
80.00	12	42	0.100	4.000	60.000	165	200	48.1



Steel
850 - 1100 N/mm²



40.00	8	50	0.065	20.000	1.000	400	205	4.1
50.00	8	50	0.080	25.000	1.250	320	205	6.4
63.00	10	50	0.080	31.500	1.575	255	200	10.0
80.00	12	50	0.100	40.000	2.000	200	240	19.1

Steel
1100 - 1300 N/mm²



40.00	8	35	0.065	20.000	1.000	280	145	2.9
50.00	8	35	0.080	25.000	1.250	225	145	4.5
63.00	10	35	0.080	31.500	1.575	175	140	7.0
80.00	12	35	0.100	40.000	2.000	140	165	13.4

Cold work tool steel
(12% Cr),
high alloyed
[1.2379]




40.00	8	25	0.065	20.000	1.000	200	105	2.1
50.00	8	25	0.080	25.000	1.250	160	100	3.2
63.00	10	25	0.080	31.500	1.575	125	100	5.0
80.00	12	25	0.100	40.000	2.000	100	120	9.5

Cast iron
(lamellar / spheroidal)



40.00	8	45	0.065	20.000	1.000	360	185	3.7
50.00	8	45	0.080	25.000	1.250	285	185	5.7
63.00	10	45	0.080	31.500	1.575	225	180	9.0
80.00	12	45	0.100	40.000	2.000	180	215	17.2

Application



Material

CFC

B

B

GRP

B

B



CFC

B

B

GRP

B

B

d1 [mm]	z	v _c [m/min]	f _i [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	v _r [mm/min]
4.00	8	200	0.025	7.200	1.600	15915	3185
5.00	8	200	0.030	9.000	2.000	12730	3055
6.00	8	200	0.040	10.800	2.400	10610	3395
8.00	8	200	0.045	14.400	3.200	7960	2865
10.00	8	200	0.050	18.000	4.000	6365	2545
12.00	8	200	0.060	21.600	4.800	5305	2545
4.00	8	150	0.030	7.200	1.600	11935	2865
5.00	8	150	0.035	9.000	2.000	9550	2675
6.00	8	150	0.040	10.800	2.400	7960	2545
8.00	8	150	0.050	14.400	3.200	5970	2385
10.00	8	150	0.055	18.000	4.000	4775	2100
12.00	8	150	0.065	21.600	4.800	3980	2070
4.00	8	150	0.020	3.200	4.000	11935	1910
5.00	8	150	0.025	4.000	5.000	9550	1910
6.00	8	150	0.030	4.800	6.000	7960	1910
8.00	8	150	0.035	6.400	8.000	5970	1670
10.00	8	150	0.040	8.000	10.000	4775	1530
12.00	8	150	0.050	9.600	12.000	3980	1590
4.00	8	100	0.025	3.200	4.000	7960	1590
5.00	8	100	0.030	4.000	5.000	6365	1530
6.00	8	100	0.030	4.800	6.000	5305	1275
8.00	8	100	0.040	6.400	8.000	3980	1275
10.00	8	100	0.045	8.000	10.000	3185	1145
12.00	8	100	0.050	9.600	12.000	2655	1060



Round indexable insert milling tools

777 – 791

Indexable insert milling tools HFC

793 – 807

Indexable insert Face milling tools

809 – 813

Corner/slot indexable insert milling tools

815 – 825

Accessories

826 – 827



Round indexable insert milling tools

Round insert end mill for indexable inserts 10mm

N° W03140



N° W03185



NX	λ 5°	d, 20 – 32	Rm 850-1500			781
	γ 15°					
SX	λ 5°	d, 20 – 32	Inox Stainless	Rm <850		
	γ 20°					
HX	λ 5°	d, 20 – 32	Rm 1300-1500	HRC 48-60		
	γ -4°					
ZX	λ 5°	d, 20 – 32	Ni Alloys	Inox Stainless	Rm <850	
	γ 14°					
AX	λ 5°	d, 20 – 32	Al Aluminium Alloy	Al Aluminium Cast	Cu Copper	
	γ 21°					

Round insert end mill for indexable inserts 12mm

N° W03150



N° W03195



NX	λ 0°	d, 25 – 32	Rm 850-1500			783
	γ 14°					
SX	λ 0°	d, 25 – 32	Inox Stainless	Rm <850		
	γ 19°					
HX	λ 0°	d, 25 – 32	Rm 1300-1500	HRC 48-60		
	γ -4°					
ZX	λ 0°	d, 25 – 32	Ni Alloys	Inox Stainless	Rm <850	
	γ 13°					
AX	λ 0°	d, 25 – 32	Al Aluminium Alloy	Al Aluminium Cast	Cu Copper	
	γ 20°					

Round indexable insert milling tools

Round insert end mill for indexable inserts 10mm

N° W03410



NX	λ 5°	d. 40 – 52	Rm 850-1500			785
	γ 15°					
SX	λ 5°	d. 40 – 52	Inox Stainless	Rm <850		
	γ 20°					
HX	λ 5°	d. 40 – 52	Rm 1300-1500	HRC 48-60		
	γ -4°					
ZX	λ 5°	d. 40 – 52	Ni Alloys	Inox Stainless	Rm <850	
	γ 14°					
AX	λ 5°	d. 40 – 52	Al Aluminium Alloy	Al Aluminium Cast	Cu Copper	
	γ 21°					

Round insert end mill for indexable inserts 12mm

N° W03412



NX	λ 5°	d. 40 – 100	Rm 850-1500			787
	γ 15°					
SX	λ 5°	d. 40 – 100	Inox Stainless	Rm <850		
	γ 20°					
HX	λ 5°	d. 40 – 100	Rm 1300-1500	HRC 48-60		
	γ -4°					
ZX	λ 5°	d. 40 – 100	Ni Alloys	Inox Stainless	Rm <850	
	γ 14°					
AX	λ 5°	d. 40 – 100	Al Aluminium Alloy	Al Aluminium Cast	Cu Copper	
	γ 21°					

Round indexable insert milling tools

Round insert end mill for indexable inserts 10mm

N° W03210



NX	λ 5°	d. 25 – 35	Rm 850-1500			789
	γ 15°					
SX	λ 5°	d. 25 – 35	Inox Stainless	Rm <850		
	γ 20°					
HX	λ 5°	d. 25 – 35	Rm 1300-1500	HRC 48-60		
	γ -4°					
ZX	λ 5°	d. 25 – 35	Ni Alloys	Inox Stainless	Rm <850	
	γ 14°					
AX	λ 5°	d. 25 – 35	Al Aluminium Alloy	Al Aluminium Cast	Cu Copper	
	γ 21°					

Round insert end mill for indexable inserts 12mm



N° W03212



NX	λ 5°	d. 35 – 42	Rm 850-1500			791
	γ 15°					
SX	λ 5°	d. 35 – 42	Inox Stainless	Rm <850		
	γ 20°					
HX	λ 5°	d. 35 – 42	Rm 1300-1500	HRC 48-60		
	γ -4°					
ZX	λ 5°	d. 35 – 42	Ni Alloys	Inox Stainless	Rm <850	
	γ 14°					
AX	λ 5°	d. 35 – 42	Al Aluminium Alloy	Al Aluminium Cast	Cu Copper	
	γ 21°					

Round insert end mill

Inserts 10mm, integral air/cooling channel

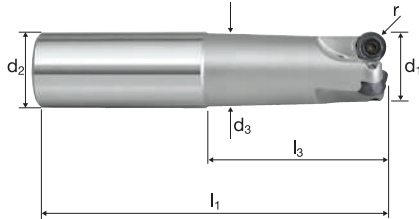
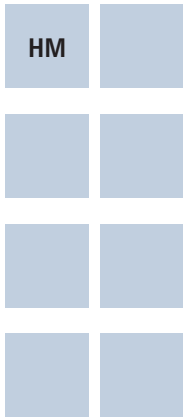


Round insert end mill		Delivery range: Cutter body incl. damping screws for inserts							
Order-N°.	d ₁	d ₂ h ₆	d ₃	l ₁	l ₃	ap _{max.}	z	L-Typ	
W03140202	20.00	20.00	19.00	110	57.00	1.40	2	M	●
W03185202	20.00	20.00	19.00	185	57.00	1.40	2	XL	●
W03140253	25.00	25.00	24.00	124	65.00	1.40	3	M	●
W03185253	25.00	25.00	24.00	210	65.00	1.40	3	XL	●
W03140324	32.00	32.00	31.00	144	81.00	1.40	4	M	●
W03185324	32.00	32.00	31.00	250	81.00	1.40	4	XL	●

Accessories		Delivery range damping screws for inserts: Packaging unit 10 pieces	
Order-N°.			
W93110010	Torque screwdriver 2.0 Nm with blade Torx TX 10		●
W93111010	Interchangeable blade for torque screwdriver Torx TX 10		●
W93100010	Screwdriver Torx TX 10		●
W93500010	Clamping screws for inserts Torx TX 10 / M 3 x 7.3		●

Round insert end mill

Inserts 12mm, integral air/cooling channel

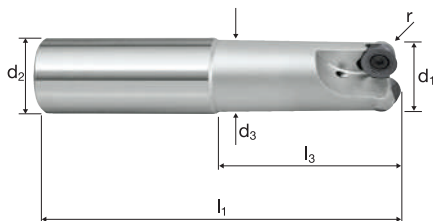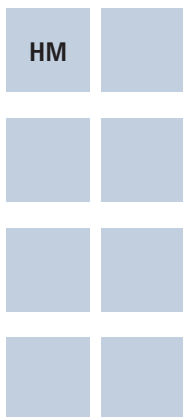



Round insert end mill		Delivery range: Cutter body incl. clamping screws for inserts							
Order-N°.	d ₁	d ₂ h ₆	d ₃	l ₁	l ₃	ap _{max.}	z	L-Typ	
W03150252	25.00	25.00	24.00	124	65.00	1.70	2	M	●
W03195252	25.00	25.00	24.00	210	65.00	1.70	2	XL	●
W03150323	32.00	32.00	31.00	144	81.00	1.70	3	M	●
W03195323	32.00	32.00	31.00	250	81.00	1.70	3	XL	●

VI

Accessories		Delivery range clamping screws for inserts: Packaging unit 10 pieces	
Order-N°.			
W93110012	Torque screwdriver 4.2 Nm with blade Torx TX 15		●
W90111013	Interchangeable blade for torque screwdriver TX 15		●
W90100013	Screwdriver Torx TX 15		●
W93500012	Clamping screws for inserts Torx TX 15 / M 4 x 8.5		●

Round insert end mill

Inserts 10mm, integral air/cooling channel

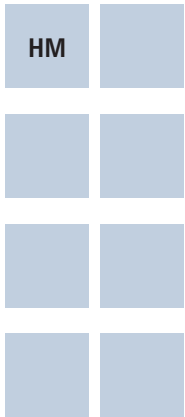

Round insert end mill						Delivery range: Cutter body incl. clamping screws for inserts
Order-N°.	d_1	d_2	b	$ap_{max.}$	z	
W03410404*	40.00	16.00	40.0	1.40	4	●
W03410424*	42.00	16.00	40.0	1.40	4	●
W03410505	50.00	22.00	40.0	1.40	5	●
W03410525	52.00	22.00	40.0	1.40	5	●

VI

Accessories		Delivery range clamping screws for inserts: Packaging unit 10 pieces
Order-N°.		
W93110010	Torque screwdriver 2.0 Nm with blade Torx TX 10	●
W93111010	Interchangeable blade for torque screwdriver Torx TX 10	●
W93100010	Screwdriver Torx TX 10	●
W93500010	Clamping screws for inserts Torx TX 10 / M 3 x 7.3	●
W99510010*	Powerscrew M8.0 x 30.0 (Torque 15.0 Nm)	●


Inserts

12mm

NX Steel	SX Stainless Steel	HX Hardened Steel	ZX Difficult-to-cut materials	AX Aluminium
				
W53110012	W53310012	W53210012	W53410012	W53510012

Inserts						Delivery range: Packaging unit 10 pieces
Order-N°.	ISO-Norm	D ₁	D	r		
W53110012	RPMX 1204MOSN	12.0	4.8	6.000	●	
W53310012	RPMX 1204MOEN	12.0	4.8	6.000	●	
W53210012	RDHW 1204MOSN	12.0	4.8	6.000	●	
W53410012	RPHX 1204MOEN	12.0	4.8	6.000	●	
W53510012	RDHX 1204MOFN	12.0	4.8	6.000	●	



ToolExpert 2.0
 The new online cutting data tool for optimum tool use.



This way to the new cutting data calculator ToolExpert 2.0 or the FRAISA website
<http://www.fraisa.com/en/toolexpert>

Round insert end mill

Inserts 12mm, integral air/cooling channel

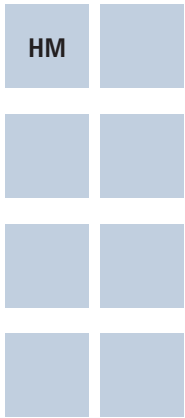



Round insert end mill						Delivery range: Cutter body incl. damping screws for inserts
Order-N°.	d_1	d_2	b	$ap_{max.}$	z	
W03412404*	40.00	16.00	40.0	1.70	4	●
W03412424*	42.00	16.00	40.0	1.70	4	●
W03412505	50.00	22.00	40.0	1.70	5	●
W03412525	52.00	22.00	40.0	1.70	5	●
W03412636	63.00	22.00	40.0	1.70	6	●
W03412666	66.00	22.00	40.0	1.70	6	●
W03412808	80.00	27.00	50.0	1.70	8	●
W03412100	100.00	32.00	50.0	1.70	10	●


VI

Accessories		Delivery range damping screws for inserts: Packaging unit 10 pieces
Order-N°.		
W93110012	Torque screwdriver 4.2 Nm with blade Torx TX 15	●
W90111013	Interchangeable blade for torque screwdriver TX 15	●
W90100013	Screwdriver Torx TX 15	●
W93500012	Clamping screws for inserts Torx TX 15 / M 4 x 8.5	●
W99510010*	Powerscrew M8.0 x 30.0 (Torque 15.0 Nm)	●

Round insert end mill

Inserts 10mm, integral air/cooling channel

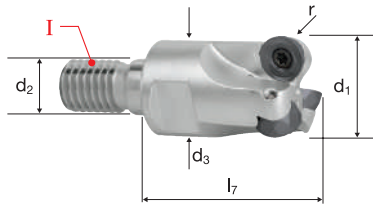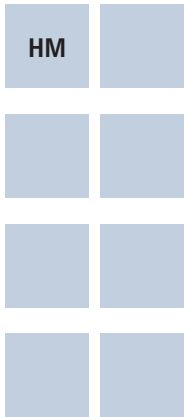



Round insert end mill		Delivery range: Cutter body incl. clamping screws for inserts							
Order-N°.	d ₁	d ₂	d ₃	l ₇	ap _{max.}	z		I	
W03210253	25.00	12.50	21.00	35	1.40	3	17	M12	●
W03210354	35.00	17.00	29.00	35	1.40	4	24	M16	●


VI

Accessories		Delivery range clamping screws for inserts: Packaging unit 10 pieces	
Order-N°.			
W93110010	Torque screwdriver 2.0 Nm with blade Torx TX 10		●
W93111010	Interchangeable blade for torque screwdriver Torx TX 10		●
W93100010	Screwdriver Torx TX 10		●
W93500010	Clamping screws for inserts Torx TX 10 / M 3 x 7.3		●

Round insert end mill

Inserts 12mm, integral air/cooling channel

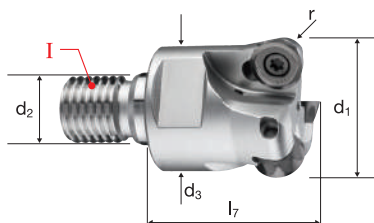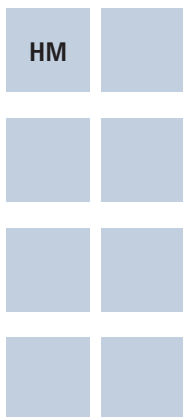

Round insert end mill		Delivery range: Cutter body incl. clamping screws for inserts							
Order-N°.	d ₁	d ₂	d ₃	l ₇	ap _{max}	z		I	
W03212353	35.00	17.00	29.00	35	1.70	3	24	M16	●
W03212424	42.00	17.00	31.00	40	1.70	4	24	M16	●

VI

Accessories		Delivery range clamping screws for inserts: Packaging unit 10 pieces	
Order-N°.			
W93110012	Torque screwdriver 4.2 Nm with blade Torx TX 15		●
W90111013	Interchangeable blade for torque screwdriver TX 15		●
W90100013	Screwdriver Torx TX 15		●
W93500012	Clamping screws for inserts Torx TX 15 / M 4 x 8.5		●



Indexable insert milling tools HFC

High feed end mills for inserts 10mm

N° W02140



N° W02180



NX	λ 2°	d, 25	Rm 850-1500			797
	γ 14°					
SX	λ 2°	d, 25	Inox Stainless	Rm <850		
	γ 15°					
HX	λ 2°	d, 25	Rm 1300-1500	HRC 48- >60		
	γ 2°					
ZX	λ 2°	d, 25	Ni Alloys	Inox Stainless	Rm <850	
	γ 15°					

High feed end mills for inserts 13mm

N° W02150



N° W02190



NX	λ 0°	d, 35	Rm 850-1500			799
	γ 12°					
SX	λ 0°	d, 35	Inox Stainless	Rm <850		
	γ 13°					
HX	λ 0°	d, 35	Rm 1300-1500	HRC 48- >60		
	γ 0°					
ZX	λ 0°	d, 35	Ni Alloys	Inox Stainless	Rm <850	
	γ 13°					

Indexable insert milling tools HFC

High feed end mills for inserts 10mm

N° W02400



NX	λ 4°	d. 40 – 63	Rm 850-1500			801
	γ 16°					
SX	λ 4°	d. 40 – 63	Inox Stainless	Rm <850		
	γ 17°					
HX	λ 4°	d. 40 – 63	Rm 1300-1500	HRC 48- >60		
	γ 4°					
ZX	λ 4°	d. 40 – 63	Ni Alloys	Inox Stainless	Rm <850	
	γ 17°					

High feed end mills for inserts 13mm

N° W02410



NX	λ 4°	d. 50 – 80	Rm 850-1500			803
	γ 16°					
SX	λ 4°	d. 50 – 80	Inox Stainless	Rm <850		
	γ 17°					
HX	λ 4°	d. 50 – 80	Rm 1300-1500	HRC 48- >60		
	γ 4°					
ZX	λ 4°	d. 50 – 80	Ni Alloys	Inox Stainless	Rm <850	
	γ 17°					

Indexable insert milling tools HFC

High feed end mills for inserts 10mm

N° W02200



NX	λ 2°	d, 25	Rm 850-1500			805
	γ 14°					
SX	λ 2°	d, 25	Inox Stainless	Rm <850		
	γ 15°					
HX	λ 2°	d, 25	Rm 1300-1500	HRC 48- >60		
	γ 2°					
ZX	λ 2°	d, 25	Ni Alloys	Inox Stainless	Rm <850	
	γ 15°					

High feed end mills for inserts 13mm

N° W02210



NX	λ 0°	d, 35	Rm 850-1500			807
	γ 12°					
SX	λ 0°	d, 35	Inox Stainless	Rm <850		
	γ 13°					
HX	λ 0°	d, 35	Rm 1300-1500	HRC 48- >60		
	γ 0°					
ZX	λ 0°	d, 35	Ni Alloys	Inox Stainless	Rm <850	
	γ 13°					

Inserts

10mm

NX Steel	SX Stainless Steel	HX Hardened Steel	ZX Difficult-to-cut materials
			
W52110010	W52310010	W52210010	W52410010

Inserts		Delivery range: Packaging unit 10 pieces					
Order-N°.	ISO-Norm	H	B	D	r	R _{theo.}	
W52110010	XDLT 10T308SR	10.2	10.0	4.0	0.800	2.00	•
W52310010	XDLT 10T308ER	10.2	10.0	4.0	0.800	2.00	•
W52210010	XDLW 10T308SR	10.2	10.0	4.0	0.800	2.00	•
W52410010	XDLT 10T308ER	10.2	10.0	4.0	0.800	2.00	•

ToolExpert 2.0

The new online cutting data tool for optimum tool use.



This way to the new cutting data calculator ToolExpert 2.0 or the FRAISA website
<http://www.fraisa.com/en/toolexpert>


Inserts

13mm

NX Steel	SX Stainless Steel	HX Hardened Steel	ZX Difficult-to-cut materials
			
W52110013	W52310013	W52210013	W52410013

Inserts							Delivery range: Packaging unit 10 pieces
Order-N°.	ISO-Norm	H	B	D	r	R _{theo.}	
W52110013	XOLT 130410SR	13.6	13.1	4.8	1.000	3.00	●
W52310013	XOLT 130410ER	13.6	13.1	4.8	1.000	3.00	●
W52210013	XOLW 130410SR	13.6	13.1	4.8	1.000	3.00	●
W52410013	XOLT 130410ER	13.6	13.1	4.8	1.000	3.00	●



ToolExpert 2.0
The new online cutting data tool for optimum tool use.



This way to the new cutting data calculator ToolExpert 2.0 or the FRAISA website
<http://www.fraisa.com/en/toolexpert>

Inserts

10mm

NX Steel	SX Stainless Steel	HX Hardened Steel	ZX Difficult-to-cut materials
			
W52110010	W52310010	W52210010	W52410010

Inserts		Delivery range: Packaging unit 10 pieces					
Order-N°.	ISO-Norm	H	B	D	r	R _{theo.}	
W52110010	XDLT 10T308SR	10.2	10.0	4.0	0.800	2.00	●
W52310010	XDLT 10T308ER	10.2	10.0	4.0	0.800	2.00	●
W52210010	XDLW 10T308SR	10.2	10.0	4.0	0.800	2.00	●
W52410010	XDLT 10T308ER	10.2	10.0	4.0	0.800	2.00	●

ToolExpert 2.0



The new online cutting data tool for optimum tool use.



This way to the new cutting data calculator ToolExpert 2.0 or the FRAISA website
<http://www.fraisa.com/en/toolexpert>

High feed end mills

Inserts 10mm, integral air/cooling channel

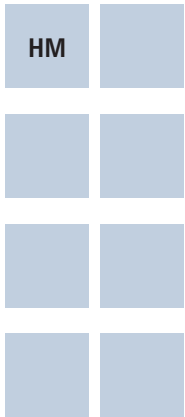



High feed end mills						Delivery range: Cutter body incl. clamping screws for inserts
Order-N°.	d ₁	d ₂	b	ap _{max.}	z	
W02400404*	40.00	16.00	40.0	1.00	4	●
W02400505	50.00	22.00	40.0	1.00	5	●
W02400636	63.00	22.00	40.0	1.00	6	●

VI

Accessories		Delivery range clamping screws for inserts: Packaging unit 10 pieces
Order-N°.		
W90110013	Torque screwdriver 3.2 Nm with blade Torx TX 15	●
W90111013	Interchangeable blade for torque screwdriver TX 15	●
W90100013	Screwdriver Torx TX 15	●
W92500010	Clamping screws for inserts Torx TX 15 / M 3.5 x 8.6	●
W99510010*	Powerscrew M8.0 x 30.0 (Torque 15.0 Nm)	●

High feed end mills

Inserts 13mm, integral air/cooling channel

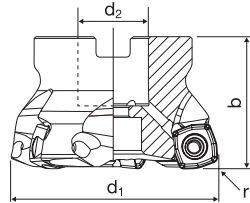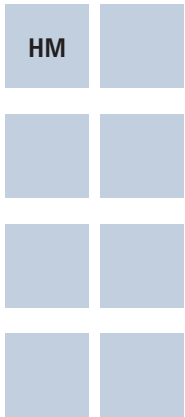


High feed end mills		Delivery range: Cutter body incl. clamping screws for inserts					
Order-N°.	d_1	d_2	b	$ap_{max.}$	z		
W02410504	50.00	22.00	40.0	2.00	4	●	
W02410635	63.00	22.00	40.0	2.00	5	●	
W02410807	80.00	27.00	50.0	2.00	7	●	

VI


Accessories		Delivery range clamping screws for inserts: Packaging unit 10 pieces	
Order-N°.			
W91110013	Torque screwdriver 5.0 Nm with blade Torx TX 20		●
W91111013	Interchangeable blade for torque screwdriver TX 20		●
W91100013	Screwdriver Torx TX 20		●
W91500013	Clamping screws for inserts Torx TX 20 / M 4.5 x 10.5		●


High feed end mills

Inserts 10mm, integral air/cooling channel

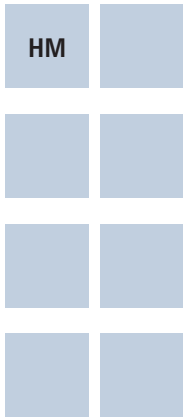

HM

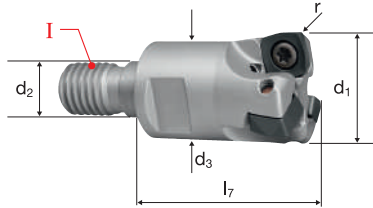



High feed end mills		Delivery range: Cutter body incl. damping screws for inserts							
Order-N°.	d ₁	d ₂	d ₃	l ₇	ap _{max.}	z		I	
W02200253	25.00	12.50	21.00	35	1.00	3	17	M12	●


VI

Accessories		Delivery range damping screws for inserts: Packaging unit 10 pieces	
Order-N°.			
W90110013	Torque screwdriver 3.2 Nm with blade Torx TX 15		●
W90111013	Interchangeable blade for torque screwdriver TX 15		●
W90100013	Screwdriver Torx TX 15		●
W90500013	Clamping screws for inserts Torx TX 15 / M 3.5 x 7.2		●

High feed end mills

Inserts 13mm, integral air/cooling channel

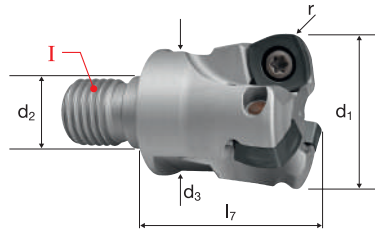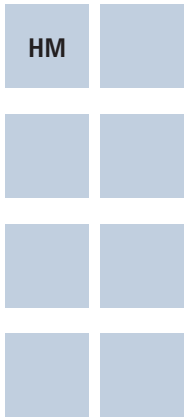

High feed end mills		Delivery range: Cutter body incl. clamping screws for inserts							
Order-N°.	d ₁	d ₂	d ₃	l ₇	ap _{max.}	z		I	
W02210353	35.00	17.00	29.00	35	2.00	3	24	M16	●



Accessories		Delivery range clamping screws for inserts: Packaging unit 10 pieces	
Order-N°.			
W91110013	Torque screwdriver 5.0 Nm with blade Torx TX 20		●
W91111013	Interchangeable blade for torque screwdriver TX 20		●
W91100013	Screwdriver Torx TX 20		●
W91500013	Clamping screws for inserts Torx TX 20 / M 4.5 x 10.5		●



Indexable insert face milling tools

Face milling cutter for inserts 9mm

N° W01400



NX	λ 12°	d. 40 – 125	Rm 850-1300			811
	γ -6°					
SX	λ 12°	d. 40 – 125	Inox Stainless	Rm <850		
	γ -6°					
ZX	λ 12°	d. 40 – 125	Ni-/Mn- Alloys	Inox Stainless	Rm <850	
	γ -6°					
AX	λ 12°	d. 40 – 125	Al Aluminium Alloy	Al Aluminium Cast	Cu Copper	
	γ 15°					

Face milling cutter for inserts 13mm



N° W01410



NX	λ 13°	d. 40 – 125	Rm 850-1300			813
	γ -6°					
SX	λ 13°	d. 40 – 125	Inox Stainless	Rm <850		
	γ -6°					
ZX	λ 13°	d. 40 – 125	Ni-/Mn- Alloys	Inox Stainless	Rm <850	
	γ -6°					
AX	λ 13°	d. 40 – 125	Al Aluminium Alloy	Al Aluminium Cast	Cu Copper	
	γ 13°					

Face milling cutter 45°

Inserts 9mm, integral air/cooling channel

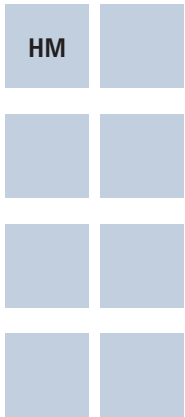



Face milling cutter 45°							Delivery range: Cutter body incl. clamping screws for inserts
Order-N°.	d ₁	d ₂	d ₃	b	ap _{max.}	z	
W01400406	40.00	16.00	48.40	40.0	4.00	6	●
W01400507	50.00	22.00	58.40	40.0	4.00	7	●
W01400638	63.00	22.00	71.40	40.0	4.00	8	●
W01400809	80.00	27.00	88.40	50.0	4.00	9	●
W01400100	100.00	32.00	108.40	50.0	4.00	11	●
W01400125	125.00	40.00	133.40	63.0	4.00	12	●



Accessories		Delivery range clamping screws for inserts: Packaging unit 10 pieces
Order-N°.		
W90110008	Torque screwdriver 1.2 Nm with blade Torx TX 08	●
W90111008	Interchangeable blade for torque screwdriver TX 08	●
W90100008	Screwdriver Torx TX 08	●
W91500009	Clamping screws for inserts Torx TX 08 / M 3.0 x 7.3	●

Face milling cutter 45°

Inserts 13mm, integral air/cooling channel

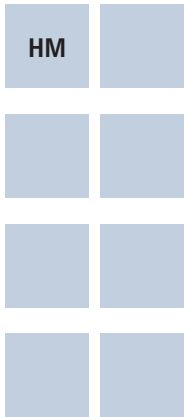

Face milling cutter 45°							Delivery range: Cutter body incl. clamping screws for inserts
Order-N°.	d ₁	d ₂	d ₃	b	ap _{max.}	z	
W01410403	40.00	16.00	54.00	40.0	6.00	3	●
W01410504	50.00	22.00	63.90	40.0	6.00	4	●
W01410635	63.00	22.00	76.90	40.0	6.00	5	●
W01410806	80.00	27.00	93.90	50.0	6.00	6	●
W01410100	100.00	32.00	113.90	50.0	6.00	7	●
W01410125	125.00	40.00	138.90	63.0	6.00	8	●

VI

Accessories		Delivery range clamping screws for inserts: Packaging unit 10 pieces
Order-N°.		
W91110013	Torque screwdriver 5.0 Nm with blade Torx TX 20	●
W91111013	Interchangeable blade for torque screwdriver TX 20	●
W91100013	Screwdriver Torx TX 20	●
W91500013	Clamping screws for inserts Torx TX 20 / M 4.5 x 10.5	●



Corner/slot indexable insert milling tools

Corner/Slot end mills 90° for inserts 8mm

N° W00100



N° W00140



N° W00180



NX	λ 8°	d, 16 – 32	Rm 850-1300			819
	γ 0°					
SX	λ 8°	d, 16 – 32	Inox Stainless	Rm <850		
	γ 0°					
HX	λ 8°	d, 16 – 32	Rm 1300-1500	HRC 48-60		
	γ -8°					
ZX	λ 8°	d, 16 – 32	Ni-/Mn- Alloys	Inox Stainless	Rm <850	
	γ 0°					
AX	λ 8°	d, 16 – 32	Al Aluminium Alloy	Al Aluminium Cast	Cu Copper	
	γ 20°					

Corner/Slot end mills 90° for inserts 13mm

N° W00110



N° W00150



N° W00190



NX	λ 8°	d, 25 – 32	Rm 850-1300			821
	γ 6°					
SX	λ 8°	d, 25 – 32	Inox Stainless	Rm <850		
	γ 6°					
HX	λ 8°	d, 25 – 32	Rm 1300-1500	HRC 48-60		
	γ -10°					
ZX	λ 8°	d, 25 – 32	Ni-/Mn- Alloys	Inox Stainless	Rm <850	
	γ 6°					
AX	λ 8°	d, 25 – 32	Al Aluminium Alloy	Al Aluminium Cast	Cu Copper	
	γ 20°					



Corner/slot indexable insert milling tools

Corner end mills 90° for inserts 8mm

N° W00400



NX	λ 8°	d. 40 – 80	Rm 850-1300			823
	γ 0°					
SX	λ 8°	d. 40 – 80	Inox Stainless	Rm <850		
	γ 0°					
HX	λ 8°	d. 40 – 80	Rm 1300-1500	HRC 48-60		
	γ -8°					
ZX	λ 8°	d. 40 – 80	Ni-/Mn- Alloys	Inox Stainless	Rm <850	
	γ 0°					
AX	λ 8°	d. 40 – 80	Al Aluminium Alloy	Al Aluminium Cast	Cu Copper	
	γ 20°					

Corner end mills 90° for inserts 13mm



N° W00410



NX	λ 8°	d. 40 – 80	Rm 850-1300			825
	γ 6°					
SX	λ 8°	d. 40 – 80	Inox Stainless	Rm <850		
	γ 6°					
HX	λ 8°	d. 40 – 80	Rm 1300-1500	HRC 48-60		
	γ -10°					
ZX	λ 8°	d. 40 – 80	Ni-/Mn- Alloys	Inox Stainless	Rm <850	
	γ 6°					
AX	λ 8°	d. 40 – 80	Al Aluminium Alloy	Al Aluminium Cast	Cu Copper	
	γ 20°					

Corner/Slot end mills 90°

Inserts 8mm, integral air/cooling channel

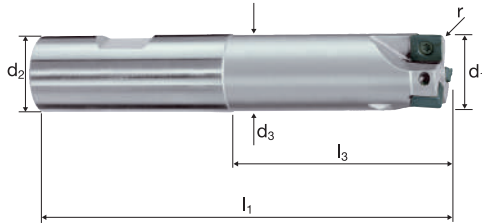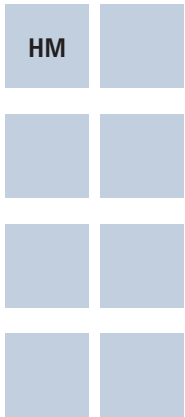



Corner/Slot end mills 90°									Delivery range: Cutter body incl. clamping screws for inserts
Order-N°.	d ₁	d ₂ h ₆	d ₃	l ₁	l ₃	ap _{max.}	z	L-Typ	
W00100162	16.00	16.00	15.40	75	25.00	7.50	2	K	●
W00100203	20.00	20.00	19.40	77	25.00	7.50	3	K	●
W00100254	25.00	25.00	24.00	90	32.00	7.50	4	K	●
W00100325	32.00	32.00	31.00	102	40.00	7.50	5	K	●
W00140162	16.00	16.00	15.00	102	51.00	7.50	2	M	●
W00140203	20.00	20.00	19.40	110	57.00	7.50	3	M	●
W00140254	25.00	25.00	24.00	124	65.00	7.50	4	M	●
W00140325	32.00	32.00	31.00	144	81.00	7.50	5	M	●
W00180162	16.00	16.00	15.00	129	78.00	7.50	2	L	●
W00180203	20.00	20.00	19.40	140	87.00	7.50	3	L	●
W00180254	25.00	25.00	24.00	158	99.00	7.50	4	L	●
W00180325	32.00	32.00	31.00	186	123.00	7.50	5	L	●

Accessories		Delivery range clamping screws for inserts: Packaging unit 10 pieces
Order-N°.		
W90110008	Torque screwdriver 1.2 Nm with blade Torx TX 08	●
W90111008	Interchangeable blade for torque screwdriver TX 08	●
W90100008	Screwdriver Torx TX 08	●
W90500008	Clamping screws for inserts Torx TX 08 / M 2.5 x 5.0	●



Corner/Slot end mills 90°

Inserts 13mm, integral air/cooling channel

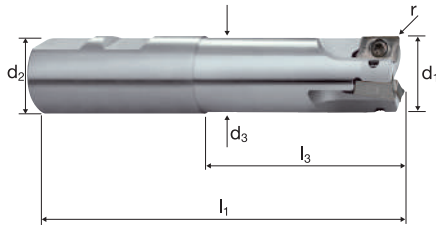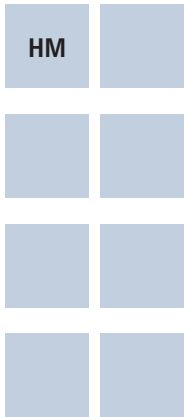



Corner/Slot end mills 90°		Delivery range: Cutter body incl. damping screws for inserts							
Order-N°.	d ₁	d ₂ h ₆	d ₃	l ₁	l ₃	ap _{max.}	z	L-Typ	
W00110253	25.00	25.00	24.00	90	32.00	12.50	3	K	●
W00150253	25.00	25.00	24.00	124	65.00	12.50	3	M	●
W00190253	25.00	25.00	24.00	158	99.00	12.50	3	L	●
W00110324	32.00	32.00	31.00	102	40.00	12.50	4	K	●
W00150324	32.00	32.00	31.00	144	81.00	12.50	4	M	●
W00190324	32.00	32.00	31.00	186	123.00	12.50	4	L	●

Accessories		Delivery range damping screws for inserts: Packaging unit 10 pieces	
Order-N°.			
W90110013	Torque screwdriver 3.2 Nm with blade Torx TX 15		●
W90111013	Interchangeable blade for torque screwdriver TX 15		●
W90100013	Screwdriver Torx TX 15		●
W90500013	Clamping screws for inserts Torx TX 15 / M 3.5 x 7.2		●



Corner end mills 90°

Inserts 8mm, integral air/cooling channel

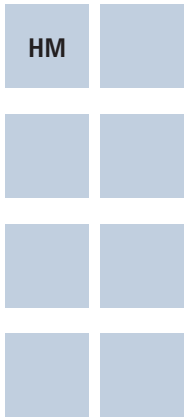



Corner end mills 90°						Delivery range: Cutter body incl. damping screws for inserts
Order-N°.	d ₁	d ₂	b	ap _{max.}	z	
W00400405	40.00	16.00	40.0	7.50	5	●
W00400506	50.00	22.00	40.0	7.50	6	●
W00400637	63.00	22.00	40.0	7.50	7	●
W00400801	80.00	27.00	50.0	7.50	10	●



Accessories		Delivery range damping screws for inserts: Packaging unit 10 pieces
Order-N°.		
W90110008	Torque screwdriver 1.2 Nm with blade Torx TX 08	●
W90111008	Interchangeable blade for torque screwdriver TX 08	●
W90100008	Screwdriver Torx TX 08	●
W90500008	Clamping screws for inserts Torx TX 08 / M 2.5 x 5.0	●

Corner end mills 90°

Inserts 13mm, integral air/cooling channel

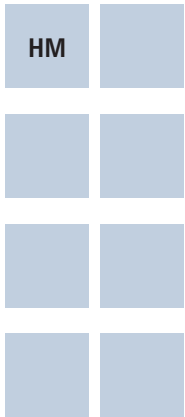

Corner end mills 90°						Delivery range: Cutter body incl. clamping screws for inserts
Order-N°.	d ₁	d ₂	b	ap _{max.}	z	
W00410404	40.00	16.00	40.0	12.50	4	●
W00410505	50.00	22.00	40.0	12.50	5	●
W00410636	63.00	22.00	40.0	12.50	6	●
W00410808	80.00	27.00	50.0	12.50	8	●

VI

Accessories		Delivery range clamping screws for inserts: Packaging unit 10 pieces
Order-N°.		
W90110013	Torque screwdriver 3.2 Nm with blade Torx TX 15	●
W90111013	Interchangeable blade for torque screwdriver TX 15	●
W90100013	Screwdriver Torx TX 15	●
W90500013	Clamping screws for inserts Torx TX 15 / M 3.5 x 7.2	●

Accessories

Torque screwdriver Torx with blade

Torque is pre-set according to table



Order-N°.	Torx-Dimension	Torque	
W90110008	TX 08	1.2 Nm	●
W93110010	TX 10	2.0 Nm	●
W90110013	TX 15	3.2 Nm	●
W93110012	TX 15	4.2 Nm	●
W91110013	TX 20	5.0 Nm	●

Interchangeable blade for torque screwdriver





















Order-N°.	Torx-Dimension		
W90111008	TX 08		●
W93111010	TX 10		●
W90111013	TX 15		●
W91111013	TX 20		●

Screwdriver Torx



Order-N°.	Torx-Dimension		
W90100008	TX 08		●
W93100010	TX 10		●
W90100013	TX 15		●
W91100013	TX 20		●

Marking and assembly of indexable inserts

Type	Corner end mills	Face milling cutter	High feed end mills	Round insert milling*
NX Steel •	 Order-N°: W50111008 W50111013	 Order-N°: W51110009 W51110013	 Order-N°: W52110010 W52110013	 Order-N°: W53110010 W53110012
SX Stainless Steel ••	 Order-N°: W50311008 W50311013	 Order-N°: W51310009 W51310013	 Order-N°: W52310010 W52310013	 Order-N°: W53310010 W53310012
HX Hardened Steel •••	 Order-N°: W50210008 W50210013		 Order-N°: W52210010 W52210013	 Order-N°: W53210010 W53210012
ZX Difficult-to-cut materials ••••	 Order-N°: W50410008 W50410013	 Order-N°: W51410009 W51410013	 Order-N°: W52410010 W52410013	 Order-N°: W53410010 W53410012
AX Aluminium •••• •	 Order-N°: W50510008 W50510013	 Order-N°: W51510009 W51510013		 Order-N°: W53510010 W53510012

- Clean the insert seats prior to assembly
- Ensure that all insert markings have the same orientation
- Use the turning moment screw driver to tighten the screws
- Ensure an exact positioning when tightening the indexable inserts

* The indexable round inserts may be used on eight positioning surfaces. It is not necessary to remove the screw completely to turn the insert to the next surface. Ensure a precise positioning when tightening the indexable round insert to the surface in order to prevent damage to the insert seat.




ToolSchool – Recommendation



FRAISA offers you highly innovative products; products that are always state-of-the-art and right at the cutting edge of technological development.

For this reason, we would like to use our **“ToolSchool Recommendation”** concept to draw your attention to the latest technologies now incorporated in our product catalogue and, of course, to the advantages they bring.

Our **“ToolSchool Recommendation”** clearly demonstrates how you can and should switch from the products you have been using until now to the new cutting-edge products from FRAISA. The  logo has been used in this catalogue to highlight selected products that offer a particularly good opportunity to upgrade from an existing tool to the latest technology.

By switching from “old” to “new”, you benefit from increased productivity, cost reductions and genuine competitive advantages in the marketplace.

With our ToolSchool concept, you can be sure you always have the very latest technology to hand. This will strengthen your position in comparison to all your competitors.

FRAISA's ToolSchool stands for longstanding, field-proven experience and expertise. ToolSchool stands for application know-how and customer value. You can count on that.

Latest FRAISA technology for:

- Greater efficiency
- Lower costs
- Improved competitiveness

Enclosed with this catalogue is a flyer that illustrates the ToolSchool recommendations by means of a tool compendium.



FRAISA ReTool® – Industrial tool reconditioning




FRAISA ReTool® offers an all-round service that restores your used tools to their original performance level and optimises your processes. FRAISA and third-party tools are reconditioned using the very latest technology – and in a resource-friendly way. The outcome: mint-condition tools as productive as they were the first day they were used. And to make things even better, your level of investment is lower than if you were to buy new tools, you increase your productivity and you save costs.

FRAISA ReTool® – a performance guarantee founded on integrated development of the tools and the reconditioning process


We guarantee that following their reconditioning with FRAISA ReTool®, your used tools will be restored to the original performance level they had when new. Our ability to provide this performance guarantee is a priority of our team of experts right from very early on in product development.

That's why the development of the reconditioning process is an integral part of the development phase, alongside the actual product tests and calculating the cutting data. Strict rules apply: the FRAISA ReTool® process is approved only if we are able to fulfil our performance guarantee 100%.

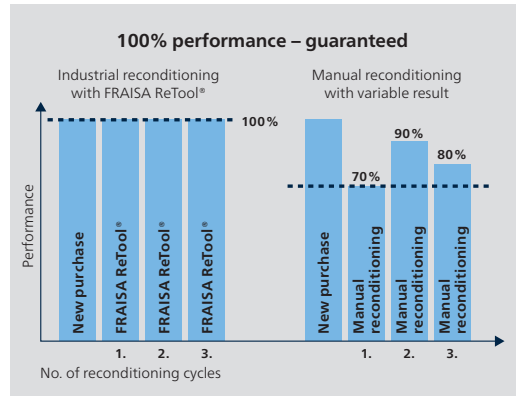

FRAISA ReToolBlue – recycle rather than throw away

With our FRAISA ReToolBlue service, we recycle the valuable carbide from tools that can no longer be reconditioned.

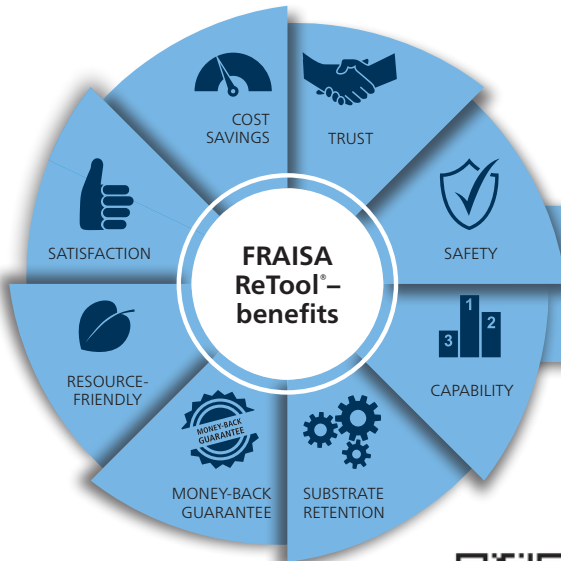

FRAISA ReTool® makes economic sense for you, too: After reconditioning them, we return your tools to you in mint condition. We restore them to their original performance level at a price that's more cost-effective for you than purchasing new ones or reconditioning them by hand.

Over 30 years' experience in tool reconditioning:

Our competence centre in Germany is Europe's largest service centre for carbide milling tools.



Video on our service product:
FRAISA ReTool®

Legend to the product page

Performance rating



Products that have a **high level of specialisation** for applications that go beyond (eXtra!) general applications and performance demands.



Products that have a **wide application area** within the scope of general applications and **high to very high performance demands**.



Products that have an **exceedingly wide application area, average performance demands** and a **favourable price-performance ratio**.



Products made from heavy-duty, high-speed steel for **basic applications** and/or performance demands limited by the machinery.



FRAISA marks all exceptional innovations with the signature **KS**. This is in memory of the legendary Head of Production and Development, Mr Konrad Schmid, who defined the FRAISA brand from 1969 until 2000.

Performance

Roughing



Roughing HPC



Roughing HDC



Finishing



This index describes the performance of the tool in comparison to other products in the respective chapter. The more boxes that are filled, the better it is suited for each operation.

Wear resistance



This index describes the wear resistance of the tools in the CFC section. The more fields are completed, the greater is the wear resistance of the tool, which is crucial for processing abrasive composite materials.

Legend to the product page

Tool technologies



Vario

- Milling tool with a variable helix angle
- Minimisation of oscillation and vibrations
 - Increase in material removal rates and tool life



Vario

- Ball nose end mill with a variable helix angle
- Minimisation of oscillation and vibrations
 - Increase in material removal rates and tool life



- Milling tool with a variable helix angle
- Axial and radial vibration damping, as well as smooth and gentle cutting
 - Better component surfaces and lower noise levels
 - Less stress on the spindle and energy consumption, despite high metal removal volume



- High-performance penetration edge
- Easy-cutting high-performance penetration edge for high penetration angles
 - Higher performance, tool life and process reliability for penetration
 - High functionality with cutting data from ToolExpert HelixRamp



- Milling tool with scaled slot
- Extension of swarf space
 - Optimised chip removal
 - Highest possible axial and radial infeeds



- Milling tool with chip breaker
- Shorter chip lengths at high axial infeed rates, improving chip removal from both the component and the machine
 - Improved optimisation and process reliability
 - High multi-functionality of the smooth-cutting tool is maintained



- Milling tool with a special groove geometry
- Optimised swarf/groove geometry for improved swarf removal
 - Optimised relationship between core diameter and swarf space for a high level of tool stability



- Milling tool with a partially polished blade
- Reinforcement of the exposed cutting corner
 - Absorption of high cutting forces



- Milling tool with a special protective chamfer
- Reinforcement of the main cutting edge against chipping
 - High tooth feed rates are possible in the case of smooth-edged tools
 - High axial and radial infeeds are possible in the case of profiled tools



- Milling tool with special edge conditioning
- Conditioning of the main cutting edge for increased stability
 - Increase the mechanical and thermal load on the cutting edge
 - General increase in the tool life

Legend to the product page

Tool technologies



Front chamfer

- Tool is supported in radial and axial directions
- Reduced vibrations
- Better surface quality from both side and end faces



Supporting chamfer

- Support for the tool in the radial and axial directions
- Reduced vibrations and higher performance
- Improved surface quality as a result of increased running smoothness



Milling tool with special free space design

- Significant reinforcement of the cutting edge
- Higher performance, less vibrations and improved component quality
- Longer tool life and more process safety - therefore higher degree of automation



Mirror finish technology

- Mirror finish cutting faces and flanks as well as flutes reduce the tendency to stick and improve the surface qualities of the component



Parabolic support face

- Support for the tool in the radial and axial directions
- Reduced vibration and higher performance



Finely balanced tools

- Finely balanced tools at least G2.5 at $n=20,000$ rpm or permissible residual imbalance <1 gmm
- Reduction or elimination of the balancing process in the case of finely balanced clamping devices
- Improved surface quality as a result of increased running smoothness and fewer vibrations
- Increase in the service life of the machine spindle



Smooth transitions

- The shaft-neck-cutting edge transitions are fitted with smooth gradients and radii
- Improved tool rigidity and therefore less radial deflection
- Minimal step formation with several infeed depths
- Higher mechanical load and therefore improved performance



Milling tool with increased core diameter

- Improved tool rigidity and less tool deflection
- Higher performance in the area of the infeeds a_p , a_e and of the feed rate f_z
- Better component accuracy through less tool deflection



Milling tool with shank of h4 tolerance

- High concentric and eccentric precision
- Optimal for modern precision chucks



Milling tool with shank of h5 tolerance

- High concentric and eccentric precision
- Optimal for modern precision chucks

Legend to the product page

Tool technologies



Ball nose end mill with special edge conditioning for rough machining

- Conditioning of the main cutting edge for increased stability
- Significant increase in material removal rates compared to conventional ball nose mills
- General increase in the tool life



Ball nose end mill with special edge conditioning for finish machining

- Conditioning and smoothening of the main cutter profile
- Long term contour precision and surface quality
- General increase in the tool life



Corner radius end mill with special edge conditioning for roughing

- Conditioning of the main cutting edge for increased stability
- Significant increase of the material removal rate compared to standard corner radius end mills
- General increase in the tool life



Corner radius end mill with special edge conditioning for finishing

- Conditioning and smoothening of the main cutting edge
- Long-lasting contour accuracy and surface quality
- General increase in the tool life



Ball nose end mill with high-precision diameter

- High-precision tolerance zone across 180° of the ball for high dimensional accuracy
- Cutting edge diameter is twice the effective radius of the ball



Ball nose end mill with a highly precise radius tolerance

- Specially designed bearing tolerances simplify the programming and the secure finish of the end contour
- Highly precise tolerance field for high dimensional accuracy



Corner radius end mill with a highly precise diameter tolerance

- Specially designed bearing tolerances simplify the programming and the secure finish of the end contour
- Highly precise tolerance field for high dimensional accuracy



Corner radius end mill with a highly precise radius tolerance

- Specially designed tolerances simplify the programming and the secure finish of the end contour
- Highly precise tolerance field for high dimensional accuracy



Cylindrical end mill with a highly precise diameter tolerance

- Specially designed bearing tolerances simplify the programming and the secure finish of the end contour
- Highly precise tolerance field for high dimensional accuracy



Dimensional accuracy

- Dimensional accuracy of up to ± 0.005 mm guarantees high component precision

Legend to the product page


Tool technologies



Face finishing cutting edge

- Tool with special cutting edge for face finishing
- Top quality plane surfaces can be machined


Tools with the face finishing cutting edge have a theoretical 45° chamfer ($45^\circ_{\text{theo.}}$). This value is indicated for each diameter in the data table of the catalogue page and is indicated as the tool chamfer for CNC/CAM programming. During machining, however, a minimal amount of rest material is produced due to the difference of $45^\circ_{\text{theo.}}$ to the effective tool contour. (Observe the application related tips.)



High feed cutting (HFC) tool

- Tool with a special cutting geometry for high feed cutting
- High feeds are possible due to a defined swarf cross section distribution
- Large swarf space for quick and trouble-free removal of the swarf
- High removal volume with good contour convergency as well

The HFC tool has a theoretical programming radius ($R_{\text{theo.}}$). This value is stated for each diameter in the data table on the catalogue page and, for the CNC/CAM programming, it is stated as a tool radius. However as a result of the $R_{\text{theo.}}$ difference to the effective tool contour, residual material arises in the machining.



Indexable insert

- Periphally ground, partially face polished on all sides
- Improved performance



New Safe-Center cutting edge geometry

- Counteracts chipping during the penetration process
- Good cutting-edge stability means good wear resistance and performance capability

Legend to the product page

Cutting tool substrate material

**HM
XT**

Fine grain carbide. Hardness 1900 HV. Co content 9%.
Characterised by a particularly high level of toughness.

**HM
XA**

Fine grain carbide. Hardness 1950 HV. Co content 8%.
Characterised by a particularly high level of abrasion resistance.

**HM
MG10**

Fine grain carbide. Hardness 1600 HV. Co content 10%.

**HM
MG6**

Fine grain carbide. Hardness 1800 HV. Co content 6%.

**HM
Plus**

Ultrafine-grain carbide. Hardness 1800 HV. Co content 12%.

HM

Universal fine-grain carbide.

CBN

Cubic crystallized boron nitride (CBN). Hardness 4700 HV.
Characterised by a particularly high level of abrasion resistance.

**HSS
PM/F**

High-performance substrate material, powder metallurgically produced HSS alloys.

**HSS-E
Co8**

High-performance high speed steel.

Legend to the product page

Form of the corner of the cutting edges



The corner between the front side blade and the circumference blade has a protective chamfer of 45°. The size of the protective chamfer is stated for each diameter in the data table on the catalogue page.



The tool is furnished with a corner radius. For every diameter the size of the radius is listed in the corresponding data table of the catalogue.



The corner between front cutting edge and circumferential cutting edge is executed sharp-edged.



High Feed Cutting (HFC) tool. Tool with a special cutting geometry for high feed milling.



High Feed Cutting (HFC) tool with corner radius. Tool with special cutting edge geometry for high feed machining.

Legend to the product page

Application suitability



A blue background means that the tool is particularly suitable for this material.



A light blue background means that the tool has good to adequate suitability for this material.

Chapter: Steel, stainless steel and titanium / 3D machining of steel / special shapes

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500	HRC 48-56	HRC 56-60	HRC > 60	Inox Stainless	Ti Titanium	
-------------	----------------	-----------------	-----------------	--------------	--------------	-------------	-------------------	----------------	--

Chapter: Aluminium and copper

Rm < 850			Al Aluminium > 99%	Al Aluminium Alloy	Al Aluminium Cast		Cu Copper	Plastic Thermo- plast	
-------------	--	--	--------------------------	--------------------------	-------------------------	--	--------------	-----------------------------	--

Additional material which can be machined is stated in the additional field

Chapter: CFC

Al Aluminium Cast	Cu Copper	CuZn Brass		C Graphite	CFK GFK I	CFK GFK II	CFK III	CFK/Al	
-------------------------	--------------	---------------	--	---------------	-----------------	------------------	------------	--------	--



Group I: Fibre-reinforced technical plastics and plastic composites with fibre content up to 30%



Group II: Abrasive fibre-reinforced plastic composites with fibre content up to 60%







Group III: Very abrasive carbon fibre-reinforced high-performance plastic composites with a fibre content of over 60%

Depending on the combination of the following influencing factors, the fibre-reinforced composite materials can be assigned to the 3 metal-cutting groups (whereby the above description serves as a simplified aid):



- Matrix (binding agent)
- Fibre type (material)
- Fibre shape (short, long, endless, fabric)
- Fibre content
- Fibre structure (orientation)
- Manufacturing process

Legend to the product page


Shape of the shank / shank versions

-  Full carbide tools with a cylindrical shank: shank version in accordance with DIN 6535 HA
-  Full carbide tools with a cylindrical shank and a side clamping surface. Shank version in accordance with DIN 6535 HB
-  Short shank tools: In the diameter graduation and diameter tolerance, the shank corresponds to the DIN 6535 HB standard. The section behind the clamping surface is shortened.
-  HSS tools with a cylindrical shank and a side clamping surface: Shank version in accordance with DIN 1835 B


Indexable insert milling tools

-  Shank version in accordance with DIN 1835 B
-  Bore receptacle with crosswise slot adherent to DIN 138

Helix angle and rake angle

-  Helix and rake angles are particularly important characteristics of milling tools. Due to this fact, helix angle λ and rake angle γ are specified for each tool. The exact values can vary with the tool diameter.

Crash angle α

-  Tools with a smaller cutting diameter than the shank diameter need specific attention during machining. A crash can surely be avoided when the limiting side surfaces are sloped with at least a minimum angle, the crash angle α , against the vertical. The angle of collision is stated for each diameter in the data table on the catalogue page.

Legend to the product page

Abbreviations

d₁	Diameter of the cutting edge [mm]
d₂	Shank diameter or bore diameter [mm]
d₃	Neck diameter or external diameter (face milling cutter) [mm]
d₄	Diameter of the neck before the neck-shank intersection [mm]
d₅	End face diameter [mm]
l₁	Total length of the tool [mm]
l₂	Length of cutting edge [mm]
l₃	Distance from the front of the tool to the end of the neck [mm]
l₄	Distance from the edge of the tool to the beginning of the shank [mm]
l₅	Distance from the front of the shank to the end of the neck [mm]
l₆	Shank length [mm]
l₇	Head length [mm]
l₈	Flank length [mm]
⊖	Tightening angle «Theta» between d ₃ and d ₄ [° - DEG]
45°	Size of the protective chamfer between the face end blade and the circumference blade [mm]
r	Corner radius [mm]
α	Collision angle «Alpha» [° - DEG]
β	Minimum setting angle «Beta» [° - DEG]
z	Number of cutting edges
45°_{theo.}	Size of theoretical protective chamfer between end cutting edge and peripheral cutting edge [mm]
R_{theo.}	Theoretical programming radius (R _{theo.}) for HFC tools [mm] See information at Tool Technology HFC
α/2	Conical angle [° - DEG]

Legend to the product page

r_1	Cutting edge radius [mm]
r_2	Curved surface radius [mm]
r_3	Run-out radius [mm]
ap_{max}	Maximum axial infeed [mm]
ap_{lim}	Axial infeed [mm] limited by the application or tool geometry [mm]
b	Tool height of shell end mills [mm]
φ_{max}	Maximum infeed angle
H	Height of the insert
B	Width of the insert
D	Thickness of the insert
D_1	Diameter of the indexable insert
L_A	Overall length from the spindle nose
L-Type	Version: K = short; N = normal; M = medium; L = long; XL = extra long
I	Interface: Interface parameters

Application technology information

2.5D machining strategies

HPC High-Performance-Cutting

Characteristics of HPC:

- High machining volume with high cutting forces
- Large tool engagement angle of 66° – 80° (a_e) and small cutting depths ($a_p < 1.5 x_d$)
- Short tool path (tool always engaged)

HDC High-Dynamic-Cutting


Characteristics of HDC:

- Maximum machining volume with lower cutting forces
- Constant cutting forces / cutting conditions / tool engagement angle
- Small tool engagement angle of 25° – 60° (a_e) and large cutting depths ($a_p > 1.5 x_d$)

Applications for 2.5D machining

Cylindrical and Corner radius

Roughing HPC




Roughing HPC, laterally (partial cut)




Roughing HPC, slots (full cut)

Penetration




Penetration, helical interpolation




Penetration, ramping

Roughing HDC




Roughing HDC-S (partial cut)




Roughing HDC-P (partial cut)

Finishing



Pre-finishing (partial cut)
(Pre-Finishing PF)



Finishing (partial cut)
(Finishing F)


Application technology information

3D machining strategies

- HSC** High-Speed-Cutting
Characteristics of HSC:
- Machining with toric or spherical tools
 - High surface quality & dimensional accuracy attainable
 - Machining is performed with small depths of cut (a_p & a_e)
 - High cutting speeds (v_c)
- HFC** High-Feed-Cutting
Characteristics of HFC:
- Small depths of cut (a_p)
 - Very high feed per tooth (f_z)
 - High machining volume with low cutting forces
 - Special cutting geometry of the tools



Application notes can be found in the chapter 3D

The application symbols are on the left next to the cutting data.
The letter, top right, provides information concerning strategy in relation to the stated cutting data.




R stands for «Roughing» - a process which requires sufficient power and stability with regard to the machine and clamping.

Z-level roughing: The cutting data given in the catalogue is for layer-by-layer removal. In this case the axial machine axis is set to constant depth and does not change. Pull and push cutting are therefore not recommended!



PF stands for «Pre-Finishing»
F stands for «Finishing»
SF stands for «Super-Finishing»

The cutting data given in the catalogue applies for removal from level surfaces and parallel with the shape of the workpiece. Pull and push cutting are permissible. Push cutting is however less than ideal and will result in a reduction in tool life.




Application technology information


Applications for 3D machining

HSC machining


Ball nose




Z-level roughing
(Roughing R)




Roughing parallel
to contour
(Roughing R)



Pre-finishing
(Pre-Finishing PF)
Steep slopes




Finishing
(Finishing F)
Steep slopes




Super-Finishing
(Super-Finishing SF)
Steep slopes

Corner radius




Z-level roughing
(Roughing R)

For use above the
corner radius area




Z-level roughing
(Roughing R)

For use in the
corner radius area







Pre-finishing
(Pre-Finishing PF)

Steep slopes /
Flat surfaces



Finishing
(Finishing F)


Steep slopes /
Flat surfaces



Super-Finishing
(Super-Finishing SF)

Steep slopes /
Flat surfaces

HFC machining



Rough milling (area clearance) with high-feed mills
(High-Feed-Cutting)

Application technology information

Machining strategies for ArCutX milling tools (circular arc milling cutters)

Finishing Planes and free-form surfaces can be pre-finished and finished highly efficiently using the ArCutX tool concept.

HSC Radius areas can be machined using a 5-axis HSC strategy.

HDC Rest material in corners can be removed using a 5-axis HDC strategy.

Applications for ArCutX milling tools (circular arc milling cutters)

Spherical / Spherical & Toric



Pre-finishing
(Pre-Finishing PF)

Steep slopes /
Flat surfaces



Finishing
(Finishing F)

Steep slopes /
Flat surfaces




Super-Finishing
(Super-Finishing SF)

Steep slopes /
Flat surfaces



Pre-finishing HSC
(Pre-Finishing PF)

Radius areas



Finishing HSC
(Finishing F)

Radius areas



Super-Finishing HSC
(Super-Finishing SF)

Radius areas

Toric / Toric integral



HDC (Rest material)
Roughing
(Roughing HDC)

Corners




Pre-finishing
(Pre-Finishing PF)

Steep slopes




Finishing
(Finishing F)

Steep slopes



Super-Finishing
(Super-Finishing SF)

Steep slopes




Roughing HSC
(Roughing R)

Corners

Application technology information

AX tools:



Clean transitions can be achieved with the AX tools during finishing by means of several infeed depths. However, in this application the correct infeed depth is important. On the basis of the tool geometry with front radius, the limited axial infeed (ap_{lim}) is specified in the following table:


Axial infeed depth ap_{lim} for plane transition in wall for AX

d_1	l_2	Radius r	ap_{lim}	Radius r	ap_{lim}	Radius r	ap_{lim}	Radius r	ap_{lim}	Radius r	ap_{lim}	Radius r	ap_{lim}
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
3	4	0.5	2.5										
4	5	0.5	3.5										
5	6	0.5	4.5										
6	7	0.5	5.5	1.0	5.0					2.5	3.5		
8	9			1.0	7.0					2.5	5.5		
10	11			1.0	9.0	1.5	8.5			2.5	7.5	4.0	6.0
12	13			1.0	11.0	1.5	10.5			2.5	9.5	4.0	8.0
16	18			1.0	16.0	1.5	15.5	2.0	15.0	2.5	14.5	4.0	13.0
20	22			1.0	20.0	1.5	19.5	2.0	19.0	2.5	18.5	4.0	17.0
25	27			1.0	25.0	1.5	24.5			2.5	23.5	4.0	22.0

Tools with face finishing cutting edge:

Radial cutting depth ae_{max} for plane surfaces with tools with a face finishing cutting edge

d_1	h	b	c	ae_{max}
[mm]	[mm]	[mm]	[mm]	[mm]
3	0.02	0.1	0.20	2.6
4	0.02	0.1	0.20	3.6
5	0.02	0.1	0.20	4.6
6	0.03	0.2	0.20	5.3
8	0.03	0.2	0.35	7.3
10	0.04	0.3	0.35	9
12	0.04	0.3	0.50	11
16	0.04	0.3	0.50	15

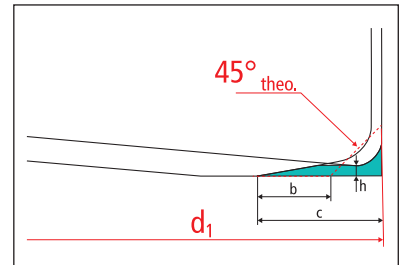

CFC/GRP processing:

- Recommended processing:
- Heat is led away from the component
 - Improved surface quality
 - Less disintegration (mechanical damage)
 - Dust is led away
- Counter-rotation**

Cylindrical end mill DIAMOND coated: Roughing and finishing of CFC in one operation.



Straight cutting edge for neutral use with medium clamping quality and wall thickness.



Pulling cutting edge for normal use with good clamping and dust/chip removal.



Pushing cutting edge for use in thin materials, as the material is pressed on to the substrate.

Application technology information


Indexable insert milling tools:

Radial infeed depth a_e for flat surfaces with HFC indexable insert milling tools

d_1 [mm]	Insert size [mm]	a_e [mm]
25	10	13.6
35	13	18.8
40	10	28.6
50	10	38.6
63	10	51.6
50	13	33.8
63	13	46.8
80	13	63.8

Plunge milling with HFC indexable insert milling tools


Insert size [mm]	ae_{max} [mm]	f_z [mm]	Y_{max} [mm]
10	8	0.15	$< 0.7 \times d_1$
13	10.5	0.20	$< 0.7 \times d_1$

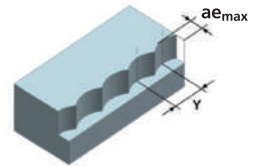

Bore milling/helical plunging with milling tools for HFC and round indexable inserts

Minimum and maximum bore diameters

d_1 [mm]	Indexable inserts HFC 10mm		Indexable inserts HFC 13mm	
	D_{max} [mm]	D_{min} [mm]	D_{max} [mm]	D_{min} [mm]
25	48	35	–	–
35	–	–	68	50
40	78	65	–	–
50	98	85	98	80
63	124	111	124	106
80	–	–	158	140



d_1 [mm]	Round indexable inserts 10mm		Round indexable inserts 12mm	
	D_{max} [mm]	D_{min} [mm]	D_{max} [mm]	D_{min} [mm]
20	40	24	–	–
25	50	32	–	–
32	64	46	–	–
35	70	52	70	48
40	80	62	80	58
42	84	66	84	62
50	100	82	100	78
52	104	86	104	82
63	–	–	126	104
66	–	–	132	110
80	–	–	160	138
100	–	–	200	178

Information for cutting data


Infeed angle for monoblock milling tools

Chapter: Steel, stainless steel, titanium and nickel												
Material group	Rm 850-1500			HRC 48-60			Inox Stainless			Ti Titanium		
	N	M	L	N	M	L	N	M	L	N	M	L
Version	N	M	L	N	M	L	N	M	L	N	M	L
Feed rate v_f [%]	100%			100%			80%			80%		
$z = 2$	2.50°	1.80°	1.00°	1.50°	1.00°	0.60°	2.50°	1.80°	1.00°	2.50°	1.80°	1.00°
$z = 3$	2.00°	1.20°	0.80°	1.00°	0.65°	0.40°	2.00°	1.20°	0.80°	2.00°	1.20°	0.80°
$z = 4$	1.00°	0.65°	0.40°	0.50°	0.35°	0.20°	1.00°	0.65°	0.40°	1.00°	0.65°	0.40°
$z > 4$	0.40°	0.30°	0.20°	0.20°	0.15°	0.10°	0.40°	0.30°	0.20°	0.40°	0.30°	0.20°

Chapter: 3D machining												
Material group	Rm 850-1500			HRC 48-60			Inox Stainless			Ti Titanium		
	N	M	L	N	M	L	N	M	L	N	M	L
Version	N	M	L	N	M	L	N	M	L	N	M	L
Feed rate v_f [%]	100%			100%			80%			80%		
$z = 2$	0.50°	0.35°	0.25°	0.25°	0.20°	0.10°	0.50°	0.35°	0.25°	0.50°	0.35°	0.25°
$z = 4$	0.30°	0.25°	0.15°	0.20°	0.15°	0.10°	0.30°	0.25°	0.15°	0.30°	0.25°	0.15°
$z > 4$	0.20°	0.15°	0.10°	0.15°	0.10°	0.10°	0.20°	0.15°	0.10°	0.20°	0.15°	0.10°
HFC	0.50°	0.35°	0.25°	0.40°	0.30°	0.20°	0.50°	0.35°	0.25°	0.50°	0.35°	0.25°

Chapter: Aluminium and copper												
Material group	Al Aluminium Alloy						Cu Copper					
	N	M	2xd	3xd	4xd	5xd	N	M	2xd	3xd	4xd	5xd
Version	N	M	2xd	3xd	4xd	5xd	N	M	2xd	3xd	4xd	5xd
Feed rate v_f [%]	100%						100%					
$z = 2$	5.00°	4.00°	6.00°	5.00°	4.00°	2.50°	4.00°	3.00°	5.00°	4.00°	3.00°	2.00°
$z = 3$	4.50°	3.50°	5.00°	4.50°	3.50°	2.00°	3.50°	2.50°	4.00°	3.50°	2.50°	1.50°

The penetration angle (Helix) for milling tools with high-performance penetration edge

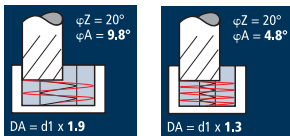

Program the penetration angle φ_Z or φ_A correctly!

Conversion table φ_Z to φ_A with corresponding bore diameter											
Penetration angle φ_Z [°]	20°	18°	17.5°	16°	15°	13°	12°	10°	9°	8°	7°
Bore diameter DA	Penetration angle φ_A [°]										
DA = $d_1 \times 1.3$ [mm]	4.8°	4.3°	4.2°	3.8°	3.5°	3.0°	2.8°	2.3°	2.1°	1.9°	1.6°
DA = $d_1 \times 1.5$ [mm]	6.9°	6.2°	6.0°	5.5°	5.1°	4.4°	4.1°	3.4°	3.0°	2.7°	2.3°
DA = $d_1 \times 1.7$ [mm]	8.5°	7.6°	7.4°	6.7°	6.3°	5.4°	5.0°	4.2°	3.7°	3.3°	2.9°
DA = $d_1 \times 1.9$ [mm]	9.8°	8.7°	8.5°	7.7°	7.2°	6.2°	5.7°	4.8°	4.3°	3.8°	3.3°

FRAISA recommendation

www.fraisa.com

Information for cutting data

Infeed angle for indexable insert milling tools

Material group		Rm 850-1500			HRC 48-60			Inox Stainless		Ti Titanium	Al Aluminium Alloy		
		K	M	L/XL	K	M	L/XL	K	M	L/XL	K	M	L/XL
Version		100 %			100 %			80 %			100 %		
Feed rate v_f [%]		100 %			100 %			80 %			100 %		
	d_1												
Corner-/Slot end mills 8mm	16	1.00°	0.80°	0.60°	0.70°	0.55°	0.40°	1.00°	0.80°	0.60°	1.30°	1.10°	0.80°
Corner-/Slot end mills 8mm	20	0.75°	0.60°	0.45°	0.55°	0.40°	0.30°	0.75°	0.60°	0.45°	1.00°	0.80°	0.60°
Corner-/Slot end mills 8mm	25	0.75°	0.60°	0.45°	0.55°	0.40°	0.30°	0.75°	0.60°	0.45°	1.00°	0.80°	0.60°
Corner-/Slot end mills 8mm	32	0.50°	0.40°	0.30°	0.35°	0.30°	0.20°	0.50°	0.40°	0.30°	0.65°	0.50°	0.40°
Corner-/Slot end mills 13mm	25	2.00°	1.60°	1.20°	1.40°	1.10°	0.85°	2.00°	1.60°	1.20°	2.50°	2.00°	1.50°
Corner-/Slot end mills 13mm	32	1.60°	1.30°	0.95°	1.10°	0.90°	0.65°	1.60°	1.30°	0.95°	2.00°	1.60°	1.20°
Corner end mills 8mm	40 ; 50	0.20°			0.20°			0.20°			0.25°		
Corner end mills 8mm	63 ; 80	0.10°			0.10°			0.10°			0.15°		
Corner end mills 13mm	40 ; 50	0.40°			0.40°			0.40°			0.45°		
Corner end mills 13mm	63 ; 80	0.20°			0.20°			0.20°			0.25°		
Face milling cutter	40 ; 50	0.15°			X			0.15°			0.20°		
Face milling cutter	63 ; 80	0.10°			X			0.10°			0.15°		
Face milling cutter	100 ; 125	X			X			X			X		
High feed end mills	25 ; 35	0.60°	0.40°	0.20°	0.50°	0.30°	0.15°	0.60°	0.40°	0.20°	X		
High feed end mills	40 ; 50	0.40°			0.30°			0.40°			X		
High feed end mills	63 ; 80	0.20°			0.15°			0.20°			X		
Round insert end mills	20 ; 25	0.60°	0.40°	0.20°	0.50°	0.30°	0.15°	0.60°	0.40°	0.20°	0.80°	0.50°	0.25°
Round insert end mills	32 ; 35	0.60°	0.40°	0.20°	0.50°	0.30°	0.15°	0.60°	0.40°	0.20°	0.80°	0.50°	0.25°
Round insert end mills	40 ; 42	0.50°			0.40°			0.50°			0.60°		
Round insert end mills	50 ; 52	0.40°			0.30°			0.40°			0.50°		
Round insert end mills	63 ; 66	0.25°			0.20°			0.25°			0.35°		
Round insert end mills	80 ; 100	0.10°			0.10°			0.10°			0.20°		

Information for cutting data

FRAISA ToolExpert® 2.0 – the new online cutting data tool for optimum tool use

ToolExpert is available online, so there's no longer any need to download it. What's more, it is platform-independent. All you need is an up-to-date browser. It has also been redesigned to make it even more user-friendly.

The user-friendly online tool provides you with perfectly coordinated, tool- and material- specific cutting data for your production – and the perfect basis for high-precision usage of your FRAISA tools: fast, simple and free of charge.

The three applications ToolExpert MFC, ToolExpert HelixRamp and ToolExpert HDC are now integrated into ToolExpert. This means ToolExpert can be implemented even more flexibly and in a wider range of applications.



FRAISA ToolExpert® E-Cut – easy to use, highly efficient, and extremely economical

FRAISA's cutting data calculator FRAISA ToolExpert® E-Cut provides tool- and material-specific cutting data for production – and is the basis for precision use of FRAISA E-Cut tools.

This innovative software solution is very user-friendly: Simply select the material, application, and tool and the software provides you with the right cutting data. FRAISA ToolExpert® E-Cut can then transfer the tool geometry data straight to your CAM system.



Information for cutting data

FRAISA ToolExpert® MFC – Quick, simple, reliable: Knowledge of the application technology = ToolExpert MFC

The ToolExpert MFC cutting data software has been developed for the new MFC cutters designed with a central air and cooling channel. The software is easy to launch via the FRAISA website: www.fraisa.com/en/toolexpert-mfc

With just a few clicks, you select the application, material, and tool and obtain the parameters that need to be programmed for your machine control system or the CAM. ToolExpert MFC is fast, simple, and reliable to use.



FRAISA ToolExpert® ArCutX – Tested online application data for efficient milling with ArCutX

ArCutX milling cutters were developed for finishing processes aimed at producing excellent surface quality. A variety of applications are possible for each of the five ArCutX tool types.

The specially developed ToolExpert ArCutX is now a reliable aid for finding the perfect tool from the ArCutX family to suit the desired material and application. The clearly structured menu lets you select/read off material, application, ArCutX tool type and the option «coated» or «uncoated».

Similarly, using ToolExpert ArCutX you can also find the corresponding cutting data for the selected tool. The phenomenal range of options offered by the ArCutX can therefore be exploited to the full, thanks to the specially developed cutting data calculator.



FRAISA ToolExpert® AX-FPS – An innovative solution for defining cutting data

The new ToolExpert AX-FPS gives FRAISA customers an innovative solution for defining cutting data that is specially tailored to their machine environment. High-performance roughing of aluminum alloys is not limited by the tool, but by the machine spindle and the machine environment.

ToolExpert AX-FPS lets you clearly and simply describe your machine environment, making it easy to discover the most effective and reliable cutting data for your application. This new option, the only one of its kind on the market, offers our customers real added value and ensures a reduction in machining times and production costs.

The functions incorporated into ToolExpert AX-FPS have been developed by recording over a thousand measuring points and guarantee highly productive and reliable system utilisation. At the same time, capacity utilisation of the milling cutter, the machine spindle and machine environment come as close as possible to maximum utilisation.



FRAISA's service portfolio at a glance



FRAISA ToolCare® 2.1:
management, procurement and information system for tools



FRAISA ConceptTool:
custom-made special tools



FRAISA ReTool®:
industrial tool reconditioning with performance guarantee



FRAISA ToolSchool:
initial and further training

CAD data

We offer you the possibility to download 2D drawings (DXF), 3D models (STEP) and XML data (according DIN4000-102) for our products. Simply enter the article number of the tool and select the desired file.

Download measurement report*

As a customer, you can enter the measurement report number of your FRAISA tool and download the measurement report as a PDF file.

* Measurement reports available for the following article:

- High precision mills +/- 0,003 SpheroX (X7500)

<https://www.fraisa.com/en/online-tools>

Do you have any questions about our services or our company?
Then give us a call or send us an e-mail. We'll be happy to help you.



Scan this QR code to access more information about the FRAISA Group.



You can also use our ordering service via our E-Shop and benefit from our changing offers.

Calculation formulas for cutting data

Formulas

d_1	Diameter of the cutting edge [mm]
z	Number of cutting edges
a_p	Axial infeed depth [mm]
a_e	Radial infeed depth [mm]
v_c	Cutting speed [m/min]
f_z	Feed per tooth and revolution [mm]
n	Spindle speed [min ⁻¹]
v_f	Feed rate [mm/min]
f	Feed per rotation [mm]
Q	Material removal rate [cm ³ /min]
d_{eff}	Effective engagement diameter [mm]
β	Setting angle «Beta» [° - DEG]

Spindle speed

$$n = \frac{v_c \cdot 1000}{d_1 \cdot \pi} \left[\frac{1}{\text{min}} \right]$$

Cutting speed

$$v_c = \frac{d_1 \cdot n \cdot \pi}{1000} \left[\frac{\text{m}}{\text{min}} \right]$$

Feed rate

$$v_f = f_z \cdot z \cdot n \left[\frac{\text{mm}}{\text{min}} \right]$$

Feed per tooth

$$f_z = \frac{v_f}{z \cdot n} \left[\text{mm} \right]$$

Feed per rotation


$$f = f_z \cdot z \left[\text{mm} \right]$$

Material removal rate

$$Q = \frac{a_p \cdot a_e \cdot v_f}{1000} \left[\frac{\text{cm}^3}{\text{min}} \right]$$


Calculation formulas for cutting data

Effective diameter for ball nose end mills at a set angle $\beta = 0^\circ$




$$d_{\text{eff}} = 2 \cdot \sqrt{d_1 \cdot a_p - a_p^2} \quad [\text{mm}]$$

Effective diameter for ball nose end mills at a set angle $0 < \beta < 90^\circ$
 Calculator setting in [° - DEG]; entry of β in [° - DEG]




$$d_{\text{eff}} = d_1 \cdot \sin \left[\beta + \cos^{-1} \left(\frac{d_1 - 2 \cdot a_p}{d_1} \right) \right] \quad [\text{mm}]$$

Effective diameter for corner radius end mills at a set angle $0 \leq \beta < 90^\circ$
 Calculator setting in [° - DEG]; entry of β in [° - DEG]



$$d_{\text{eff}} = d_1 - 2 \cdot r + 2 \cdot r \cdot \sin \left[\beta + \cos^{-1} \left(1 - \frac{a_p}{r} \right) \right] \quad [\text{mm}]$$



Calculation formulas for cutting data




Theoretical surface roughness and surface qualities

Surface roughness in the direction of feed v_f

$$R_{th,vf} = \left(\frac{d_1}{2} - \sqrt{\frac{d_1^2 - f_z^2}{4}} \right) \cdot 1000 \text{ } [\mu\text{m}]$$

Surface roughness in the infeed direction ae

$$R_{th,ae} = \left(\frac{d_1}{2} - \sqrt{\frac{d_1^2 - ae^2}{4}} \right) \cdot 1000 \text{ } [\mu\text{m}]$$

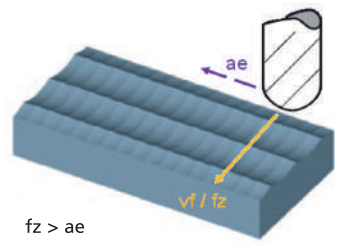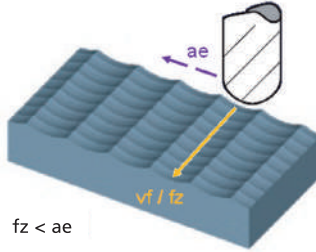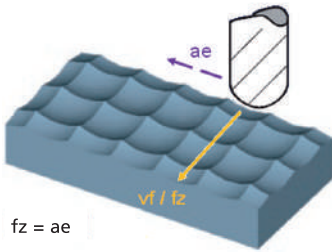

Surface qualities

Maximum roughness values R_a in μm ; $1 \mu\text{m} = 0.001 \text{ mm}$					
3.2	1.6	0.8	0.4	0.2	0.1
Roughness classes					
N8	N7	N6	N5	N4	N3

Hardness conversion table ($R_m \rightarrow HV10 \rightarrow HB \rightarrow HRC$)

R_m [N/mm ²]	HV 10	HB	HRC	R_m [N/mm ²]	HV 10	HB	HRC
240	75	71		920	287	273	28
255	80	76		940	293	278	29
270	85	81		970	302	287	30
285	90	86		995	310	295	31
305	95	90		1020	317	301	32
320	100	95		1050	327	311	33
335	105	100		1080	336	319	34
350	110	105		1110	345	328	35
370	115	109		1140	355	337	36
385	120	114		1170	364	346	37
400	125	119		1200	373	354	38
415	130	124		1230	382	363	39
430	135	128		1260	392	372	40
450	140	133		1300	403	383	41
465	145	138		1330	413	393	42
480	150	143		1360	423	402	43
495	155	147		1400	434	413	44
510	160	152		1440	446	424	45
530	165	157		1480	458	435	46
545	170	162		1530	473	449	47
560	175	166		1570	484	460	48
575	180	171		1620	497	472	49
595	185	176		1680	514	488	50
610	190	181		1730	527	501	51
625	195	185		1790	544	517	52
640	200	190		1845	560	532	53
660	205	195		1910	578	549	54
675	210	199		1980	596	567	55
690	215	204		2050	615	584	56
705	220	209		2140	639	607	57
720	225	214			655	622	58
740	230	219			675		59
755	235	223			698		60
770	240	228			720		61
785	245	233			745		62
800	250	238	22		773		63
820	255	242	23		800		64
835	260	247	24		829		65
860	268	255	25		864		66
870	272	258	26		900		67
900	280	266	27		940		68

Coating suitability for milling tools

Coating suitability related to dry or wet machining conditions



- A: Excellent suitability of the coating A during wet machining.
 B: The suitability of the coating B during wet machining is sufficient to good.
 C: Excellent suitability of the coating C during dry machining.
 D: The suitability of the coating D during dry machining is sufficient to good.

Coating suitability for milling tools in the corresponding material class

1 = Ideally suited 2 = Adequate to well-suited	U		P		D		V		H		X		M		C	
	UNICUT-4X	POLYCHROM	DURO-S	DURO-V	DURO-Si	X-AL	MICRO	CELERO								
Material classes																
Steel < 500 N/mm ²	1	1			2	2	1	1	1							
Steel 500 - 850 N/mm ²	1	1			2	2	1	1								
Steel 850 - 1100 N/mm ²	1	1	1		2	1		1	1	1						
Steel 1100 - 1300 N/mm ²	2	2	2	1		2	1		2	1	1					
Steel 1300 - 1500 N/mm ²	2	2	2	1		2	2	1	2	2	1	2	1			
Hardened tool steel 48-52 HRC		2		1		2	1	2	1	1	1	1				
Hardened tool steel 52-56 HRC				1		1	1	1	1	1	1	1				
Hardened tool steel 56-60 HRC				1		1	1	1	1	1	1	1				
Hardened tool steel > 60 HRC				2		1	1	1	1	1	1					
Cold work tool steel (12% Cr) hoch legiert [1.2379]	2	2	2	1		1	2	1	2		2	1				
Cold work tool steel, low alloyed [1.2067]	2	2	2	1		1	2	1	2		2	1				
Stainless steel ferritic/martensitic	1		1			2		1	1	1	1					
Inox normal [Cr-Ni/1.4301]	1		1			2		1	1	1	1			2		
Inox medium [Cr-Ni-Mo+/1.4539] Duplex steel [17-4 PH]	1		1			2		1	1	1	1					
Inox difficult [Cr-Ni-Mo++/1.4529] Heat resistant steel [1.4841]	1		1			2		1	2		1					
Nickel base alloys prec.-hard. [Inconel 718]	1		1			2		2	2	2	1					
Cast iron (lamellar / spheroidal)	2	2	2	1		1	2	1		2	1	2	1			
Titanium alloys up to 300 HB [Ti5Al2.5Sn]	1		1		2	2	2	2	2	2	1	2				
Titanium alloy > 300 HB [Ti6Al4V]	1		1		1	2	2	2	2	2	1	1				
Unalloyed aluminium																1
Wrought aluminium Si < 6%	2		2										1		1	
Unalloyed copper	2		2			2			2		1	1			1	
Wrought copper alloys Bronze	2	2	2	1		2	2	1		2	1	2	1			
Brass short chips [Ms58]	2	2	2	1		2	2	1		2	1	2	1			
Thermoplastics	2		2										2		2	
High speed steel hardened					1	1	1	1	2							

Distribution network

Sales and service locations

FRAISA SA

Gurzelenstrasse 7
4512 Bellach
Tel: +41 (0)32 617 42 42
mail.ch@fraisa.com

FRAISA GmbH

Hanns-Martin-Schleyer-Str. 15b
D-47877 Willich
Tel: +49 2154 489 84-0
info@fraisa.de

FRAISA Sarl.

7, Rue de Lombardie
F-69150 Décines
Tel: +33 4 721 45 700
fraisa@fraisa.fr

FRAISA Italia s.r.l.

Via Grosio 10/8
I-20151 Milano
Tel: +39 02 334 06 086
mail.it@fraisa.com

FRAISA Hungária Kft.

Vásárhelyi Pál u. 3
H-3950 Sárospatak
Tel: +36 47 511 217
mail.hu@fraisa.com

FRAISA USA Inc.

711 5th St SW
USA-New Brighton MN 55112
Tel: +1 651 636 8488
info@fraisausa.com

FRAISA (Shanghai) Co., Ltd

A202, Building 3, No. 526,
3rd East Fute Road
Shanghai Pilot Free Trade Zone,
Shanghai 200131, P.R. China
Tel: +86 21 5820 5550
infochina@fraisa.com



(●) Associated companies.
To find your **contact** and our **conditions** refer to www.fraisa.com.



Article list – Drilling tools

Example: Article: B62015

Article-N°.: B62015

Coating: NANO-U²

Page: 17

Article-N°.	Coating														
INDEX	without	P POLYCHROM	U UNICUT-4 X	D DURO-5	V DURO-V	H DURO-5I	S DURO-XI	Y DURO-AI	X X-AL	M MICRO	C CELERO	I TICUT	B DIAMOND	B DIAPLUS	B DIA-C
Chemical composition		TiAlCrN	TiAlCN	AlTiN	AlTiSiN	TiAlSiN	AlTiN/ TiSiXN	TiAlN/ AlCrN	TiAlN/ AlCrN	TiAlN	TiB ₂	TiAlN/ TiSiN	C	C	C
Hardness [HV]		3000	3200	3600	3300	3200	3800	3300	3300	3000	4000	3800	10000	10000	10000
Max. temp. [°C]		1000	650	880	1100	1100	1100	1100	1100	800	700	1100	600	600	600
0110	85		●												
0200	137		●												
0391	639										●				
0393	645										●				
0400	321		●												
0410	325		●												
0540	201	●													
0609	207		●												
0610	203		●												
0619	199		●												
0621	227		●												
0650	217		●												
0659	215		●												
0665	225		●												
0695	209		●												
0700	153		●												
0780	89		●												
0890	755		●												
0905	751		●												
0910	749		●												
0915	747		●												
0920	745		●												
3209	767		●												
3490	765		●												
5036	151	●													
5200	71	●													
5213	147	●													
5225	95	●													
5229	149	●													
5236	315	●													
5237	319	●													
5249	145	●		●											
5250	415	●													
5252	421	●													
5255	65	●													
5272	605										●				
5286	381	●													
5297	637										●				

Article-N°.		Coating														
INDEX		without	P POLYCHROM	U UNICUT-4-X	D DURO-S	V DURO-V	H DURO-SI	S DURO-XI	Y DURO-AI	X X-AL	M MICRO	C CELERO	I TICUT	B DIAMOND	B DIAPLUS	B DIA-C
5300	71		●													
5313	147		●													
5325	95		●													
5329	149		●													
5335	317		●													
5336	315		●													
5337	319		●													
5349	145		●		●											
5355	65		●													
5397	637											●				
5500	605											●				
5580	443															●
5640	735													●		
5645	737													●		
5710	303	●														
5712	281										●					
5712	723													●		
5714	285										●					
5714	725													●		
5716	289										●					
5716	727													●		
5717	291										●					
5717	729													●		
5721	293										●					
5723	295										●					
5752	583										●					
5752	717													●		
5754	585										●					
5754	719													●		
5756	587										●					
5756	721													●		
5782	521										●					
5782	683													●		
5784	523										●					
5784	685													●		
5786	525										●					
5786	687													●		
5787	527										●					
5787	689													●		
5791	529										●					
5791	691													●		
5793	531										●					
5793	693													●		
6032	697														●	
6034	699														●	
6036	703														●	
6038	707														●	
6040	711														●	
6042	713														●	
6044	715														●	
6062	669														●	
6064	671														●	
6066	673														●	
6068	675														●	
6070	677														●	
6072	679														●	
6074	681														●	
6460	451								●							
6461	453								●							
6462	457								●							
6463	461								●							
6464	465								●							
6481	455								●							
6482	459								●							

Article-Nº.		Coating														
INDEX		without	P POLYCHROM	U UNICUT-4X	D DURO-S	V DURO-V	H DURO-SI	S DURO-XI	Y DURO-AI	X X-AL	M MICRO	C CELERO	I TICUT	B DIAMOND	B DIAPLUS	B DIA-C
6483	463								●							
6500	249									●						
6501	251									●						
6502	253									●						
6503	255									●						
6504	257									●						
6505	259									●						
6506	261									●						
6508	263									●						
6531	537									●						
6532	539									●						
6533	543									●						
6534	545									●						
6535	549									●						
6536	551									●						
6538	555									●						
6560	467									●						
6561	469									●						
6562	473									●						
6563	477									●						
6564	481									●						
6565	483									●						
6566	487									●						
6567	489									●						
6568	491									●						
6579	485									●						
6581	471									●						
6582	475									●						
6583	479									●						
6632	571									●						
6634	573									●						
6735	559									●						
6736	561									●						
6738	563									●						
6740	565									●						
6742	567									●						
6744	569									●						
6765	493									●						
6766	495									●						
6768	497									●						
6770	499									●						
6772	501									●						
6774	503									●						
6800	265									●						
6802	267									●						
6804	269									●						
6807	271									●						
6809	273									●						
6810	275									●						
6811	277									●						
6812	279									●						
6816	575									●						
6818	577									●						
6820	579									●						
6823	581									●						
6832	505									●						
6836	507									●						
6840	509									●						
6844	511									●						
6846	513									●						
6847	515									●						
6848	517									●						
6849	519									●						
7100	401									●						

Article-N°.		Coating														
INDEX		without	P POLYCHROM	U UNICUT-4-X	D DURO-5	V DURO-V	H DURO-SI	S DURO-XI	Y DURO-AI	X X-AL	M MICRO	C CELERO	I TICUT	B DIAMOND	B DIAPLUS	B DIA-C
7104	411									●						
7200	397									●						
7204	407									●						
7210	395						●									
7212	405						●									
7284	733														●	
7340	417		●													
7344	423		●													
7400	351									●						
7402	363									●						
7404	369									●						
7408	379									●						
7460	353									●						
7464	371									●						
7470	347					●										
7472	359					●										
7474	365					●										
7478	377					●										
7484	731														●	
7490	349							●								
7492	361							●								
7494	367							●								
7500	345									●						
7540	355		●													
7544	373		●													
7550	357	●														
7554	375	●														
7600	429									●						
7604	437									●						
7608	441									●						
7610	427						●									
7612	433						●									
7614	435						●									
7620	431									●						
7624	439									●						
7920	743			●												
7930	757			●												
7940	759			●												
7942	761			●												
7960	763			●												
8100	55		●													
8101	49		●													
8102	51		●													
8105	53		●													
8107	171		●													
8111	105		●													
8112	107		●													
8115	109		●													
8117	189		●													
8121	139		●													
8200	55		●													
8201	49		●													
8202	51		●													
8205	53		●													
8207	171		●													
8211	105		●													
8212	107		●													
8215	109		●													
8217	189		●													
8221	139		●													
8300	61		●													
8301	231		●													
8302	193		●													
8303	67		●													

Article-Nº.		Coating														
INDEX		without	P POLYCHROM	U UNICUT-4X	D DURO-S	V DURO-V	H DURO-SI	S DURO-XI	Y DURO-AI	X X-AL	M MICRO	C CELERO	I TICUT	B DIAMOND	B DIAPLUS	B DIA-C
8304	57		●													
8305	63		●													
8310	115		●													
8311	237		●													
8313	119		●													
8315	117		●													
8320	141		●													
8321	245		●													
8323	143		●													
8400	61		●													
8401	231		●													
8402	193		●													
8403	67		●													
8404	57		●													
8405	63		●													
8410	115		●													
8413	119		●													
8415	117		●													
8420	141		●													
8423	143		●													
8500	37		●													
8502	247						●									
8504	35						●									
8506	45						●									
8507	157						●									
8508	47							●								
8514	97						●									
8516	101						●									
8517	185						●									
8518	103							●								
8521	243						●									
8530	385	●	●													
8535	387	●	●													
8540	389	●	●													
8545	391	●	●													
8550	393	●	●													
8600	37		●													
8604	35						●									
8606	45						●									
8607	157						●									
8608	47							●								
8614	97						●									
8616	101						●									
8617	185						●									
8618	103							●								
8700	41		●										●			
8705	43		●										●			
8720	165		●										●			
8800	41		●										●			
8805	43		●										●			
8820	165		●										●			
15207	59		●													
15208	113		●													
15210	111		●													
15222	39		●													
15223	99		●													
15225	131		●													
15226	175		●													
15232	311	●	●													
15233	69		●													
15236	195		●													
15238	211		●													
15239	219		●													
15242	93		●													

Article-N°.		Coating														
INDEX		without	P POLYCHROM	U UNICUT-4 X	D DURO-S	V DURO-V	H DURO-SI	S DURO-XI	Y DURO-AI	X X-AL	M MICRO	C CELERO	I TICUT	B DIAMOND	B DIAPLUS	B DIA-C
15248	223		●													
15250	229		●				●									
15251	235		●				●									
15254	241		●				●									
15259	129		●													
15260	221		●													
15268	161		●													
15297	643											●				
15298	649											●				
15299	133		●													
15307	59		●													
15308	113		●													
15310	111		●													
15322	39		●													
15323	99		●													
15325	131		●													
15326	175		●													
15333	69		●													
15336	195		●													
15338	211		●													
15339	219		●													
15342	93		●													
15348	223		●													
15359	129		●													
15360	221		●													
15368	161		●													
15397	643											●				
15398	649											●				
15399	133		●													
15500	635	●														
15502	653	●														
15505	647	●														
15506	641	●														
15507	651	●														
15510	659	●														
15512	661	●														
15520	597	●										●				
15525	599	●										●				
15530	601	●										●				
15535	603	●										●				
15550	607	●										●				
15557	609	●										●				
15559	613	●										●				
15560	611	●										●				
15561	615	●										●				
15573	617	●										●				
15574	621	●										●				
15575	625	●										●				
15583	627	●										●				
15584	631	●										●				
15585	633	●										●				
15589	655	●										●				
15590	657	●										●				
15600	635	●										●				
15605	647	●														
15606	641	●														
15607	651	●														
15620	597	●										●				
15625	599	●										●				
15630	601	●										●				
15635	603	●										●				
15650	607	●										●				
15657	609	●										●				
15659	613	●										●				

Notes

